

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	4398.8 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	48.1V x 49.8H
	At 50% of Imax	18.7V x 22.3H
	At 90% of Imax	6.7V x 8.3H

Beam Flux	Total	1000.2 lumens per klm.
	To 10% of Imax	763.5 lumens per klm.
	To 50% of Imax	312.9 lumens per klm.
	To 90% of Imax	57.5 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-13

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:BlazeMini Recessed-500mm-RGBW ALL 1525D-Rev2	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:15x25 DEG	DIM.:500mm	SERIAL No.:IES000901
MFR.:	SUR.:	Shielding Angle:

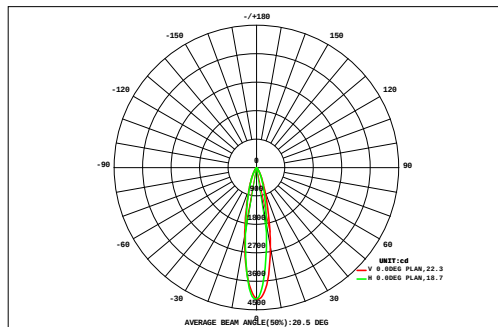

DATA OF LAMP		PHOTOMETRIC DATA	
MODEL		Imax(cd)	4166
NOMINAL POWER(W)	24.8	AVAILABILITY(%)	76.3
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	722.3
NOMINAL FLUX(lm)	947.1	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	947.1
TEST VOLTAGE(V)	24	q @50%(H,V)	22,19DEG

AREA FLUX DIAGRAM																	UNIT:lm	F t	F a
45	0.06	0.07	0.10	0.13	0.17	0.21	0.25	0.26	0.26	0.27	0.25	0.22	0.18	0.13	0.10	0.07	0.06	3.04	0.00
40	0.07	0.10	0.15	0.22	0.32	0.43	0.52	0.56	0.56	0.57	0.52	0.44	0.32	0.22	0.15	0.10	0.07	5.86	0.00
35	0.09	0.14	0.24	0.39	0.60	0.84	1.04	1.17	1.20	1.16	1.03	0.85	0.60	0.39	0.24	0.14	0.09	11.4	0.00
30	0.11	0.21	0.38	0.65	1.01	1.41	1.79	2.08	2.20	2.19	2.05	1.76	1.39	1.00	0.65	0.38	0.21	19.6	0.00
25	0.14	0.29	0.58	0.98	1.51	2.15	2.85	3.41	3.70	3.68	3.36	2.79	2.11	1.49	0.97	0.58	0.29	31.0	12.5
20	0.18	0.38	0.76	1.33	2.09	3.08	4.30	5.49	6.16	6.13	5.39	4.22	3.04	2.06	1.32	0.76	0.36	47.2	34.9
15	0.20	0.45	0.91	1.63	2.69	4.23	6.41	8.91	10.5	10.5	8.78	6.33	4.19	2.70	1.65	0.92	0.43	71.6	61.5
10	0.22	0.49	1.02	1.88	3.24	5.48	9.21	14.3	18.3	18.2	14.2	9.27	5.69	3.40	1.96	1.05	0.48	109	99.9
5	0.22	0.50	1.05	2.01	3.59	6.43	11.7	19.8	27.3	27.4	20.8	13.0	7.27	3.99	2.17	1.11	0.49	149	141
0	0.22	0.49	1.05	2.00	3.63	6.59	12.2	20.9	28.3	28.7	22.2	13.6	7.51	4.06	2.19	1.11	0.49	155	147
-5	0.21	0.47	0.99	1.86	3.31	5.84	10.1	15.6	19.7	19.8	15.8	10.5	6.23	3.58	2.00	1.05	0.47	118	109
-10	0.18	0.42	0.87	1.59	2.73	4.44	8.80	13.3	17.4	17.4	13.4	9.49	6.98	4.62	2.87	1.68	0.91	76.3	66.9
-15	0.14	0.34	0.71	1.26	2.03	3.07	4.31	5.59	6.50	6.53	5.68	4.44	3.19	2.13	1.32	0.73	0.34	48.4	36.9
-20	0.10	0.25	0.52	0.90	1.40	2.03	2.71	3.36	3.78	3.80	3.42	2.79	2.11	1.46	0.94	0.54	0.25	30.5	12.6
-25	0.06	0.15	0.33	0.58	0.91	1.28	1.65	1.96	2.14	2.16	2.00	1.70	1.33	0.94	0.60	0.33	0.15	18.3	0.00
-30	0.03	0.08	0.17	0.32	0.52	0.74	0.93	1.07	1.13	1.14	1.09	0.95	0.76	0.53	0.33	0.17	0.08	10.1	0.00
-35	0.01	0.03	0.08	0.15	0.24	0.35	0.44	0.49	0.49	0.49	0.44	0.35	0.24	0.15	0.08	0.03	0.01	4.56	0.00
-40	0.00	0.01	0.03	0.05	0.09	0.13	0.16	0.18	0.17	0.17	0.18	0.16	0.13	0.09	0.05	0.03	0.01	1.66	0.00
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
HORIZONTAL(DEG)																			
F t	2.24	4.87	9.92	17.9	30.1	48.8	77.4	114	144	144	117	80.8	51.4	31.7	18.7	10.2	4.81	1.90	910
F a	0.00	0.00	0.00	0.00	12.9	36.6	66.5	104	134	135	107	70.0	39.0	16.5	0.00	0.00	0.00	0.00	722

one-half-peak spread: U:9.4,D:9.5 , L:11.0,R:11.5


NEMA Beam Type: Type 4

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-03-13

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:BlazeMini Recessed-500mm-RGBW ALL 1525D-Rev2	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:15x25 DEG	DIM.:500mm	SERIAL No.:IES000901
MFR.:	SUR.:	Shielding Angle:

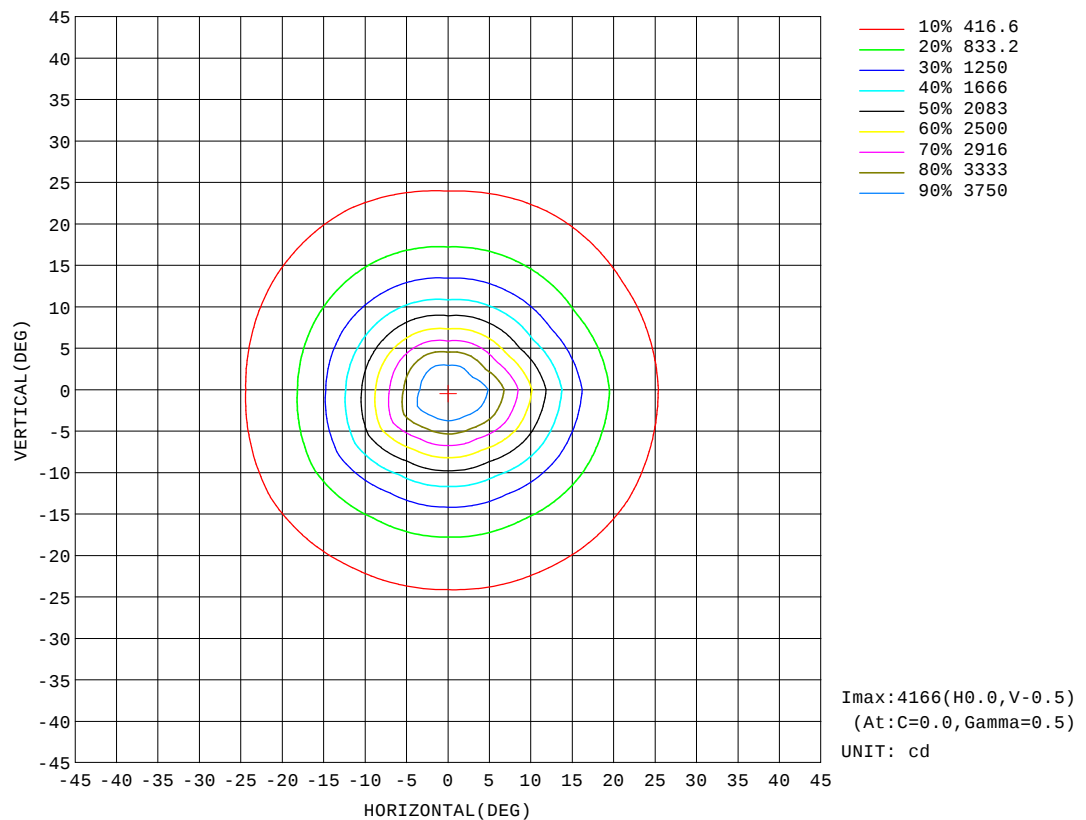


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-03-13

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:BlazeMini Recessed-500mm-RGBW ALL 1525D-Rev2	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:15x25 DEG	DIM.:500mm	SERIAL No.:IES000901
MFR.:	SUR.:	Shielding Angle:

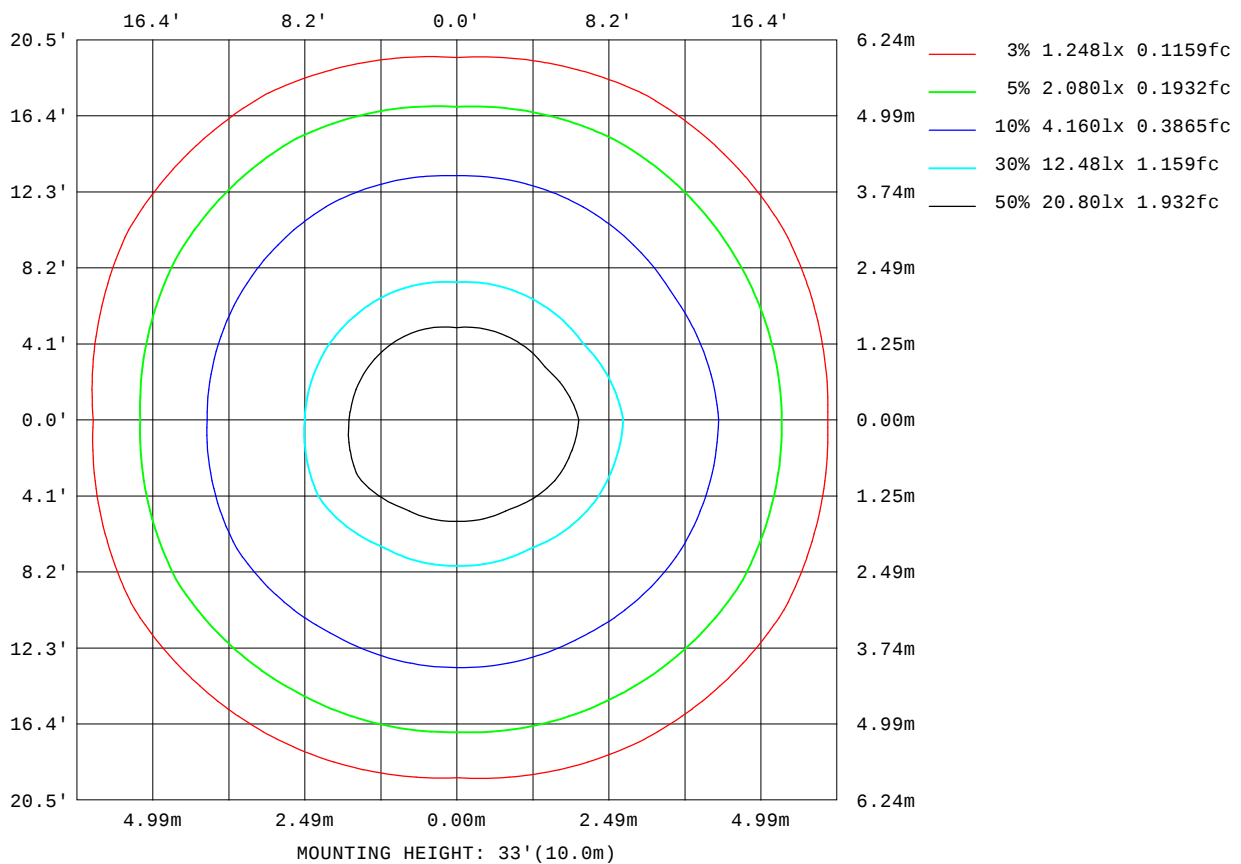

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-03-13

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

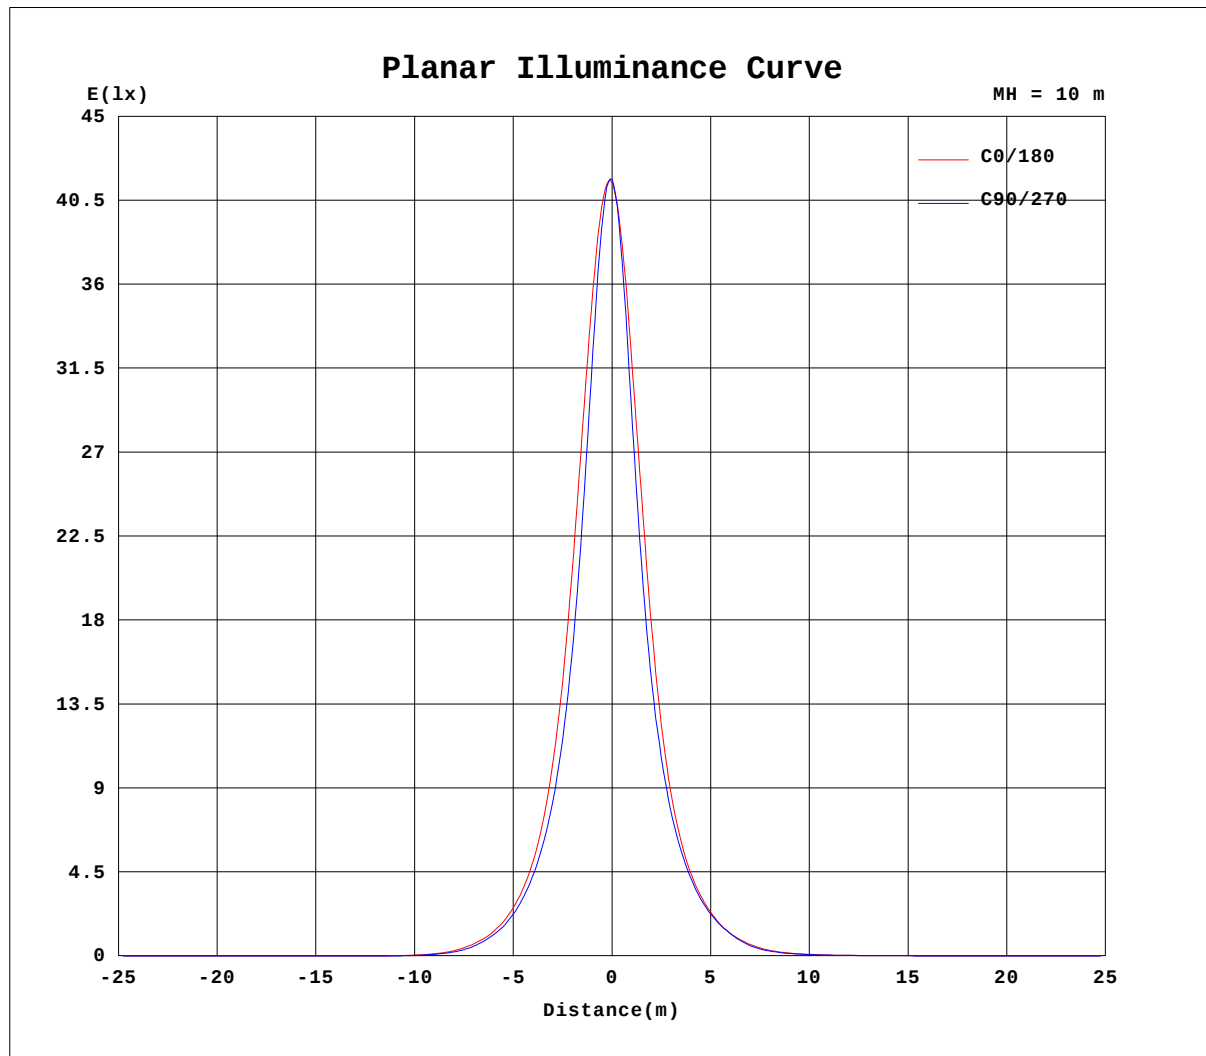


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-03-13

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:BlazeMini Recessed-500mm-RGBW ALL 1525D-Rev2	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:15x25 DEG	DIM.:500mm	SERIAL No.:IES000901
MFR.:	SUR.:	Shielding Angle:

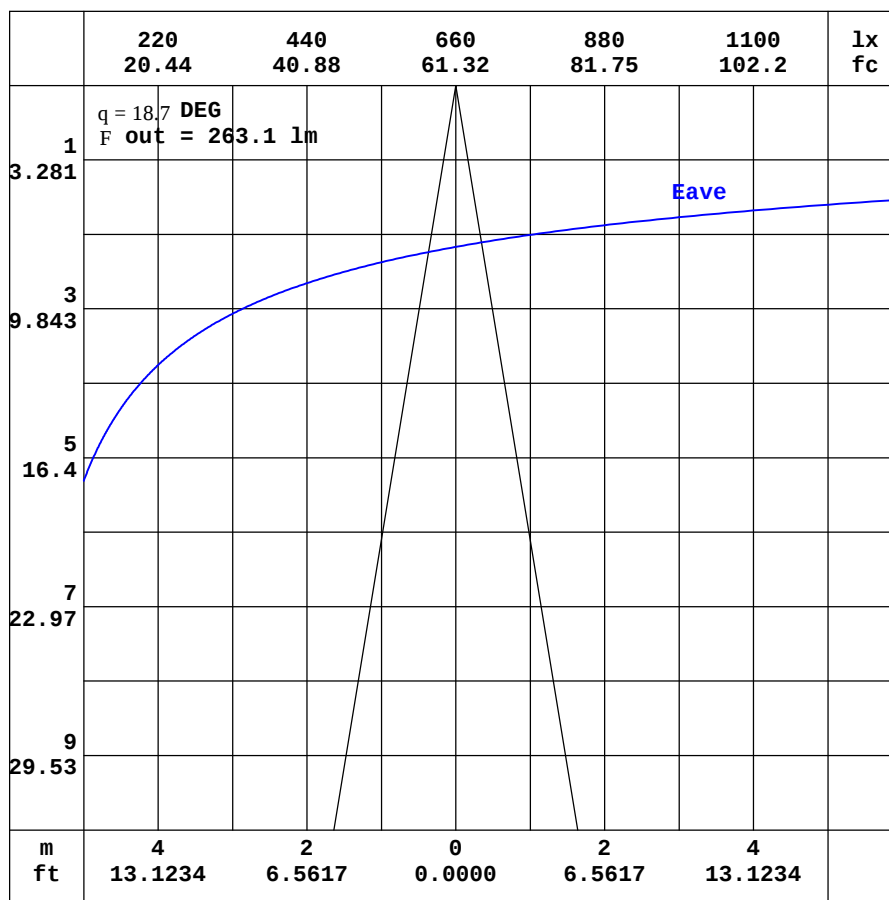

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

$H(b)$ Range:-90 - 90DEG
 $H(b)$ Interval: 0.5DEG
 Test Speed: LOW
 Temperature:25.3DEG
 Operators:Fan
 Test Date:2023-03-13

$V(B)$ Range:-180 - 180DEG
 $V(B)$ Interval: 0.5DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:8.630m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeMini Recessed-500mm-RGBW ALL 1525D-Rev2	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:15x25 DEG	DIM.:500mm	SERIAL No.:IES000901
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	3.25	2.89	2.65	2.56	2.62	2.85	3.31	4.07	5.08	6.15	7.09	7.71	8.01	8.04	7.94	7.77	7.48	7.19	7.18
-170	3.25	2.86	2.59	2.47	2.48	2.58	2.85	3.30	3.90	4.54	5.07	5.43	5.62	5.69	5.68	5.81	6.26	6.63	6.83
-160	3.25	2.83	2.54	2.39	2.33	2.32	2.38	2.52	2.71	2.88	2.99	3.01	3.06	3.77	4.46	5.06	5.54	5.86	6.03
-150	3.25	2.81	2.51	2.30	2.20	2.11	2.01	1.90	1.77	1.56	1.37	1.70	2.13	2.63	3.12	3.57	3.94	4.19	4.31
-140	3.25	2.80	2.47	2.25	2.11	1.96	1.79	1.55	1.25	1.10	1.10	1.18	1.33	1.55	1.79	2.03	2.24	2.38	2.45
-130	3.25	2.80	2.46	2.23	2.03	1.88	1.69	1.46	1.29	1.20	1.12	1.07	1.05	1.03	1.05	1.11	1.16	1.21	1.23
-120	3.25	2.81	2.47	2.20	2.00	1.81	1.64	1.51	1.47	1.43	1.37	1.31	1.25	1.19	1.14	1.09	1.05	1.03	1.01
-110	3.25	2.83	2.48	2.20	1.96	1.76	1.59	1.53	1.53	1.54	1.54	1.54	1.54	1.52	1.50	1.48	1.46	1.44	1.43
-100	3.25	2.87	2.51	2.20	1.92	1.66	1.43	1.44	1.46	1.48	1.49	1.50	1.50	1.52	1.53	1.54	1.54	1.55	1.55
-90	3.25	2.91	2.56	2.22	1.88	1.53	1.19	1.19	1.19	1.19	1.19	1.19	1.19	1.20	1.21	1.21	1.22	1.22	1.23
-80	3.25	2.96	2.64	2.28	1.88	1.44	0.96	0.88	0.83	0.79	0.75	0.71	0.68	0.66	0.64	0.63	0.63	0.63	0.63
-70	3.25	3.03	2.76	2.39	1.95	1.44	0.85	0.61	0.54	0.49	0.45	0.41	0.37	0.36	0.35	0.36	0.36	0.36	0.36
-60	3.25	3.11	2.90	2.56	2.13	1.61	0.99	0.45	0.40	0.38	0.36	0.36	0.36	0.37	0.38	0.40	0.41	0.43	0.44
-50	3.25	3.22	3.06	2.80	2.45	2.01	1.45	0.73	0.38	0.38	0.41	0.50	0.67	0.99	1.67	2.30	2.52	2.29	1.63
-40	3.25	3.32	3.26	3.13	2.93	2.67	2.30	1.74	0.88	0.64	1.85	4.85	9.93	17.3	25.8	33.0	37.8	39.0	35.7
-30	3.25	3.42	3.49	3.51	3.55	3.59	3.60	3.45	3.29	5.07	11.8	26.2	49.8	81.3	117	153	182	201	205
-20	3.25	3.52	3.72	3.95	4.27	4.71	5.29	5.87	7.63	14.3	31.9	69.5	126	197	290	400	514	616	658
-10	3.25	3.62	3.96	4.40	5.03	5.95	7.19	8.74	12.2	23.1	50.1	105	194	333	551	904	1366	1801	2034
0	3.25	3.70	4.18	4.81	5.73	7.10	8.99	11.3	15.3	26.5	53.2	114	218	390	676	1212	2182	3418	4145
10	3.25	3.70	4.17	4.78	5.66	6.96	8.75	11.0	15.0	26.3	53.2	109	199	333	529	832	1270	1702	1828
20	3.25	3.68	4.12	4.68	5.46	6.58	8.14	10.1	13.0	20.7	38.5	76.3	136	209	302	411	524	605	627
30	3.25	3.65	4.05	4.53	5.18	6.06	7.28	8.78	10.6	14.1	22.1	35.8	58.6	92.0	133	171	198	215	215
40	3.25	3.61	3.95	4.35	4.84	5.49	6.33	7.39	8.61	10.0	12.0	15.5	20.9	28.3	36.7	43.9	48.6	49.5	45.9
50	3.25	3.55	3.84	4.15	4.50	4.93	5.45	6.10	6.84	7.70	8.61	9.57	10.6	11.5	12.6	13.6	14.3	14.4	13.9
60	3.25	3.47	3.72	3.95	4.19	4.45	4.74	5.08	5.43	5.84	6.28	6.74	7.21	7.64	8.01	8.31	8.52	8.65	8.67
70	3.25	3.40	3.59	3.73	3.89	4.04	4.20	4.35	4.50	4.64	4.80	4.95	5.08	5.22	5.33	5.41	5.47	5.49	5.49
80	3.25	3.33	3.42	3.51	3.61	3.68	3.75	3.81	3.86	3.91	3.95	3.99	4.02	4.05	4.08	4.10	4.11	4.12	4.12
90	3.25	3.26	3.28	3.29	3.31	3.32	3.34	3.33	3.32	3.31	3.29	3.28	3.27	3.26	3.25	3.24	3.24	3.23	3.22
100	3.25	3.20	3.14	3.09	3.04	2.99	2.94	2.88	2.82	2.76	2.71	2.67	2.63	2.61	2.59	2.58	2.58	2.57	2.57
110	3.25	3.13	3.02	2.91	2.82	2.74	2.67	2.62	2.57	2.54	2.53	2.52	2.52	2.52	2.52	2.52	2.52	2.51	2.50
120	3.25	3.08	2.91	2.77	2.67	2.60	2.56	2.54	2.54	2.57	2.62	2.69	2.76	2.84	2.93	3.00	3.05	3.10	3.11
130	3.25	3.02	2.82	2.67	2.58	2.55	2.56	2.60	2.72	2.89	3.12	3.39	3.68	3.98	4.29	4.57	4.80	4.94	5.00
140	3.25	2.98	2.75	2.61	2.56	2.57	2.65	2.85	3.15	3.58	4.11	4.71	5.33	5.91	6.40	6.78	7.04	7.19	7.25
150	3.25	2.95	2.71	2.57	2.56	2.63	2.84	3.22	3.78	4.52	5.34	6.15	6.85	7.40	7.81	8.08	8.24	8.31	8.34
160	3.25	2.92	2.67	2.57	2.58	2.73	3.06	3.62	4.43	5.39	6.34	7.12	7.69	8.08	8.34	8.54	8.65	8.70	8.76
170	3.25	2.90	2.66	2.56	2.61	2.81	3.23	3.94	4.89	5.96	6.91	7.59	8.01	8.21	8.30	8.29	8.22	8.21	8.32
180	3.25	2.89	2.65	2.56	2.62	2.85	3.31	4.07	5.08	6.15	7.09	7.71	8.01	8.04	7.94	7.77	7.48	7.19	7.18

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature: 25.3DEG

Operators: Fan

Test Date: 2023-03-13

V(B) Range: -180 - 180DEG

V(B) Interval: 0.5DEG

Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity: 65.0%

Test Distance: 8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeMini Recessed-500mm-RGBW ALL 1525D-Rev2	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:15x25 DEG	DIM.:500mm	SERIAL No.:IES000901
MFR.:	SUR.:	Shielding Angle:

Table--2
UNIT: cd

H(DEC) V(DEC)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	6.42	6.09	5.77	5.34	4.78	4.10	3.33	2.55	1.88	1.40	1.16	1.19	1.31	1.46	1.55	1.53	1.41	1.20	
-170	6.56	6.30	5.94	5.41	4.74	3.97	3.17	2.41	1.78	1.35	1.16	1.18	1.31	1.46	1.55	1.53	1.41	1.20	
-160	5.91	5.66	5.23	4.68	4.03	3.33	2.63	2.00	1.52	1.23	1.15	1.19	1.34	1.48	1.55	1.53	1.40	1.20	
-150	4.26	4.06	3.75	3.32	2.84	2.34	1.88	1.51	1.26	1.14	1.14	1.25	1.39	1.52	1.56	1.52	1.39	1.20	
-140	2.43	2.32	2.15	1.92	1.68	1.44	1.27	1.15	1.12	1.12	1.21	1.35	1.46	1.54	1.55	1.51	1.37	1.20	
-130	1.22	1.20	1.15	1.10	1.06	1.07	1.08	1.10	1.17	1.27	1.36	1.46	1.53	1.55	1.54	1.47	1.35	1.20	
-120	1.03	1.05	1.08	1.12	1.17	1.21	1.28	1.34	1.40	1.46	1.50	1.53	1.55	1.54	1.51	1.43	1.32	1.20	
-110	1.44	1.45	1.46	1.48	1.51	1.53	1.54	1.55	1.55	1.55	1.55	1.55	1.54	1.50	1.44	1.37	1.29	1.20	
-100	1.55	1.55	1.55	1.54	1.53	1.52	1.52	1.52	1.52	1.50	1.49	1.47	1.44	1.40	1.35	1.30	1.24	1.20	
-90	1.23	1.23	1.23	1.24	1.24	1.24	1.24	1.25	1.25	1.26	1.26	1.27	1.26	1.25	1.23	1.22	1.21	1.20	
-80	0.63	0.65	0.66	0.68	0.70	0.73	0.77	0.81	0.86	0.90	0.95	1.01	1.04	1.08	1.13	1.15	1.17	1.20	
-70	0.36	0.36	0.36	0.37	0.37	0.41	0.44	0.49	0.54	0.60	0.67	0.75	0.83	0.90	0.99	1.08	1.14	1.20	
-60	0.43	0.41	0.40	0.38	0.37	0.36	0.36	0.37	0.39	0.43	0.49	0.56	0.64	0.75	0.87	1.00	1.13	1.20	
-50	2.24	2.45	2.21	1.59	0.94	0.64	0.48	0.41	0.38	0.38	0.41	0.45	0.52	0.62	0.76	0.92	1.08	1.20	
-40	39.2	37.9	32.8	25.3	16.9	9.63	4.63	1.73	0.59	0.42	0.41	0.42	0.45	0.54	0.68	0.86	1.06	1.20	
-30	204	186	158	120	83.8	50.9	26.1	11.5	3.58	0.83	0.49	0.44	0.44	0.48	0.61	0.80	1.03	1.20	
-20	624	527	414	302	205	131	71.1	29.4	9.71	2.27	0.65	0.50	0.45	0.46	0.57	0.77	1.01	1.20	
-10	1812	1398	934	583	354	205	108	45.8	15.3	3.75	0.86	0.58	0.48	0.46	0.56	0.75	0.99	1.20	
0	3721	2537	1436	784	435	238	119	46.8	15.3	3.65	0.83	0.63	0.51	0.46	0.55	0.74	0.99	1.20	
10	1682	1252	825	537	340	204	110	48.2	18.6	6.70	3.14	2.13	1.48	1.08	0.93	0.95	1.07	1.20	
20	598	513	404	297	207	135	75.7	35.8	16.5	7.80	4.84	3.34	2.30	1.64	1.29	1.15	1.16	1.20	
30	213	196	169	132	92.9	59.2	36.1	22.3	12.8	8.20	5.80	4.10	2.90	2.08	1.61	1.35	1.25	1.20	
40	50.0	49.5	44.8	37.8	28.9	21.2	15.6	12.0	9.99	8.12	6.02	4.41	3.24	2.42	1.87	1.52	1.33	1.20	
50	14.4	14.4	13.7	12.7	11.5	10.5	9.53	8.56	7.65	6.80	5.72	4.40	3.39	2.63	2.06	1.66	1.39	1.20	
60	8.64	8.50	8.27	7.96	7.59	7.16	6.70	6.24	5.80	5.40	5.04	4.23	3.42	2.74	2.20	1.78	1.47	1.20	
70	5.49	5.46	5.40	5.31	5.20	5.07	4.92	4.77	4.62	4.47	4.32	3.99	3.34	2.76	2.27	1.85	1.49	1.20	
80	4.11	4.10	4.08	4.06	4.03	3.99	3.96	3.92	3.87	3.81	3.76	3.67	3.17	2.71	2.29	1.88	1.51	1.20	
90	3.22	3.22	3.22	3.22	3.22	3.22	3.22	3.23	3.23	3.24	3.24	3.25	2.91	2.57	2.23	1.88	1.54	1.20	
100	2.56	2.56	2.57	2.57	2.58	2.59	2.61	2.65	2.69	2.74	2.78	2.82	2.62	2.40	2.15	1.87	1.55	1.20	
110	2.50	2.51	2.51	2.51	2.50	2.49	2.49	2.49	2.50	2.51	2.54	2.55	2.42	2.27	2.08	1.85	1.56	1.20	
120	3.10	3.07	3.02	2.95	2.86	2.78	2.69	2.62	2.55	2.51	2.50	2.40	2.27	2.16	2.02	1.83	1.55	1.20	
130	4.97	4.85	4.65	4.40	4.09	3.77	3.46	3.18	2.93	2.73	2.51	2.30	2.17	2.06	1.95	1.79	1.55	1.20	
140	7.21	7.08	6.85	6.51	6.04	5.48	4.86	4.25	3.69	3.10	2.56	2.23	2.05	1.97	1.87	1.76	1.53	1.20	
150	8.31	8.23	8.08	7.82	7.46	6.96	6.30	5.51	4.27	3.22	2.52	2.11	1.93	1.86	1.81	1.70	1.51	1.20	
160	8.68	8.61	8.50	8.31	8.07	7.71	6.59	5.30	4.05	3.00	2.29	1.90	1.75	1.73	1.72	1.65	1.48	1.20	
170	8.14	8.15	8.23	7.81	7.07	6.20	5.23	4.19	3.19	2.36	1.81	1.58	1.54	1.59	1.64	1.59	1.45	1.20	
180	6.42	6.09	5.77	5.34	4.78	4.10	3.33	2.55	1.88	1.40	1.16	1.19	1.31	1.46	1.55	1.53	1.41	1.20	

H_b Range:-90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-13

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: