

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	4336.4 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	48.5V x 50.4H
	At 50% of Imax	19.0V x 22.6H
	At 90% of Imax	6.6V x 8.5H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	768.5 lumens per klm.
	To 50% of Imax	315.7 lumens per klm.
	To 90% of Imax	52.6 lumens per klm.

Upward LOR	2.1 %
Downward LOR	97.9 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-13

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:BlazeMini Recessed-500mm-RGBW GREEN-1525D-Rev2	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:15x25 DEG	DIM.:500mm	SERIAL No.:IES000901-G
MFR.:	SUR.:	Shielding Angle:

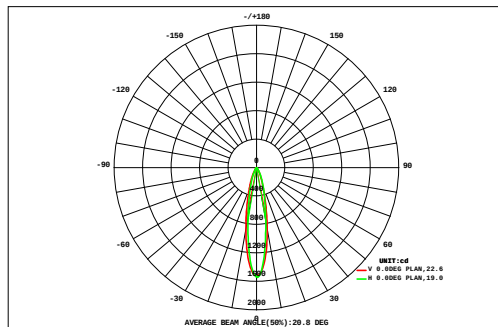

DATA OF LAMP		Eff:54.84lm/W	
MODEL		Imax(cd)	1546
NOMINAL POWER(W)	6.5	AVAILABILITY(%)	76.9
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	274.2
NOMINAL FLUX(lm)	356.5	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	356.5
TEST VOLTAGE(V)	24	q @50%(H,V)	23,19DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	0.02	0.03	0.04	0.05	0.06	0.08	0.09	0.09	0.09	0.09	0.09	0.09	0.08	0.06	0.05	0.04	0.03	0.02	1.09	0.00
45	0.02	0.03	0.04	0.05	0.06	0.08	0.09	0.09	0.09	0.09	0.09	0.09	0.08	0.06	0.05	0.04	0.03	0.02	1.09	0.00
40	0.03	0.04	0.05	0.08	0.12	0.17	0.21	0.22	0.21	0.20	0.21	0.19	0.15	0.11	0.08	0.06	0.04	0.03	2.19	0.00
35	0.03	0.05	0.09	0.15	0.25	0.37	0.46	0.51	0.51	0.49	0.46	0.40	0.32	0.22	0.14	0.09	0.06	0.03	4.63	0.00
30	0.04	0.08	0.15	0.29	0.46	0.66	0.83	0.93	0.96	0.92	0.83	0.69	0.53	0.37	0.24	0.15	0.09	0.04	8.25	0.24
25	0.05	0.11	0.25	0.45	0.70	1.00	1.32	1.54	1.63	1.55	1.34	1.07	0.78	0.54	0.35	0.21	0.11	0.05	13.1	7.59
20	0.06	0.15	0.34	0.61	0.98	1.44	2.00	2.49	2.68	2.55	2.14	1.59	1.10	0.72	0.46	0.27	0.14	0.06	19.8	15.6
15	0.07	0.18	0.41	0.75	1.26	1.97	2.92	3.95	4.47	4.25	3.40	2.34	1.49	0.93	0.56	0.31	0.16	0.07	29.5	26.0
10	0.08	0.20	0.45	0.85	1.48	2.49	4.07	6.10	7.52	7.16	5.33	3.33	1.97	1.15	0.64	0.35	0.17	0.07	43.4	40.3
5	0.08	0.20	0.46	0.89	1.59	2.81	4.93	8.01	10.6	10.2	7.48	4.49	2.44	1.31	0.70	0.36	0.17	0.07	56.9	54.0
0	0.08	0.19	0.45	0.87	1.56	2.78	4.90	7.95	10.3	10.1	7.61	4.58	2.46	1.31	0.69	0.35	0.17	0.07	56.4	53.5
-5	0.07	0.19	0.42	0.79	1.37	2.37	3.94	5.75	6.97	6.77	5.28	3.45	2.00	1.13	0.62	0.33	0.16	0.07	41.7	38.5
-10	0.06	0.16	0.36	0.66	1.10	1.75	2.59	3.41	4.00	3.89	3.14	2.26	1.45	0.89	0.52	0.29	0.14	0.06	26.7	23.2
-15	0.05	0.13	0.29	0.51	0.80	1.18	1.60	2.00	2.25	2.19	1.85	1.41	0.99	0.66	0.41	0.23	0.12	0.05	16.7	12.2
-20	0.03	0.09	0.21	0.36	0.55	0.76	0.98	1.18	1.28	1.25	1.10	0.88	0.65	0.45	0.30	0.18	0.09	0.04	10.4	3.09
-25	0.02	0.05	0.13	0.23	0.35	0.47	0.59	0.68	0.72	0.70	0.64	0.53	0.41	0.30	0.20	0.12	0.06	0.02	6.21	0.00
-30	0.01	0.03	0.07	0.13	0.20	0.27	0.34	0.38	0.39	0.38	0.36	0.31	0.25	0.18	0.12	0.07	0.03	0.01	3.52	0.00
-35	0.00	0.01	0.03	0.06	0.10	0.14	0.17	0.19	0.19	0.19	0.18	0.16	0.13	0.10	0.06	0.03	0.01	0.00	1.79	0.00
-40	0.00	0.00	0.01	0.02	0.04	0.06	0.07	0.08	0.08	0.08	0.08	0.07	0.06	0.04	0.02	0.01	0.00	0.00	0.74	0.00
-45	0.00	0.00	0.01	0.02	0.04	0.06	0.07	0.08	0.08	0.08	0.08	0.07	0.06	0.04	0.02	0.01	0.00	0.00	0.74	0.00
-45 -40 -35 -30 -25 -20 -15 -10 HORIZONTAL (DEG) 10 15 20 25 30 35 40 45																				
F t	0.81	1.90	4.19	7.76	13.0	20.8	32.0	45.5	54.9	53.0	41.5	27.8	17.3	10.5	6.15	3.44	1.76	0.79	343	---
F a	0.00	0.00	0.00	0.53	7.90	16.5	28.2	41.9	51.5	49.5	37.8	23.8	12.5	3.88	0.00	0.00	0.00	0.00	---	274

one-half-peak spread: U:9.8,D:9.3 , L:11.5,R:11.3


NEMA Beam Type: Type 4

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-03-13

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:BlazeMini Recessed-500mm-RGBW GREEN-1525D-Rev2	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:15x25 DEG	DIM.:500mm	SERIAL No.:IES000901-G
MFR.:	SUR.:	Shielding Angle:

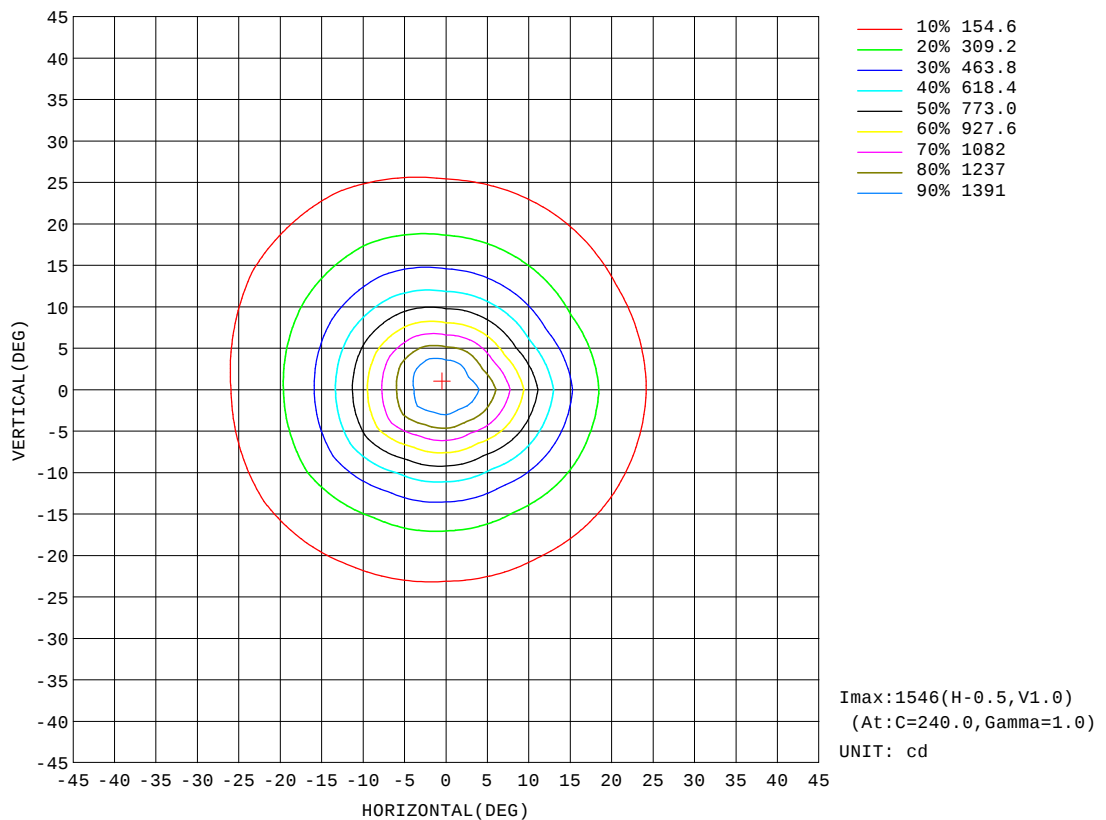


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-13

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:BlazeMini Recessed-500mm-RGBW GREEN-1525D-Rev2	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:15x25 DEG	DIM.:500mm	SERIAL No.:IES000901-G
MFR.:	SUR.:	Shielding Angle:

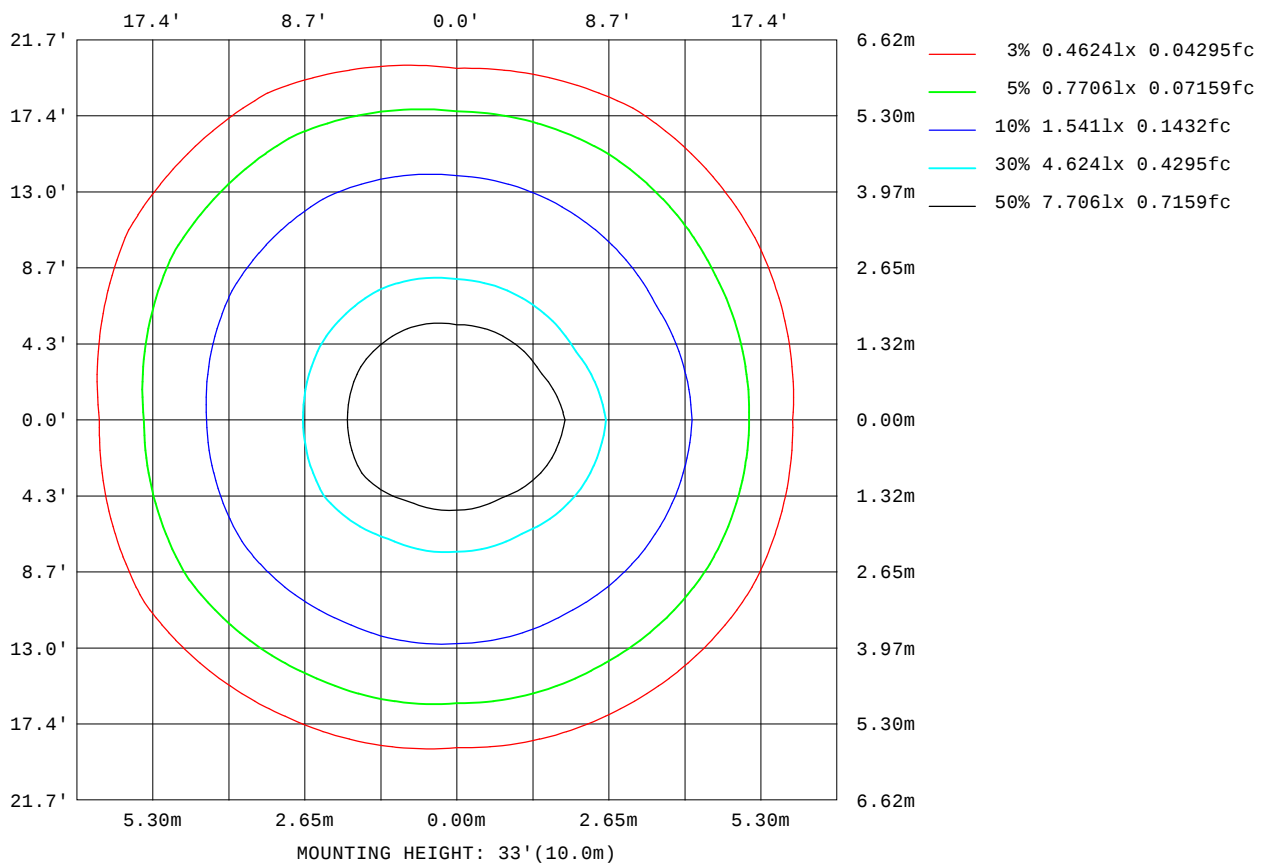

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-03-13

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

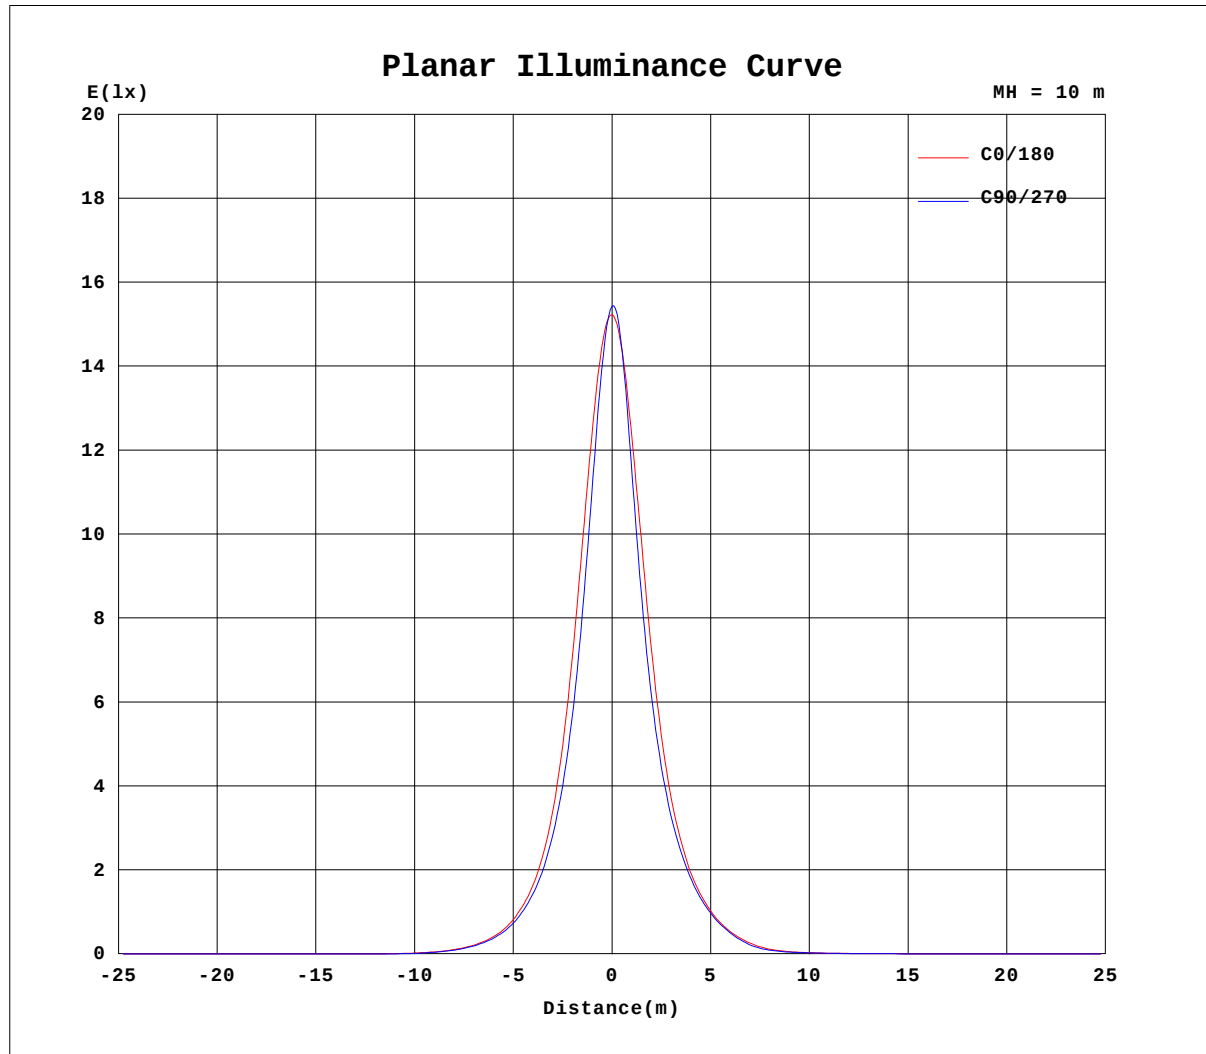


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-03-13

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:BlazeMini Recessed-500mm-RGBW GREEN-1525D-Rev2	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:15x25 DEG	DIM.:500mm	SERIAL No.:IES000901-G
MFR.:	SUR.:	Shielding Angle:

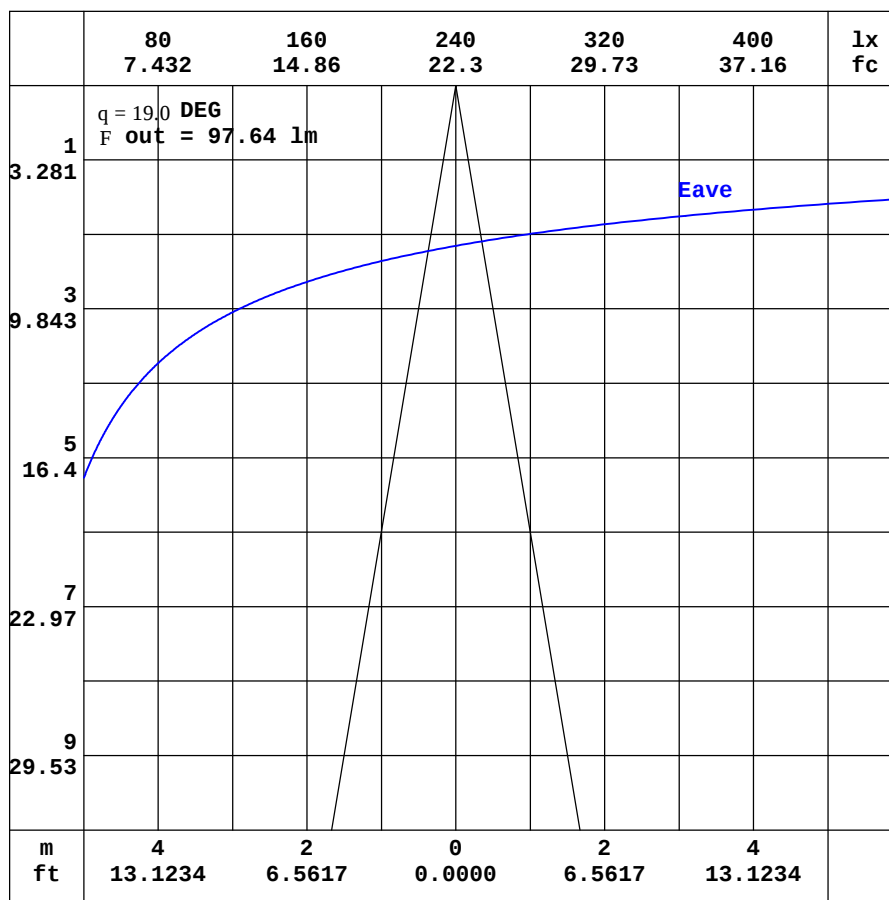

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-13

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeMini Recessed-500mm-RGBW GREEN-1525D-Rev2	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:15x25 DEG	DIM.:500mm	SERIAL No.:IES000901-G
MFR.:	SUR.:	Shielding Angle:

Table--1
UNIT: cd

H(°)\V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	1.15	1.02	0.93	0.91	0.93	1.00	1.15	1.41	1.77	2.17	2.54	2.79	2.92	2.94	2.92	2.86	2.74	2.65	2.67
-170	1.15	1.00	0.90	0.87	0.87	0.90	0.98	1.14	1.35	1.59	1.81	1.95	2.03	2.06	2.06	2.12	2.29	2.43	2.51
-160	1.15	0.99	0.88	0.84	0.81	0.80	0.81	0.86	0.93	1.00	1.05	1.06	1.08	1.35	1.61	1.84	2.02	2.17	2.25
-150	1.15	0.98	0.87	0.81	0.77	0.72	0.69	0.64	0.60	0.52	0.45	0.58	0.75	0.93	1.12	1.30	1.45	1.57	1.64
-140	1.15	0.98	0.86	0.79	0.73	0.67	0.60	0.52	0.40	0.35	0.36	0.38	0.43	0.52	0.63	0.72	0.82	0.89	0.94
-130	1.15	0.98	0.86	0.76	0.70	0.64	0.57	0.47	0.42	0.38	0.35	0.34	0.34	0.33	0.34	0.36	0.39	0.41	0.43
-120	1.15	0.98	0.86	0.76	0.68	0.61	0.54	0.49	0.48	0.46	0.44	0.42	0.40	0.38	0.36	0.34	0.33	0.32	0.32
-110	1.15	0.99	0.86	0.76	0.67	0.60	0.52	0.50	0.50	0.49	0.49	0.49	0.49	0.49	0.48	0.47	0.45	0.45	0.44
-100	1.15	1.01	0.87	0.75	0.65	0.55	0.47	0.47	0.47	0.47	0.48	0.48	0.49	0.49	0.49	0.49	0.49	0.49	0.49
-90	1.15	1.02	0.89	0.76	0.63	0.50	0.37	0.37	0.37	0.37	0.36	0.36	0.36	0.37	0.38	0.39	0.40	0.41	0.42
-80	1.15	1.04	0.92	0.79	0.64	0.47	0.29	0.25	0.24	0.21	0.20	0.19	0.17	0.17	0.17	0.17	0.18	0.18	0.19
-70	1.15	1.07	0.97	0.83	0.66	0.47	0.25	0.16	0.13	0.11	0.09	0.08	0.07	0.07	0.08	0.08	0.08	0.08	0.08
-60	1.15	1.10	1.02	0.89	0.73	0.54	0.31	0.11	0.09	0.08	0.08	0.08	0.08	0.08	0.09	0.09	0.09	0.10	0.10
-50	1.15	1.14	1.08	0.99	0.86	0.70	0.49	0.22	0.08	0.08	0.09	0.12	0.19	0.36	0.67	0.99	1.09	0.97	0.64
-40	1.15	1.18	1.16	1.11	1.05	0.96	0.82	0.60	0.26	0.14	0.55	1.64	3.91	7.64	11.8	14.5	16.4	17.0	15.9
-30	1.15	1.21	1.24	1.26	1.30	1.32	1.32	1.26	1.17	1.60	3.55	9.50	19.7	31.9	43.8	54.8	63.7	68.9	68.1
-20	1.15	1.25	1.33	1.44	1.57	1.75	1.98	2.21	2.76	4.77	11.3	27.1	51.0	78.6	111	150	185	215	220
-10	1.15	1.29	1.43	1.61	1.86	2.23	2.73	3.33	4.51	8.10	18.5	42.4	81.5	138	222	356	515	648	706
0	1.15	1.32	1.51	1.77	2.13	2.68	3.43	4.36	5.85	9.44	19.4	47.7	95.8	171	297	511	879	1309	1523
10	1.15	1.32	1.51	1.76	2.11	2.63	3.36	4.25	5.73	9.51	20.4	47.0	90.4	154	245	381	560	730	751
20	1.15	1.31	1.49	1.72	2.05	2.50	3.13	3.90	5.02	7.57	14.3	32.3	61.8	97.3	141	192	241	271	270
30	1.15	1.30	1.46	1.66	1.94	2.30	2.80	3.42	4.15	5.39	7.98	13.2	23.4	39.7	59.9	78.9	89.6	94.4	91.2
40	1.15	1.29	1.43	1.59	1.80	2.07	2.43	2.88	3.39	3.94	4.68	5.91	7.68	10.2	13.3	16.1	17.9	17.9	15.8
50	1.15	1.27	1.39	1.51	1.67	1.85	2.08	2.35	2.66	3.01	3.38	3.75	4.13	4.51	4.91	5.27	5.49	5.50	5.34
60	1.15	1.24	1.34	1.44	1.54	1.65	1.78	1.93	2.08	2.24	2.41	2.60	2.79	2.96	3.10	3.21	3.28	3.32	3.32
70	1.15	1.21	1.29	1.35	1.42	1.49	1.56	1.62	1.68	1.74	1.80	1.85	1.91	1.96	2.01	2.04	2.06	2.07	2.07
80	1.15	1.18	1.23	1.27	1.31	1.35	1.38	1.40	1.42	1.43	1.44	1.45	1.47	1.48	1.50	1.51	1.51	1.52	1.52
90	1.15	1.16	1.17	1.19	1.20	1.21	1.23	1.22	1.21	1.20	1.19	1.18	1.17	1.17	1.17	1.17	1.17	1.17	1.17
100	1.15	1.14	1.12	1.11	1.10	1.09	1.08	1.05	1.02	0.99	0.97	0.95	0.93	0.93	0.93	0.93	0.93	0.93	0.93
110	1.15	1.11	1.08	1.04	1.01	0.99	0.97	0.94	0.93	0.91	0.90	0.90	0.90	0.90	0.90	0.89	0.89	0.89	0.89
120	1.15	1.08	1.04	0.99	0.95	0.93	0.91	0.91	0.90	0.91	0.91	0.94	0.96	0.99	1.01	1.04	1.05	1.06	1.06
130	1.15	1.07	1.00	0.95	0.93	0.91	0.91	0.91	0.92	0.98	1.06	1.15	1.25	1.37	1.47	1.57	1.66	1.71	1.73
140	1.15	1.05	0.97	0.93	0.91	0.91	0.92	0.97	1.06	1.20	1.39	1.60	1.83	2.06	2.25	2.40	2.51	2.57	2.60
150	1.15	1.04	0.95	0.92	0.91	0.92	0.97	1.09	1.28	1.52	1.82	2.13	2.41	2.64	2.81	2.94	3.00	3.04	3.06
160	1.15	1.03	0.93	0.91	0.91	0.95	1.05	1.24	1.51	1.86	2.21	2.51	2.74	2.92	3.06	3.14	3.18	3.21	3.24
170	1.15	1.02	0.93	0.91	0.92	0.98	1.11	1.36	1.69	2.08	2.45	2.72	2.90	3.00	3.05	3.08	3.07	3.06	3.15
180	1.15	1.02	0.93	0.91	0.93	1.00	1.15	1.41	1.77	2.17	2.54	2.79	2.92	2.94	2.92	2.86	2.74	2.65	2.70

H_b Range:-90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-13

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeMini Recessed-500mm-RGBW GREEN-1525D-Rev2	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:15x25 DEG	DIM.:500mm	SERIAL No.:IES000901-G
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	2.33	2.22	2.10	1.95	1.77	1.51	1.23	0.93	0.67	0.47	0.37	0.37	0.41	0.47	0.49	0.49	0.44	0.37	
-170	2.39	2.31	2.19	2.01	1.78	1.50	1.19	0.90	0.64	0.46	0.37	0.38	0.41	0.47	0.49	0.49	0.44	0.37	
-160	2.20	2.11	1.96	1.77	1.54	1.29	1.01	0.76	0.56	0.42	0.37	0.37	0.42	0.47	0.49	0.49	0.44	0.37	
-150	1.62	1.55	1.43	1.28	1.09	0.90	0.72	0.57	0.45	0.38	0.37	0.38	0.44	0.48	0.49	0.49	0.44	0.37	
-140	0.93	0.88	0.82	0.72	0.63	0.53	0.45	0.40	0.37	0.36	0.37	0.40	0.46	0.48	0.49	0.49	0.44	0.37	
-130	0.43	0.42	0.39	0.36	0.34	0.34	0.35	0.35	0.36	0.37	0.41	0.45	0.48	0.49	0.49	0.47	0.43	0.37	
-120	0.32	0.33	0.34	0.34	0.36	0.38	0.39	0.41	0.43	0.45	0.45	0.48	0.49	0.49	0.49	0.45	0.42	0.37	
-110	0.44	0.44	0.45	0.47	0.48	0.49	0.49	0.49	0.49	0.49	0.49	0.49	0.49	0.49	0.48	0.46	0.44	0.41	0.37
-100	0.49	0.49	0.49	0.49	0.49	0.50	0.49	0.49	0.49	0.49	0.49	0.49	0.49	0.48	0.46	0.45	0.42	0.40	0.37
-90	0.42	0.42	0.41	0.41	0.41	0.41	0.42	0.42	0.43	0.43	0.44	0.44	0.43	0.42	0.41	0.40	0.39	0.37	
-80	0.19	0.20	0.20	0.20	0.21	0.22	0.24	0.26	0.28	0.30	0.32	0.34	0.36	0.37	0.37	0.37	0.37	0.37	
-70	0.08	0.08	0.09	0.09	0.09	0.09	0.11	0.14	0.15	0.19	0.22	0.24	0.27	0.29	0.32	0.35	0.37	0.37	
-60	0.10	0.10	0.10	0.09	0.09	0.09	0.09	0.10	0.11	0.12	0.15	0.17	0.21	0.23	0.28	0.32	0.35	0.37	
-50	0.91	1.00	0.88	0.60	0.35	0.21	0.13	0.10	0.10	0.10	0.11	0.13	0.15	0.19	0.23	0.29	0.34	0.37	
-40	16.4	15.4	13.5	10.8	7.51	4.37	2.07	0.72	0.17	0.10	0.11	0.11	0.13	0.15	0.20	0.27	0.33	0.37	
-30	66.3	59.2	49.4	38.2	27.6	18.1	10.6	5.28	1.60	0.28	0.14	0.12	0.12	0.14	0.17	0.24	0.32	0.37	
-20	204	168	130	93.2	63.8	41.2	23.7	11.7	4.45	0.97	0.20	0.15	0.13	0.13	0.16	0.22	0.31	0.37	
-10	610	459	302	183	110	64.1	35.1	17.2	6.86	1.65	0.29	0.18	0.14	0.13	0.14	0.22	0.31	0.37	
0	1322	871	481	256	140	74.8	38.8	18.2	7.16	1.60	0.28	0.20	0.14	0.13	0.14	0.22	0.31	0.37	
10	658	466	295	185	114	67.9	37.8	19.1	8.22	2.69	1.12	0.75	0.51	0.36	0.28	0.29	0.34	0.37	
20	244	199	151	107	73.0	47.5	28.2	14.9	6.87	2.94	1.75	1.20	0.82	0.57	0.42	0.37	0.36	0.37	
30	87.5	77.7	65.3	49.3	33.9	22.1	14.4	9.11	4.89	2.98	2.11	1.48	1.03	0.73	0.54	0.44	0.40	0.37	
40	17.3	17.2	15.4	12.8	10.3	7.96	5.93	4.43	3.66	2.96	2.20	1.60	1.16	0.85	0.65	0.51	0.43	0.37	
50	5.45	5.39	5.13	4.72	4.29	3.89	3.51	3.15	2.80	2.48	2.09	1.60	1.22	0.93	0.71	0.56	0.46	0.37	
60	3.29	3.21	3.11	2.97	2.81	2.63	2.46	2.29	2.12	1.97	1.84	1.54	1.22	0.97	0.77	0.60	0.48	0.37	
70	2.06	2.03	2.00	1.95	1.90	1.84	1.78	1.73	1.67	1.62	1.57	1.45	1.20	0.98	0.79	0.63	0.49	0.37	
80	1.51	1.50	1.49	1.47	1.45	1.42	1.42	1.40	1.39	1.37	1.35	1.32	1.13	0.96	0.79	0.64	0.50	0.37	
90	1.17	1.16	1.15	1.14	1.14	1.13	1.14	1.14	1.15	1.16	1.16	1.17	1.04	0.90	0.77	0.64	0.51	0.37	
100	0.93	0.92	0.91	0.90	0.90	0.90	0.92	0.93	0.95	0.97	1.00	1.01	0.93	0.84	0.74	0.64	0.51	0.37	
110	0.89	0.90	0.90	0.90	0.90	0.89	0.89	0.89	0.90	0.90	0.91	0.90	0.85	0.79	0.71	0.62	0.51	0.37	
120	1.07	1.07	1.07	1.05	1.03	1.00	0.96	0.93	0.91	0.89	0.89	0.85	0.79	0.74	0.69	0.61	0.51	0.37	
130	1.74	1.72	1.66	1.58	1.48	1.37	1.25	1.15	1.05	0.98	0.89	0.81	0.75	0.70	0.66	0.60	0.50	0.37	
140	2.60	2.57	2.51	2.39	2.22	2.02	1.79	1.55	1.35	1.12	0.90	0.77	0.71	0.67	0.63	0.59	0.50	0.37	
150	3.06	3.04	3.00	2.91	2.77	2.59	2.34	2.05	1.58	1.17	0.89	0.73	0.66	0.63	0.60	0.57	0.49	0.37	
160	3.22	3.20	3.17	3.10	3.01	2.87	2.46	1.97	1.49	1.08	0.81	0.65	0.59	0.58	0.56	0.54	0.47	0.37	
170	3.05	3.06	3.09	2.90	2.63	2.31	1.93	1.55	1.16	0.84	0.62	0.53	0.50	0.53	0.53	0.51	0.46	0.37	
180	2.33	2.22	2.10	1.95	1.77	1.51	1.23	0.93	0.67	0.47	0.37	0.37	0.41	0.47	0.49	0.49	0.44	0.37	

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-03-13

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: