

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	4622.2 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	46.5V x 48.5H
	At 50% of Imax	18.2V x 22.1H
	At 90% of Imax	6.5V x 8.3H

Beam Flux	Total	1000.3 lumens per klm.
	To 10% of Imax	757.3 lumens per klm.
	To 50% of Imax	313.9 lumens per klm.
	To 90% of Imax	53.7 lumens per klm.

Upward LOR	2.0 %
Downward LOR	98.0 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-13

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:BlazeMini Recessed-500mm-RGBW RED-1525D-Rev2	TYPE:RGBW-RED	WEIGHT:
SPEC.:15x25 DEG	DIM.:500mm	SERIAL No.:IES000901-R
MFR.:	SUR.:	Shielding Angle:

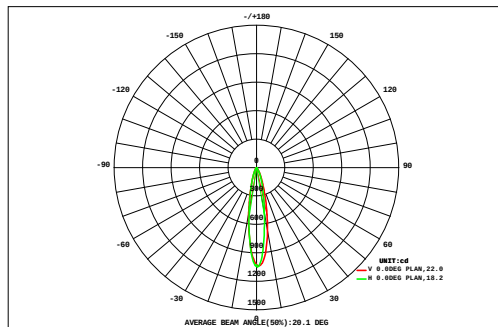

DATA OF LAMP		Eff:42.98lm/W	
MODEL		Imax(cd)	1049
NOMINAL POWER(W)	5.28	AVAILABILITY(%)	75.9
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	172.1
NOMINAL FLUX(lm)	226.9	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	226.9
TEST VOLTAGE(V)	24	q @50%(H,V)	22,18DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm				F t	F a
	0.01	0.02	0.02	0.03	0.04	0.05	0.05	0.06	0.06	0.06	0.06	0.06	0.05	0.04	0.03	0.02	0.02	0.01	0.70	0.00		
	40	0.02	0.02	0.04	0.05	0.07	0.09	0.11	0.13	0.13	0.13	0.14	0.13	0.11	0.08	0.05	0.03	0.02	0.02	1.37	0.00	
	35	0.02	0.04	0.06	0.09	0.13	0.19	0.24	0.28	0.30	0.31	0.31	0.29	0.24	0.16	0.10	0.06	0.03	0.02	2.86	0.00	
	30	0.03	0.05	0.09	0.14	0.22	0.32	0.42	0.50	0.56	0.59	0.57	0.51	0.41	0.29	0.18	0.10	0.05	0.02	5.05	0.00	
	25	0.04	0.07	0.13	0.21	0.32	0.47	0.65	0.82	0.95	0.99	0.94	0.81	0.62	0.44	0.28	0.16	0.07	0.03	8.00	3.59	
	20	0.04	0.09	0.16	0.27	0.44	0.67	0.97	1.31	1.58	1.66	1.52	1.23	0.89	0.60	0.38	0.21	0.09	0.03	12.2	9.25	
	15	0.05	0.10	0.19	0.33	0.55	0.90	1.44	2.14	2.70	2.84	2.48	1.83	1.23	0.79	0.48	0.26	0.11	0.04	18.5	16.0	
	10	0.05	0.11	0.21	0.38	0.66	1.16	2.06	3.44	4.72	4.92	3.96	2.64	1.63	0.97	0.55	0.29	0.13	0.04	27.9	25.7	
	5	0.05	0.11	0.22	0.40	0.72	1.33	2.57	4.66	6.86	7.20	5.61	3.56	2.01	1.11	0.60	0.31	0.13	0.04	37.5	35.4	
	0	0.05	0.11	0.21	0.39	0.72	1.35	2.64	4.75	6.73	7.03	5.61	3.56	1.98	1.08	0.58	0.30	0.12	0.03	37.3	35.2	
	-5	0.05	0.10	0.20	0.36	0.65	1.18	2.16	3.44	4.48	4.60	3.77	2.58	1.55	0.90	0.51	0.27	0.12	0.03	26.9	24.8	
	-10	0.04	0.09	0.17	0.31	0.53	0.89	1.40	1.99	2.48	2.54	2.15	1.62	1.08	0.69	0.41	0.22	0.10	0.03	16.7	14.2	
	-15	0.03	0.07	0.14	0.24	0.39	0.60	0.87	1.15	1.35	1.38	1.22	0.98	0.72	0.49	0.31	0.18	0.08	0.02	10.2	6.92	
	-20	0.03	0.05	0.10	0.18	0.27	0.39	0.53	0.67	0.76	0.77	0.71	0.59	0.46	0.33	0.22	0.13	0.05	0.02	6.25	1.06	
	-25	0.02	0.04	0.07	0.12	0.18	0.25	0.32	0.38	0.42	0.43	0.41	0.35	0.28	0.21	0.14	0.08	0.03	0.01	3.71	0.00	
	-30	0.01	0.02	0.04	0.07	0.11	0.15	0.18	0.21	0.23	0.23	0.22	0.20	0.16	0.12	0.08	0.04	0.01	0.00	2.08	0.00	
	-35	0.00	0.01	0.02	0.04	0.06	0.08	0.10	0.11	0.11	0.11	0.11	0.10	0.08	0.06	0.03	0.02	0.01	0.00	1.04	0.00	
	-40	0.00	0.00	0.01	0.01	0.02	0.03	0.04	0.04	0.04	0.04	0.05	0.04	0.03	0.02	0.01	0.01	0.00	0.00	0.42	0.00	
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)				10	15	20	25	30	35	40	45		
F t	0.55	1.11	2.07	3.62	6.09	10.1	16.8	26.1	34.4	35.8	29.9	21.1	13.5	8.37	4.95	2.67	1.18	0.41	219	---		
F a	0.00	0.00	0.00	0.00	1.13	6.73	13.9	23.5	32.0	33.5	27.4	18.4	10.6	4.79	0.30	0.00	0.00	0.00	---	172		

one-half-peak spread: U:9.5,D:8.9 , L:11.1,R:11.2


NEMA Beam Type: Type 4

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-03-13

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:BlazeMini Recessed-500mm-RGBW RED-1525D-Rev2	TYPE:RGBW-RED	WEIGHT:
SPEC.:15x25 DEG	DIM.:500mm	SERIAL No.:IES000901-R
MFR.:	SUR.:	Shielding Angle:

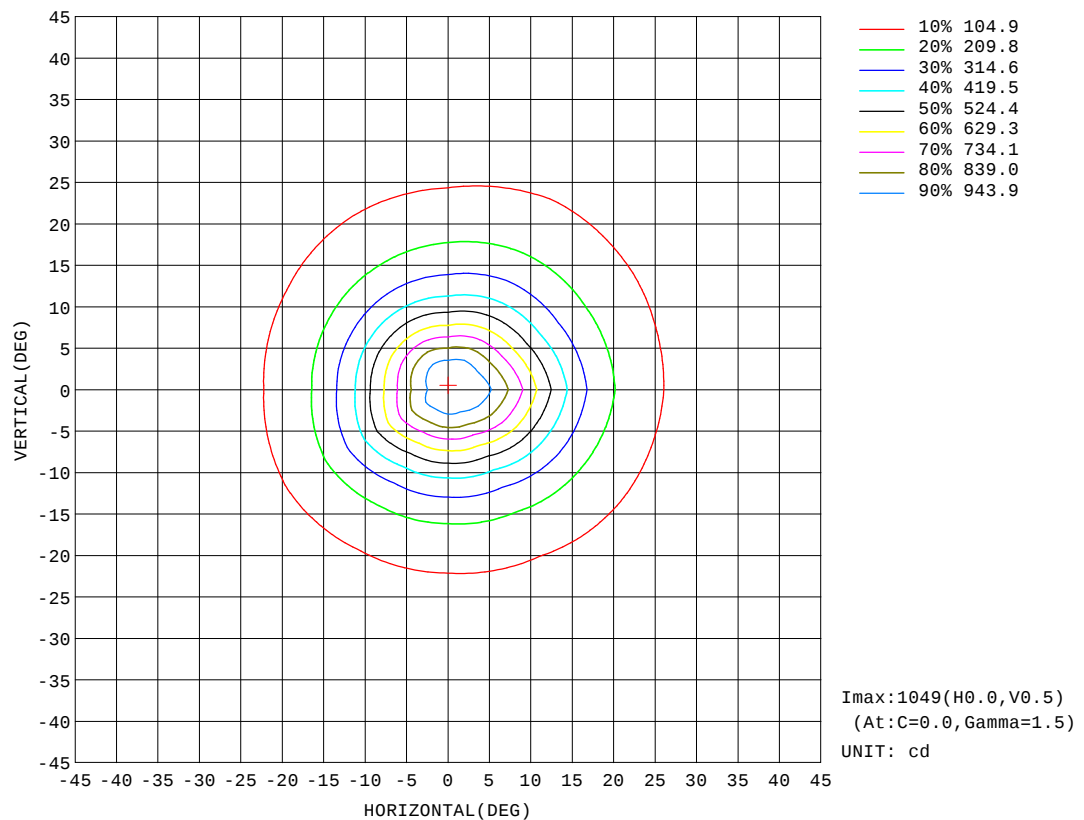


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-13

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:BlazeMini Recessed-500mm-RGBW RED-1525D-Rev2	TYPE:RGBW-RED	WEIGHT:
SPEC.:15x25 DEG	DIM.:500mm	SERIAL No.:IES000901-R
MFR.:	SUR.:	Shielding Angle:

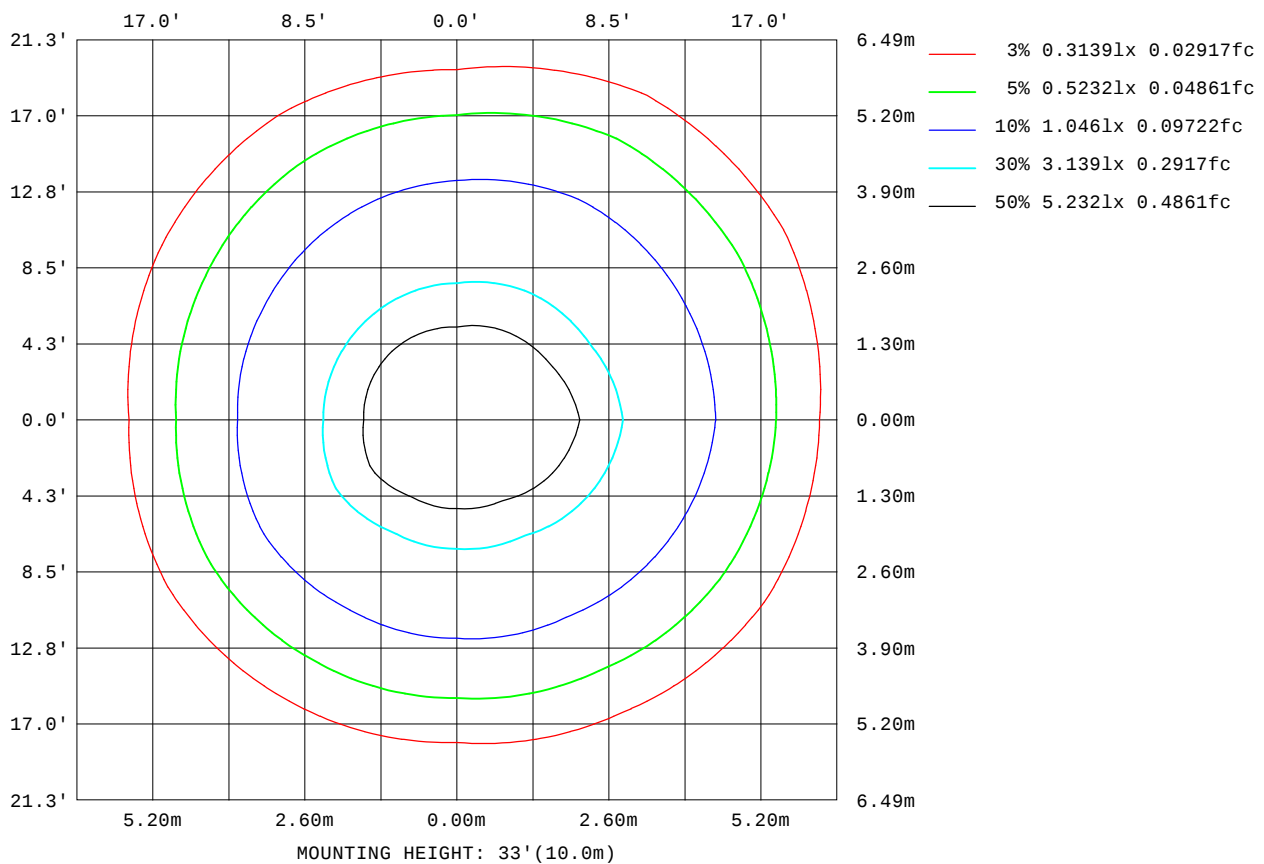

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-03-13

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

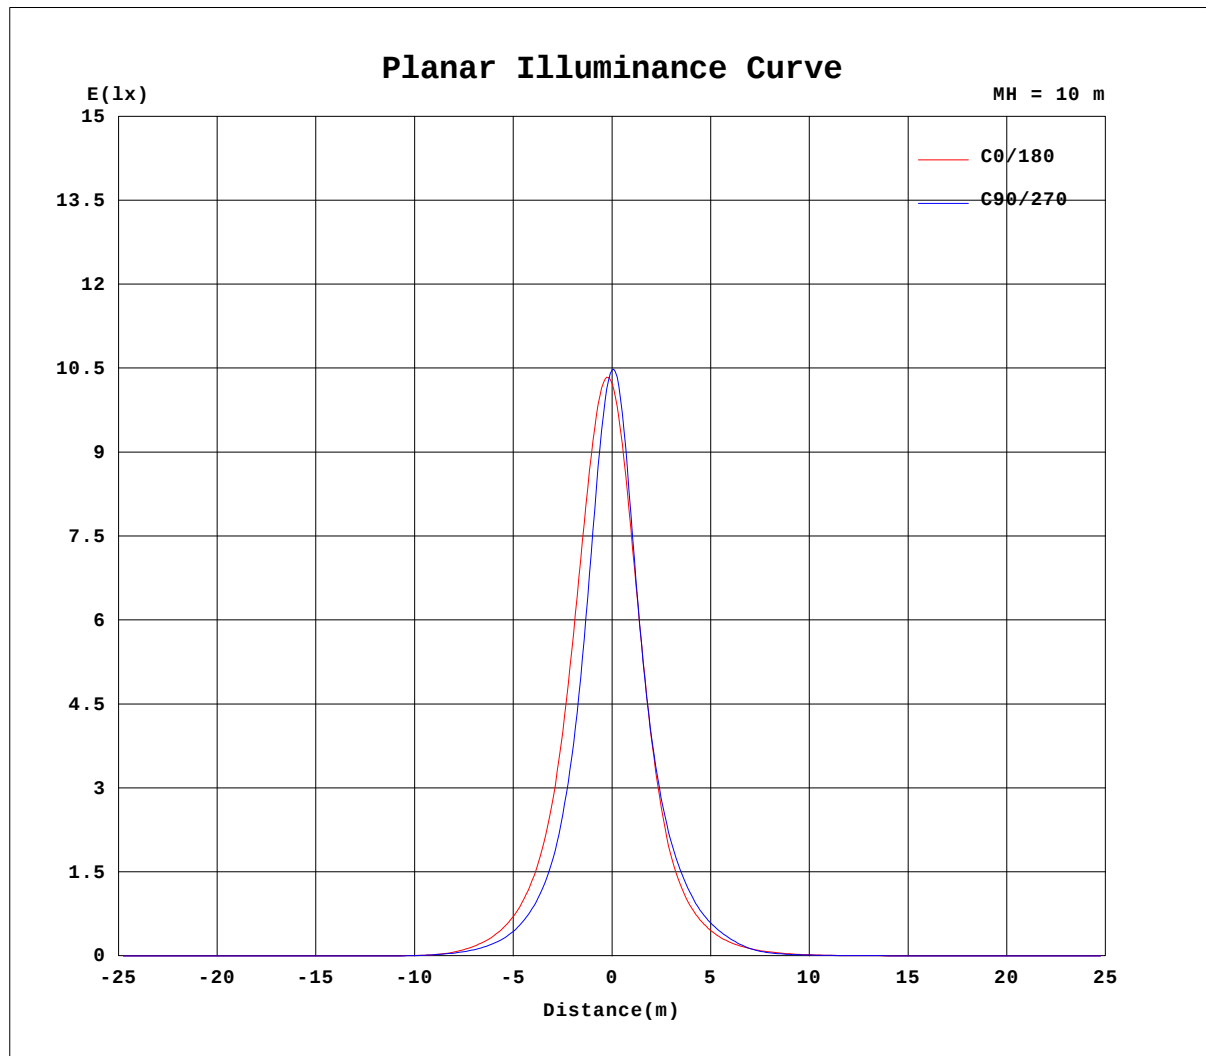


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-03-13

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:BlazeMini Recessed-500mm-RGBW RED-1525D-Rev2	TYPE:RGBW-RED	WEIGHT:
SPEC.:15x25 DEG	DIM.:500mm	SERIAL No.:IES000901-R
MFR.:	SUR.:	Shielding Angle:

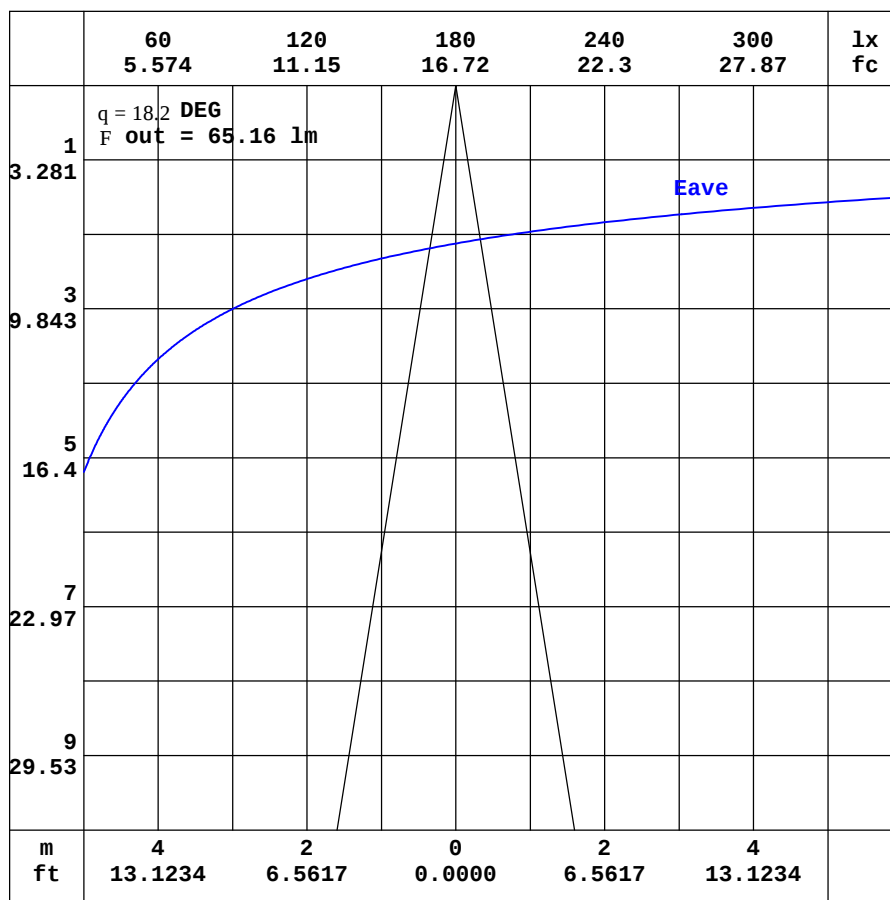

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-13

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeMini Recessed-500mm-RGBW RED-1525D-Rev2	TYPE:RGBW-RED	WEIGHT:
SPEC.:15x25 DEG	DIM.:500mm	SERIAL No.:IES000901-R
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°)\V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.66	0.58	0.54	0.54	0.57	0.64	0.77	0.97	1.23	1.49	1.70	1.84	1.87	1.86	1.82	1.77	1.69	1.63	1.66
-170	0.66	0.57	0.53	0.52	0.53	0.56	0.65	0.77	0.92	1.09	1.21	1.30	1.34	1.36	1.36	1.39	1.47	1.55	1.61
-160	0.66	0.57	0.52	0.49	0.49	0.49	0.52	0.56	0.62	0.67	0.70	0.71	0.73	0.91	1.07	1.20	1.31	1.40	1.44
-150	0.66	0.56	0.51	0.47	0.46	0.44	0.41	0.40	0.37	0.33	0.28	0.37	0.48	0.61	0.73	0.83	0.93	1.00	1.03
-140	0.66	0.56	0.50	0.46	0.43	0.40	0.35	0.29	0.22	0.20	0.20	0.22	0.25	0.31	0.37	0.44	0.49	0.54	0.55
-130	0.66	0.56	0.49	0.45	0.41	0.37	0.33	0.26	0.21	0.20	0.20	0.19	0.18	0.18	0.18	0.19	0.21	0.23	0.23
-120	0.66	0.57	0.50	0.44	0.40	0.36	0.31	0.28	0.28	0.27	0.25	0.24	0.23	0.22	0.20	0.19	0.18	0.17	0.17
-110	0.66	0.57	0.50	0.44	0.39	0.35	0.31	0.30	0.29	0.29	0.29	0.29	0.30	0.29	0.29	0.28	0.28	0.27	0.26
-100	0.66	0.59	0.51	0.46	0.40	0.35	0.30	0.29	0.29	0.29	0.29	0.29	0.30	0.30	0.30	0.30	0.30	0.30	0.30
-90	0.66	0.59	0.53	0.46	0.39	0.32	0.26	0.25	0.25	0.24	0.24	0.23	0.23	0.23	0.24	0.25	0.25	0.26	0.27
-80	0.66	0.62	0.55	0.47	0.39	0.30	0.19	0.17	0.16	0.14	0.13	0.11	0.09	0.09	0.09	0.09	0.09	0.09	0.10
-70	0.66	0.63	0.58	0.50	0.40	0.29	0.16	0.10	0.08	0.05	0.04	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.03
-60	0.66	0.64	0.60	0.54	0.44	0.32	0.18	0.06	0.04	0.03	0.02	0.02	0.02	0.02	0.03	0.03	0.03	0.02	0.02
-50	0.66	0.67	0.64	0.59	0.51	0.41	0.28	0.11	0.03	0.03	0.03	0.05	0.10	0.19	0.34	0.48	0.54	0.49	0.32
-40	0.66	0.70	0.69	0.66	0.61	0.55	0.47	0.34	0.13	0.06	0.40	1.24	2.56	4.40	6.45	7.96	9.09	9.54	9.15
-30	0.66	0.72	0.74	0.75	0.75	0.76	0.76	0.72	0.68	1.26	3.14	6.28	10.7	16.5	22.9	29.6	35.4	39.5	40.5
-20	0.66	0.74	0.79	0.84	0.91	1.01	1.14	1.27	1.76	3.61	7.49	14.3	24.5	38.2	56.1	78.5	102	125	134
-10	0.66	0.76	0.84	0.94	1.08	1.29	1.58	1.94	2.87	5.71	11.6	21.7	38.2	64.6	109	185	292	396	456
0	0.66	0.77	0.88	1.03	1.24	1.56	2.00	2.54	3.54	6.67	13.0	24.2	43.3	76.6	136	255	486	805	1023
10	0.66	0.78	0.88	1.03	1.23	1.53	1.95	2.49	3.54	6.57	12.8	23.4	40.5	67.1	109	181	293	423	484
20	0.66	0.77	0.88	1.02	1.20	1.46	1.82	2.29	3.04	5.17	9.53	17.1	28.4	43.9	64.7	91.6	122	150	166
30	0.66	0.77	0.87	0.98	1.14	1.35	1.64	2.00	2.45	3.37	5.62	8.75	13.2	20.2	29.6	39.5	47.3	53.5	55.9
40	0.66	0.76	0.85	0.95	1.07	1.22	1.43	1.68	1.99	2.34	2.84	3.74	4.99	6.35	7.86	9.46	10.6	10.8	10.0
50	0.66	0.74	0.82	0.90	0.99	1.10	1.23	1.40	1.57	1.78	2.01	2.26	2.50	2.76	3.04	3.29	3.48	3.54	3.49
60	0.66	0.73	0.79	0.86	0.92	0.99	1.07	1.15	1.24	1.33	1.43	1.55	1.67	1.79	1.89	1.99	2.06	2.11	2.14
70	0.66	0.71	0.76	0.81	0.85	0.90	0.94	0.98	1.01	1.04	1.07	1.11	1.14	1.18	1.22	1.25	1.28	1.29	1.30
80	0.66	0.70	0.73	0.75	0.79	0.81	0.84	0.85	0.86	0.87	0.87	0.87	0.88	0.89	0.91	0.92	0.93	0.94	0.95
90	0.66	0.68	0.69	0.70	0.71	0.73	0.74	0.73	0.72	0.72	0.71	0.70	0.69	0.70	0.71	0.71	0.72	0.72	0.73
100	0.66	0.66	0.65	0.65	0.65	0.64	0.64	0.62	0.60	0.58	0.57	0.55	0.54	0.55	0.55	0.55	0.56	0.56	0.57
110	0.66	0.64	0.62	0.61	0.59	0.58	0.58	0.56	0.55	0.54	0.54	0.54	0.54	0.54	0.54	0.54	0.53	0.53	0.53
120	0.66	0.63	0.60	0.57	0.56	0.55	0.54	0.54	0.54	0.54	0.55	0.57	0.59	0.60	0.62	0.62	0.63	0.63	0.62
130	0.66	0.61	0.57	0.56	0.54	0.54	0.54	0.54	0.57	0.61	0.67	0.74	0.81	0.88	0.95	1.01	1.05	1.07	1.07
140	0.66	0.60	0.56	0.54	0.54	0.55	0.56	0.60	0.68	0.78	0.92	1.07	1.22	1.36	1.49	1.57	1.62	1.64	1.64
150	0.66	0.59	0.55	0.54	0.55	0.56	0.61	0.71	0.85	1.02	1.23	1.43	1.60	1.74	1.83	1.91	1.93	1.94	1.93
160	0.66	0.59	0.55	0.54	0.56	0.59	0.68	0.82	1.03	1.26	1.49	1.67	1.79	1.90	1.97	2.01	2.03	2.04	2.05
170	0.66	0.58	0.54	0.54	0.56	0.62	0.74	0.92	1.16	1.42	1.64	1.80	1.88	1.92	1.94	1.96	1.94	1.94	2.01
180	0.66	0.58	0.54	0.54	0.57	0.64	0.77	0.97	1.23	1.49	1.70	1.84	1.87	1.86	1.82	1.77	1.69	1.63	1.69

H_(b) Range:-90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature:25.3DEG
 Operators:Fan
 Test Date:2023-03-13

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:8.630m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeMini Recessed-500mm-RGBW RED-1525D-Rev2	TYPE:RGBW-RED	WEIGHT:
SPEC.:15x25 DEG	DIM.:500mm	SERIAL No.:IES000901-R
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	1.45	1.37	1.30	1.20	1.04	0.86	0.68	0.47	0.32	0.22	0.21	0.22	0.27	0.30	0.30	0.29	0.27	0.20
-170	1.51	1.45	1.38	1.24	1.06	0.86	0.65	0.46	0.31	0.22	0.21	0.23	0.27	0.30	0.30	0.29	0.27	0.20
-160	1.39	1.31	1.20	1.06	0.89	0.72	0.53	0.38	0.27	0.22	0.21	0.23	0.27	0.30	0.30	0.30	0.27	0.20
-150	1.00	0.93	0.83	0.72	0.59	0.47	0.36	0.28	0.22	0.20	0.21	0.24	0.29	0.30	0.30	0.29	0.27	0.20
-140	0.53	0.49	0.43	0.36	0.30	0.25	0.21	0.20	0.20	0.20	0.22	0.26	0.28	0.30	0.30	0.29	0.26	0.20
-130	0.22	0.21	0.19	0.18	0.18	0.18	0.19	0.20	0.20	0.23	0.26	0.28	0.30	0.30	0.30	0.28	0.24	0.20
-120	0.17	0.18	0.18	0.20	0.22	0.23	0.24	0.26	0.28	0.28	0.29	0.30	0.30	0.30	0.29	0.28	0.24	0.20
-110	0.27	0.28	0.29	0.29	0.30	0.30	0.30	0.30	0.30	0.30	0.30	0.30	0.30	0.30	0.29	0.29	0.26	0.20
-100	0.30	0.30	0.30	0.30	0.30	0.30	0.30	0.30	0.30	0.29	0.30	0.30	0.29	0.28	0.26	0.24	0.21	0.20
-90	0.26	0.25	0.25	0.24	0.23	0.23	0.23	0.23	0.24	0.24	0.25	0.25	0.24	0.23	0.23	0.22	0.21	0.20
-80	0.09	0.09	0.09	0.08	0.08	0.09	0.11	0.13	0.14	0.15	0.17	0.18	0.18	0.19	0.19	0.20	0.20	0.20
-70	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.04	0.07	0.09	0.11	0.13	0.14	0.15	0.17	0.19	0.20
-60	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.05	0.06	0.08	0.10	0.12	0.14	0.17	0.20
-50	0.49	0.55	0.49	0.33	0.17	0.07	0.04	0.02	0.02	0.02	0.02	0.03	0.05	0.07	0.09	0.14	0.17	0.20
-40	9.75	9.43	8.23	6.59	4.21	2.13	0.86	0.25	0.03	0.02	0.02	0.03	0.03	0.05	0.07	0.11	0.16	0.20
-30	40.9	37.9	32.4	25.9	18.9	11.6	5.48	1.99	0.55	0.08	0.04	0.03	0.03	0.04	0.06	0.09	0.15	0.20
-20	131	111	90.1	67.4	47.5	30.8	16.4	5.98	1.67	0.34	0.06	0.05	0.03	0.03	0.05	0.08	0.14	0.20
-10	415	329	221	142	87.8	51.6	26.8	10.2	2.83	0.62	0.11	0.06	0.04	0.03	0.04	0.07	0.13	0.20
0	955	673	391	214	118	65.0	31.8	10.8	2.79	0.62	0.12	0.07	0.05	0.03	0.04	0.07	0.13	0.20
10	466	356	240	157	97.8	58.0	30.2	11.6	3.86	1.46	0.72	0.47	0.30	0.19	0.14	0.12	0.15	0.20
20	165	148	118	86.9	60.5	38.7	20.3	8.27	3.66	1.88	1.18	0.79	0.51	0.33	0.23	0.18	0.18	0.20
30	58.0	55.2	48.8	37.5	25.3	14.9	8.39	5.14	3.13	2.05	1.44	0.99	0.66	0.45	0.31	0.23	0.20	0.20
40	11.5	11.5	10.5	8.60	6.61	4.99	3.80	3.02	2.54	2.04	1.49	1.05	0.75	0.52	0.37	0.28	0.23	0.20
50	3.59	3.58	3.42	3.18	2.90	2.64	2.40	2.14	1.90	1.68	1.40	1.05	0.78	0.57	0.42	0.32	0.24	0.20
60	2.13	2.10	2.04	1.96	1.86	1.74	1.63	1.51	1.40	1.30	1.20	0.99	0.78	0.60	0.45	0.34	0.26	0.20
70	1.30	1.29	1.28	1.25	1.21	1.18	1.14	1.11	1.08	1.04	1.01	0.93	0.76	0.61	0.47	0.36	0.28	0.20
80	0.94	0.94	0.93	0.92	0.91	0.89	0.89	0.88	0.88	0.87	0.87	0.85	0.71	0.59	0.48	0.38	0.29	0.20
90	0.72	0.72	0.71	0.71	0.70	0.70	0.71	0.72	0.72	0.73	0.74	0.75	0.66	0.56	0.47	0.38	0.29	0.20
100	0.56	0.56	0.55	0.55	0.55	0.55	0.56	0.57	0.58	0.60	0.62	0.63	0.59	0.53	0.46	0.38	0.29	0.20
110	0.53	0.53	0.53	0.54	0.53	0.53	0.53	0.54	0.54	0.55	0.56	0.56	0.53	0.49	0.44	0.38	0.29	0.20
120	0.63	0.63	0.62	0.61	0.60	0.58	0.56	0.55	0.54	0.54	0.54	0.51	0.49	0.46	0.42	0.38	0.30	0.20
130	1.07	1.04	0.99	0.94	0.87	0.78	0.71	0.64	0.59	0.55	0.52	0.49	0.46	0.43	0.41	0.36	0.29	0.20
140	1.64	1.60	1.54	1.45	1.33	1.18	1.02	0.88	0.75	0.61	0.51	0.46	0.43	0.41	0.39	0.35	0.30	0.20
150	1.93	1.91	1.87	1.80	1.69	1.55	1.38	1.17	0.88	0.64	0.49	0.43	0.40	0.38	0.37	0.34	0.30	0.20
160	2.03	2.01	1.99	1.93	1.87	1.75	1.45	1.13	0.83	0.60	0.45	0.39	0.36	0.36	0.34	0.33	0.29	0.20
170	1.93	1.94	1.94	1.81	1.61	1.40	1.14	0.87	0.63	0.44	0.35	0.31	0.32	0.33	0.32	0.31	0.28	0.20
180	1.45	1.37	1.30	1.20	1.04	0.86	0.68	0.47	0.32	0.22	0.21	0.22	0.27	0.30	0.30	0.29	0.27	0.20

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-03-13

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: