

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	2510.4 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	53.2V x 72.2H
	At 50% of Imax	21.5V x 47.2H
	At 90% of Imax	7.6V x 21.8H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	853.6 lumens per klm.
	To 50% of Imax	448.7 lumens per klm.
	To 90% of Imax	98.1 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:BlazeMini Recessed-500mm-RGBW ALL-2045D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:20x45 DEG	DIM.:500mm	SERIAL No.:IES000898
MFR.:	SUR.:	Shielding Angle:

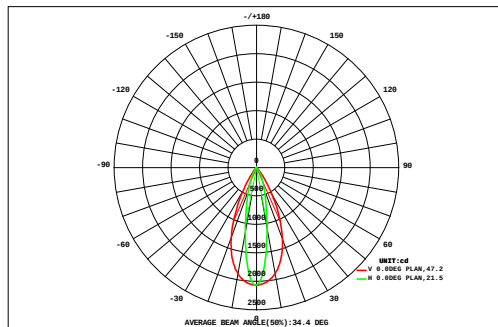

DATA OF LAMP		Eff:33.18lm/W	
MODEL		Imax(cd)	2066
NOMINAL POWER(W)	24.8	AVAILABILITY(%)	85.4
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	703.0
NOMINAL FLUX(lm)	823	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	823.0
TEST VOLTAGE(V)	24	q @50%(H,V)	47,22DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm				F t	F a
	72	64	56	48	40	32	24	16	8	0	8	16	24	32	40	48	56	64	72			
	0.03	0.04	0.05	0.06	0.07	0.08	0.09	0.10	0.10	0.10	0.10	0.09	0.08	0.07	0.06	0.05	0.04	0.02	1.23	0.00		
	0.03	0.04	0.06	0.08	0.09	0.11	0.12	0.13	0.14	0.14	0.14	0.13	0.11	0.09	0.08	0.06	0.04	0.02	1.61	0.00		
	0.03	0.05	0.07	0.10	0.12	0.15	0.18	0.20	0.20	0.21	0.20	0.18	0.15	0.12	0.10	0.07	0.04	0.02	2.19	0.00		
	0.03	0.06	0.09	0.12	0.17	0.26	0.36	0.44	0.45	0.45	0.45	0.37	0.26	0.17	0.12	0.08	0.04	0.02	3.93	0.00		
	0.04	0.06	0.10	0.16	0.32	0.63	1.01	1.32	1.37	1.37	1.33	1.03	0.63	0.32	0.16	0.08	0.04	0.02	9.99	0.00		
	0.04	0.07	0.12	0.25	0.70	1.61	2.68	3.38	3.69	3.68	3.36	2.67	1.59	0.69	0.23	0.08	0.04	0.02	24.9	6.61		
	0.04	0.08	0.14	0.39	1.37	3.44	5.91	7.43	8.16	8.15	7.40	5.87	3.39	1.35	0.34	0.08	0.03	0.01	53.6	46.2		
	0.04	0.09	0.16	0.56	2.25	6.27	11.6	16.1	17.9	17.9	16.3	11.7	6.47	2.34	0.50	0.07	0.02	0.01	110	105		
	0.05	0.09	0.17	0.68	3.09	9.81	19.9	28.9	33.9	34.1	29.1	20.3	10.5	3.38	0.62	0.06	0.01	0.01	195	191		
	0.04	0.08	0.16	0.68	3.10	9.85	20.0	29.1	34.4	34.7	29.5	20.5	10.6	3.40	0.61	0.05	0.01	0.00	197	193		
	0.04	0.07	0.13	0.53	2.25	6.35	11.8	16.4	18.5	18.7	16.7	12.1	6.65	2.37	0.47	0.04	0.01	0.00	113	108		
	0.03	0.05	0.09	0.33	1.37	3.47	5.95	7.37	8.33	8.38	7.46	6.03	3.50	1.36	0.28	0.02	0.01	0.00	54.0	47.1		
	0.03	0.04	0.05	0.16	0.64	1.59	2.62	3.28	3.65	3.66	3.30	2.63	1.57	0.61	0.13	0.01	0.01	0.00	24.0	6.19		
	0.02	0.03	0.02	0.04	0.20	0.53	0.92	1.23	1.30	1.30	1.23	0.91	0.51	0.19	0.04	0.01	0.01	0.00	8.50	0.00		
	0.02	0.02	0.01	0.01	0.04	0.11	0.21	0.29	0.29	0.28	0.28	0.20	0.11	0.03	0.01	0.01	0.01	0.00	1.93	0.00		
	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.03	0.03	0.03	0.02	0.01	0.01	0.01	0.01	0.01	0.00	0.27	0.00		
	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.13	0.00		
	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.12	0.00		
-72 -64 -56 -48 -40 -32 -24 -16 HORIZONTAL (DEG) 16 24 32 40 48 56 64 72																						
F t	0.56	0.90	1.45	4.18	15.8	44.3	83.4	116	132	133	117	84.8	46.1	16.5	3.75	0.79	0.37	0.19	802	---		
F a	0.00	0.00	0.00	0.00	4.62	35.8	75.5	108	125	125	109	76.9	37.7	5.63	0.00	0.00	0.00	0.00	---	703		


one-half-peak spread: U:10.7,D:11.0 , L:22.9,NEFM Beam Type: Type 5 x 4 (H x V)

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-03-09

V_(B) Range: -180 - 180DEG
V_(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:BlazeMini Recessed-500mm-RGBW ALL-2045D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:20x45 DEG	DIM.:500mm	SERIAL No.:IES000898
MFR.:	SUR.:	Shielding Angle:

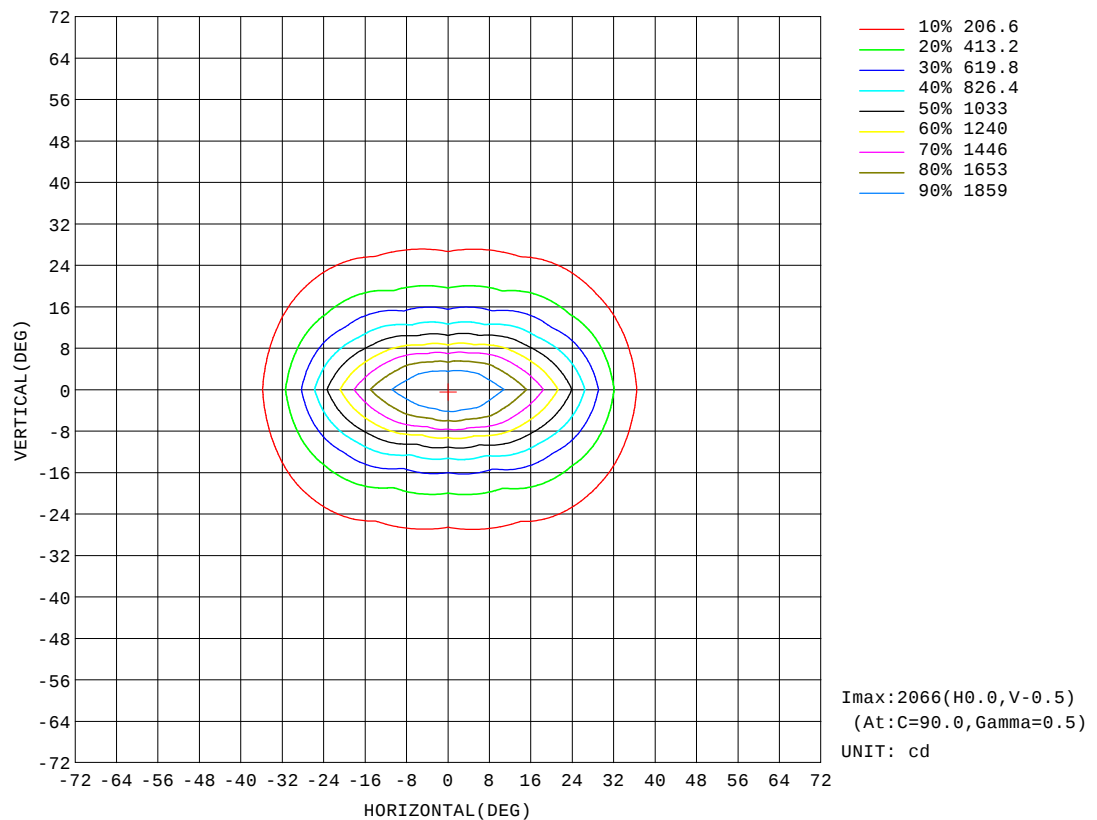


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:BlazeMini Recessed-500mm-RGBW ALL-2045D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:20x45 DEG	DIM.:500mm	SERIAL No.:IES000898
MFR.:	SUR.:	Shielding Angle:

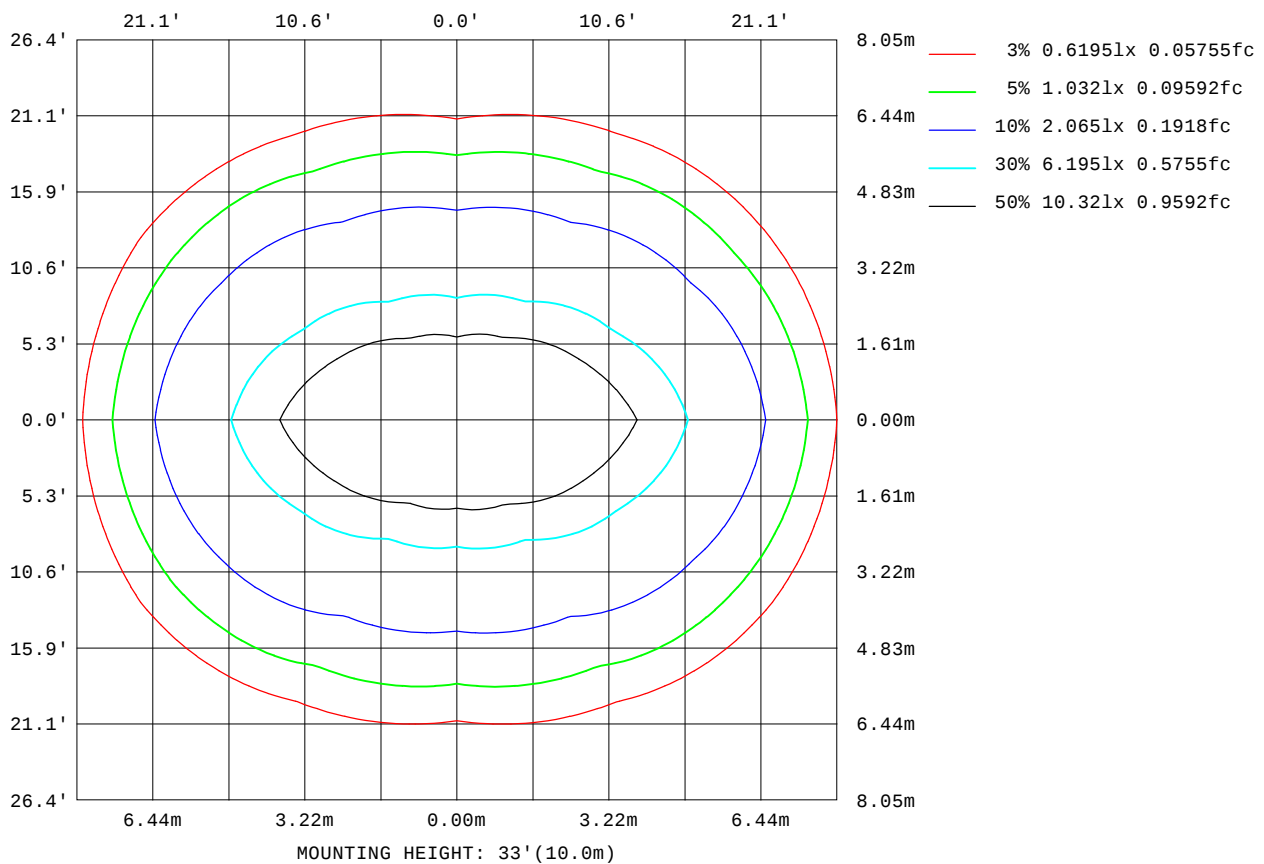

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-03-09

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

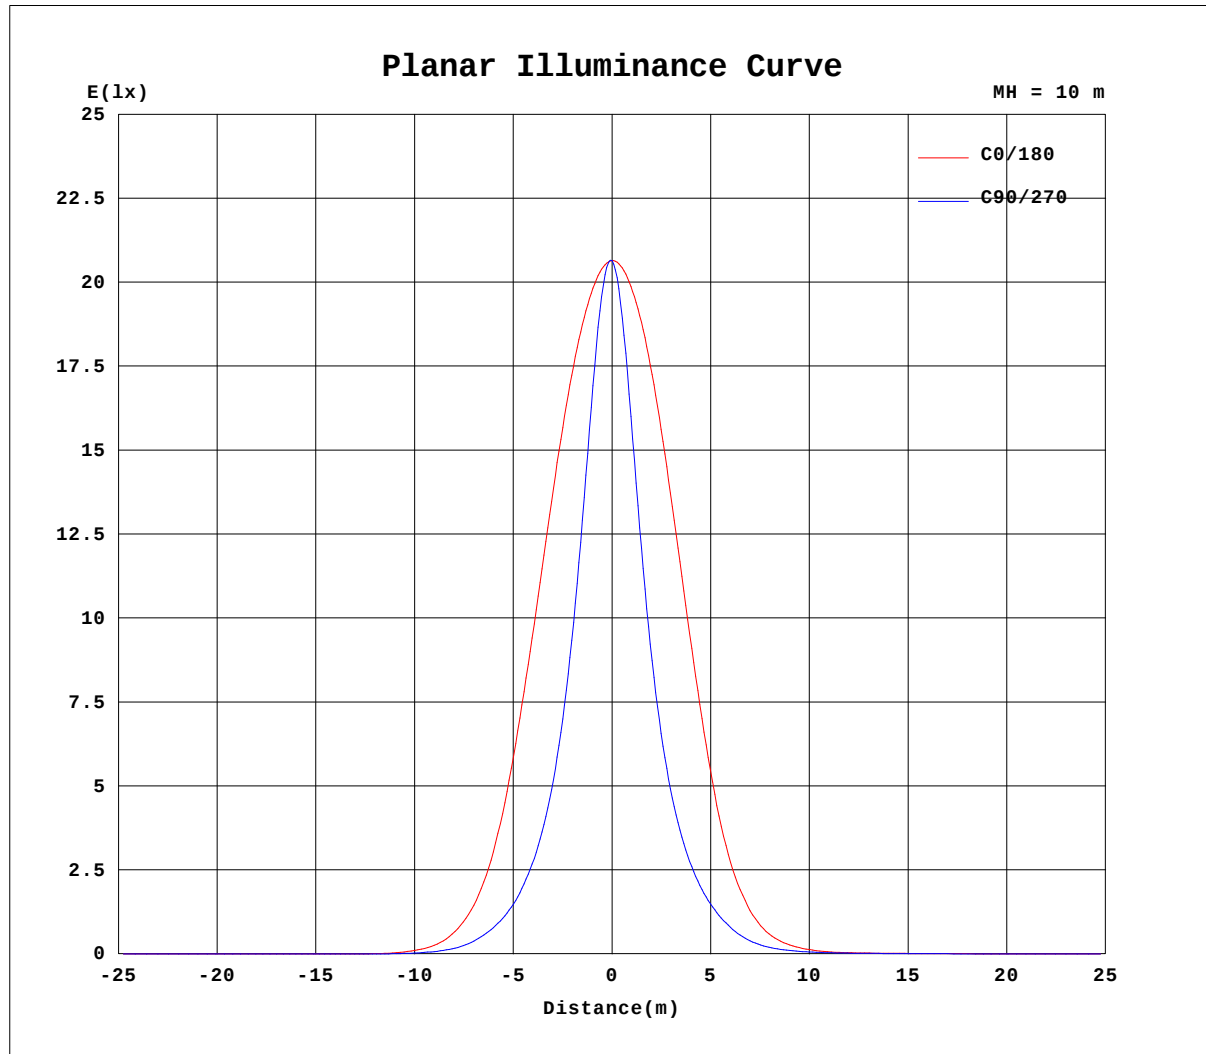


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-03-09

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:BlazeMini Recessed-500mm-RGBW ALL-2045D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:20x45 DEG	DIM.:500mm	SERIAL No.:IES000898
MFR.:	SUR.:	Shielding Angle:

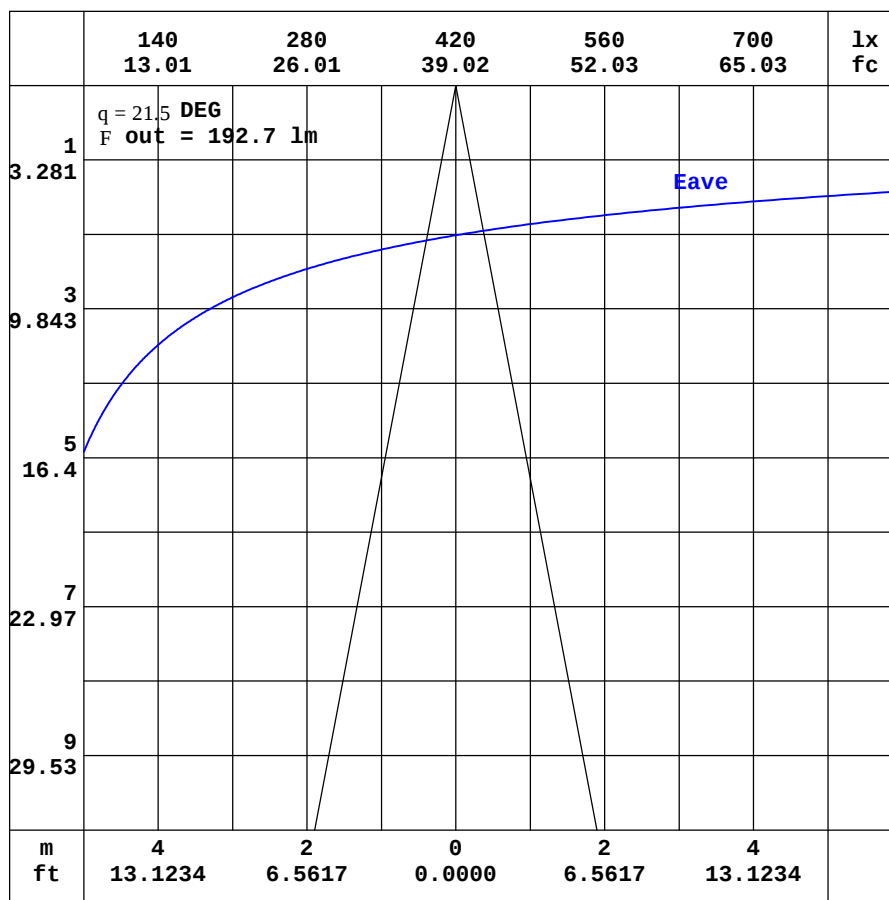

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeMini Recessed-500mm-RGBW ALL-2045D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:20x45 DEG	DIM.:500mm	SERIAL No.:IES000898
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°)\V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	2.87	2.60	2.47	2.49	2.63	2.92	3.34	3.88	4.49	5.09	5.65	6.13	6.51	6.71	6.69	6.57	6.36	6.22	6.11
-170	2.87	2.55	2.39	2.37	2.43	2.61	2.88	3.21	3.56	3.90	4.20	4.46	4.65	4.75	4.68	4.70	5.11	5.49	5.82
-160	2.87	2.52	2.31	2.25	2.23	2.29	2.39	2.51	2.61	2.67	2.71	2.70	2.73	3.24	3.75	4.22	4.63	4.93	5.10
-150	2.87	2.49	2.25	2.13	2.05	2.00	1.97	1.91	1.80	1.63	1.47	1.69	1.98	2.31	2.66	3.00	3.30	3.52	3.62
-140	2.87	2.48	2.21	2.03	1.90	1.77	1.63	1.47	1.24	1.13	1.14	1.20	1.28	1.40	1.54	1.72	1.87	1.97	2.00
-130	2.87	2.47	2.18	1.95	1.78	1.61	1.43	1.20	1.10	1.08	1.03	0.99	0.95	0.89	0.90	0.94	0.96	0.98	0.97
-120	2.87	2.47	2.16	1.91	1.69	1.49	1.29	1.14	1.14	1.12	1.09	1.06	1.01	0.96	0.91	0.87	0.83	0.80	0.78
-110	2.87	2.49	2.17	1.88	1.64	1.43	1.21	1.15	1.16	1.17	1.18	1.19	1.20	1.19	1.16	1.15	1.14	1.12	1.12
-100	2.87	2.52	2.19	1.88	1.61	1.35	1.11	1.11	1.12	1.14	1.15	1.17	1.19	1.20	1.20	1.21	1.22	1.22	1.23
-90	2.87	2.55	2.24	1.92	1.61	1.29	0.97	0.97	0.97	0.97	0.97	0.97	0.96	0.97	0.97	0.97	0.97	0.98	0.98
-80	2.87	2.61	2.31	2.01	1.67	1.28	0.86	0.79	0.76	0.72	0.68	0.65	0.61	0.58	0.56	0.54	0.53	0.51	0.50
-70	2.87	2.66	2.46	2.16	1.79	1.36	0.84	0.63	0.56	0.51	0.46	0.40	0.35	0.33	0.32	0.31	0.31	0.30	0.29
-60	2.87	2.76	2.61	2.35	2.01	1.57	1.02	0.50	0.44	0.40	0.37	0.36	0.35	0.35	0.37	0.38	0.40	0.41	0.41
-50	2.87	2.87	2.79	2.63	2.37	2.00	1.48	0.77	0.41	0.41	0.44	0.52	0.71	1.06	1.77	2.44	2.64	2.31	1.54
-40	2.87	2.97	3.00	2.97	2.87	2.68	2.34	1.80	0.94	0.72	2.36	6.27	11.7	18.1	23.8	29.3	32.2	31.8	27.6
-30	2.87	3.07	3.22	3.37	3.51	3.61	3.66	3.56	3.52	6.48	16.0	33.6	59.3	87.6	111	127	142	149	142
-20	2.87	3.17	3.46	3.82	4.24	4.77	5.40	6.09	8.46	17.8	44.2	95.3	167	248	322	367	381	420	413
-10	2.87	3.26	3.69	4.26	5.01	6.02	7.37	9.10	13.3	30.8	77.7	174	334	543	747	934	1073	1116	1156
0	2.87	3.34	3.89	4.65	5.70	7.18	9.22	11.8	16.1	37.8	95.5	235	498	888	1303	1652	1894	2025	2065
10	2.87	3.33	3.87	4.61	5.60	6.97	8.82	11.1	15.5	32.6	77.8	174	331	535	734	916	1055	1086	1077
20	2.87	3.31	3.81	4.48	5.35	6.52	8.06	9.93	12.9	22.4	46.6	94.8	165	245	319	370	386	414	397
30	2.87	3.27	3.72	4.29	5.02	5.94	7.11	8.51	10.2	13.7	23.3	38.3	61.4	89.6	116	132	147	152	143
40	2.87	3.23	3.61	4.06	4.62	5.30	6.12	7.08	8.13	9.25	11.0	14.4	19.6	25.3	30.6	35.7	38.5	38.2	34.5
50	2.87	3.16	3.47	3.82	4.22	4.69	5.22	5.81	6.42	7.08	7.75	8.43	9.07	9.68	10.4	11.2	11.7	11.7	11.2
60	2.87	3.07	3.33	3.58	3.84	4.13	4.44	4.76	5.07	5.38	5.69	5.98	6.25	6.50	6.76	6.96	7.10	7.16	7.14
70	2.87	3.00	3.18	3.34	3.49	3.66	3.82	3.95	4.08	4.20	4.30	4.39	4.46	4.53	4.60	4.64	4.65	4.64	4.60
80	2.87	2.94	3.01	3.10	3.19	3.26	3.33	3.37	3.40	3.43	3.46	3.47	3.48	3.50	3.51	3.51	3.51	3.51	3.49
90	2.87	2.88	2.89	2.90	2.91	2.92	2.93	2.91	2.89	2.88	2.86	2.84	2.82	2.81	2.80	2.79	2.78	2.77	2.76
100	2.87	2.82	2.78	2.74	2.70	2.66	2.62	2.57	2.51	2.46	2.41	2.37	2.33	2.31	2.30	2.29	2.28	2.27	2.27
110	2.87	2.77	2.68	2.60	2.54	2.48	2.44	2.39	2.34	2.31	2.29	2.26	2.24	2.23	2.22	2.22	2.21	2.19	2.18
120	2.87	2.72	2.60	2.51	2.45	2.41	2.39	2.37	2.37	2.40	2.45	2.49	2.52	2.57	2.62	2.66	2.68	2.68	2.65
130	2.87	2.69	2.55	2.46	2.43	2.42	2.44	2.53	2.66	2.81	2.99	3.18	3.38	3.59	3.80	4.00	4.16	4.27	4.30
140	2.87	2.65	2.50	2.45	2.44	2.48	2.63	2.84	3.13	3.45	3.80	4.18	4.60	5.01	5.39	5.73	5.99	6.17	6.27
150	2.87	2.63	2.48	2.45	2.48	2.61	2.86	3.21	3.64	4.10	4.61	5.14	5.67	6.15	6.56	6.88	7.05	7.15	7.20
160	2.87	2.61	2.46	2.46	2.53	2.75	3.09	3.54	4.07	4.65	5.23	5.79	6.32	6.75	7.06	7.27	7.37	7.42	7.50
170	2.87	2.60	2.46	2.48	2.59	2.85	3.26	3.78	4.37	4.99	5.58	6.12	6.57	6.87	6.96	6.94	6.87	6.86	7.05
180	2.87	2.60	2.47	2.49	2.63	2.92	3.34	3.88	4.49	5.09	5.65	6.13	6.51	6.71	6.69	6.57	6.36	6.22	6.14

H_(b) Range:-90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature:25.3DEG
 Operators:Fan
 Test Date:2023-03-09

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:8.630m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeMini Recessed-500mm-RGBW ALL-2045D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:20x45 DEG	DIM.:500mm	SERIAL No.:IES000898
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	5.57	5.14	4.75	4.38	3.96	3.47	2.95	2.44	2.01	1.66	1.39	1.23	1.16	1.14	1.14	1.10	1.04	0.94
-170	5.65	5.37	5.00	4.54	4.02	3.45	2.88	2.36	1.93	1.59	1.35	1.21	1.15	1.14	1.14	1.10	1.04	0.94
-160	5.01	4.80	4.44	4.00	3.52	3.03	2.52	2.07	1.71	1.45	1.27	1.18	1.14	1.14	1.14	1.10	1.03	0.94
-150	3.59	3.46	3.22	2.90	2.56	2.22	1.92	1.67	1.45	1.29	1.20	1.15	1.14	1.14	1.14	1.10	1.03	0.94
-140	2.02	1.98	1.87	1.73	1.58	1.45	1.34	1.26	1.21	1.18	1.15	1.14	1.14	1.15	1.13	1.09	1.02	0.94
-130	1.00	1.02	1.02	1.00	0.99	1.02	1.06	1.09	1.11	1.13	1.14	1.14	1.15	1.14	1.12	1.08	1.01	0.94
-120	0.81	0.85	0.90	0.94	0.99	1.03	1.08	1.12	1.14	1.15	1.14	1.14	1.14	1.14	1.13	1.11	1.07	1.00
-110	1.13	1.14	1.16	1.17	1.20	1.21	1.21	1.19	1.18	1.17	1.16	1.15	1.14	1.12	1.09	1.04	0.99	0.94
-100	1.22	1.22	1.22	1.22	1.21	1.20	1.19	1.18	1.16	1.16	1.14	1.14	1.11	1.07	1.04	1.00	0.97	0.94
-90	0.98	0.98	0.98	0.98	0.98	0.98	0.99	1.00	1.01	1.02	1.02	1.03	1.02	1.00	0.99	0.97	0.96	0.94
-80	0.51	0.53	0.55	0.57	0.60	0.63	0.67	0.71	0.77	0.81	0.85	0.90	0.91	0.93	0.95	0.96	0.95	0.94
-70	0.30	0.31	0.32	0.34	0.35	0.38	0.43	0.48	0.55	0.61	0.68	0.75	0.80	0.84	0.89	0.92	0.95	0.94
-60	0.41	0.39	0.38	0.37	0.36	0.36	0.38	0.41	0.44	0.49	0.56	0.62	0.68	0.75	0.83	0.89	0.94	0.94
-50	2.24	2.51	2.30	1.65	0.99	0.67	0.53	0.46	0.44	0.46	0.49	0.55	0.60	0.68	0.77	0.85	0.93	0.94
-40	31.7	31.9	28.7	23.0	17.3	10.9	5.64	2.04	0.69	0.51	0.51	0.53	0.57	0.62	0.72	0.83	0.92	0.94
-30	149	143	127	111	86.9	57.9	32.0	14.6	4.55	0.98	0.61	0.57	0.56	0.60	0.69	0.80	0.91	0.94
-20	423	385	373	326	250	166	94.8	41.2	13.3	2.81	0.82	0.66	0.59	0.60	0.66	0.78	0.89	0.94
-10	1132	1095	956	765	566	356	186	77.6	25.1	4.95	1.08	0.75	0.63	0.60	0.65	0.77	0.89	0.94
0	2019	1890	1662	1333	944	554	264	101	30.6	5.25	1.08	0.82	0.67	0.62	0.64	0.77	0.88	0.94
10	1096	1066	925	742	552	349	184	77.6	27.3	7.37	3.17	2.21	1.57	1.18	0.98	0.94	0.95	0.94
20	414	385	369	317	241	161	93.7	44.2	18.6	7.56	4.72	3.32	2.32	1.68	1.30	1.11	1.03	0.94
30	151	146	132	115	89.0	60.8	37.8	23.0	12.4	7.80	5.60	4.00	2.85	2.07	1.57	1.27	1.10	0.94
40	38.6	39.2	36.7	31.5	25.7	19.7	14.5	11.0	9.37	7.74	5.77	4.26	3.13	2.32	1.77	1.40	1.15	0.94
50	11.8	11.9	11.4	10.6	9.80	9.15	8.51	7.82	7.12	6.42	5.45	4.19	3.21	2.46	1.91	1.50	1.20	0.94
60	7.17	7.12	6.99	6.80	6.55	6.30	6.01	5.69	5.36	5.03	4.70	3.93	3.14	2.50	1.98	1.56	1.24	0.94
70	4.64	4.66	4.64	4.60	4.53	4.44	4.36	4.25	4.14	4.01	3.88	3.58	2.98	2.45	1.99	1.60	1.26	0.94
80	3.49	3.49	3.48	3.46	3.44	3.40	3.40	3.38	3.35	3.32	3.28	3.21	2.77	2.35	1.97	1.61	1.26	0.94
90	2.76	2.76	2.76	2.75	2.75	2.75	2.77	2.78	2.80	2.81	2.83	2.84	2.52	2.21	1.89	1.57	1.26	0.94
100	2.26	2.26	2.26	2.27	2.28	2.28	2.32	2.35	2.40	2.44	2.48	2.51	2.30	2.06	1.82	1.55	1.25	0.94
110	2.19	2.21	2.22	2.23	2.23	2.23	2.25	2.26	2.28	2.31	2.33	2.31	2.13	1.94	1.74	1.51	1.25	0.94
120	2.69	2.71	2.71	2.67	2.63	2.58	2.54	2.48	2.43	2.38	2.34	2.20	2.02	1.84	1.67	1.47	1.23	0.94
130	4.30	4.23	4.09	3.92	3.72	3.51	3.29	3.08	2.89	2.72	2.47	2.15	1.92	1.76	1.59	1.42	1.21	0.94
140	6.20	6.05	5.83	5.53	5.16	4.75	4.34	3.94	3.58	3.11	2.55	2.14	1.85	1.67	1.52	1.37	1.18	0.94
150	7.17	7.08	6.93	6.64	6.25	5.80	5.29	4.76	3.93	3.15	2.53	2.06	1.76	1.56	1.45	1.31	1.15	0.94
160	7.46	7.43	7.31	7.10	6.80	6.40	5.47	4.52	3.66	2.92	2.33	1.89	1.61	1.44	1.35	1.24	1.11	0.94
170	7.02	7.02	7.05	6.63	5.97	5.23	4.45	3.68	2.99	2.40	1.93	1.60	1.40	1.30	1.25	1.17	1.08	0.94
180	5.57	5.14	4.75	4.38	3.96	3.47	2.95	2.44	2.01	1.66	1.39	1.23	1.16	1.14	1.14	1.10	1.04	0.94

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-03-09

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks: