

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	2431.8 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	55.1V x 72.8H
	At 50% of Imax	22.6V x 47.4H
	At 90% of Imax	7.9V x 21.6H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	867.5 lumens per klm.
	To 50% of Imax	455.6 lumens per klm.
	To 90% of Imax	89.3 lumens per klm.

Upward LOR	1.6 %
Downward LOR	98.4 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-11

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:BlazeMini Recessed-500mm-RGBW BLUE-2045D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:20x45 DEG	DIM.:500mm	SERIAL No.:IES000898-B
MFR.:	SUR.:	Shielding Angle:

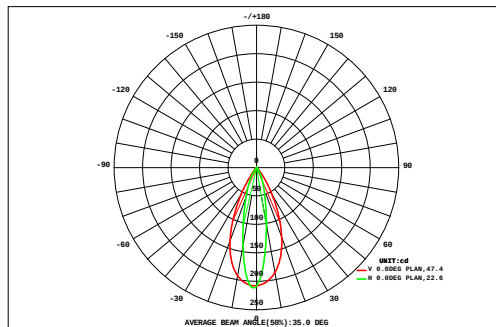

DATA OF LAMP		Eff:12.70lm/W	
MODEL		Imax(cd)	211.3
NOMINAL POWER(W)	6.84	AVAILABILITY(%)	86.8
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	75.40
NOMINAL FLUX(lm)	86.89	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	86.89
TEST VOLTAGE(V)	24	q @50%(H,V)	47,23DEG

AREA FLUX DIAGRAM																	UNIT:lm	F t	F a
72	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.11	0.00
64	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.14	0.00
56	0.00	0.00	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.00	0.20	0.00
48	0.00	0.01	0.01	0.01	0.02	0.03	0.04	0.05	0.05	0.05	0.05	0.04	0.03	0.02	0.01	0.01	0.00	0.42	0.00
40	0.00	0.01	0.01	0.02	0.03	0.07	0.11	0.14	0.15	0.15	0.14	0.11	0.07	0.04	0.02	0.01	0.00	1.07	0.00
32	0.00	0.01	0.01	0.02	0.07	0.17	0.27	0.33	0.36	0.35	0.33	0.26	0.17	0.08	0.02	0.01	0.00	2.47	0.46
24	0.00	0.01	0.01	0.04	0.14	0.35	0.59	0.72	0.78	0.77	0.70	0.57	0.34	0.15	0.04	0.01	0.00	5.21	4.43
	0.00	0.01	0.02	0.05	0.23	0.66	1.17	1.57	1.69	1.68	1.54	1.12	0.63	0.25	0.06	0.01	0.00	10.7	10.1
	0.00	0.01	0.02	0.06	0.32	1.05	2.06	2.88	3.31	3.31	2.82	1.96	1.02	0.35	0.08	0.01	0.00	19.3	18.8
	0.00	0.01	0.02	0.06	0.34	1.11	2.22	3.20	3.75	3.68	3.06	2.07	1.06	0.36	0.08	0.01	0.00	21.0	20.6
	0.00	0.01	0.01	0.05	0.27	0.80	1.50	2.06	2.30	2.24	1.91	1.32	0.71	0.26	0.06	0.00	0.00	13.5	13.0
-24	0.00	0.00	0.01	0.03	0.17	0.47	0.81	1.00	1.11	1.07	0.91	0.69	0.39	0.16	0.04	0.00	0.00	6.89	6.26
-32	0.00	0.00	0.00	0.01	0.08	0.21	0.37	0.46	0.50	0.48	0.41	0.31	0.18	0.08	0.02	0.00	0.00	3.13	1.64
-40	0.00	0.00	0.00	0.00	0.02	0.06	0.12	0.17	0.17	0.16	0.15	0.10	0.06	0.02	0.00	0.00	0.00	1.05	0.00
-48	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.03	0.03	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.18	0.00
-56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00
-64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)	16	24	32	40	48	56	64	72		
F t	0.05	0.08	0.13	0.39	1.69	5.00	9.32	12.7	14.2	14.0	12.1	8.62	4.70	1.79	0.46	0.07	0.03	0.01	85
F a	0.00	0.00	0.00	0.00	0.59	4.20	8.55	11.9	13.5	13.2	11.3	7.82	3.82	0.62	0.00	0.00	0.00	0.00	75


one-half-peak spread: U:11.7,D:11.1 , L:23.1,NEFM Beam Type: Type 5 x 4 (H x V)

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-11

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:BlazeMini Recessed-500mm-RGBW BLUE-2045D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:20x45 DEG	DIM.:500mm	SERIAL No.:IES000898-B
MFR.:	SUR.:	Shielding Angle:

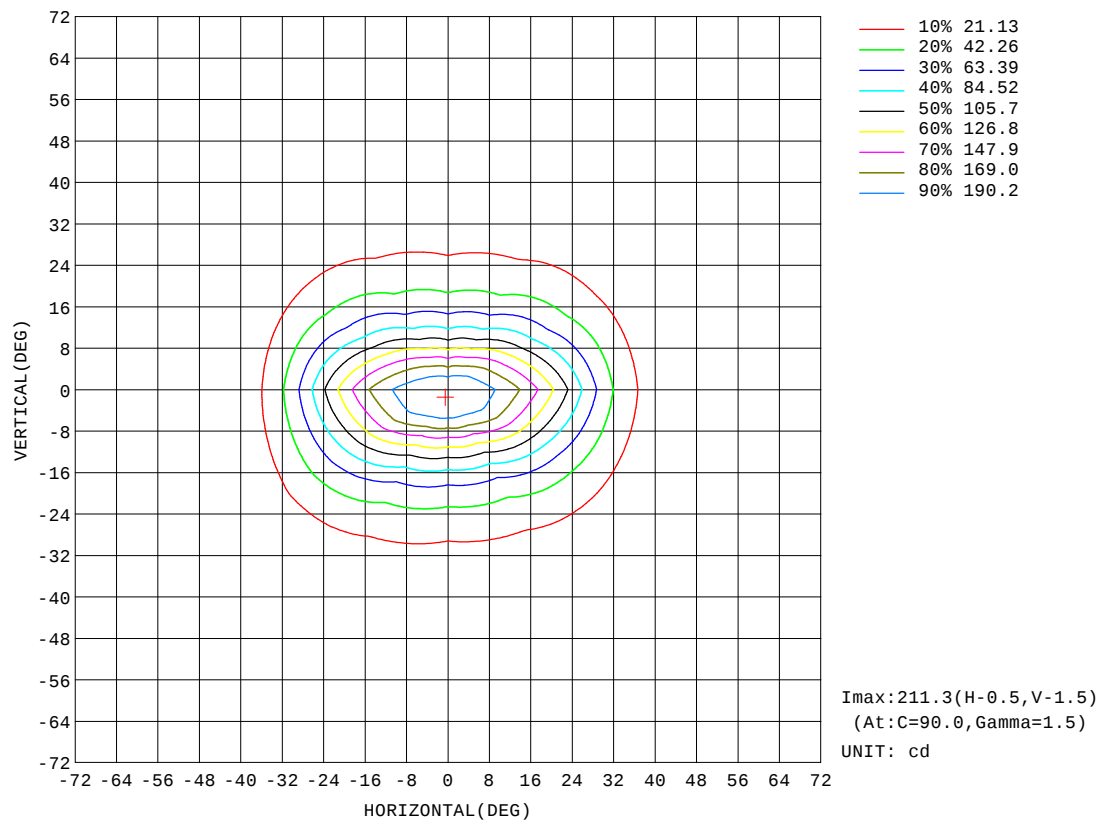


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-11

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:BlazeMini Recessed-500mm-RGBW BLUE-2045D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:20x45 DEG	DIM.:500mm	SERIAL No.:IES000898-B
MFR.:	SUR.:	Shielding Angle:

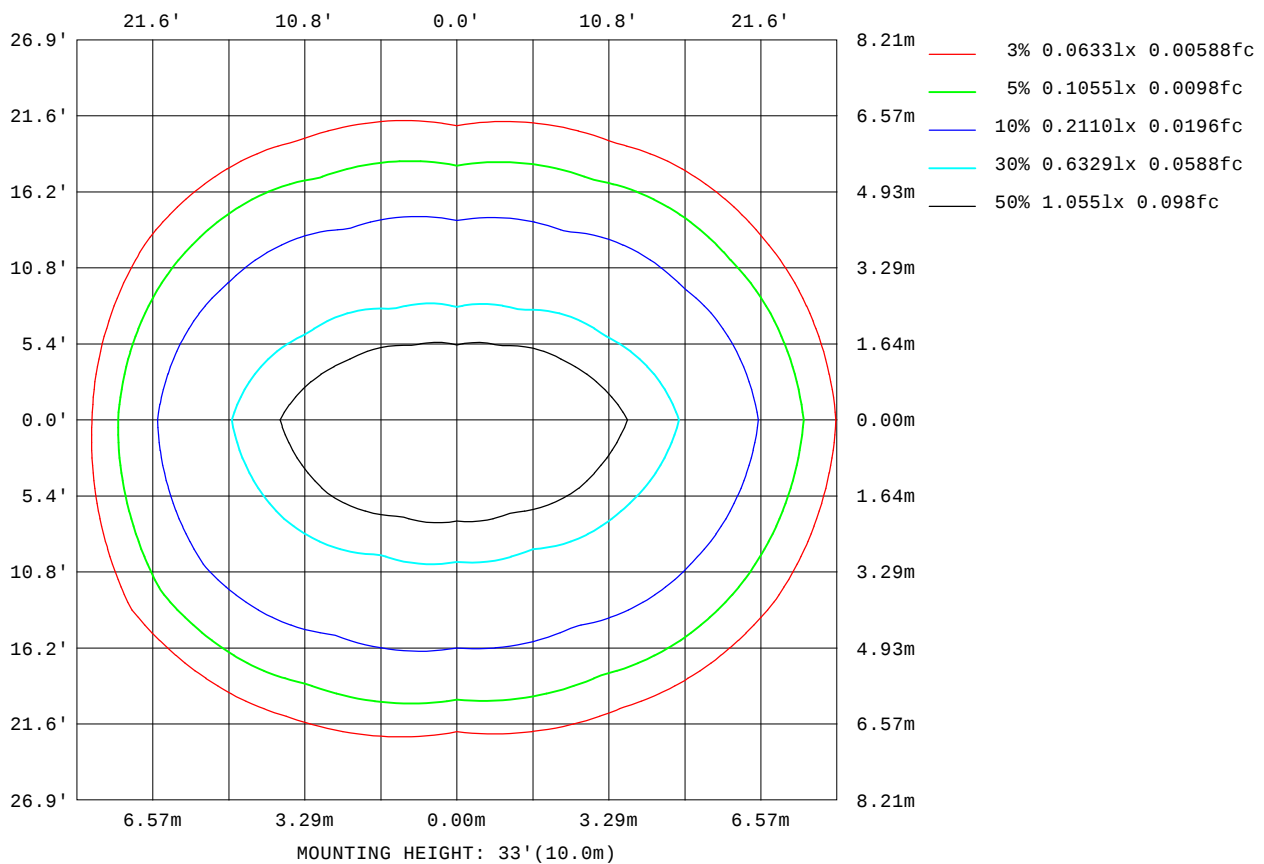

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-03-11

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

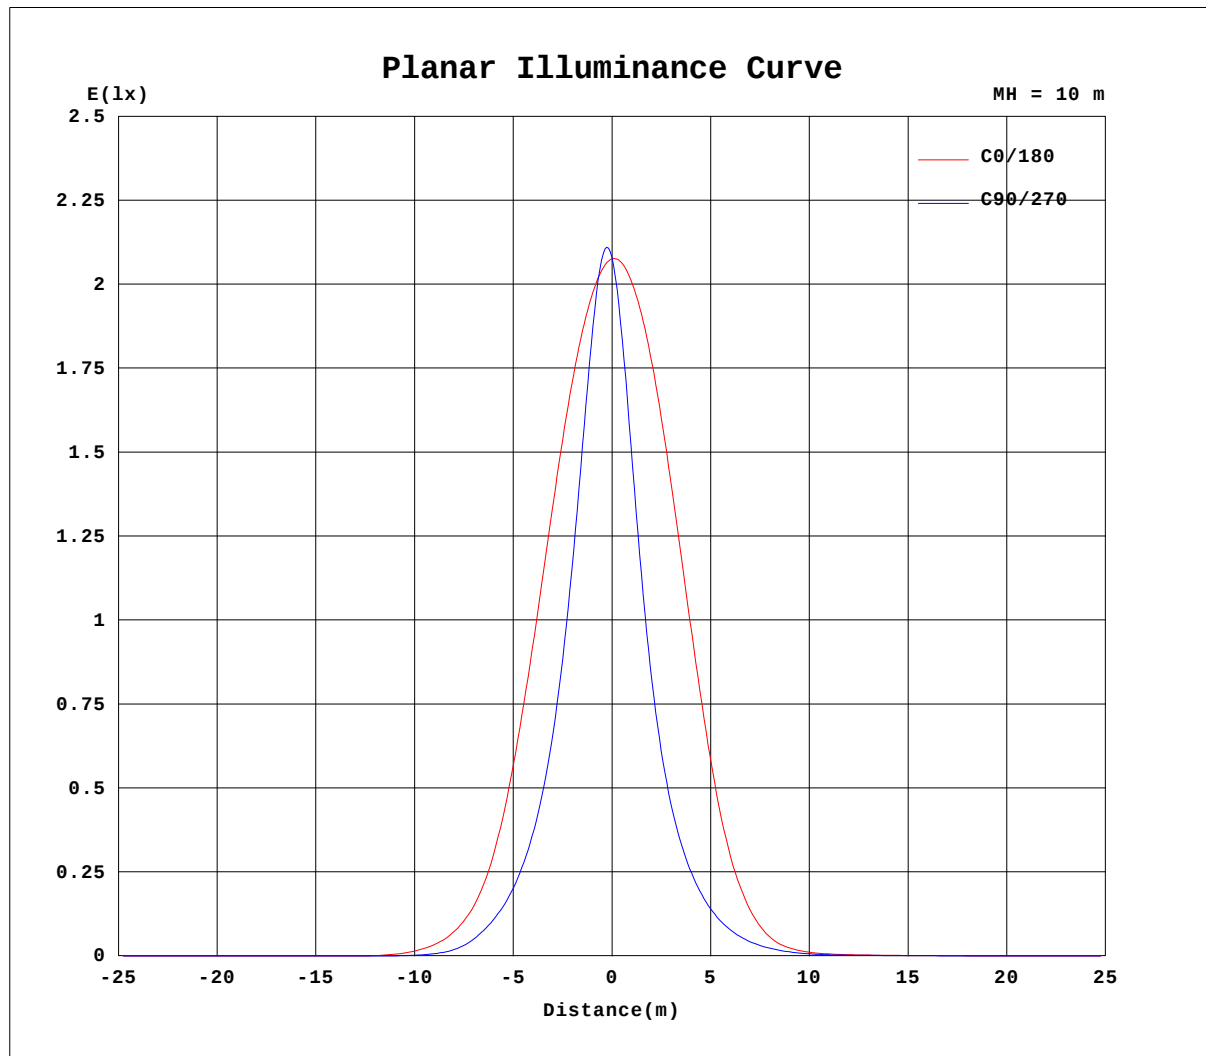


H(b) Range: -90 - 90DEG
H(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-03-11

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:BlazeMini Recessed-500mm-RGBW BLUE-2045D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:20x45 DEG	DIM.:500mm	SERIAL No.:IES000898-B
MFR.:	SUR.:	Shielding Angle:

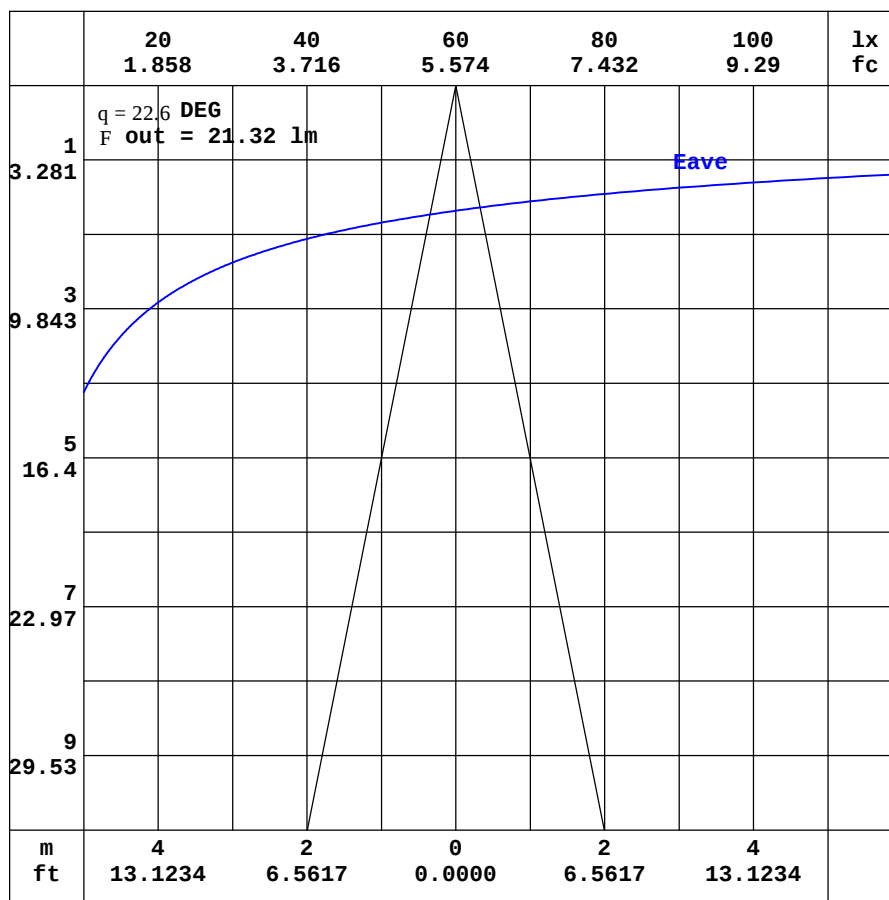

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-11

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeMini Recessed-500mm-RGBW BLUE-2045D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:20x45 DEG	DIM.:500mm	SERIAL No.:IES000898-B
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°)\V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.21	0.20	0.19	0.19	0.21	0.23	0.27	0.32	0.39	0.45	0.51	0.57	0.61	0.62	0.62	0.60	0.58	0.57	0.56
-170	0.21	0.19	0.18	0.18	0.18	0.20	0.23	0.26	0.29	0.32	0.36	0.39	0.40	0.42	0.41	0.41	0.45	0.47	0.54
-160	0.21	0.19	0.17	0.16	0.16	0.17	0.17	0.18	0.19	0.20	0.20	0.20	0.20	0.24	0.29	0.33	0.36	0.41	0.45
-150	0.21	0.18	0.17	0.15	0.14	0.13	0.13	0.12	0.11	0.09	0.07	0.09	0.11	0.13	0.15	0.19	0.23	0.26	0.28
-140	0.21	0.18	0.16	0.14	0.12	0.11	0.09	0.07	0.05	0.03	0.04	0.03	0.03	0.03	0.04	0.07	0.09	0.11	0.12
-130	0.21	0.18	0.15	0.13	0.11	0.09	0.06	0.04	0.02	0.02	0.02	0.02	0.01	0.00	0.00	0.00	0.01	0.01	0.02
-120	0.21	0.17	0.15	0.12	0.10	0.07	0.05	0.03	0.02	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.21	0.17	0.15	0.12	0.09	0.06	0.03	0.02	0.02	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.21	0.17	0.14	0.11	0.08	0.05	0.03	0.02	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.21	0.18	0.14	0.11	0.07	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.21	0.18	0.15	0.12	0.08	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.21	0.19	0.17	0.14	0.10	0.06	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.21	0.20	0.19	0.16	0.13	0.09	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.21	0.21	0.20	0.19	0.17	0.14	0.10	0.03	0.00	0.00	0.00	0.00	0.00	0.03	0.10	0.15	0.15	0.12	0.04
-40	0.21	0.23	0.23	0.23	0.23	0.21	0.18	0.13	0.05	0.00	0.13	0.51	1.05	1.74	2.51	3.30	3.75	3.59	2.87
-30	0.21	0.24	0.25	0.27	0.29	0.31	0.32	0.30	0.26	0.53	1.51	3.77	7.54	11.9	15.7	17.9	20.0	20.6	19.4
-20	0.21	0.25	0.27	0.31	0.36	0.42	0.48	0.55	0.76	1.70	4.82	12.1	22.8	34.1	43.9	50.1	52.3	56.4	54.5
-10	0.21	0.26	0.30	0.36	0.43	0.54	0.68	0.84	1.27	2.94	8.13	20.4	40.5	66.5	92.8	116	131	137	139
0	0.21	0.27	0.32	0.40	0.50	0.65	0.86	1.13	1.57	3.31	8.85	25.1	54.1	95.1	137	170	193	205	208
10	0.21	0.27	0.32	0.40	0.49	0.63	0.82	1.07	1.49	2.93	7.21	18.0	34.9	55.8	74.3	89.8	102	103	101
20	0.21	0.26	0.31	0.38	0.47	0.59	0.75	0.95	1.24	2.05	4.22	9.40	17.0	25.0	32.3	36.5	37.3	39.5	37.4
30	0.21	0.26	0.30	0.36	0.44	0.54	0.66	0.80	0.98	1.31	2.09	3.64	6.29	9.44	11.9	13.2	14.6	14.8	13.8
40	0.21	0.26	0.29	0.35	0.41	0.48	0.56	0.66	0.77	0.89	1.04	1.38	1.97	2.79	3.68	4.21	4.50	4.48	4.09
50	0.21	0.25	0.28	0.32	0.37	0.42	0.48	0.54	0.60	0.66	0.72	0.78	0.83	0.89	0.99	1.09	1.15	1.14	1.06
60	0.21	0.24	0.27	0.30	0.33	0.36	0.40	0.43	0.46	0.48	0.50	0.52	0.54	0.56	0.60	0.63	0.64	0.65	0.66
70	0.21	0.23	0.25	0.28	0.30	0.32	0.34	0.35	0.36	0.36	0.37	0.36	0.36	0.37	0.38	0.39	0.40	0.41	0.41
80	0.21	0.23	0.23	0.25	0.26	0.28	0.29	0.29	0.30	0.30	0.29	0.29	0.28	0.28	0.29	0.29	0.30	0.30	0.31
90	0.21	0.22	0.23	0.23	0.24	0.25	0.25	0.24	0.23	0.23	0.22	0.21	0.20	0.20	0.21	0.21	0.22	0.22	0.23
100	0.21	0.21	0.21	0.21	0.22	0.22	0.22	0.21	0.19	0.18	0.18	0.17	0.16	0.16	0.16	0.16	0.16	0.16	0.16
110	0.21	0.20	0.21	0.21	0.20	0.20	0.20	0.19	0.18	0.17	0.17	0.17	0.16	0.16	0.16	0.16	0.16	0.16	0.15
120	0.21	0.20	0.20	0.20	0.19	0.19	0.18	0.18	0.18	0.18	0.18	0.19	0.20	0.21	0.21	0.21	0.20	0.20	0.19
130	0.21	0.20	0.20	0.20	0.19	0.19	0.19	0.18	0.19	0.21	0.23	0.26	0.28	0.31	0.34	0.35	0.37	0.37	0.37
140	0.21	0.20	0.20	0.19	0.19	0.19	0.19	0.21	0.23	0.27	0.30	0.35	0.40	0.46	0.51	0.54	0.56	0.57	0.56
150	0.21	0.20	0.19	0.19	0.19	0.20	0.22	0.24	0.28	0.33	0.37	0.44	0.51	0.57	0.62	0.66	0.66	0.66	0.66
160	0.21	0.20	0.19	0.19	0.20	0.21	0.24	0.28	0.34	0.39	0.45	0.50	0.57	0.61	0.64	0.66	0.67	0.68	0.70
170	0.21	0.20	0.19	0.19	0.20	0.22	0.26	0.31	0.37	0.43	0.49	0.55	0.59	0.63	0.63	0.64	0.63	0.61	0.67
180	0.21	0.20	0.19	0.19	0.21	0.23	0.27	0.32	0.39	0.45	0.51	0.57	0.61	0.62	0.62	0.60	0.58	0.57	0.57

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-03-11

V(B) Range: -180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeMini Recessed-500mm-RGBW BLUE-2045D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:20x45 DEG	DIM.:500mm	SERIAL No.:IES000898-B
MFR.:	SUR.:	Shielding Angle:

Table--2
UNIT: cd

H(DEC) V(DEC)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.49	0.44	0.42	0.36	0.31	0.27	0.20	0.15	0.11	0.06	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-170	0.49	0.48	0.46	0.40	0.34	0.27	0.21	0.15	0.11	0.06	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-160	0.43	0.39	0.36	0.33	0.29	0.24	0.18	0.14	0.09	0.06	0.03	0.01	0.01	0.00	0.00	0.00	0.00	0.00	
-150	0.27	0.26	0.22	0.19	0.16	0.14	0.11	0.09	0.07	0.04	0.02	0.01	0.01	0.01	0.00	0.00	0.00	0.00	
-140	0.12	0.11	0.08	0.06	0.06	0.05	0.04	0.04	0.04	0.03	0.02	0.01	0.01	0.01	0.01	0.00	0.00	0.00	
-130	0.01	0.01	0.00	0.00	0.00	0.01	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.00	0.00	0.00	
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.11	0.14	0.14	0.09	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-40	3.40	3.42	3.01	2.29	1.78	1.26	0.69	0.18	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-30	19.6	18.2	15.8	13.4	10.2	6.87	4.11	2.11	0.59	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-20	53.9	47.9	44.2	37.5	28.2	18.8	11.1	5.45	1.90	0.31	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-10	133	124	106	82.5	59.3	37.1	20.2	9.55	3.51	0.62	0.05	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
0	202	187	163	130	91.3	54.3	27.2	12.1	4.31	0.62	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
10	103	101	87.6	71.0	53.4	34.4	19.2	9.26	3.60	0.78	0.26	0.16	0.09	0.06	0.04	0.02	0.01	0.00	
20	39.0	36.3	35.1	30.6	23.7	16.4	10.2	5.38	2.17	0.73	0.42	0.27	0.17	0.11	0.07	0.04	0.02	0.00	
30	14.6	14.3	12.9	11.5	9.35	6.78	4.44	2.56	1.24	0.73	0.50	0.34	0.23	0.15	0.10	0.05	0.02	0.00	
40	4.46	4.48	4.21	3.72	3.00	2.18	1.47	1.05	0.88	0.72	0.53	0.38	0.27	0.18	0.12	0.07	0.03	0.00	
50	1.14	1.16	1.10	0.99	0.89	0.82	0.77	0.71	0.66	0.59	0.51	0.38	0.27	0.19	0.13	0.07	0.03	0.00	
60	0.65	0.64	0.62	0.59	0.56	0.54	0.52	0.50	0.48	0.46	0.43	0.35	0.27	0.20	0.13	0.08	0.04	0.00	
70	0.41	0.40	0.39	0.38	0.37	0.36	0.36	0.36	0.36	0.35	0.35	0.32	0.25	0.19	0.13	0.08	0.04	0.00	
80	0.30	0.30	0.29	0.28	0.28	0.27	0.28	0.28	0.28	0.28	0.28	0.28	0.23	0.18	0.13	0.08	0.04	0.00	
90	0.22	0.22	0.21	0.21	0.20	0.20	0.21	0.21	0.22	0.23	0.24	0.24	0.20	0.16	0.12	0.08	0.04	0.00	
100	0.16	0.16	0.16	0.16	0.16	0.16	0.17	0.17	0.18	0.19	0.19	0.20	0.17	0.14	0.11	0.07	0.04	0.00	
110	0.16	0.16	0.16	0.16	0.17	0.17	0.17	0.17	0.17	0.17	0.18	0.18	0.15	0.12	0.10	0.07	0.04	0.00	
120	0.20	0.21	0.22	0.22	0.22	0.21	0.20	0.19	0.18	0.17	0.18	0.16	0.13	0.11	0.08	0.06	0.03	0.00	
130	0.38	0.38	0.38	0.36	0.34	0.31	0.28	0.25	0.22	0.20	0.17	0.14	0.12	0.09	0.07	0.05	0.03	0.00	
140	0.57	0.57	0.56	0.54	0.49	0.44	0.39	0.34	0.29	0.24	0.17	0.13	0.10	0.08	0.06	0.04	0.02	0.00	
150	0.67	0.67	0.67	0.63	0.60	0.54	0.47	0.42	0.32	0.23	0.17	0.11	0.08	0.06	0.04	0.03	0.02	0.00	
160	0.69	0.69	0.67	0.66	0.63	0.58	0.48	0.39	0.29	0.21	0.14	0.09	0.06	0.04	0.03	0.02	0.01	0.00	
170	0.63	0.64	0.65	0.59	0.53	0.45	0.37	0.28	0.21	0.15	0.09	0.05	0.03	0.02	0.02	0.01	0.01	0.00	
180	0.49	0.44	0.42	0.36	0.31	0.27	0.20	0.15	0.11	0.06	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	

H_b Range:-90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-11

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: