

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	2569.7 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	60.7V x 62.9H
	At 50% of Imax	30.4V x 30.3H
	At 90% of Imax	11.1V x 11.2H

Beam Flux	Total	1000.3 lumens per klm.
	To 10% of Imax	872.6 lumens per klm.
	To 50% of Imax	395.1 lumens per klm.
	To 90% of Imax	71.8 lumens per klm.

Upward LOR	2.1 %
Downward LOR	98.0 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-11

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:BlazeMini Recessed-500mm-RGBW 3000K-30D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:30 DEG	DIM.:500mm	SERIAL No.:IES000899-W
MFR.:	SUR.:	Shielding Angle:

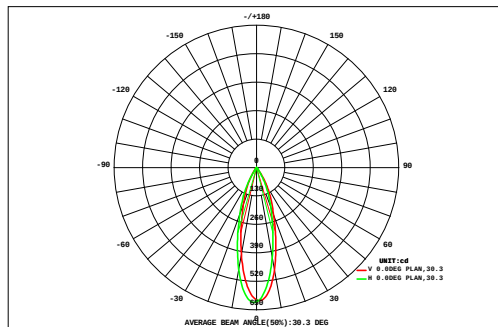

DATA OF LAMP		Eff:35.08lm/W	
MODEL		Imax(cd)	616.5
NOMINAL POWER(W)	6.84	AVAILABILITY(%)	87.1
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	209.1
NOMINAL FLUX(lm)	239.9	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	239.9
TEST VOLTAGE(V)	24	q @50%(H,V)	30,30DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	0.01	0.02	0.03	0.04	0.05	0.07	0.08	0.08	0.08	0.08	0.09	0.08	0.07	0.06	0.04	0.03	0.02	0.02	0.95	0.00
45	0.01	0.02	0.03	0.04	0.05	0.07	0.08	0.08	0.08	0.08	0.09	0.08	0.07	0.06	0.04	0.03	0.02	0.02	0.95	0.00
40	0.02	0.03	0.04	0.07	0.10	0.13	0.15	0.17	0.17	0.17	0.18	0.16	0.14	0.10	0.07	0.04	0.03	0.02	1.78	0.00
35	0.02	0.04	0.07	0.11	0.17	0.25	0.31	0.35	0.35	0.36	0.38	0.35	0.28	0.19	0.11	0.07	0.04	0.02	3.47	0.25
30	0.03	0.06	0.10	0.18	0.30	0.46	0.58	0.67	0.71	0.72	0.71	0.65	0.53	0.36	0.21	0.10	0.05	0.03	6.44	4.84
25	0.04	0.08	0.15	0.29	0.48	0.68	0.89	1.05	1.17	1.18	1.11	0.97	0.78	0.58	0.36	0.17	0.07	0.03	10.1	8.90
20	0.05	0.10	0.21	0.41	0.64	0.92	1.24	1.55	1.76	1.79	1.63	1.35	1.05	0.78	0.52	0.26	0.10	0.04	14.4	13.4
15	0.06	0.12	0.26	0.50	0.80	1.18	1.67	2.23	2.60	2.64	2.35	1.84	1.35	0.97	0.64	0.33	0.12	0.04	19.7	18.8
10	0.06	0.13	0.28	0.56	0.92	1.42	2.12	2.94	3.56	3.62	3.13	2.37	1.68	1.15	0.75	0.39	0.14	0.04	25.3	24.4
5	0.06	0.13	0.29	0.59	0.99	1.58	2.43	3.44	4.25	4.37	3.77	2.87	1.97	1.29	0.81	0.41	0.14	0.04	29.4	28.7
0	0.06	0.13	0.29	0.60	1.02	1.63	2.56	3.65	4.45	4.52	3.95	2.99	2.03	1.31	0.83	0.42	0.14	0.04	30.6	29.8
-5	0.06	0.13	0.30	0.59	0.99	1.56	2.40	3.29	3.90	3.96	3.45	2.65	1.83	1.22	0.79	0.42	0.15	0.04	27.7	26.9
-10	0.05	0.12	0.29	0.55	0.88	1.32	1.90	2.51	2.97	3.01	2.64	2.08	1.50	1.06	0.71	0.38	0.13	0.04	22.1	21.3
-15	0.04	0.10	0.24	0.46	0.72	1.03	1.40	1.77	2.05	2.08	1.86	1.53	1.17	0.87	0.60	0.31	0.10	0.03	16.4	15.5
-20	0.03	0.07	0.16	0.32	0.53	0.76	1.00	1.21	1.34	1.37	1.27	1.09	0.87	0.64	0.41	0.20	0.06	0.02	11.4	10.3
-25	0.02	0.04	0.09	0.17	0.31	0.49	0.64	0.74	0.80	0.81	0.79	0.70	0.55	0.37	0.21	0.09	0.04	0.01	6.86	5.42
-30	0.01	0.02	0.04	0.08	0.14	0.21	0.29	0.34	0.34	0.34	0.35	0.31	0.23	0.15	0.08	0.04	0.02	0.01	3.01	0.43
-35	0.00	0.01	0.02	0.03	0.05	0.08	0.10	0.11	0.11	0.11	0.12	0.10	0.08	0.05	0.03	0.02	0.01	0.00	1.04	0.00
-40	0.00	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.04	0.03	0.03	0.02	0.01	0.01	0.00	0.00	0.33	0.00
-45	0.00	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.04	0.03	0.03	0.02	0.01	0.01	0.00	0.00	0.33	0.00
F t	0.62	1.32	2.88	5.57	9.11	13.8	19.8	26.1	30.6	31.2	27.8	22.1	16.1	11.2	7.18	3.69	1.35	0.46	231	---
F a	0.00	0.00	0.03	3.93	7.89	12.7	18.8	25.2	29.7	30.2	26.9	21.2	15.2	10.1	5.92	1.51	0.00	0.00	---	209

one-half-peak spread: U:15.3,D:15.3 , L:14.9,R:15.7


NEMA Beam Type: Type 4

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-03-11

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:BlazeMini Recessed-500mm-RGBW 3000K-30D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:30 DEG	DIM.:500mm	SERIAL No.:IES000899-W
MFR.:	SUR.:	Shielding Angle:

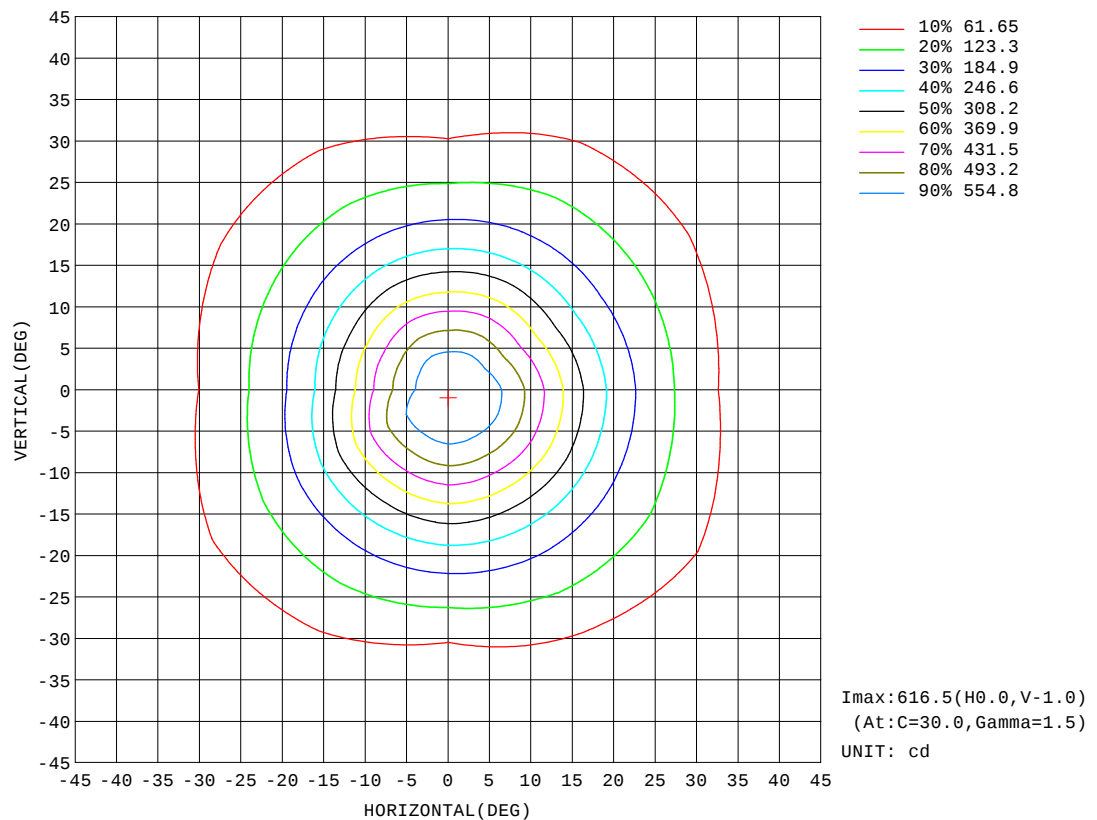


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-11

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:BlazeMini Recessed-500mm-RGBW 3000K-30D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:30 DEG	DIM.:500mm	SERIAL No.:IES000899-W
MFR.:	SUR.:	Shielding Angle:

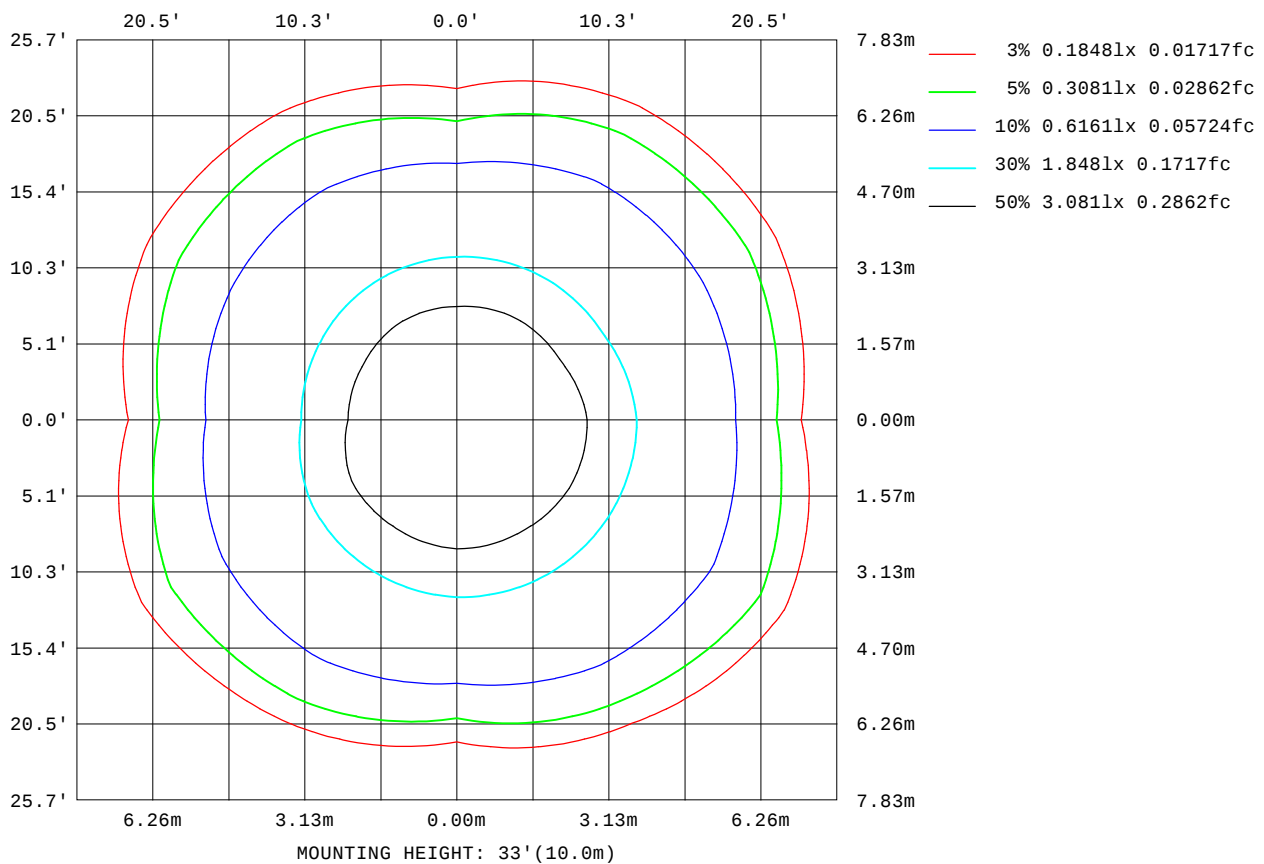

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-03-11

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

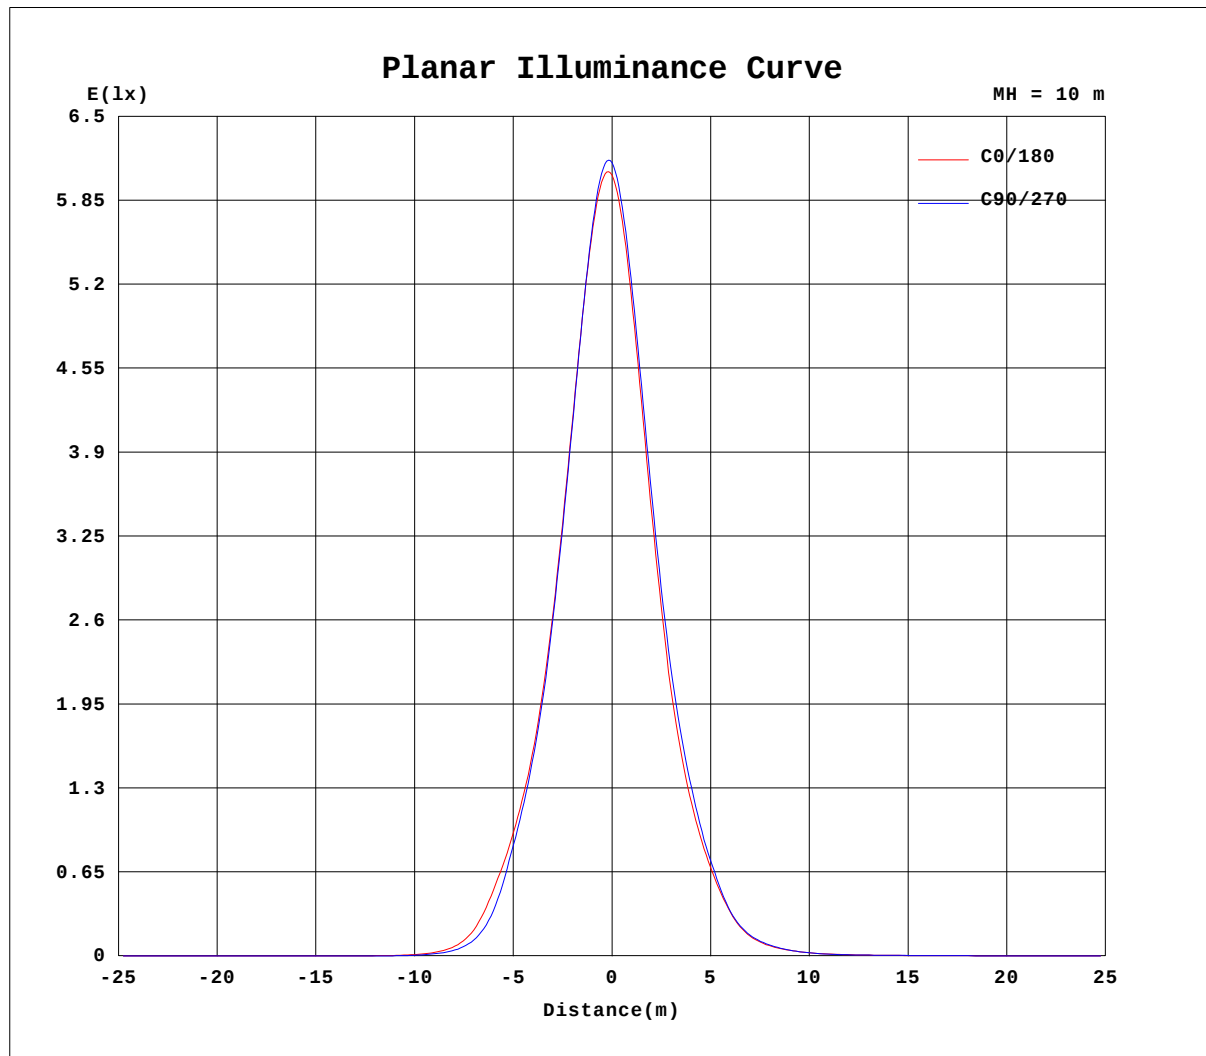


H(b) Range: -90 - 90DEG
H(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-03-11

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:BlazeMini Recessed-500mm-RGBW 3000K-30D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:30 DEG	DIM.:500mm	SERIAL No.:IES000899-W
MFR.:	SUR.:	Shielding Angle:

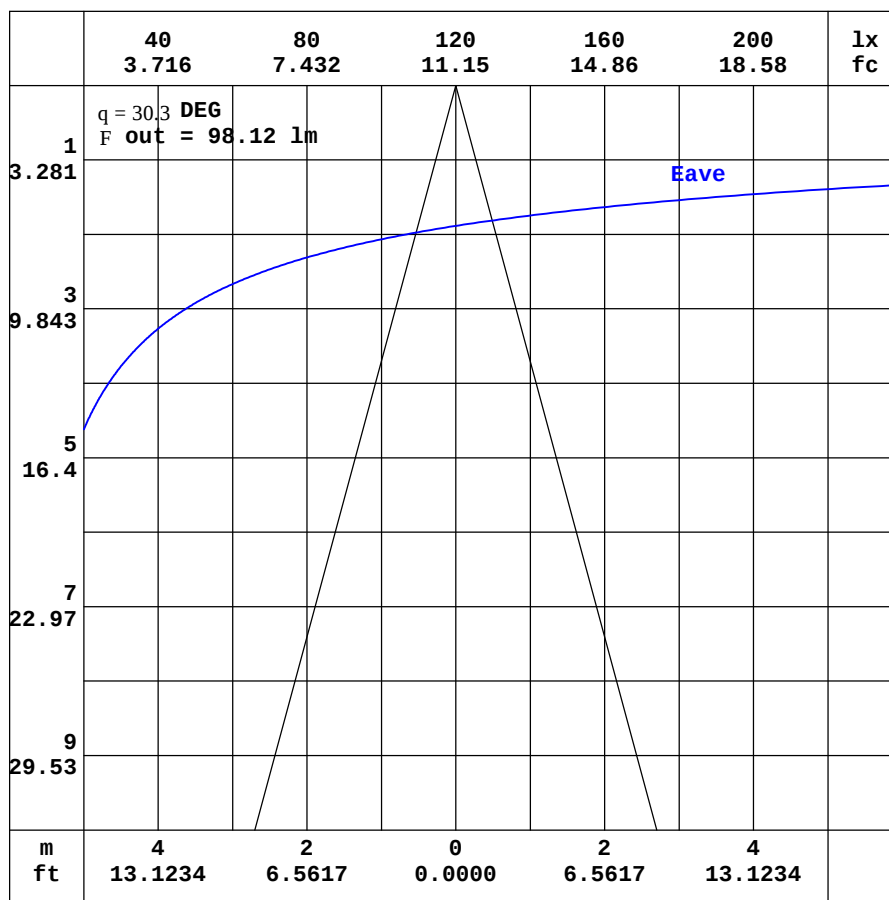

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-11

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeMini Recessed-500mm-RGBW 3000K-30D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:30 DEG	DIM.:500mm	SERIAL No.:IES000899-W
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.71	0.64	0.61	0.63	0.66	0.74	0.88	1.06	1.29	1.51	1.71	1.86	1.96	1.97	1.95	1.92	1.86	1.80	1.82
-170	0.71	0.63	0.59	0.59	0.61	0.66	0.74	0.86	0.99	1.12	1.24	1.31	1.36	1.37	1.36	1.37	1.46	1.54	1.61
-160	0.71	0.62	0.57	0.56	0.56	0.58	0.61	0.65	0.69	0.73	0.75	0.74	0.74	0.90	1.04	1.15	1.25	1.32	1.36
-150	0.71	0.61	0.56	0.53	0.51	0.50	0.49	0.47	0.45	0.40	0.35	0.43	0.52	0.63	0.72	0.83	0.91	0.96	0.99
-140	0.71	0.61	0.54	0.50	0.47	0.44	0.39	0.35	0.29	0.26	0.27	0.29	0.32	0.37	0.42	0.48	0.53	0.56	0.58
-130	0.71	0.61	0.54	0.48	0.44	0.39	0.35	0.28	0.25	0.25	0.25	0.25	0.25	0.24	0.25	0.27	0.29	0.30	0.32
-120	0.71	0.61	0.53	0.47	0.42	0.37	0.31	0.27	0.27	0.26	0.26	0.27	0.27	0.26	0.25	0.25	0.25	0.24	0.24
-110	0.71	0.63	0.54	0.47	0.40	0.35	0.29	0.28	0.28	0.27	0.27	0.27	0.27	0.28	0.28	0.28	0.28	0.28	0.28
-100	0.71	0.63	0.56	0.48	0.41	0.34	0.28	0.28	0.28	0.27	0.27	0.27	0.27	0.27	0.27	0.27	0.28	0.28	0.28
-90	0.71	0.63	0.56	0.48	0.41	0.34	0.26	0.25	0.24	0.23	0.22	0.21	0.20	0.21	0.21	0.22	0.22	0.23	0.23
-80	0.71	0.64	0.58	0.50	0.42	0.32	0.22	0.19	0.17	0.16	0.15	0.14	0.12	0.12	0.11	0.11	0.11	0.12	0.12
-70	0.71	0.67	0.62	0.55	0.45	0.33	0.21	0.14	0.11	0.10	0.08	0.07	0.07	0.06	0.06	0.06	0.06	0.05	0.05
-60	0.71	0.69	0.66	0.59	0.50	0.38	0.24	0.11	0.09	0.08	0.08	0.07	0.07	0.07	0.08	0.07	0.07	0.07	0.06
-50	0.71	0.72	0.71	0.66	0.59	0.49	0.36	0.18	0.09	0.08	0.09	0.12	0.17	0.23	0.31	0.43	0.48	0.44	0.32
-40	0.71	0.76	0.76	0.75	0.71	0.66	0.58	0.44	0.21	0.17	0.53	1.32	2.38	3.61	4.97	6.57	7.67	7.86	6.92
-30	0.71	0.78	0.82	0.85	0.88	0.90	0.91	0.88	0.86	1.52	3.56	7.02	12.8	22.5	36.8	54.6	66.1	70.8	68.3
-20	0.71	0.81	0.88	0.96	1.06	1.19	1.35	1.53	2.09	4.10	8.84	20.2	45.3	74.0	106	141	178	208	224
-10	0.71	0.83	0.93	1.07	1.26	1.51	1.85	2.28	3.30	6.43	13.8	31.5	63.9	108	163	242	341	427	473
0	0.71	0.85	0.99	1.17	1.43	1.80	2.32	2.96	4.05	7.29	14.1	28.1	62.4	112	176	273	402	533	605
10	0.71	0.85	0.99	1.17	1.42	1.77	2.26	2.87	4.05	7.31	14.1	29.1	59.0	99.3	149	215	301	383	416
20	0.71	0.84	0.98	1.15	1.37	1.67	2.09	2.62	3.47	5.81	10.6	19.8	39.6	66.2	94.4	125	156	181	193
30	0.71	0.84	0.96	1.10	1.29	1.54	1.87	2.27	2.77	3.82	6.32	10.3	16.1	25.4	38.7	54.2	62.8	66.2	64.1
40	0.71	0.83	0.93	1.05	1.20	1.39	1.62	1.90	2.23	2.62	3.18	4.38	6.20	8.72	11.6	13.7	15.1	15.6	14.9
50	0.71	0.80	0.90	0.99	1.10	1.23	1.39	1.56	1.76	1.98	2.23	2.49	2.76	3.06	3.45	3.82	4.03	4.03	3.86
60	0.71	0.78	0.86	0.94	1.01	1.09	1.19	1.29	1.39	1.49	1.61	1.72	1.85	1.96	2.07	2.17	2.24	2.29	2.31
70	0.71	0.76	0.82	0.87	0.92	0.97	1.03	1.07	1.11	1.15	1.19	1.24	1.27	1.32	1.36	1.39	1.42	1.44	1.45
80	0.71	0.74	0.77	0.80	0.84	0.87	0.90	0.91	0.91	0.92	0.93	0.94	0.94	0.96	0.97	0.99	1.00	1.00	1.01
90	0.71	0.72	0.73	0.75	0.76	0.77	0.78	0.78	0.77	0.76	0.75	0.74	0.73	0.73	0.74	0.74	0.75	0.75	0.76
100	0.71	0.72	0.71	0.70	0.69	0.69	0.68	0.66	0.65	0.64	0.62	0.61	0.60	0.61	0.61	0.61	0.61	0.61	0.61
110	0.71	0.70	0.67	0.66	0.65	0.64	0.63	0.63	0.62	0.61	0.61	0.61	0.61	0.61	0.61	0.61	0.61	0.60	0.59
120	0.71	0.68	0.65	0.63	0.62	0.62	0.62	0.61	0.61	0.63	0.66	0.69	0.72	0.75	0.78	0.79	0.81	0.81	0.80
130	0.71	0.67	0.63	0.62	0.62	0.62	0.62	0.64	0.68	0.74	0.81	0.89	0.97	1.05	1.13	1.17	1.22	1.23	1.23
140	0.71	0.66	0.62	0.62	0.62	0.63	0.66	0.72	0.81	0.92	1.05	1.20	1.34	1.46	1.57	1.63	1.68	1.71	1.70
150	0.71	0.65	0.62	0.62	0.62	0.66	0.73	0.83	0.97	1.14	1.32	1.49	1.65	1.77	1.89	1.96	1.99	2.01	2.01
160	0.71	0.64	0.62	0.62	0.64	0.70	0.79	0.94	1.13	1.33	1.53	1.69	1.81	1.92	1.99	2.01	2.03	2.05	2.08
170	0.71	0.64	0.61	0.62	0.65	0.72	0.85	1.02	1.24	1.46	1.66	1.81	1.92	1.97	1.98	1.98	1.95	1.93	1.97
180	0.71	0.64	0.61	0.63	0.66	0.74	0.88	1.06	1.29	1.51	1.71	1.86	1.96	1.97	1.95	1.92	1.86	1.80	1.85

H_b Range: -90 - 90DEGH_b Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-03-11

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeMini Recessed-500mm-RGBW 3000K-30D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:30 DEG	DIM.:500mm	SERIAL No.:IES000899-W
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	1.61	1.49	1.38	1.26	1.09	0.92	0.73	0.55	0.41	0.30	0.26	0.26	0.27	0.27	0.27	0.28	0.23	0.21
-170	1.50	1.44	1.36	1.23	1.07	0.89	0.71	0.53	0.40	0.30	0.26	0.26	0.28	0.27	0.28	0.28	0.24	0.21
-160	1.32	1.25	1.15	1.04	0.90	0.75	0.60	0.46	0.35	0.28	0.26	0.26	0.27	0.27	0.28	0.28	0.24	0.21
-150	0.96	0.91	0.82	0.73	0.63	0.52	0.43	0.35	0.30	0.27	0.26	0.26	0.27	0.27	0.28	0.27	0.23	0.21
-140	0.56	0.53	0.48	0.42	0.37	0.32	0.29	0.27	0.26	0.26	0.26	0.27	0.27	0.27	0.28	0.28	0.27	0.23
-130	0.30	0.29	0.27	0.25	0.25	0.25	0.25	0.25	0.26	0.26	0.27	0.27	0.27	0.27	0.28	0.28	0.25	0.23
-120	0.24	0.25	0.25	0.26	0.26	0.26	0.27	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.27	0.26	0.25	0.22
-110	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.27	0.26	0.23	0.22
-100	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.27	0.25	0.24	0.23	0.22
-90	0.23	0.22	0.22	0.21	0.21	0.21	0.21	0.22	0.23	0.23	0.24	0.24	0.24	0.23	0.23	0.23	0.22	0.21
-80	0.12	0.11	0.11	0.10	0.11	0.11	0.13	0.14	0.15	0.17	0.18	0.20	0.20	0.21	0.21	0.21	0.21	0.21
-70	0.05	0.05	0.06	0.06	0.05	0.06	0.06	0.07	0.09	0.11	0.12	0.14	0.16	0.16	0.18	0.20	0.21	0.21
-60	0.07	0.06	0.07	0.07	0.06	0.06	0.06	0.06	0.07	0.08	0.09	0.10	0.12	0.14	0.15	0.18	0.21	0.21
-50	0.44	0.48	0.42	0.30	0.20	0.14	0.09	0.07	0.06	0.06	0.07	0.08	0.09	0.11	0.13	0.15	0.20	0.21
-40	8.07	8.04	6.98	5.30	3.46	1.94	0.93	0.35	0.10	0.07	0.08	0.08	0.09	0.10	0.11	0.14	0.20	0.21
-30	73.9	70.9	58.7	41.6	26.3	13.5	6.03	2.42	0.76	0.16	0.10	0.09	0.09	0.09	0.10	0.14	0.19	0.21
-20	215	190	157	124	92.9	60.3	23.1	7.01	2.11	0.52	0.15	0.12	0.10	0.09	0.10	0.13	0.18	0.21
-10	440	365	274	192	136	87.6	39.9	12.0	3.44	0.90	0.23	0.15	0.11	0.09	0.10	0.13	0.17	0.21
0	580	474	343	230	153	92.9	37.0	11.2	3.37	0.94	0.26	0.18	0.12	0.09	0.09	0.13	0.17	0.21
10	397	326	243	177	126	80.4	34.9	12.0	4.41	1.76	0.88	0.59	0.38	0.26	0.20	0.18	0.19	0.21
20	187	167	140	111	82.1	48.8	20.8	8.76	4.12	2.13	1.35	0.92	0.60	0.41	0.29	0.23	0.22	0.21
30	69.5	68.9	62.1	45.0	28.4	16.6	9.46	5.67	3.45	2.27	1.60	1.11	0.76	0.53	0.37	0.28	0.25	0.21
40	16.1	15.8	14.5	12.4	9.02	6.21	4.35	3.30	2.77	2.24	1.63	1.17	0.84	0.60	0.43	0.31	0.27	0.21
50	4.10	4.15	3.98	3.61	3.19	2.87	2.60	2.33	2.07	1.83	1.53	1.16	0.87	0.64	0.48	0.35	0.28	0.21
60	2.31	2.27	2.21	2.12	2.02	1.90	1.78	1.65	1.53	1.42	1.32	1.09	0.85	0.66	0.50	0.38	0.30	0.21
70	1.44	1.43	1.41	1.38	1.35	1.30	1.26	1.22	1.17	1.13	1.09	1.00	0.81	0.65	0.52	0.41	0.31	0.21
80	1.00	1.00	0.99	0.98	0.97	0.96	0.95	0.94	0.93	0.92	0.91	0.90	0.76	0.64	0.52	0.41	0.31	0.21
90	0.75	0.75	0.75	0.74	0.74	0.74	0.75	0.75	0.76	0.77	0.77	0.78	0.68	0.59	0.49	0.40	0.30	0.21
100	0.61	0.61	0.61	0.61	0.60	0.60	0.61	0.62	0.64	0.65	0.67	0.68	0.62	0.55	0.47	0.39	0.30	0.21
110	0.60	0.60	0.61	0.61	0.61	0.61	0.61	0.61	0.61	0.62	0.63	0.61	0.57	0.51	0.45	0.37	0.29	0.21
120	0.81	0.80	0.79	0.76	0.74	0.71	0.68	0.65	0.62	0.61	0.61	0.58	0.53	0.48	0.43	0.37	0.29	0.21
130	1.23	1.21	1.17	1.12	1.05	0.96	0.88	0.80	0.73	0.66	0.60	0.54	0.49	0.46	0.41	0.35	0.28	0.21
140	1.70	1.68	1.63	1.55	1.45	1.32	1.18	1.04	0.91	0.76	0.62	0.51	0.46	0.42	0.39	0.35	0.27	0.21
150	2.00	1.99	1.95	1.87	1.76	1.63	1.47	1.30	1.01	0.78	0.60	0.50	0.42	0.39	0.36	0.33	0.27	0.21
160	2.05	2.03	2.01	1.99	1.92	1.81	1.52	1.22	0.94	0.70	0.55	0.44	0.38	0.35	0.33	0.32	0.26	0.21
170	1.89	1.94	1.98	1.86	1.67	1.44	1.20	0.95	0.72	0.54	0.42	0.36	0.34	0.32	0.31	0.30	0.25	0.21
180	1.61	1.49	1.38	1.26	1.09	0.92	0.73	0.55	0.41	0.30	0.26	0.26	0.27	0.27	0.27	0.28	0.23	0.21

H_b Range: -90 - 90DEGH_b Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-03-11

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: