

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	2600.8 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	60.4V x 62.4H
	At 50% of Imax	30.1V x 29.9H
	At 90% of Imax	11.0V x 11.1H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	868.4 lumens per klm.
	To 50% of Imax	394.6 lumens per klm.
	To 90% of Imax	72.5 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-11

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:BlazeMini Recessed-500mm-RGBW ALL-30D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:30 DEG	DIM.:500mm	SERIAL No.:IES000899
MFR.:	SUR.:	Shielding Angle:

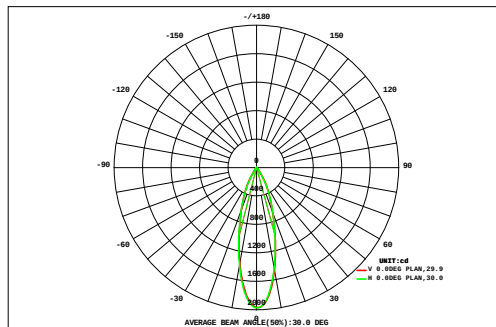

DATA OF LAMP		Eff:30.58lm/W	
MODEL		Imax(cd)	1972
NOMINAL POWER(W)	24.8	AVAILABILITY(%)	86.7
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	657.2
NOMINAL FLUX(lm)	758.3	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	758.3
TEST VOLTAGE(V)	24	q @50%(H,V)	30,30DEG

		AREA FLUX DIAGRAM																UNIT:lm				F t	F a
		0.05	0.06	0.09	0.12	0.16	0.20	0.23	0.25	0.24	0.24	0.25	0.23	0.20	0.16	0.12	0.09	0.06	0.05	2.82	0.00		
VERTICAL (DEG)	45	0.06	0.09	0.13	0.20	0.29	0.40	0.48	0.53	0.52	0.52	0.54	0.50	0.41	0.30	0.20	0.13	0.09	0.06	5.43	0.00		
	40	0.08	0.12	0.21	0.34	0.56	0.85	1.11	1.24	1.21	1.22	1.25	1.14	0.89	0.57	0.35	0.21	0.12	0.08	11.6	1.76		
	35	0.10	0.18	0.33	0.62	1.10	1.70	2.17	2.44	2.55	2.54	2.42	2.16	1.72	1.13	0.63	0.33	0.18	0.09	22.3	17.6		
	30	0.12	0.24	0.52	1.07	1.80	2.55	3.27	3.82	4.13	4.11	3.75	3.19	2.50	1.79	1.08	0.53	0.24	0.11	34.8	31.2		
	25	0.15	0.32	0.76	1.54	2.40	3.38	4.51	5.60	6.23	6.17	5.45	4.36	3.27	2.35	1.54	0.77	0.31	0.13	49.2	46.2		
	20	0.17	0.38	0.93	1.83	2.92	4.27	6.04	7.94	9.10	9.01	7.72	5.82	4.10	2.85	1.87	0.97	0.37	0.14	66.4	63.7		
	15	0.18	0.41	1.01	2.03	3.32	5.10	7.54	10.3	12.2	12.1	10.0	7.32	5.02	3.35	2.14	1.12	0.42	0.15	83.7	81.2		
	10	0.18	0.40	0.98	2.10	3.54	5.57	8.45	11.7	14.2	14.1	11.8	8.74	5.82	3.71	2.29	1.16	0.41	0.14	95.3	92.9		
	5	0.17	0.40	0.98	2.09	3.54	5.60	8.52	11.8	14.1	14.2	12.1	8.90	5.88	3.73	2.29	1.17	0.42	0.14	96.0	93.6		
	0	0.17	0.41	1.00	2.01	3.32	5.15	7.65	10.2	11.9	11.9	10.1	7.62	5.18	3.39	2.15	1.13	0.42	0.14	83.8	81.4		
	-5	0.14	0.37	0.92	1.80	2.88	4.23	5.90	7.59	8.75	8.71	7.50	5.82	4.17	2.88	1.88	1.00	0.38	0.12	65.1	62.3		
	-10	0.11	0.29	0.76	1.50	2.30	3.21	4.24	5.24	5.90	5.88	5.17	4.18	3.17	2.31	1.54	0.80	0.29	0.10	47.0	44.0		
	-15	0.08	0.20	0.50	1.02	1.64	2.30	2.94	3.47	3.80	3.79	3.45	2.90	2.29	1.65	1.06	0.53	0.20	0.07	31.9	28.1		
	-20	0.05	0.12	0.27	0.54	0.94	1.42	1.83	2.08	2.18	2.18	2.07	1.81	1.41	0.95	0.56	0.27	0.12	0.04	18.9	13.3		
	-25	0.02	0.06	0.13	0.25	0.43	0.64	0.85	0.97	0.95	0.95	0.96	0.83	0.63	0.43	0.26	0.13	0.06	0.02	8.59	0.00		
	-30	0.01	0.03	0.06	0.11	0.18	0.26	0.33	0.37	0.36	0.35	0.36	0.32	0.25	0.18	0.11	0.06	0.03	0.01	3.38	0.00		
-35	0.00	0.01	0.02	0.04	0.07	0.10	0.12	0.13	0.12	0.12	0.13	0.12	0.10	0.07	0.04	0.02	0.01	0.00	1.23	0.00			
-40																							
-45																							
		-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45					
F t	1.84	4.08	9.58	19.2	31.4	46.9	66.2	85.8	98.4	97.9	85.1	66.0	47.0	31.8	20.1	10.4	4.13	1.58	727	---			
F a	0.00	0.00	1.13	14.6	27.6	43.5	63.0	82.6	95.3	94.8	82.0	62.9	43.7	28.1	15.6	2.48	0.00	0.00	---	657			

one-half-peak spread: U:15.4,D:14.9 , L:15.1,R:15.1


NEMA Beam Type: Type 4

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-03-11

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:BlazeMini Recessed-500mm-RGBW ALL-30D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:30 DEG	DIM.:500mm	SERIAL No.:IES000899
MFR.:	SUR.:	Shielding Angle:

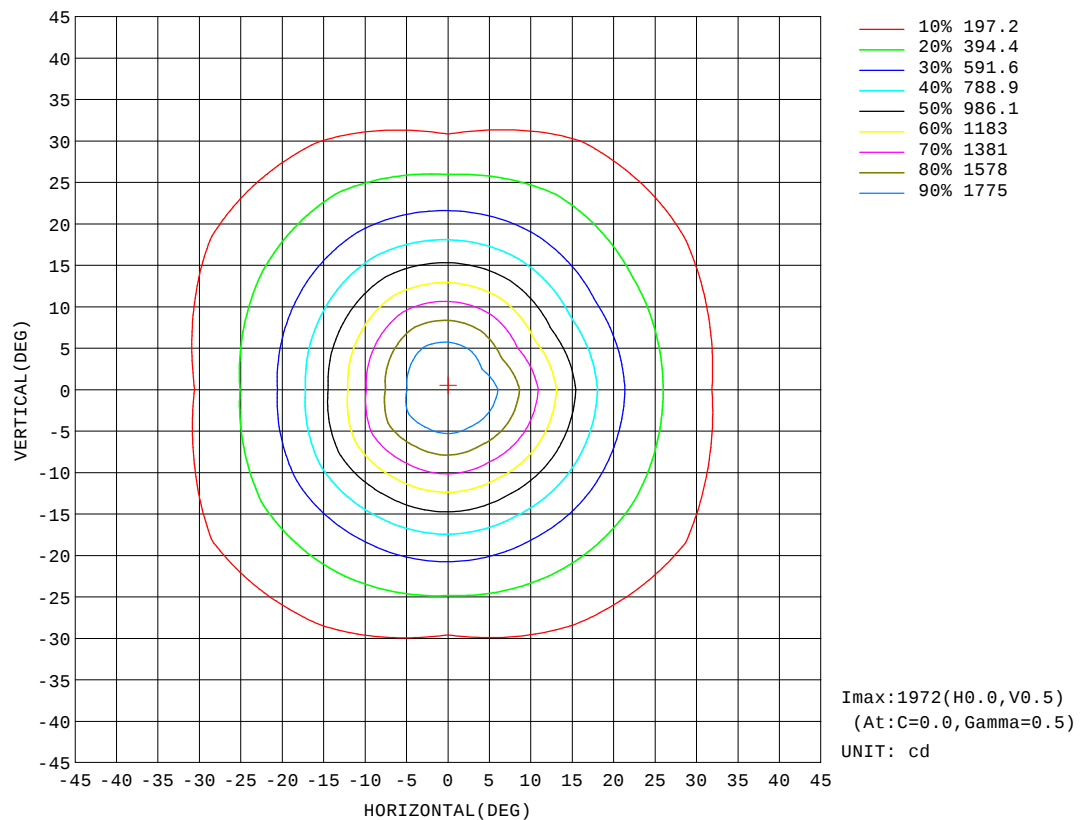


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-11

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:BlazeMini Recessed-500mm-RGBW ALL-30D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:30 DEG	DIM.:500mm	SERIAL No.:IES000899
MFR.:	SUR.:	Shielding Angle:

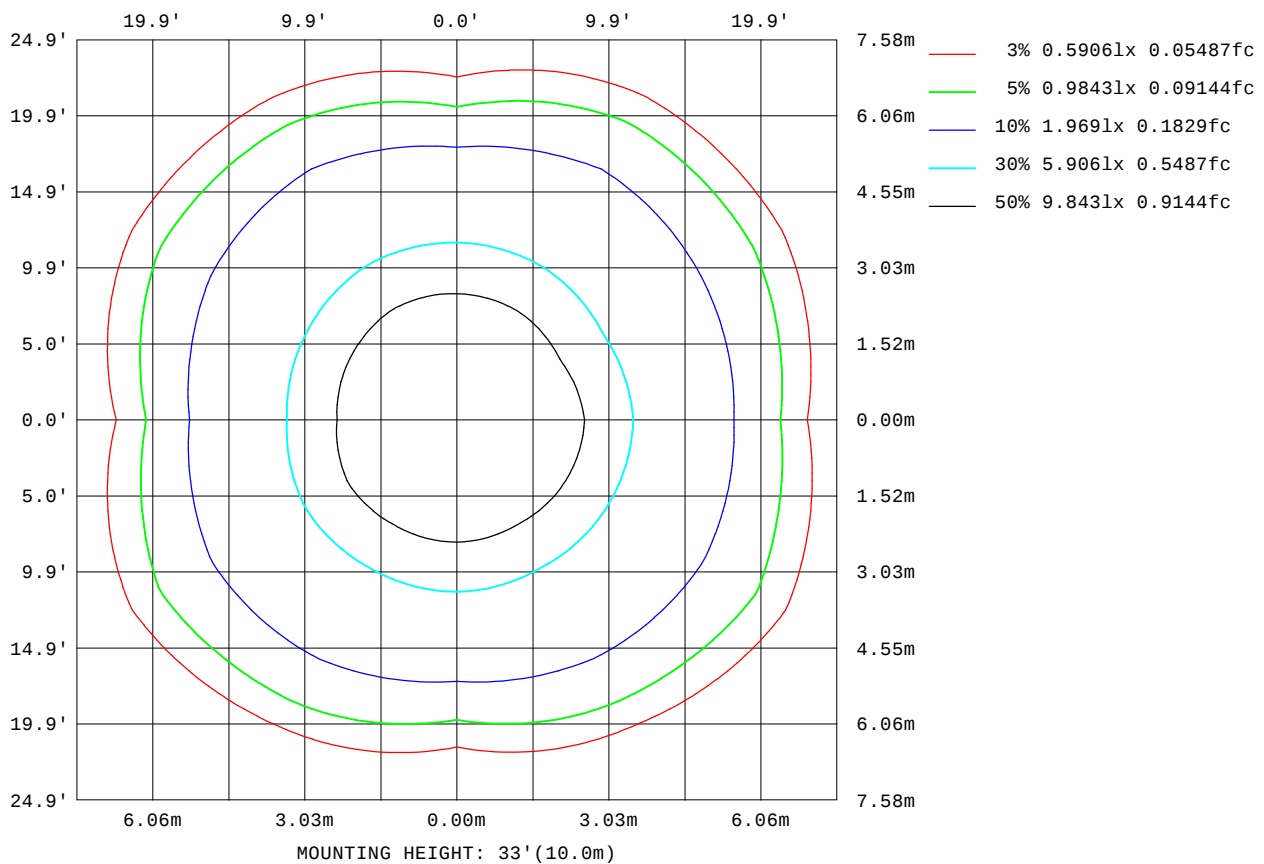

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-03-11

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

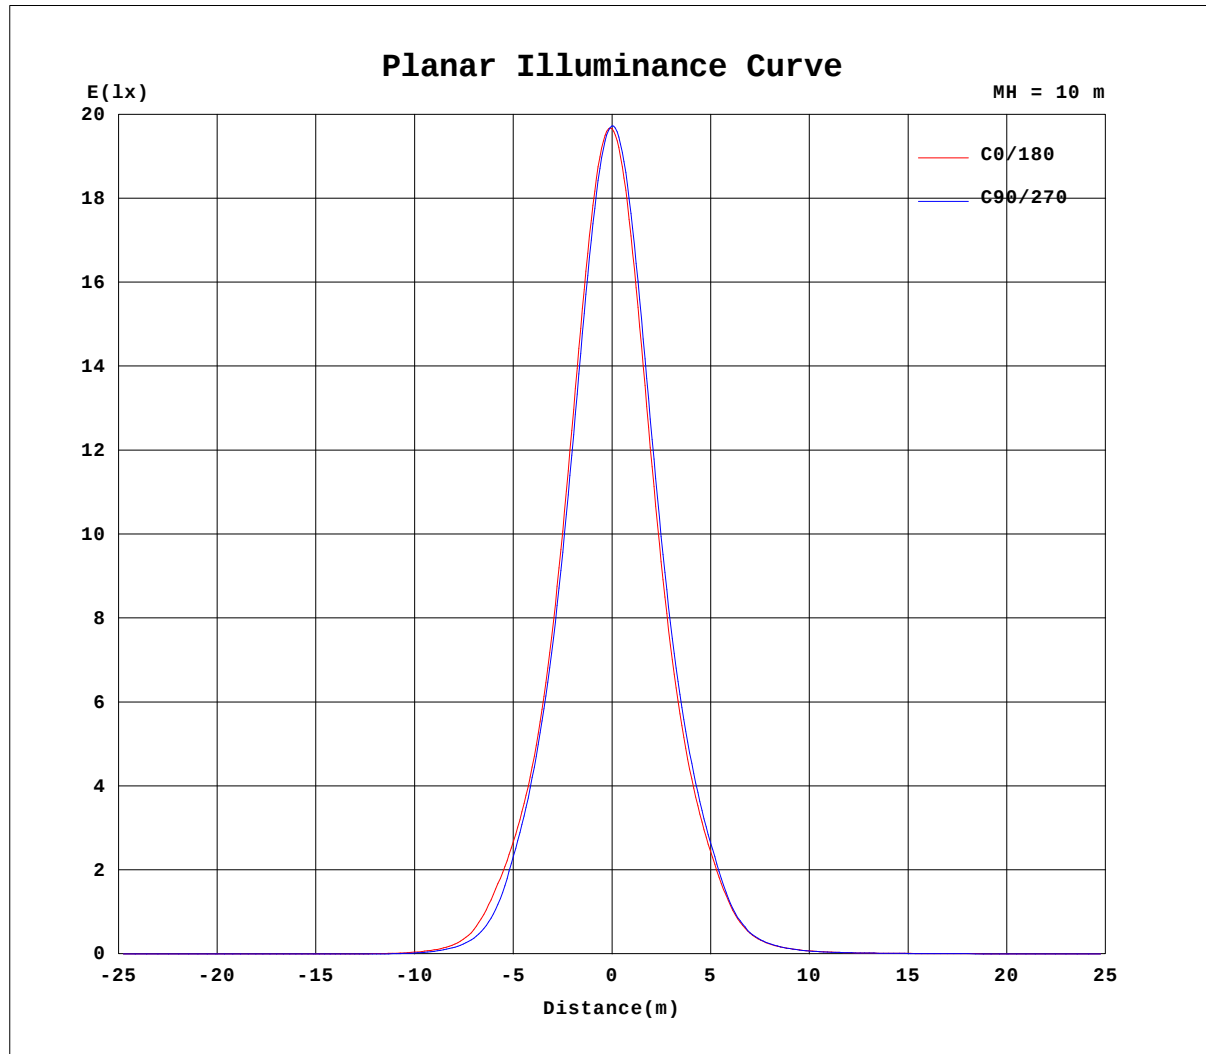


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-03-11

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:BlazeMini Recessed-500mm-RGBW ALL-30D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:30 DEG	DIM.:500mm	SERIAL No.:IES000899
MFR.:	SUR.:	Shielding Angle:

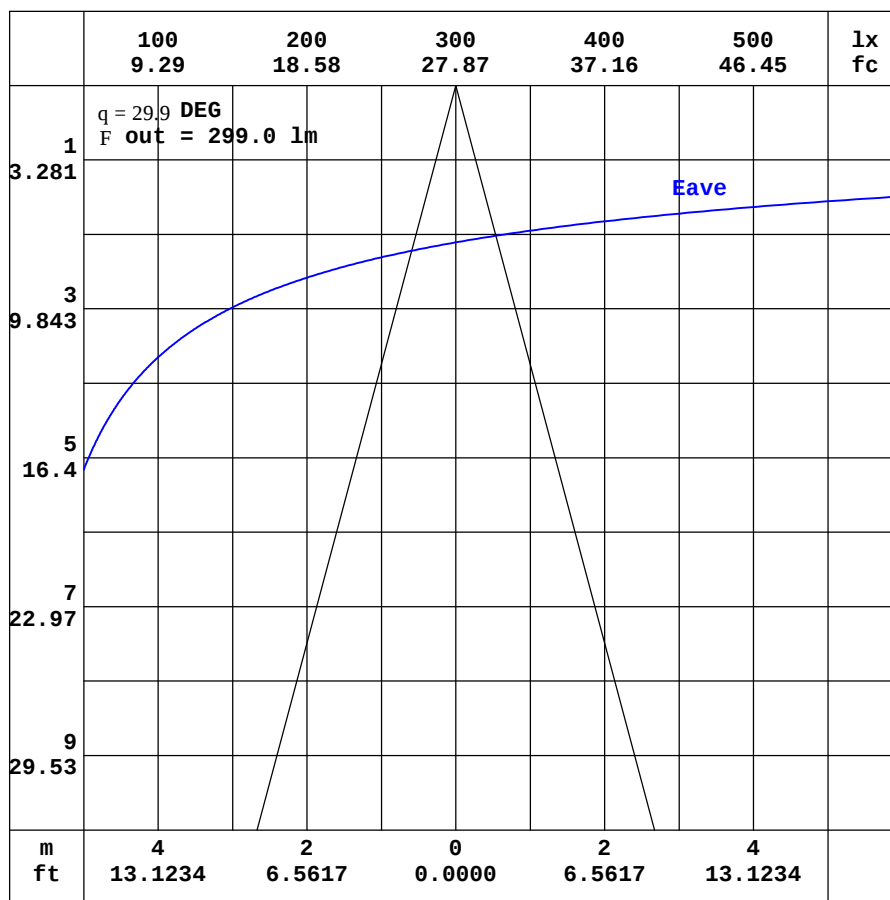

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-11

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeMini Recessed-500mm-RGBW ALL-30D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:30 DEG	DIM.:500mm	SERIAL No.:IES000899
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	2.59	2.33	2.18	2.17	2.26	2.47	2.86	3.41	4.11	4.84	5.50	6.02	6.35	6.49	6.48	6.37	6.17	5.99	6.03
-170	2.59	2.30	2.12	2.07	2.10	2.22	2.46	2.80	3.21	3.64	4.00	4.27	4.43	4.49	4.41	4.44	4.79	5.08	5.23
-160	2.59	2.27	2.06	1.98	1.95	1.97	2.04	2.16	2.29	2.41	2.46	2.46	2.46	2.98	3.47	3.88	4.21	4.45	4.57
-150	2.59	2.25	2.02	1.89	1.80	1.74	1.68	1.63	1.53	1.39	1.26	1.51	1.83	2.20	2.56	2.90	3.17	3.37	3.47
-140	2.59	2.24	1.99	1.81	1.69	1.58	1.43	1.26	1.06	0.97	1.01	1.10	1.25	1.42	1.61	1.80	1.96	2.08	2.13
-130	2.59	2.24	1.98	1.76	1.61	1.46	1.30	1.08	0.97	0.95	0.94	0.94	0.93	0.95	1.01	1.07	1.13	1.17	1.19
-120	2.59	2.24	1.96	1.74	1.54	1.38	1.21	1.07	1.06	1.03	1.01	0.99	0.97	0.95	0.93	0.93	0.92	0.92	0.91
-110	2.59	2.26	1.97	1.73	1.52	1.33	1.15	1.09	1.09	1.09	1.09	1.09	1.10	1.09	1.07	1.05	1.03	1.01	1.00
-100	2.59	2.28	1.99	1.73	1.49	1.27	1.06	1.06	1.07	1.07	1.07	1.07	1.08	1.08	1.08	1.08	1.08	1.08	1.08
-90	2.59	2.31	2.03	1.76	1.48	1.20	0.93	0.92	0.92	0.92	0.91	0.91	0.91	0.91	0.91	0.91	0.92	0.92	0.92
-80	2.59	2.35	2.10	1.82	1.53	1.17	0.80	0.74	0.71	0.68	0.65	0.63	0.61	0.60	0.59	0.58	0.58	0.58	0.58
-70	2.59	2.41	2.23	1.95	1.61	1.21	0.76	0.58	0.53	0.49	0.45	0.43	0.40	0.39	0.39	0.39	0.39	0.38	0.38
-60	2.59	2.49	2.36	2.11	1.79	1.39	0.90	0.47	0.43	0.41	0.40	0.40	0.40	0.42	0.44	0.46	0.49	0.51	0.53
-50	2.59	2.59	2.50	2.33	2.08	1.74	1.30	0.71	0.41	0.42	0.48	0.57	0.73	0.93	1.34	1.84	2.10	1.95	1.47
-40	2.59	2.68	2.67	2.61	2.49	2.31	2.02	1.56	0.87	0.68	1.61	3.88	7.69	13.0	19.4	24.4	27.7	28.4	25.7
-30	2.59	2.77	2.87	2.94	3.02	3.09	3.11	3.03	2.90	4.32	9.33	20.2	39.7	70.7	110	156	187	196	183
-20	2.59	2.85	3.07	3.32	3.63	4.04	4.54	5.09	6.55	11.6	25.0	61.6	145	233	328	426	524	603	635
-10	2.59	2.93	3.26	3.69	4.27	5.07	6.16	7.52	10.3	18.7	40.6	99.7	210	360	537	778	1057	1293	1397
0	2.59	3.00	3.44	4.03	4.86	6.03	7.68	9.74	13.0	21.7	41.6	90.4	216	398	622	944	1366	1771	1966
10	2.59	3.00	3.43	4.00	4.80	5.93	7.50	9.49	12.9	22.0	43.1	99.6	215	364	537	774	1072	1347	1436
20	2.59	2.98	3.39	3.92	4.64	5.63	6.98	8.69	11.4	17.8	32.1	65.1	145	249	352	461	569	647	673
30	2.59	2.95	3.32	3.78	4.39	5.19	6.25	7.60	9.24	12.4	19.2	30.9	50.7	85.2	138	199	229	239	227
40	2.59	2.92	3.24	3.61	4.08	4.68	5.44	6.38	7.50	8.77	10.5	13.9	18.9	26.0	34.5	40.9	45.3	46.2	42.9
50	2.59	2.86	3.14	3.43	3.77	4.18	4.68	5.26	5.93	6.70	7.54	8.41	9.31	10.3	11.4	12.4	13.0	13.0	12.5
60	2.59	2.78	3.02	3.23	3.47	3.73	4.02	4.34	4.69	5.06	5.46	5.88	6.31	6.70	7.02	7.27	7.47	7.57	7.59
70	2.59	2.71	2.90	3.04	3.18	3.34	3.49	3.64	3.79	3.94	4.10	4.26	4.40	4.53	4.64	4.73	4.78	4.81	4.81
80	2.59	2.66	2.74	2.83	2.93	3.00	3.07	3.12	3.17	3.21	3.25	3.30	3.33	3.36	3.39	3.41	3.42	3.42	3.42
90	2.59	2.61	2.63	2.65	2.67	2.69	2.71	2.70	2.69	2.68	2.67	2.66	2.65	2.65	2.64	2.63	2.62	2.62	2.61
100	2.59	2.56	2.53	2.50	2.47	2.44	2.42	2.37	2.33	2.29	2.26	2.22	2.20	2.18	2.17	2.16	2.16	2.16	2.16
110	2.59	2.51	2.44	2.37	2.31	2.26	2.23	2.19	2.15	2.13	2.12	2.11	2.11	2.11	2.11	2.11	2.10	2.10	2.10
120	2.59	2.47	2.36	2.27	2.21	2.17	2.16	2.14	2.14	2.18	2.23	2.30	2.37	2.44	2.52	2.59	2.64	2.68	2.69
130	2.59	2.43	2.30	2.21	2.17	2.16	2.16	2.22	2.32	2.48	2.66	2.87	3.10	3.32	3.53	3.72	3.85	3.94	3.97
140	2.59	2.40	2.25	2.17	2.16	2.18	2.27	2.45	2.68	3.01	3.40	3.80	4.20	4.58	4.91	5.17	5.35	5.46	5.49
150	2.59	2.37	2.22	2.16	2.17	2.26	2.45	2.75	3.17	3.67	4.21	4.76	5.26	5.67	6.00	6.24	6.39	6.47	6.50
160	2.59	2.35	2.20	2.17	2.20	2.36	2.64	3.07	3.63	4.27	4.91	5.46	5.90	6.24	6.47	6.60	6.66	6.71	6.76
170	2.59	2.34	2.18	2.16	2.24	2.43	2.78	3.31	3.97	4.68	5.34	5.87	6.24	6.45	6.49	6.50	6.43	6.39	6.44
180	2.59	2.33	2.18	2.17	2.26	2.47	2.86	3.41	4.11	4.84	5.50	6.02	6.35	6.49	6.48	6.37	6.17	5.99	6.03

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-03-11

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeMini Recessed-500mm-RGBW ALL-30D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:30 DEG	DIM.:500mm	SERIAL No.:IES000899
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	5.36	5.02	4.69	4.30	3.84	3.29	2.68	2.10	1.61	1.25	1.02	0.99	1.02	1.08	1.10	1.09	1.02	0.91
-170	4.98	4.82	4.56	4.18	3.72	3.16	2.56	2.01	1.55	1.21	1.01	0.98	1.02	1.08	1.10	1.09	1.02	0.91
-160	4.48	4.31	4.02	3.65	3.20	2.69	2.18	1.73	1.37	1.11	0.99	0.98	1.02	1.09	1.10	1.10	1.02	0.91
-150	3.41	3.27	3.03	2.72	2.36	2.00	1.65	1.37	1.15	1.01	0.98	0.99	1.04	1.09	1.11	1.09	1.01	0.91
-140	2.11	2.02	1.88	1.71	1.51	1.33	1.17	1.06	0.99	0.97	0.98	1.01	1.08	1.10	1.11	1.08	1.00	0.91
-130	1.18	1.15	1.10	1.04	0.99	0.95	0.95	0.95	0.96	0.98	1.02	1.07	1.10	1.11	1.11	1.07	0.99	0.91
-120	0.92	0.92	0.92	0.93	0.94	0.96	0.98	1.00	1.04	1.06	1.09	1.11	1.12	1.11	1.09	1.04	0.97	0.91
-110	1.01	1.03	1.05	1.07	1.09	1.10	1.11	1.11	1.11	1.12	1.12	1.12	1.12	1.10	1.06	1.01	0.95	0.91
-100	1.09	1.09	1.10	1.10	1.09	1.10	1.10	1.11	1.11	1.11	1.11	1.10	1.08	1.05	1.01	0.97	0.93	0.91
-90	0.93	0.93	0.93	0.94	0.94	0.94	0.95	0.96	0.97	0.98	0.99	1.00	0.98	0.97	0.95	0.94	0.92	0.91
-80	0.58	0.59	0.61	0.62	0.63	0.65	0.68	0.71	0.74	0.77	0.80	0.83	0.86	0.88	0.90	0.92	0.92	0.91
-70	0.39	0.39	0.40	0.40	0.41	0.42	0.46	0.49	0.53	0.58	0.63	0.68	0.73	0.77	0.82	0.87	0.92	0.91
-60	0.51	0.49	0.46	0.44	0.42	0.41	0.41	0.41	0.43	0.46	0.50	0.55	0.61	0.67	0.75	0.82	0.90	0.91
-50	1.91	2.03	1.78	1.28	0.91	0.72	0.56	0.48	0.43	0.43	0.45	0.48	0.52	0.60	0.68	0.77	0.87	0.91
-40	28.1	27.3	23.8	18.8	12.7	7.52	3.79	1.56	0.65	0.50	0.47	0.47	0.49	0.53	0.64	0.74	0.86	0.91
-30	195	185	153	110	72.5	40.2	20.2	9.35	3.21	0.89	0.60	0.53	0.50	0.51	0.59	0.71	0.84	0.91
-20	598	517	421	328	237	154	63.9	23.1	8.22	2.22	0.80	0.63	0.52	0.51	0.56	0.68	0.83	0.91
-10	1281	1045	768	535	369	231	107	37.4	12.8	3.63	1.07	0.74	0.57	0.52	0.54	0.66	0.82	0.91
0	1838	1461	1020	666	430	258	106	36.8	13.1	3.77	1.14	0.82	0.61	0.52	0.54	0.66	0.82	0.91
10	1316	1036	742	524	367	231	104	39.5	16.0	6.25	3.03	2.06	1.41	1.04	0.85	0.83	0.88	0.91
20	636	553	448	345	247	145	65.0	30.0	14.4	7.03	4.38	3.04	2.08	1.49	1.14	0.99	0.95	0.91
30	239	230	205	144	87.2	51.4	31.0	19.3	11.3	7.21	5.13	3.62	2.55	1.84	1.40	1.14	1.02	0.91
40	46.6	45.9	41.6	35.1	26.4	19.1	13.9	10.5	8.69	7.05	5.22	3.82	2.81	2.08	1.60	1.27	1.08	0.91
50	13.0	13.0	12.4	11.4	10.2	9.23	8.34	7.46	6.61	5.84	4.90	3.78	2.89	2.23	1.73	1.37	1.12	0.91
60	7.56	7.44	7.23	6.95	6.63	6.24	5.81	5.40	4.99	4.62	4.27	3.58	2.87	2.28	1.82	1.45	1.18	0.91
70	4.80	4.77	4.71	4.61	4.50	4.36	4.21	4.05	3.90	3.74	3.59	3.30	2.75	2.26	1.85	1.50	1.20	0.91
80	3.42	3.41	3.39	3.36	3.33	3.30	3.26	3.21	3.16	3.11	3.06	2.98	2.58	2.19	1.85	1.52	1.20	0.91
90	2.61	2.62	2.62	2.62	2.62	2.63	2.63	2.63	2.64	2.64	2.65	2.65	2.36	2.07	1.78	1.49	1.20	0.91
100	2.15	2.15	2.14	2.14	2.15	2.15	2.18	2.21	2.23	2.26	2.30	2.33	2.14	1.93	1.70	1.46	1.19	0.91
110	2.10	2.10	2.11	2.11	2.10	2.10	2.09	2.09	2.10	2.11	2.13	2.11	1.97	1.81	1.64	1.43	1.18	0.91
120	2.68	2.65	2.61	2.54	2.46	2.38	2.30	2.23	2.17	2.11	2.10	1.99	1.85	1.72	1.58	1.40	1.18	0.91
130	3.95	3.88	3.76	3.60	3.39	3.17	2.94	2.72	2.51	2.33	2.13	1.90	1.76	1.63	1.51	1.36	1.16	0.91
140	5.47	5.38	5.22	4.98	4.67	4.30	3.90	3.49	3.10	2.65	2.17	1.86	1.66	1.54	1.44	1.32	1.14	0.91
150	6.47	6.40	6.27	6.04	5.73	5.34	4.87	4.34	3.47	2.69	2.14	1.77	1.56	1.45	1.36	1.27	1.12	0.91
160	6.70	6.66	6.60	6.48	6.26	5.96	5.09	4.14	3.24	2.48	1.93	1.59	1.42	1.34	1.28	1.22	1.09	0.91
170	6.27	6.35	6.45	6.11	5.54	4.85	4.09	3.31	2.59	1.97	1.54	1.32	1.23	1.21	1.19	1.15	1.06	0.91
180	5.36	5.02	4.69	4.30	3.84	3.29	2.68	2.10	1.61	1.25	1.02	0.99	1.02	1.08	1.10	1.09	1.02	0.91

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-03-11

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: