

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	2533.3 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	61.2V x 63.0H
	At 50% of Imax	30.8V x 30.7H
	At 90% of Imax	11.3V x 11.3H

Beam Flux	Total	1000.2 lumens per klm.
	To 10% of Imax	879.6 lumens per klm.
	To 50% of Imax	406.4 lumens per klm.
	To 90% of Imax	70.7 lumens per klm.

Upward LOR	1.5 %
Downward LOR	98.5 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-11

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:BlazeMini Recessed-500mm-RGBW BLUE-30D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:30 DEG	DIM.:500mm	SERIAL No.:IES000899-B
MFR.:	SUR.:	Shielding Angle:

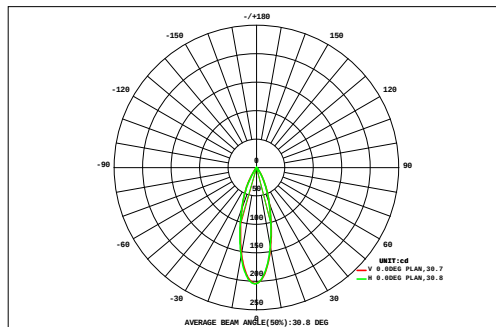

DATA OF LAMP		Eff:11.82lm/W	
MODEL		Imax(cd)	204.8
NOMINAL POWER(W)	6.84	AVAILABILITY(%)	88.0
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	71.09
NOMINAL FLUX(lm)	80.83	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	80.83
TEST VOLTAGE(V)	24	q @50%(H,V)	31,31DEG

		AREA FLUX DIAGRAM															UNIT:lm				F t	F a
		0.00	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.00	0.32	0.00	
VERTICAL (DEG)	45	0.01	0.01	0.01	0.02	0.03	0.05	0.06	0.06	0.06	0.06	0.06	0.05	0.04	0.03	0.02	0.01	0.01	0.01	0.60	0.00	
	40	0.01	0.01	0.02	0.04	0.06	0.09	0.11	0.13	0.12	0.12	0.12	0.11	0.09	0.06	0.04	0.02	0.01	0.01	1.18	0.12	
	35	0.01	0.02	0.04	0.07	0.12	0.17	0.22	0.24	0.24	0.24	0.23	0.20	0.16	0.11	0.06	0.04	0.02	0.01	2.18	1.63	
	30	0.01	0.02	0.06	0.12	0.19	0.27	0.33	0.38	0.40	0.39	0.35	0.30	0.23	0.16	0.10	0.05	0.03	0.01	3.42	3.02	
	25	0.01	0.03	0.09	0.17	0.27	0.36	0.47	0.56	0.61	0.59	0.52	0.41	0.31	0.22	0.14	0.07	0.03	0.01	4.89	4.57	
	20	0.02	0.04	0.11	0.21	0.33	0.47	0.64	0.81	0.90	0.87	0.73	0.55	0.39	0.27	0.17	0.09	0.04	0.02	6.67	6.37	
	15	0.02	0.05	0.12	0.24	0.39	0.57	0.82	1.08	1.23	1.18	0.96	0.70	0.48	0.32	0.20	0.11	0.04	0.02	8.54	8.27	
	10	0.02	0.04	0.12	0.26	0.42	0.65	0.95	1.27	1.47	1.41	1.16	0.85	0.57	0.36	0.22	0.11	0.04	0.02	9.93	9.67	
	5	0.02	0.05	0.12	0.26	0.43	0.67	0.99	1.33	1.52	1.46	1.22	0.88	0.58	0.37	0.22	0.11	0.05	0.02	10.3	10.1	
	0	0.02	0.05	0.13	0.26	0.42	0.64	0.93	1.19	1.33	1.28	1.06	0.78	0.53	0.34	0.21	0.11	0.05	0.02	9.36	9.09	
	-5	0.02	0.05	0.12	0.24	0.38	0.54	0.74	0.92	1.02	0.98	0.82	0.63	0.44	0.30	0.19	0.10	0.04	0.02	7.55	7.28	
	-10	0.01	0.04	0.10	0.21	0.31	0.42	0.54	0.65	0.72	0.69	0.59	0.47	0.35	0.24	0.16	0.08	0.03	0.01	5.64	5.36	
	-15	0.01	0.02	0.07	0.14	0.22	0.31	0.39	0.45	0.48	0.46	0.41	0.34	0.26	0.18	0.11	0.06	0.02	0.01	3.93	3.59	
	-20	0.00	0.01	0.03	0.07	0.13	0.19	0.25	0.28	0.28	0.27	0.25	0.22	0.16	0.11	0.06	0.03	0.01	0.01	2.37	1.90	
	-25	0.00	0.01	0.01	0.03	0.05	0.08	0.11	0.13	0.12	0.12	0.12	0.10	0.07	0.05	0.03	0.02	0.01	0.00	1.06	0.16	
	-30	0.00	0.00	0.01	0.01	0.02	0.03	0.04	0.04	0.04	0.04	0.04	0.03	0.03	0.02	0.01	0.01	0.00	0.00	0.37	0.00	
-35	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.11	0.00		
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
-45	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)				10	15	20	25	30	35	40	45		
F t	0.18	0.45	1.16	2.37	3.80	5.55	7.62	9.56	10.6	10.2	8.69	6.66	4.73	3.17	1.98	1.05	0.46	0.19	78	---		
F a	0.00	0.00	0.36	1.97	3.43	5.21	7.30	9.23	10.3	9.90	8.37	6.32	4.37	2.75	1.46	0.16	0.00	0.00	---	71		

one-half-peak spread: U:15.6,D:15.5 , L:15.7,R:15.3


NEMA Beam Type: Type 4

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-03-11

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:BlazeMini Recessed-500mm-RGBW BLUE-30D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:30 DEG	DIM.:500mm	SERIAL No.:IES000899-B
MFR.:	SUR.:	Shielding Angle:

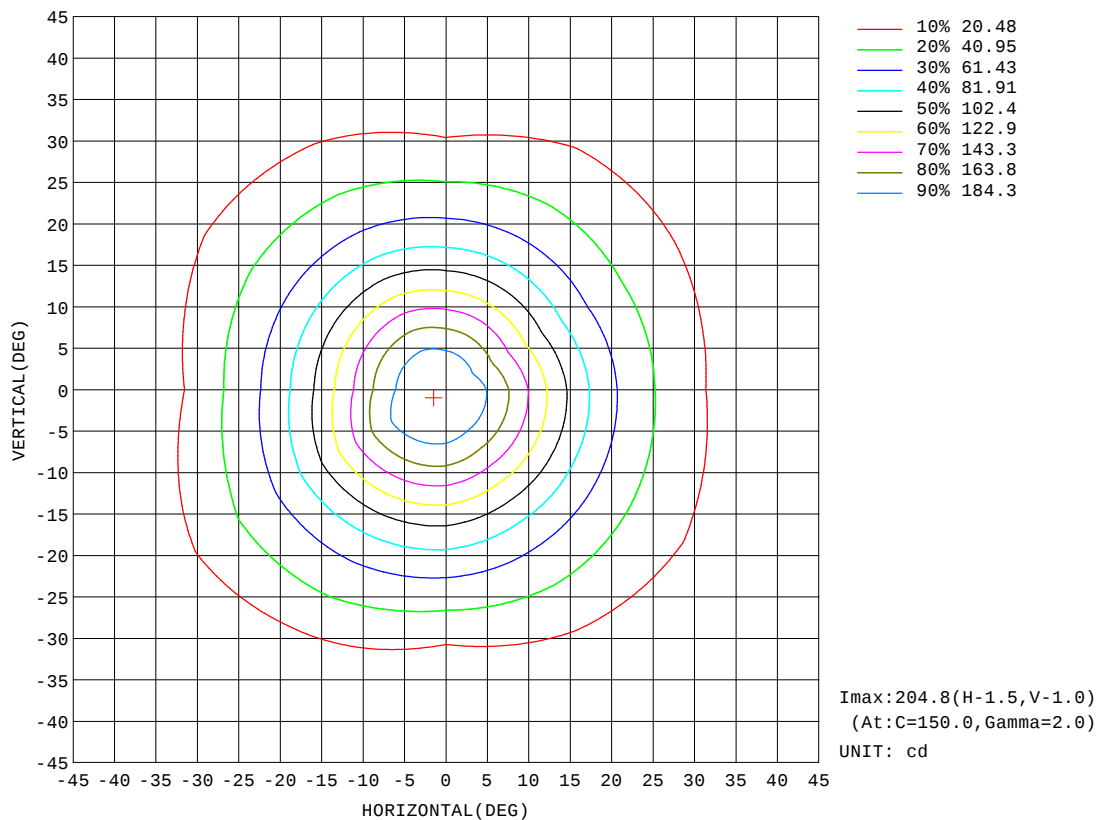


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-11

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:BlazeMini Recessed-500mm-RGBW BLUE-30D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:30 DEG	DIM.:500mm	SERIAL No.:IES000899-B
MFR.:	SUR.:	Shielding Angle:

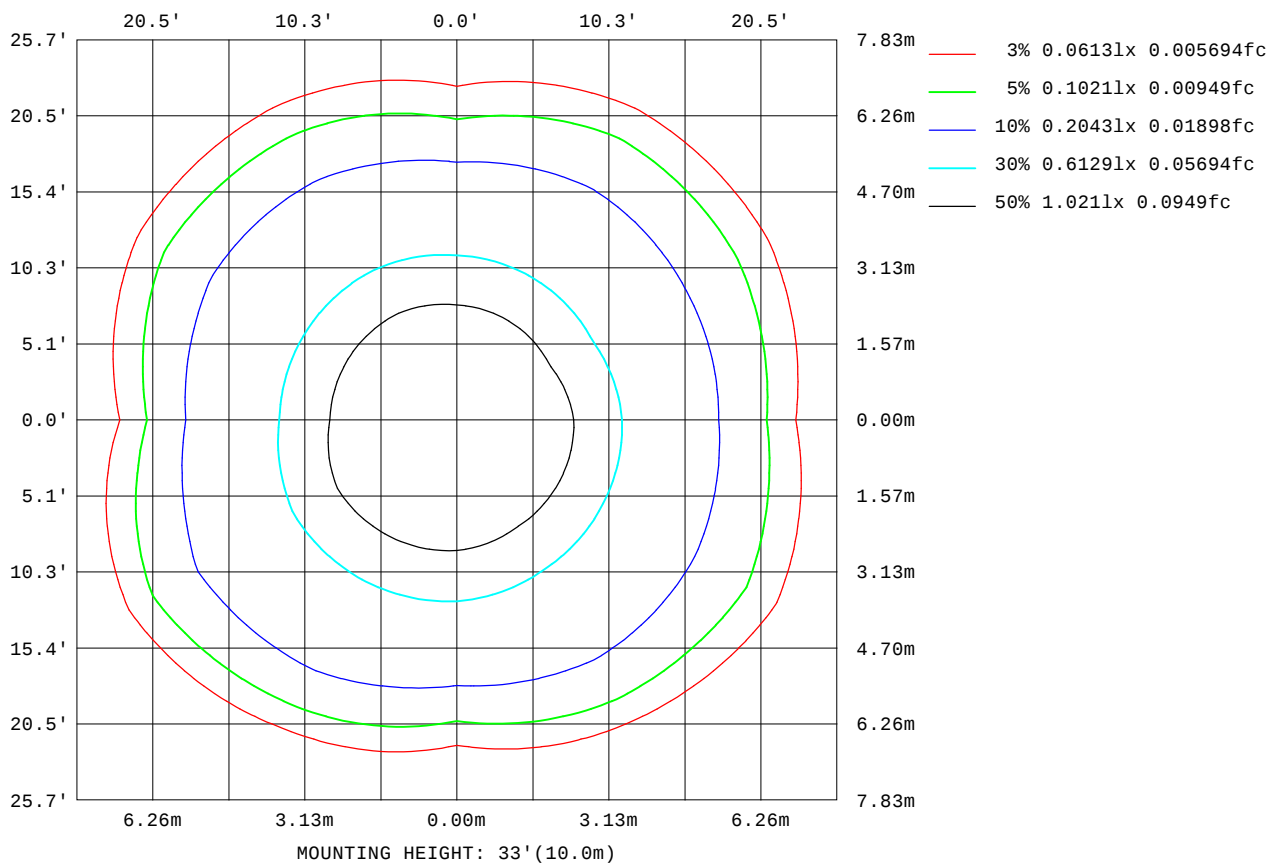

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-03-11

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

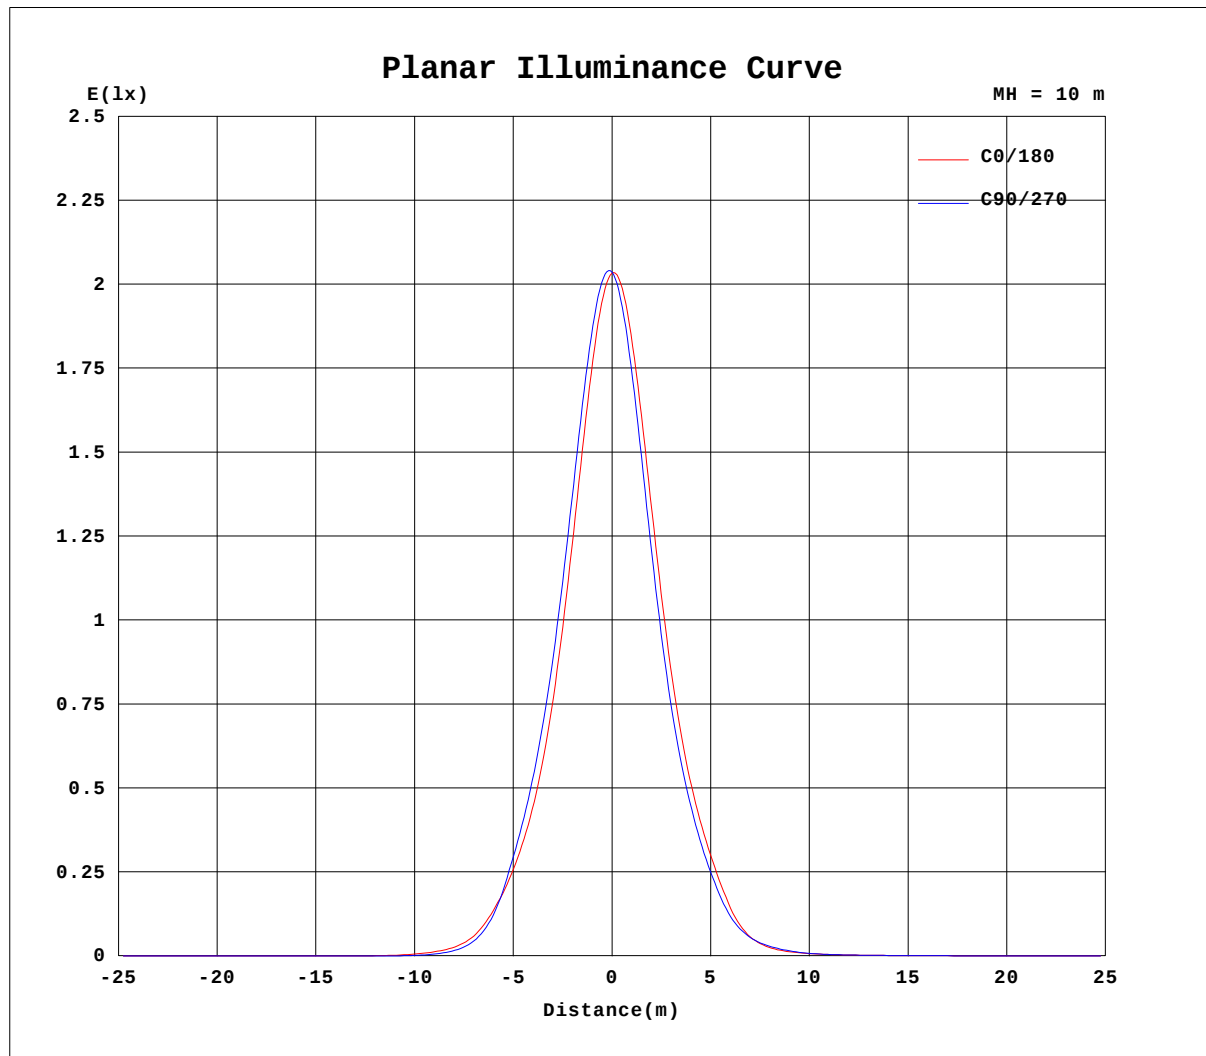


H(b) Range: -90 - 90DEG
H(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-03-11

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:BlazeMini Recessed-500mm-RGBW BLUE-30D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:30 DEG	DIM.:500mm	SERIAL No.:IES000899-B
MFR.:	SUR.:	Shielding Angle:

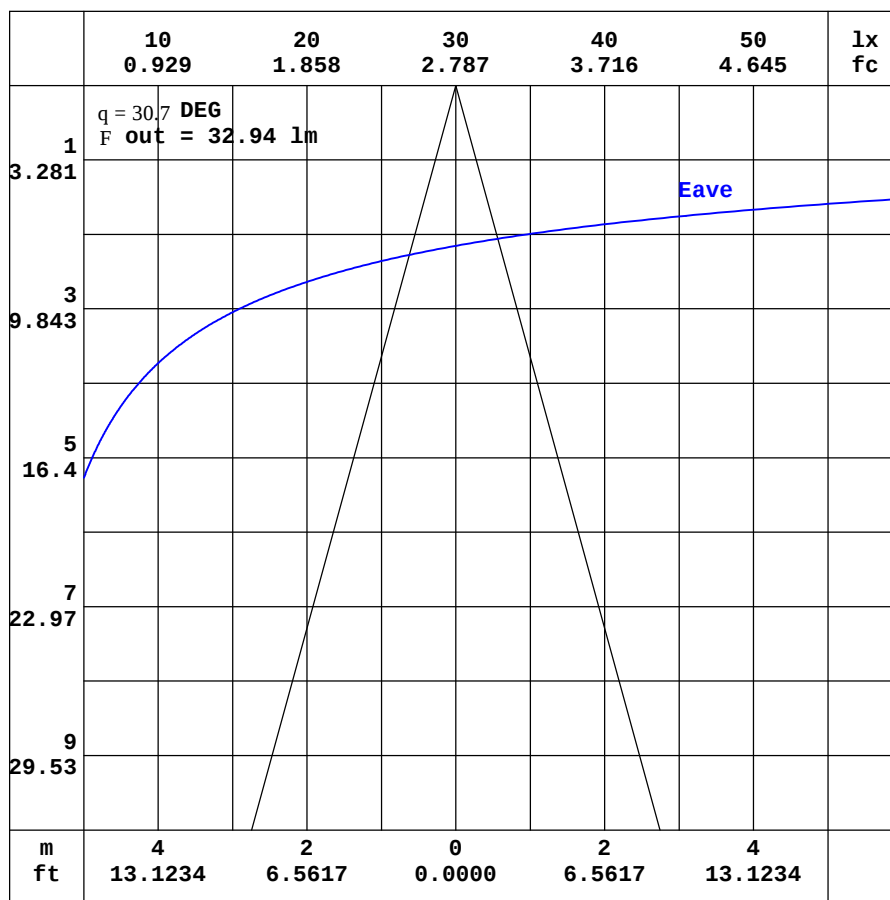

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-11

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeMini Recessed-500mm-RGBW BLUE-30D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:30 DEG	DIM.:500mm	SERIAL No.:IES000899-B
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.20	0.16	0.16	0.16	0.17	0.18	0.22	0.27	0.35	0.43	0.49	0.55	0.58	0.58	0.58	0.57	0.57	0.55	0.56
-170	0.20	0.16	0.15	0.15	0.15	0.16	0.18	0.21	0.26	0.30	0.34	0.37	0.39	0.38	0.38	0.39	0.42	0.44	0.49
-160	0.20	0.15	0.15	0.14	0.13	0.13	0.13	0.14	0.15	0.17	0.17	0.17	0.17	0.22	0.27	0.30	0.34	0.37	0.40
-150	0.20	0.15	0.14	0.12	0.11	0.10	0.09	0.09	0.08	0.07	0.05	0.07	0.10	0.12	0.15	0.18	0.22	0.25	0.28
-140	0.20	0.15	0.13	0.11	0.10	0.08	0.07	0.05	0.03	0.02	0.02	0.02	0.02	0.04	0.06	0.07	0.10	0.12	0.14
-130	0.20	0.16	0.12	0.10	0.09	0.06	0.04	0.02	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.01	0.02	0.03	0.04
-120	0.20	0.16	0.12	0.10	0.08	0.05	0.03	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01
-110	0.20	0.16	0.13	0.09	0.07	0.04	0.02	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01
-100	0.20	0.16	0.13	0.10	0.07	0.04	0.02	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01
-90	0.20	0.17	0.14	0.10	0.07	0.04	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.20	0.17	0.14	0.10	0.07	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.20	0.17	0.15	0.12	0.09	0.05	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.20	0.18	0.16	0.14	0.11	0.08	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.20	0.18	0.18	0.17	0.14	0.12	0.08	0.03	0.00	0.00	0.00	0.00	0.00	0.02	0.06	0.10	0.11	0.09	0.04
-40	0.20	0.20	0.19	0.19	0.19	0.18	0.15	0.11	0.04	0.00	0.05	0.28	0.67	1.25	1.95	2.58	2.94	2.94	2.49
-30	0.20	0.20	0.22	0.22	0.24	0.25	0.26	0.25	0.21	0.31	0.82	2.14	4.75	9.15	14.7	20.9	24.9	25.9	23.8
-20	0.20	0.21	0.24	0.27	0.31	0.35	0.40	0.46	0.57	1.08	2.70	7.87	20.3	32.5	44.0	55.9	67.3	75.4	77.6
-10	0.20	0.22	0.25	0.30	0.37	0.45	0.56	0.70	0.98	1.86	4.54	12.8	28.1	46.7	68.4	97.4	128	151	157
0	0.20	0.23	0.27	0.33	0.42	0.56	0.72	0.94	1.28	2.12	4.24	10.5	27.0	48.8	74.4	110	154	191	203
10	0.20	0.23	0.27	0.34	0.42	0.54	0.71	0.92	1.27	2.14	4.48	11.2	25.0	42.2	60.8	84.8	113	136	140
20	0.20	0.22	0.27	0.33	0.41	0.51	0.66	0.85	1.11	1.72	3.20	7.07	16.4	27.4	37.8	48.4	57.9	64.1	64.9
30	0.20	0.22	0.27	0.32	0.38	0.47	0.59	0.74	0.91	1.21	1.85	3.14	5.56	9.54	14.8	20.1	22.9	23.5	21.9
40	0.20	0.22	0.26	0.30	0.36	0.42	0.51	0.61	0.73	0.87	1.04	1.39	2.02	3.01	4.16	4.86	5.36	5.45	5.11
50	0.20	0.21	0.25	0.29	0.33	0.37	0.43	0.50	0.56	0.64	0.71	0.80	0.88	0.98	1.12	1.25	1.32	1.31	1.24
60	0.20	0.21	0.24	0.26	0.29	0.33	0.37	0.41	0.43	0.46	0.50	0.53	0.56	0.60	0.64	0.67	0.70	0.71	0.72
70	0.20	0.21	0.23	0.25	0.27	0.29	0.31	0.32	0.34	0.35	0.35	0.36	0.37	0.38	0.41	0.42	0.43	0.44	0.44
80	0.20	0.21	0.22	0.23	0.24	0.25	0.27	0.27	0.26	0.26	0.26	0.26	0.26	0.27	0.28	0.29	0.29	0.30	0.31
90	0.20	0.20	0.21	0.22	0.22	0.23	0.23	0.23	0.22	0.21	0.21	0.20	0.19	0.20	0.20	0.20	0.21	0.21	0.21
100	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.19	0.18	0.17	0.16	0.15	0.15	0.15	0.15	0.16	0.16	0.16	0.16
110	0.20	0.19	0.19	0.18	0.18	0.18	0.18	0.17	0.17	0.16	0.16	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.14
120	0.20	0.19	0.17	0.17	0.17	0.17	0.16	0.16	0.16	0.16	0.16	0.17	0.18	0.19	0.19	0.20	0.20	0.20	0.19
130	0.20	0.18	0.17	0.17	0.17	0.16	0.16	0.16	0.16	0.17	0.20	0.22	0.25	0.28	0.31	0.32	0.33	0.34	0.34
140	0.20	0.17	0.17	0.17	0.16	0.16	0.16	0.16	0.19	0.21	0.27	0.31	0.37	0.42	0.46	0.48	0.50	0.50	0.50
150	0.20	0.17	0.17	0.16	0.16	0.17	0.17	0.20	0.23	0.28	0.34	0.41	0.46	0.52	0.57	0.59	0.60	0.60	0.60
160	0.20	0.16	0.16	0.16	0.16	0.17	0.19	0.23	0.28	0.35	0.42	0.47	0.51	0.57	0.59	0.60	0.61	0.62	0.63
170	0.20	0.16	0.16	0.16	0.17	0.18	0.21	0.26	0.33	0.40	0.47	0.52	0.57	0.58	0.58	0.58	0.58	0.58	0.60
180	0.20	0.16	0.16	0.16	0.17	0.18	0.22	0.27	0.35	0.43	0.49	0.55	0.58	0.58	0.58	0.57	0.57	0.55	0.56

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-03-11

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeMini Recessed-500mm-RGBW BLUE-30D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:30 DEG	DIM.:500mm	SERIAL No.:IES000899-B
MFR.:	SUR.:	Shielding Angle:

Table--2
UNIT: cd

H(°)\V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.47	0.43	0.41	0.36	0.31	0.27	0.18	0.13	0.07	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	0.43	0.43	0.42	0.37	0.32	0.26	0.19	0.12	0.07	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-160	0.38	0.35	0.33	0.30	0.27	0.22	0.16	0.10	0.06	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-150	0.27	0.24	0.22	0.18	0.16	0.13	0.10	0.07	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-140	0.13	0.12	0.09	0.06	0.06	0.04	0.03	0.02	0.02	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	
-130	0.03	0.02	0.01	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	
-120	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	
-110	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	
-100	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.08	0.10	0.09	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-40	2.80	2.71	2.30	1.69	1.22	0.80	0.40	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-30	24.3	22.3	18.3	12.6	7.92	4.53	2.47	1.23	0.35	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-20	71.0	59.8	47.6	35.8	25.2	15.8	7.14	2.91	1.07	0.21	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-10	139	111	80.4	55.6	37.6	23.3	11.3	4.49	1.66	0.41	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
0	184	143	99.2	65.2	41.8	24.7	10.9	4.40	1.71	0.43	0.08	0.03	0.00	0.00	0.00	0.00	0.00	0.00	
10	126	98.7	71.1	50.4	34.8	21.6	10.4	4.56	1.94	0.66	0.25	0.15	0.08	0.05	0.03	0.02	0.01	0.00	
20	60.7	52.2	42.1	32.0	22.6	13.7	6.90	3.47	1.62	0.69	0.39	0.25	0.15	0.10	0.06	0.03	0.01	0.00	
30	22.5	21.4	18.9	13.7	8.92	5.63	3.52	2.12	1.14	0.68	0.46	0.31	0.21	0.13	0.08	0.05	0.02	0.00	
40	5.39	5.22	4.73	4.03	3.03	2.11	1.43	1.01	0.82	0.65	0.47	0.33	0.24	0.16	0.10	0.06	0.03	0.00	
50	1.30	1.30	1.22	1.08	0.93	0.84	0.76	0.67	0.60	0.54	0.45	0.34	0.25	0.17	0.12	0.07	0.03	0.00	
60	0.71	0.68	0.65	0.62	0.57	0.53	0.51	0.47	0.44	0.41	0.38	0.31	0.24	0.18	0.12	0.07	0.04	0.00	
70	0.43	0.42	0.41	0.39	0.37	0.36	0.35	0.34	0.33	0.32	0.31	0.29	0.23	0.17	0.12	0.08	0.04	0.00	
80	0.30	0.29	0.28	0.28	0.26	0.25	0.25	0.25	0.26	0.25	0.26	0.25	0.21	0.16	0.12	0.08	0.04	0.00	
90	0.21	0.20	0.20	0.19	0.19	0.18	0.19	0.19	0.20	0.20	0.21	0.22	0.18	0.14	0.11	0.07	0.04	0.00	
100	0.16	0.16	0.16	0.15	0.15	0.15	0.16	0.16	0.16	0.17	0.18	0.18	0.15	0.13	0.10	0.07	0.03	0.00	
110	0.15	0.15	0.15	0.15	0.16	0.15	0.16	0.15	0.16	0.16	0.16	0.15	0.13	0.11	0.09	0.06	0.03	0.00	
120	0.20	0.21	0.21	0.20	0.20	0.19	0.18	0.17	0.16	0.15	0.15	0.14	0.12	0.09	0.08	0.05	0.03	0.00	
130	0.35	0.35	0.34	0.33	0.31	0.28	0.24	0.22	0.19	0.16	0.14	0.12	0.10	0.08	0.06	0.05	0.02	0.00	
140	0.51	0.51	0.50	0.48	0.45	0.40	0.35	0.30	0.25	0.20	0.14	0.10	0.09	0.07	0.05	0.04	0.02	0.00	
150	0.60	0.60	0.61	0.58	0.54	0.50	0.44	0.37	0.29	0.20	0.13	0.09	0.07	0.05	0.04	0.03	0.02	0.00	
160	0.62	0.60	0.60	0.59	0.58	0.55	0.45	0.35	0.25	0.16	0.11	0.08	0.05	0.04	0.03	0.02	0.01	0.00	
170	0.57	0.57	0.58	0.54	0.49	0.42	0.34	0.26	0.18	0.10	0.06	0.04	0.03	0.02	0.01	0.01	0.01	0.00	
180	0.47	0.43	0.41	0.36	0.31	0.27	0.18	0.13	0.07	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H_b Range:-90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-11

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: