

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	2640.7 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	60.1V x 61.9H
	At 50% of Imax	29.9V x 29.8H
	At 90% of Imax	11.0V x 11.1H

Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	865.5 lumens per klm.
	To 50% of Imax	393.9 lumens per klm.
	To 90% of Imax	70.9 lumens per klm.

Upward LOR	2.1 %
Downward LOR	97.9 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-11

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:BlazeMini Recessed-500mm-RGBW GREEN-30D-Rev1	TYPE:RGBW-GRENN	WEIGHT:
SPEC.:30 DEG	DIM.:500mm	SERIAL No.:IES000899-G
MFR.:	SUR.:	Shielding Angle:

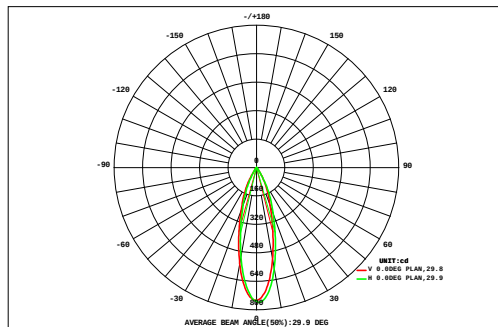

DATA OF LAMP		Eff:44.19lm/W	
MODEL		Imax(cd)	758.7
NOMINAL POWER(W)	6.5	AVAILABILITY(%)	86.4
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	248.3
NOMINAL FLUX(lm)	287.3	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	287.3
TEST VOLTAGE(V)	24	q @50%(H,V)	30,30DEG

		AREA FLUX DIAGRAM															UNIT:lm				F t	F a
		0.02	0.02	0.03	0.04	0.06	0.07	0.08	0.09	0.09	0.08	0.09	0.08	0.07	0.06	0.04	0.03	0.02	0.02	1.01	0.00	
VERTICAL (DEG)	45	0.02	0.03	0.05	0.07	0.11	0.15	0.19	0.20	0.19	0.19	0.20	0.18	0.15	0.11	0.07	0.05	0.03	0.02	2.02	0.00	
	40	0.03	0.05	0.08	0.13	0.22	0.35	0.46	0.51	0.49	0.48	0.49	0.44	0.34	0.21	0.13	0.08	0.05	0.03	4.56	0.97	
	35	0.04	0.07	0.13	0.26	0.47	0.73	0.93	1.02	1.05	1.02	0.95	0.83	0.65	0.42	0.23	0.13	0.07	0.04	9.02	7.29	
	30	0.04	0.09	0.22	0.47	0.79	1.10	1.39	1.60	1.71	1.66	1.47	1.21	0.93	0.65	0.38	0.20	0.10	0.05	14.0	12.7	
	25	0.05	0.12	0.32	0.68	1.05	1.45	1.91	2.35	2.57	2.48	2.13	1.64	1.20	0.83	0.53	0.27	0.12	0.05	19.8	18.6	
	20	0.06	0.15	0.40	0.80	1.26	1.83	2.56	3.32	3.72	3.59	2.99	2.18	1.49	1.00	0.64	0.33	0.14	0.06	26.5	25.5	
	15	0.06	0.16	0.43	0.87	1.41	2.16	3.17	4.25	4.92	4.72	3.81	2.69	1.79	1.16	0.72	0.37	0.15	0.06	32.9	31.9	
	10	0.06	0.15	0.41	0.89	1.48	2.32	3.47	4.72	5.56	5.36	4.37	3.12	2.02	1.26	0.75	0.38	0.15	0.06	36.5	35.6	
	5	0.06	0.15	0.40	0.87	1.45	2.29	3.43	4.64	5.38	5.25	4.35	3.10	2.00	1.24	0.74	0.38	0.15	0.06	35.9	35.0	
	0	0.06	0.16	0.41	0.82	1.34	2.07	3.02	3.92	4.44	4.30	3.57	2.61	1.73	1.11	0.68	0.36	0.15	0.06	30.8	29.7	
	-5	0.05	0.14	0.37	0.73	1.15	1.66	2.29	2.86	3.20	3.10	2.60	1.97	1.37	0.93	0.59	0.32	0.13	0.05	23.5	22.4	
	-10	0.04	0.11	0.30	0.60	0.90	1.23	1.61	1.94	2.12	2.06	1.77	1.40	1.04	0.73	0.48	0.25	0.10	0.04	16.7	15.5	
	-15	0.03	0.07	0.20	0.40	0.63	0.86	1.08	1.26	1.34	1.30	1.16	0.95	0.73	0.52	0.33	0.17	0.08	0.03	11.1	9.52	
	-20	0.02	0.04	0.10	0.22	0.36	0.52	0.66	0.74	0.76	0.74	0.69	0.59	0.45	0.31	0.19	0.10	0.05	0.02	6.55	3.74	
	-25	0.01	0.02	0.05	0.10	0.17	0.25	0.32	0.36	0.35	0.34	0.33	0.29	0.22	0.15	0.10	0.05	0.03	0.01	3.16	0.00	
	-30	0.00	0.01	0.02	0.05	0.08	0.11	0.14	0.15	0.15	0.15	0.14	0.13	0.10	0.07	0.05	0.03	0.01	0.00	1.39	0.00	
-35	0.00	0.00	0.01	0.02	0.03	0.05	0.06	0.06	0.06	0.06	0.06	0.05	0.04	0.03	0.02	0.01	0.00	0.00	0.54	0.00		
-40																						
-45																						
		-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45				
F t	0.66	1.56	3.93	8.02	13.0	19.2	26.7	34.0	38.1	36.9	31.2	23.5	16.3	10.8	6.67	3.51	1.54	0.65	276	---		
F a	0.00	0.00	0.74	6.40	11.6	17.9	25.5	32.8	36.8	35.6	29.9	22.2	14.9	9.17	4.50	0.26	0.00	0.00	---	248		

one-half-peak spread: U:15.0,D:15.2 , L:15.1,R:14.9


NEMA Beam Type: Type 4

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-03-11

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:BlazeMini Recessed-500mm-RGBW GREEN-30D-Rev1	TYPE:RGBW-GRENN	WEIGHT:
SPEC.:30 DEG	DIM.:500mm	SERIAL No.:IES000899-G
MFR.:	SUR.:	Shielding Angle:

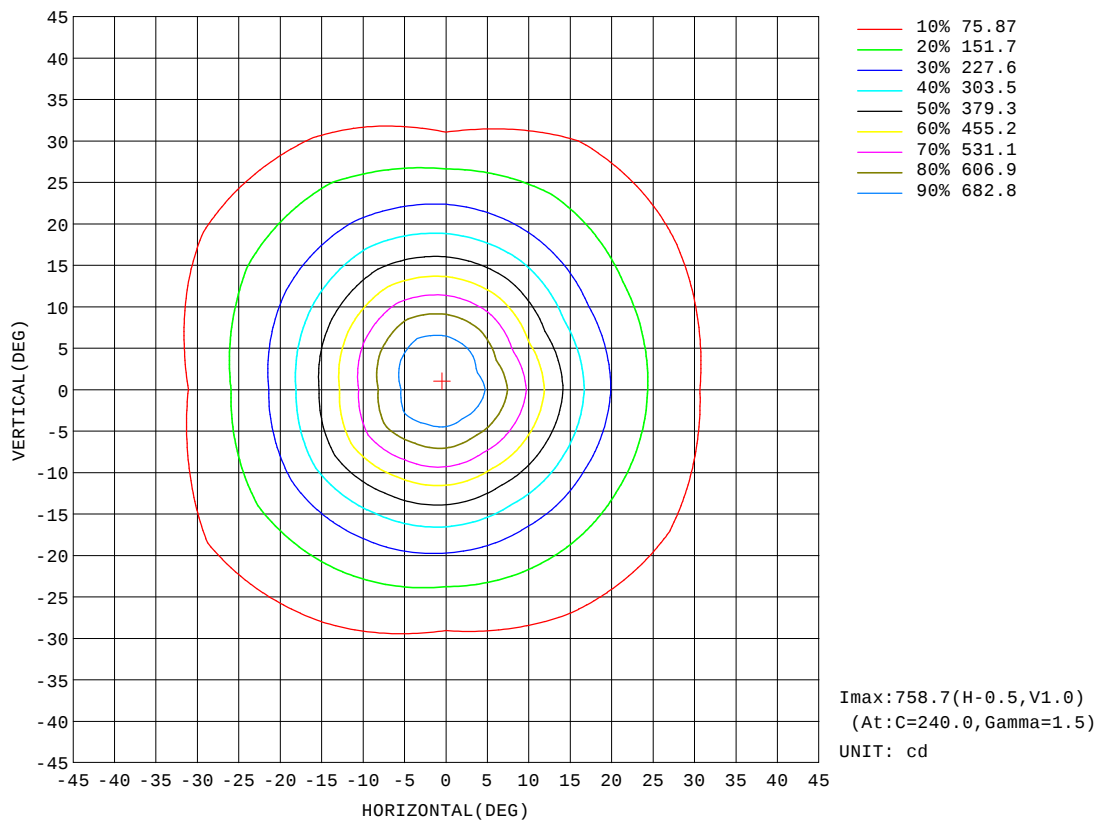


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-11

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:BlazeMini Recessed-500mm-RGBW GREEN-30D-Rev1	TYPE:RGBW-GRENN	WEIGHT:
SPEC.:30 DEG	DIM.:500mm	SERIAL No.:IES000899-G
MFR.:	SUR.:	Shielding Angle:

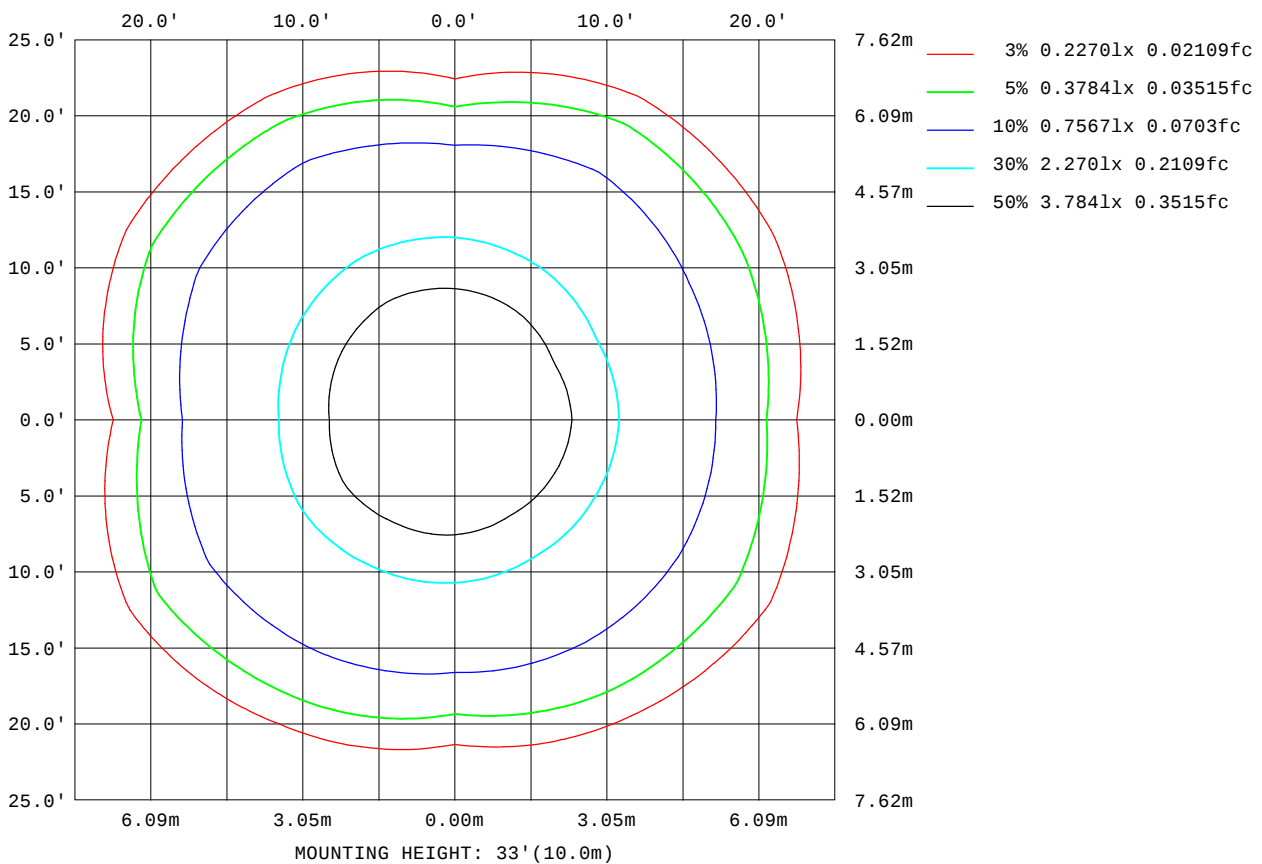

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-03-11

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

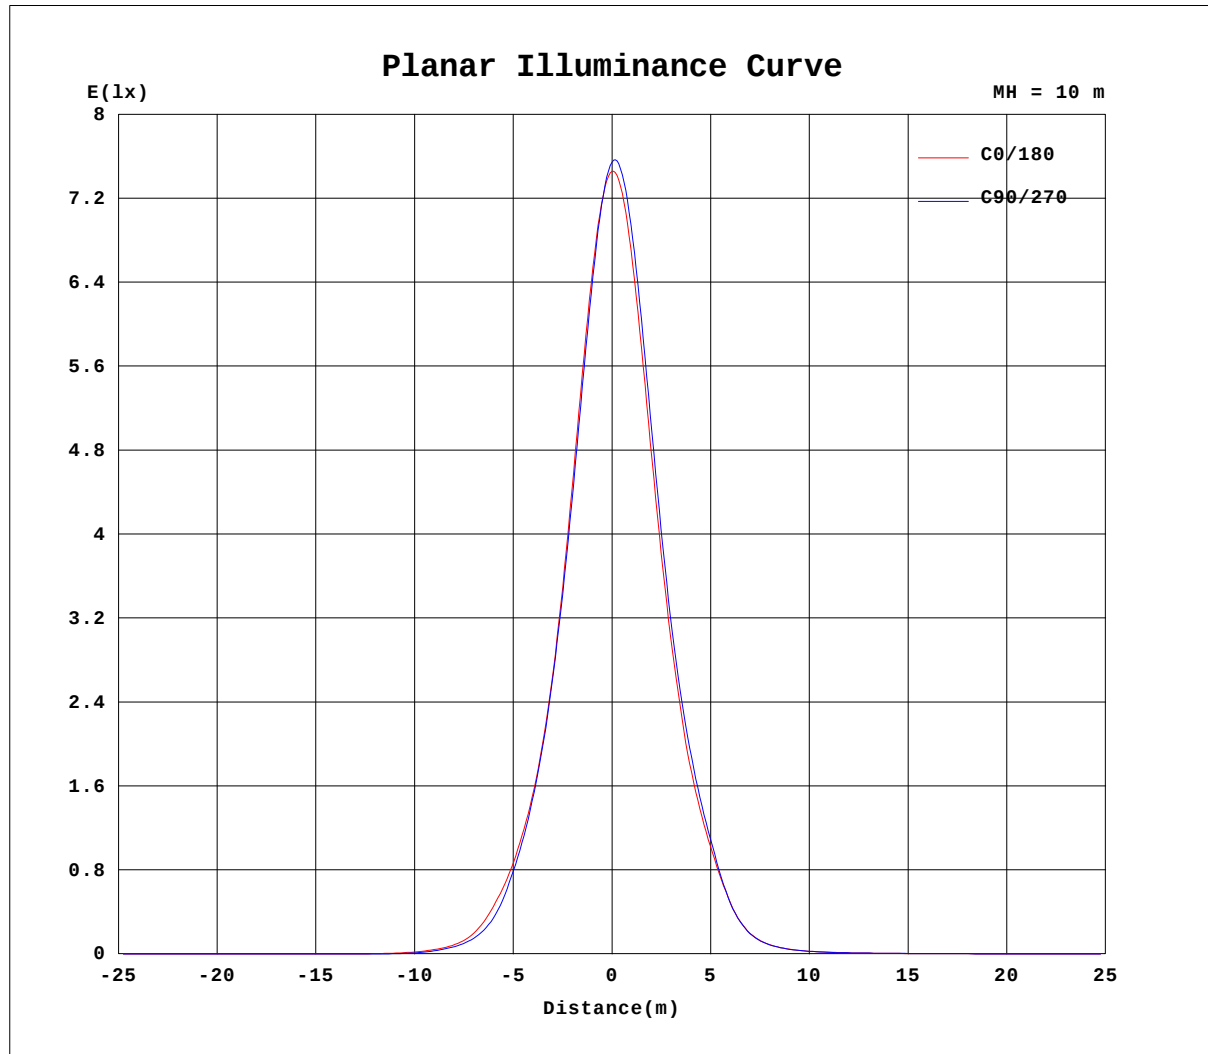


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-03-11

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:BlazeMini Recessed-500mm-RGBW GREEN-30D-Rev1	TYPE:RGBW-GRENN	WEIGHT:
SPEC.:30 DEG	DIM.:500mm	SERIAL No.:IES000899-G
MFR.:	SUR.:	Shielding Angle:

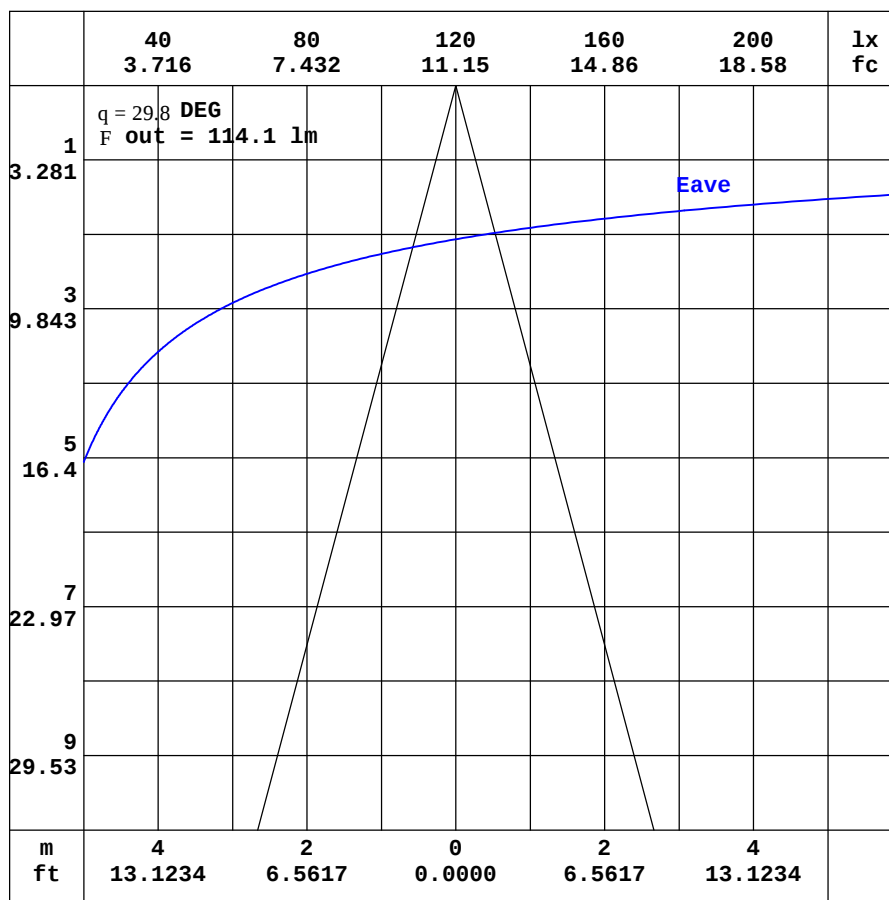

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-11

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeMini Recessed-500mm-RGBW GREEN-30D-Rev1	TYPE:RGBW-GRENN	WEIGHT:
SPEC.:30 DEG	DIM.:500mm	SERIAL No.:IES000899-G
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.91	0.81	0.76	0.76	0.78	0.86	0.98	1.19	1.44	1.72	1.98	2.19	2.33	2.37	2.37	2.33	2.25	2.19	2.23
-170	0.91	0.79	0.73	0.72	0.73	0.77	0.84	0.96	1.12	1.28	1.43	1.54	1.60	1.63	1.61	1.63	1.76	1.87	1.94
-160	0.91	0.79	0.71	0.68	0.67	0.67	0.70	0.74	0.79	0.83	0.86	0.86	0.87	1.07	1.26	1.41	1.54	1.64	1.70
-150	0.91	0.78	0.69	0.65	0.62	0.59	0.57	0.55	0.52	0.47	0.42	0.51	0.64	0.77	0.91	1.04	1.16	1.25	1.31
-140	0.91	0.77	0.68	0.62	0.58	0.53	0.47	0.42	0.35	0.32	0.33	0.36	0.41	0.48	0.55	0.64	0.71	0.76	0.79
-130	0.91	0.77	0.67	0.60	0.54	0.49	0.42	0.34	0.31	0.31	0.31	0.30	0.30	0.29	0.31	0.35	0.38	0.40	0.42
-120	0.91	0.78	0.67	0.59	0.52	0.45	0.39	0.35	0.34	0.33	0.32	0.32	0.31	0.30	0.29	0.29	0.29	0.29	0.28
-110	0.91	0.78	0.68	0.59	0.51	0.43	0.36	0.34	0.34	0.34	0.34	0.34	0.34	0.34	0.34	0.33	0.32	0.31	0.30
-100	0.91	0.79	0.68	0.59	0.50	0.41	0.34	0.34	0.33	0.33	0.33	0.33	0.33	0.34	0.34	0.34	0.34	0.35	0.35
-90	0.91	0.80	0.70	0.59	0.49	0.38	0.28	0.28	0.27	0.27	0.27	0.26	0.26	0.27	0.27	0.28	0.29	0.30	0.30
-80	0.91	0.82	0.72	0.61	0.50	0.37	0.23	0.21	0.20	0.18	0.17	0.16	0.14	0.14	0.15	0.15	0.16	0.16	0.17
-70	0.91	0.84	0.76	0.66	0.54	0.39	0.22	0.15	0.13	0.11	0.10	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09
-60	0.91	0.86	0.82	0.72	0.60	0.45	0.27	0.10	0.09	0.09	0.09	0.09	0.09	0.10	0.11	0.13	0.13	0.14	0.14
-50	0.91	0.90	0.87	0.81	0.72	0.59	0.42	0.19	0.09	0.09	0.10	0.15	0.22	0.33	0.53	0.76	0.88	0.80	0.57
-40	0.91	0.93	0.93	0.91	0.87	0.80	0.69	0.52	0.24	0.15	0.48	1.32	2.99	5.67	8.91	10.9	12.3	12.6	11.6
-30	0.91	0.97	1.01	1.04	1.07	1.10	1.11	1.06	0.99	1.37	2.92	7.36	15.8	28.5	42.6	56.6	67.1	69.9	64.7
-20	0.91	1.00	1.08	1.18	1.31	1.46	1.65	1.85	2.32	3.93	8.91	24.0	58.4	92.1	125	161	194	218	222
-10	0.91	1.03	1.16	1.32	1.55	1.85	2.27	2.79	3.76	6.56	15.0	39.6	85.8	145	214	309	408	483	508
0	0.91	1.06	1.22	1.45	1.78	2.22	2.85	3.65	4.84	7.70	15.0	36.0	91.3	166	257	388	549	692	746
10	0.91	1.06	1.22	1.45	1.76	2.19	2.81	3.58	4.82	7.92	16.2	41.0	93.2	157	229	329	450	555	576
20	0.91	1.05	1.21	1.42	1.70	2.09	2.63	3.30	4.26	6.48	11.8	26.2	62.9	110	153	197	239	269	276
30	0.91	1.04	1.19	1.37	1.61	1.93	2.36	2.90	3.54	4.61	6.95	11.3	19.6	34.8	58.3	85.1	97.2	99.3	92.1
40	0.91	1.02	1.15	1.31	1.50	1.74	2.04	2.43	2.89	3.39	4.02	5.17	6.89	9.42	12.6	15.1	16.7	16.7	15.0
50	0.91	1.00	1.11	1.24	1.38	1.55	1.75	1.99	2.26	2.57	2.90	3.23	3.57	3.92	4.32	4.66	4.86	4.85	4.67
60	0.91	0.98	1.08	1.16	1.26	1.37	1.49	1.63	1.76	1.90	2.06	2.22	2.39	2.55	2.66	2.75	2.82	2.86	2.86
70	0.91	0.96	1.02	1.09	1.15	1.21	1.29	1.35	1.40	1.46	1.52	1.57	1.62	1.67	1.72	1.76	1.78	1.80	1.80
80	0.91	0.94	0.98	1.01	1.05	1.09	1.13	1.14	1.15	1.17	1.18	1.19	1.20	1.22	1.23	1.24	1.25	1.26	1.26
90	0.91	0.92	0.94	0.95	0.96	0.97	0.99	0.98	0.97	0.96	0.95	0.95	0.94	0.94	0.94	0.94	0.94	0.95	0.95
100	0.91	0.90	0.89	0.89	0.88	0.88	0.87	0.86	0.84	0.82	0.80	0.78	0.77	0.76	0.76	0.76	0.77	0.77	0.78
110	0.91	0.88	0.86	0.84	0.82	0.81	0.80	0.78	0.77	0.76	0.75	0.75	0.75	0.75	0.75	0.75	0.74	0.74	0.73
120	0.91	0.87	0.83	0.80	0.78	0.78	0.76	0.75	0.75	0.76	0.77	0.79	0.82	0.85	0.87	0.89	0.91	0.92	0.92
130	0.91	0.85	0.80	0.78	0.77	0.76	0.76	0.76	0.78	0.85	0.91	0.98	1.07	1.16	1.23	1.30	1.35	1.38	1.39
140	0.91	0.84	0.79	0.77	0.76	0.76	0.77	0.82	0.90	1.02	1.16	1.31	1.47	1.62	1.75	1.84	1.92	1.96	1.98
150	0.91	0.83	0.77	0.76	0.76	0.78	0.83	0.93	1.07	1.25	1.45	1.66	1.86	2.04	2.17	2.28	2.35	2.37	2.38
160	0.91	0.82	0.76	0.76	0.77	0.81	0.90	1.05	1.25	1.48	1.72	1.94	2.11	2.27	2.38	2.43	2.46	2.49	2.51
170	0.91	0.81	0.76	0.76	0.78	0.84	0.96	1.14	1.38	1.65	1.91	2.12	2.27	2.36	2.38	2.39	2.40	2.38	2.43
180	0.91	0.81	0.76	0.76	0.78	0.86	0.98	1.19	1.44	1.72	1.98	2.19	2.33	2.37	2.37	2.33	2.25	2.19	2.26

H_b Range: -90 - 90DEGH_b Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-03-11

V(B) Range: -180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeMini Recessed-500mm-RGBW GREEN-30D-Rev1	TYPE:RGBW-GRENN	WEIGHT:
SPEC.:30 DEG	DIM.:500mm	SERIAL No.:IES000899-G
MFR.:	SUR.:	Shielding Angle:

Table--2
UNIT: cd

H(°) V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	1.95	1.82	1.72	1.57	1.41	1.20	0.98	0.76	0.56	0.41	0.31	0.31	0.32	0.34	0.35	0.33	0.30	0.27	
-170	1.82	1.78	1.69	1.55	1.39	1.18	0.95	0.73	0.55	0.40	0.32	0.31	0.32	0.34	0.35	0.34	0.30	0.27	
-160	1.66	1.59	1.50	1.36	1.21	1.01	0.82	0.63	0.48	0.37	0.31	0.31	0.32	0.34	0.34	0.34	0.30	0.27	
-150	1.28	1.22	1.13	1.01	0.88	0.74	0.61	0.49	0.39	0.33	0.31	0.31	0.32	0.34	0.34	0.33	0.30	0.27	
-140	0.78	0.75	0.69	0.61	0.54	0.46	0.40	0.35	0.32	0.31	0.30	0.31	0.33	0.34	0.34	0.33	0.30	0.27	
-130	0.41	0.39	0.37	0.34	0.30	0.30	0.30	0.30	0.30	0.30	0.30	0.32	0.34	0.34	0.34	0.32	0.30	0.27	
-120	0.29	0.29	0.29	0.29	0.29	0.30	0.30	0.31	0.31	0.32	0.33	0.34	0.34	0.34	0.34	0.33	0.31	0.29	0.27
-110	0.30	0.31	0.32	0.33	0.34	0.35	0.34	0.34	0.34	0.34	0.34	0.34	0.34	0.35	0.34	0.32	0.31	0.29	0.27
-100	0.35	0.34	0.34	0.34	0.34	0.34	0.34	0.34	0.34	0.35	0.35	0.35	0.34	0.33	0.32	0.30	0.29	0.27	
-90	0.30	0.30	0.29	0.29	0.29	0.28	0.29	0.30	0.31	0.31	0.32	0.33	0.32	0.31	0.30	0.29	0.28	0.27	
-80	0.17	0.17	0.17	0.17	0.18	0.18	0.20	0.21	0.23	0.24	0.26	0.27	0.28	0.29	0.29	0.29	0.28	0.27	
-70	0.10	0.10	0.10	0.10	0.10	0.11	0.12	0.13	0.15	0.17	0.20	0.22	0.23	0.24	0.25	0.28	0.28	0.27	
-60	0.14	0.14	0.13	0.12	0.12	0.11	0.11	0.11	0.12	0.13	0.15	0.17	0.19	0.20	0.23	0.25	0.28	0.27	
-50	0.76	0.81	0.69	0.49	0.33	0.25	0.17	0.13	0.12	0.12	0.12	0.14	0.16	0.18	0.20	0.23	0.27	0.27	
-40	12.2	11.6	10.0	7.99	5.46	3.30	1.65	0.63	0.20	0.13	0.14	0.14	0.14	0.16	0.18	0.22	0.26	0.27	
-30	66.4	61.3	50.4	36.9	25.1	15.1	8.38	4.20	1.41	0.31	0.18	0.16	0.14	0.15	0.17	0.20	0.25	0.27	
-20	206	174	139	104	73.9	47.1	21.9	9.41	3.68	0.94	0.28	0.21	0.16	0.15	0.16	0.19	0.25	0.27	
-10	452	360	257	175	118	72.7	35.2	14.4	5.61	1.54	0.39	0.25	0.18	0.15	0.16	0.19	0.24	0.27	
0	677	521	353	225	143	82.6	36.2	14.7	5.86	1.60	0.44	0.29	0.19	0.15	0.16	0.18	0.24	0.27	
10	514	391	271	186	126	77.2	36.4	15.8	6.90	2.50	1.12	0.75	0.49	0.35	0.28	0.25	0.26	0.27	
20	252	212	168	125	87.0	50.6	24.8	12.4	5.96	2.68	1.62	1.11	0.74	0.52	0.38	0.31	0.29	0.27	
30	94.2	89.3	78.8	54.1	32.4	19.5	12.4	7.82	4.35	2.66	1.89	1.32	0.92	0.65	0.47	0.37	0.32	0.27	
40	16.5	16.2	14.6	12.1	9.39	7.11	5.29	3.90	3.21	2.60	1.92	1.40	1.02	0.74	0.54	0.42	0.35	0.27	
50	4.81	4.79	4.56	4.19	3.76	3.41	3.08	2.75	2.43	2.15	1.80	1.38	1.05	0.79	0.60	0.45	0.37	0.27	
60	2.83	2.78	2.69	2.58	2.44	2.29	2.13	1.98	1.83	1.69	1.57	1.30	1.04	0.81	0.63	0.49	0.38	0.27	
70	1.79	1.76	1.73	1.69	1.63	1.58	1.52	1.48	1.42	1.36	1.31	1.20	0.99	0.80	0.64	0.51	0.39	0.27	
80	1.25	1.24	1.23	1.21	1.19	1.17	1.16	1.15	1.14	1.13	1.11	1.08	0.92	0.78	0.64	0.51	0.39	0.27	
90	0.94	0.93	0.93	0.92	0.92	0.91	0.92	0.93	0.93	0.94	0.95	0.96	0.84	0.73	0.62	0.50	0.39	0.27	
100	0.77	0.76	0.76	0.75	0.75	0.74	0.76	0.78	0.79	0.80	0.82	0.83	0.75	0.67	0.58	0.49	0.38	0.27	
110	0.74	0.74	0.75	0.75	0.74	0.75	0.75	0.74	0.74	0.75	0.76	0.75	0.69	0.63	0.55	0.47	0.38	0.27	
120	0.93	0.93	0.92	0.91	0.88	0.86	0.83	0.79	0.76	0.75	0.75	0.71	0.64	0.59	0.53	0.45	0.37	0.27	
130	1.40	1.39	1.36	1.31	1.24	1.16	1.07	0.98	0.90	0.84	0.75	0.67	0.61	0.56	0.51	0.44	0.36	0.27	
140	1.99	1.97	1.93	1.85	1.73	1.59	1.44	1.29	1.13	0.95	0.77	0.64	0.57	0.52	0.47	0.43	0.35	0.27	
150	2.39	2.38	2.34	2.25	2.14	2.00	1.82	1.62	1.27	0.98	0.75	0.61	0.52	0.48	0.45	0.41	0.34	0.27	
160	2.50	2.49	2.47	2.42	2.34	2.23	1.90	1.53	1.19	0.89	0.67	0.54	0.47	0.44	0.41	0.39	0.33	0.27	
170	2.35	2.38	2.44	2.29	2.06	1.81	1.52	1.22	0.93	0.69	0.52	0.44	0.40	0.39	0.38	0.36	0.31	0.27	
180	1.95	1.82	1.72	1.57	1.41	1.20	0.98	0.76	0.56	0.41	0.31	0.31	0.32	0.34	0.35	0.33	0.30	0.27	

H_b Range:-90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-11

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: