

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		2748.5 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	59.3V x 61.5H
	At 50% of Imax	29.1V x 29.0H
	At 90% of Imax	10.8V x 10.8H
Beam Flux	Total	999.9 lumens per klm.
	To 10% of Imax	865.4 lumens per klm.
	To 50% of Imax	389.2 lumens per klm.
	To 90% of Imax	70.8 lumens per klm.
Upward LOR		2.0 %
Downward LOR		98.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-11

V(θ) Range:-180 - 180DEG
V(θ) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:BlazeMini Recessed-500mm-RGBW RED-30D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:30 DEG	DIM.:500mm	SERIAL No.:IES000899-R
MFR.:	SUR.:	Shielding Angle:

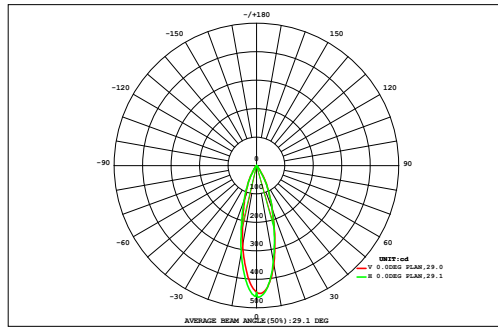

DATA OF LAMP		Eff:31.96lm/W	
MODEL		Imax (cd)	464.0
NOMINAL POWER (W)	5.28	AVAILABILITY (%)	86.4
RATED VOLTAGE (V)	24	Avai. FLUX (lm)	145.8
NOMINAL FLUX (lm)	168.8	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	168.8
TEST VOLTAGE (V)	24	q @50% (H,V)	29,29DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm				F t	F a
	0.01	0.01	0.02	0.03	0.03	0.04	0.05	0.05	0.05	0.05	0.05	0.05	0.04	0.04	0.03	0.02	0.01	0.01	0.59	0.00		
	40	0.01	0.02	0.03	0.04	0.06	0.08	0.10	0.11	0.11	0.11	0.12	0.11	0.09	0.07	0.04	0.03	0.02	0.01	1.17	0.00	
	35	0.02	0.03	0.04	0.07	0.12	0.18	0.24	0.27	0.27	0.28	0.30	0.28	0.22	0.14	0.08	0.05	0.03	0.02	2.64	0.48	
	30	0.02	0.04	0.07	0.13	0.23	0.37	0.48	0.55	0.59	0.61	0.59	0.55	0.44	0.29	0.15	0.08	0.04	0.02	5.23	4.16	
	25	0.03	0.05	0.11	0.21	0.37	0.54	0.71	0.86	0.96	0.99	0.92	0.80	0.64	0.46	0.28	0.13	0.05	0.02	8.14	7.28	
	20	0.03	0.07	0.15	0.30	0.48	0.71	0.98	1.25	1.46	1.49	1.35	1.09	0.83	0.61	0.40	0.19	0.07	0.03	11.5	10.8	
	15	0.04	0.08	0.18	0.36	0.58	0.88	1.29	1.76	2.12	2.19	1.93	1.47	1.04	0.72	0.48	0.25	0.09	0.03	15.5	14.8	
	10	0.04	0.09	0.20	0.39	0.65	1.04	1.59	2.27	2.83	2.94	2.53	1.87	1.27	0.83	0.53	0.28	0.10	0.03	19.5	18.8	
	5	0.04	0.08	0.19	0.40	0.68	1.11	1.74	2.53	3.22	3.39	2.91	2.16	1.43	0.90	0.56	0.28	0.09	0.03	21.7	21.1	
	0	0.04	0.08	0.19	0.39	0.68	1.10	1.74	2.57	3.22	3.28	2.86	2.13	1.41	0.89	0.54	0.28	0.09	0.03	21.5	20.9	
	-5	0.04	0.08	0.19	0.38	0.64	1.02	1.57	2.20	2.65	2.71	2.36	1.77	1.20	0.79	0.50	0.26	0.09	0.03	18.5	17.8	
	-10	0.03	0.07	0.17	0.34	0.55	0.83	1.19	1.58	1.88	1.92	1.68	1.31	0.94	0.65	0.43	0.23	0.08	0.02	13.9	13.2	
	-15	0.03	0.06	0.14	0.28	0.43	0.62	0.84	1.06	1.22	1.24	1.12	0.91	0.69	0.51	0.35	0.18	0.06	0.02	9.75	8.97	
	-20	0.02	0.04	0.10	0.19	0.30	0.43	0.57	0.68	0.76	0.77	0.71	0.61	0.48	0.36	0.23	0.12	0.04	0.01	6.43	5.41	
	-25	0.01	0.03	0.05	0.10	0.18	0.27	0.35	0.40	0.43	0.43	0.42	0.37	0.29	0.21	0.13	0.06	0.02	0.01	3.75	1.98	
	-30	0.01	0.01	0.03	0.05	0.09	0.13	0.17	0.19	0.19	0.19	0.20	0.17	0.13	0.10	0.06	0.03	0.01	0.00	1.76	0.00	
	-35	0.00	0.01	0.01	0.03	0.04	0.06	0.07	0.08	0.08	0.08	0.08	0.07	0.06	0.04	0.02	0.01	0.00	0.00	0.75	0.00	
	-40	0.00	0.00	0.00	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.00	0.00	0.00	0.29	0.00	
	-45	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)				10	15	20	25	30	35	40	45	
F t	0.42	0.87	1.88	3.68	6.13	9.43	13.7	18.5	22.1	22.7	20.2	15.8	11.2	7.60	4.82	2.46	0.91	0.32	163	---		
F a	0.00	0.00	0.00	2.04	5.14	8.56	12.9	17.7	21.4	22.0	19.4	15.0	10.5	6.73	3.80	0.65	0.00	0.00	---	146		

one-half-peak spread: U:14.2,D:15.2 , L:14.4,R:14.8


NEMA Beam Type: Type 4

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-11

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:BlazeMini Recessed-500mm-RGBW RED-30D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:30 DEG	DIM.:500mm	SERIAL No.:IES000899-R
MFR.:	SUR.:	Shielding Angle:

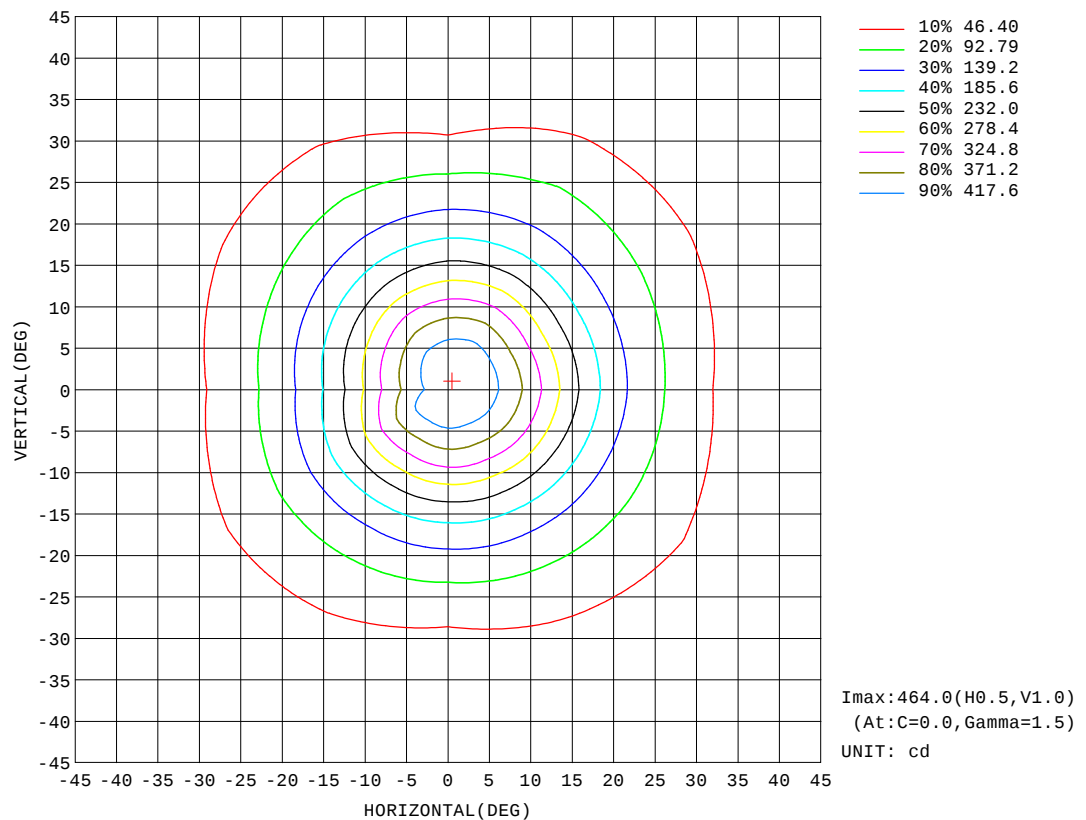


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-11

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:BlazeMini Recessed-500mm-RGBW RED-30D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:30 DEG	DIM.:500mm	SERIAL No.:IES000899-R
MFR.:	SUR.:	Shielding Angle:

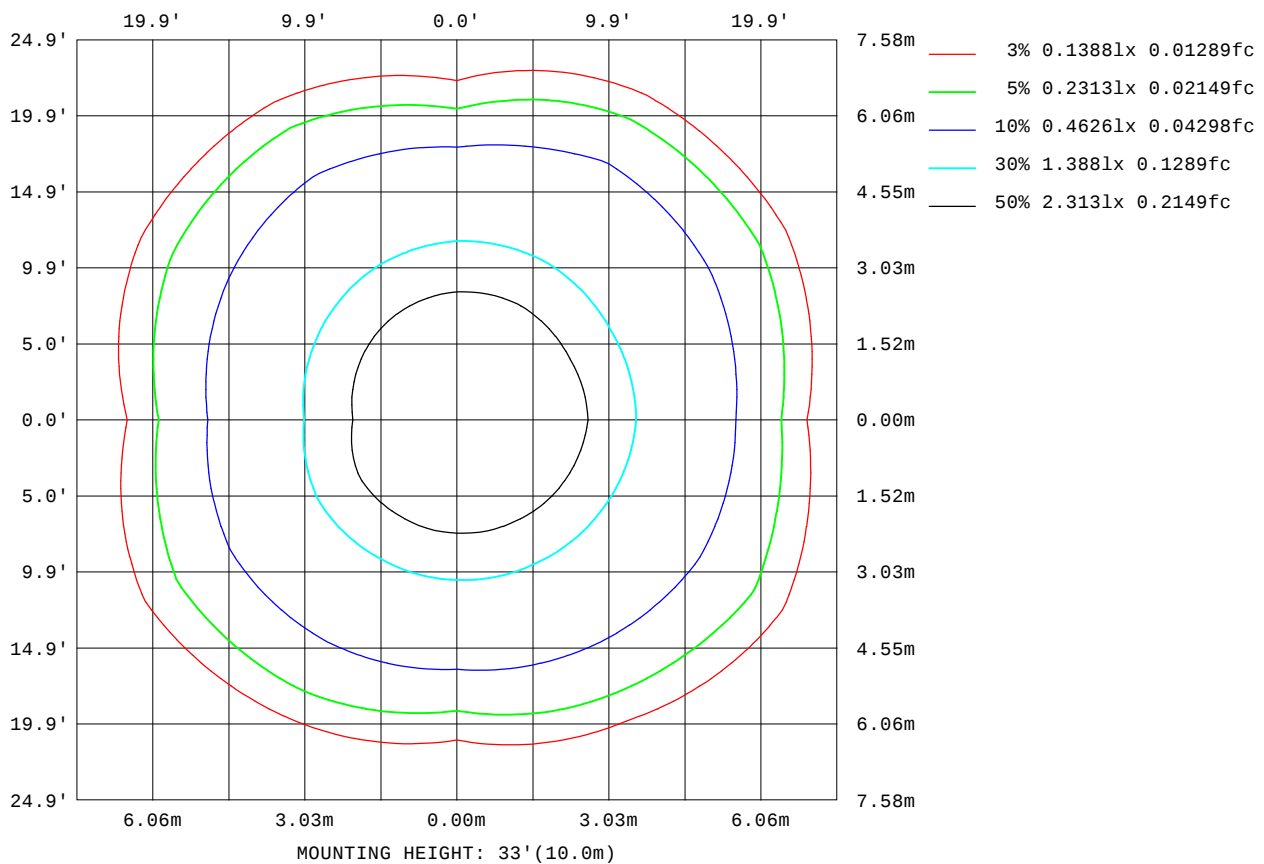

H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-11

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

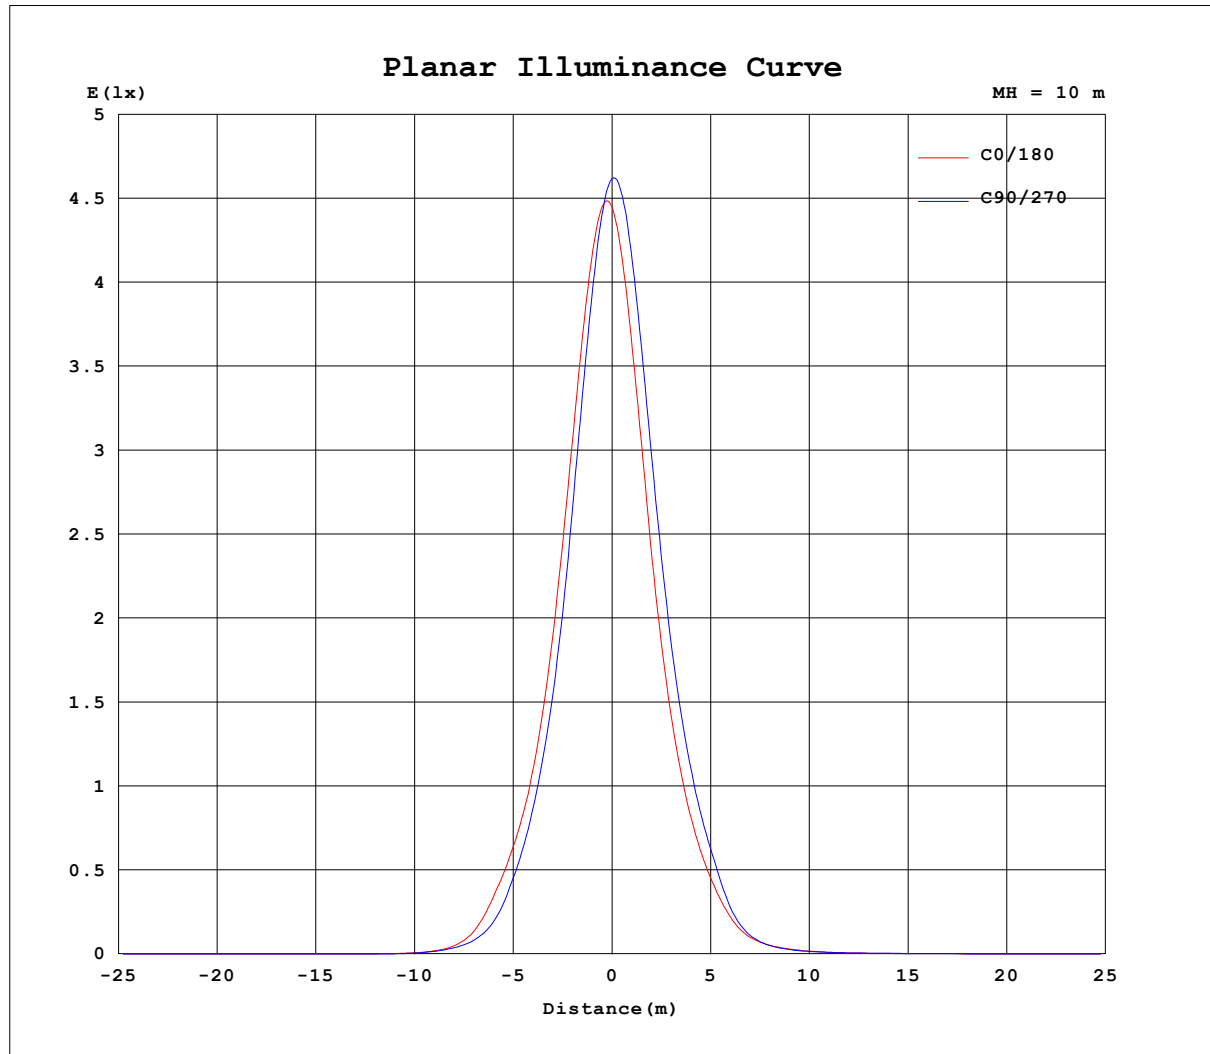


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-11

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:BlazeMini Recessed-500mm-RGBW RED-30D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:30 DEG	DIM.:500mm	SERIAL No.:IES000899-R
MFR.:	SUR.:	Shielding Angle:

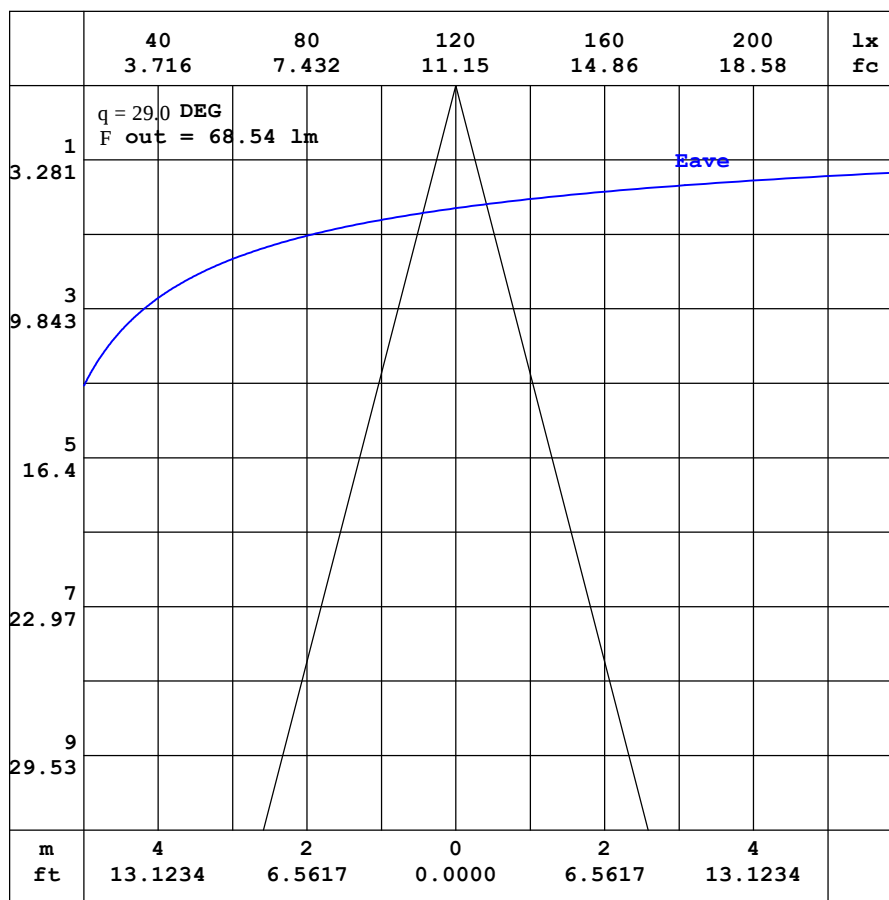

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-11

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeMini Recessed-500mm-RGBW RED-30D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:30 DEG	DIM.:500mm	SERIAL No.:IES000899-R
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.48	0.41	0.40	0.41	0.43	0.49	0.59	0.72	0.88	1.05	1.19	1.30	1.36	1.36	1.34	1.30	1.27	1.22	1.29
-170	0.48	0.40	0.39	0.39	0.39	0.43	0.49	0.58	0.68	0.77	0.86	0.92	0.96	0.97	0.97	0.98	1.05	1.09	1.14
-160	0.48	0.40	0.37	0.36	0.36	0.37	0.39	0.43	0.46	0.49	0.52	0.52	0.53	0.65	0.76	0.84	0.91	0.97	1.01
-150	0.48	0.40	0.36	0.34	0.32	0.31	0.31	0.30	0.29	0.26	0.23	0.29	0.36	0.45	0.53	0.61	0.67	0.72	0.75
-140	0.48	0.39	0.35	0.32	0.30	0.27	0.24	0.21	0.17	0.15	0.16	0.18	0.21	0.25	0.29	0.34	0.39	0.42	0.43
-130	0.48	0.39	0.34	0.31	0.28	0.25	0.21	0.16	0.15	0.15	0.14	0.14	0.14	0.14	0.14	0.16	0.18	0.20	0.21
-120	0.48	0.39	0.34	0.30	0.26	0.23	0.19	0.16	0.16	0.16	0.16	0.16	0.16	0.15	0.15	0.14	0.14	0.14	0.14
-110	0.48	0.40	0.34	0.30	0.25	0.22	0.18	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.16	0.15	0.14	0.14
-100	0.48	0.40	0.35	0.30	0.25	0.21	0.17	0.16	0.17	0.17	0.16	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17
-90	0.48	0.43	0.37	0.32	0.27	0.22	0.17	0.16	0.16	0.15	0.15	0.14	0.14	0.14	0.14	0.15	0.15	0.16	0.16
-80	0.48	0.44	0.38	0.33	0.27	0.21	0.14	0.11	0.10	0.09	0.08	0.07	0.06	0.07	0.07	0.07	0.07	0.07	0.08
-70	0.48	0.44	0.40	0.35	0.29	0.21	0.12	0.08	0.07	0.05	0.04	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02
-60	0.48	0.45	0.43	0.38	0.32	0.25	0.14	0.05	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.04	0.04
-50	0.48	0.47	0.46	0.43	0.38	0.31	0.22	0.09	0.04	0.04	0.04	0.06	0.10	0.16	0.24	0.36	0.41	0.38	0.27
-40	0.48	0.48	0.49	0.48	0.46	0.43	0.37	0.27	0.12	0.07	0.32	0.91	1.80	3.01	4.41	5.53	6.32	6.57	6.17
-30	0.48	0.51	0.53	0.56	0.58	0.59	0.60	0.57	0.55	0.98	2.31	4.59	8.30	13.9	21.1	29.5	35.7	38.0	36.3
-20	0.48	0.53	0.57	0.63	0.70	0.79	0.90	1.01	1.40	2.71	5.59	12.1	26.6	43.2	61.9	82.4	103	121	130
-10	0.48	0.54	0.61	0.70	0.83	1.00	1.24	1.54	2.24	4.27	8.77	19.3	39.3	67.7	105	156	219	279	311
0	0.48	0.55	0.64	0.77	0.95	1.21	1.56	2.01	2.78	4.92	9.33	18.3	40.6	74.6	120	187	282	383	445
10	0.48	0.55	0.64	0.77	0.95	1.19	1.54	1.98	2.81	5.03	9.60	19.9	41.5	70.7	108	162	232	306	343
20	0.48	0.55	0.64	0.76	0.92	1.14	1.44	1.82	2.44	4.07	7.28	13.8	28.4	49.7	72.7	98.5	126	148	161
30	0.48	0.55	0.63	0.74	0.87	1.05	1.29	1.59	1.97	2.73	4.47	6.90	10.8	17.7	29.3	43.7	50.9	54.1	52.9
40	0.48	0.53	0.61	0.70	0.81	0.95	1.12	1.34	1.60	1.89	2.30	3.06	4.09	5.33	6.85	8.24	9.23	9.47	8.79
50	0.48	0.52	0.59	0.66	0.75	0.85	0.96	1.10	1.25	1.42	1.61	1.81	2.01	2.23	2.47	2.70	2.85	2.88	2.82
60	0.48	0.51	0.57	0.62	0.68	0.75	0.82	0.89	0.97	1.05	1.14	1.23	1.33	1.42	1.51	1.58	1.64	1.68	1.70
70	0.48	0.50	0.54	0.58	0.62	0.67	0.71	0.74	0.77	0.80	0.83	0.87	0.90	0.93	0.96	1.00	1.02	1.04	1.05
80	0.48	0.50	0.51	0.54	0.57	0.59	0.62	0.62	0.63	0.64	0.64	0.65	0.65	0.66	0.68	0.69	0.70	0.71	0.72
90	0.48	0.49	0.50	0.51	0.52	0.53	0.54	0.53	0.52	0.52	0.51	0.50	0.50	0.50	0.51	0.52	0.52	0.53	0.54
100	0.48	0.46	0.46	0.46	0.47	0.47	0.47	0.46	0.44	0.43	0.42	0.42	0.41	0.41	0.41	0.41	0.41	0.42	0.42
110	0.48	0.45	0.45	0.44	0.43	0.43	0.43	0.42	0.41	0.40	0.40	0.40	0.41	0.40	0.40	0.40	0.40	0.40	0.40
120	0.48	0.43	0.43	0.42	0.42	0.41	0.41	0.40	0.40	0.41	0.42	0.44	0.46	0.48	0.49	0.49	0.50	0.50	0.50
130	0.48	0.43	0.42	0.41	0.41	0.41	0.41	0.41	0.42	0.47	0.51	0.57	0.62	0.68	0.72	0.75	0.78	0.79	0.78
140	0.48	0.43	0.41	0.41	0.41	0.41	0.42	0.46	0.51	0.59	0.68	0.78	0.87	0.97	1.05	1.10	1.12	1.14	1.14
150	0.48	0.42	0.41	0.40	0.41	0.43	0.47	0.54	0.63	0.74	0.86	1.00	1.12	1.21	1.30	1.35	1.38	1.38	1.39
160	0.48	0.42	0.40	0.41	0.42	0.45	0.52	0.62	0.75	0.89	1.04	1.16	1.26	1.33	1.39	1.42	1.43	1.44	1.46
170	0.48	0.41	0.40	0.41	0.42	0.48	0.56	0.69	0.84	1.00	1.14	1.25	1.33	1.36	1.37	1.38	1.37	1.36	1.43
180	0.48	0.41	0.40	0.41	0.43	0.49	0.59	0.72	0.88	1.05	1.19	1.30	1.36	1.36	1.34	1.30	1.27	1.22	1.32

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-03-11

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeMini Recessed-500mm-RGBW RED-30D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:30 DEG	DIM.:500mm	SERIAL No.:IES000899-R
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	1.09	1.02	0.95	0.85	0.74	0.61	0.47	0.35	0.23	0.16	0.15	0.16	0.16	0.16	0.16	0.16	0.13	0.11	
-170	1.03	1.01	0.95	0.86	0.74	0.61	0.46	0.34	0.23	0.17	0.15	0.16	0.16	0.16	0.16	0.16	0.13	0.11	
-160	0.96	0.91	0.83	0.74	0.63	0.52	0.40	0.29	0.21	0.16	0.15	0.16	0.16	0.16	0.16	0.15	0.14	0.11	
-150	0.72	0.66	0.59	0.51	0.44	0.35	0.28	0.22	0.18	0.16	0.15	0.15	0.16	0.16	0.16	0.16	0.14	0.11	
-140	0.41	0.38	0.33	0.28	0.24	0.20	0.17	0.16	0.16	0.15	0.15	0.15	0.16	0.16	0.16	0.15	0.13	0.11	
-130	0.20	0.18	0.15	0.14	0.14	0.14	0.14	0.15	0.15	0.15	0.15	0.15	0.16	0.16	0.16	0.15	0.13	0.11	
-120	0.14	0.14	0.14	0.14	0.14	0.15	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.15	0.14	0.13	0.11
-110	0.14	0.16	0.17	0.17	0.18	0.18	0.18	0.18	0.17	0.17	0.17	0.17	0.16	0.16	0.15	0.14	0.13	0.11	
-100	0.17	0.17	0.17	0.18	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.16	0.15	0.15	0.14	0.13	0.11	
-90	0.16	0.15	0.15	0.15	0.14	0.14	0.14	0.15	0.15	0.15	0.16	0.16	0.15	0.14	0.14	0.13	0.12	0.11	
-80	0.07	0.07	0.07	0.06	0.06	0.05	0.06	0.07	0.09	0.10	0.11	0.12	0.12	0.12	0.12	0.11	0.11	0.11	
-70	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.03	0.04	0.05	0.06	0.08	0.09	0.09	0.10	0.11	0.10	0.11	
-60	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.03	0.04	0.04	0.06	0.07	0.08	0.09	0.10	0.11	
-50	0.39	0.42	0.37	0.25	0.15	0.09	0.05	0.03	0.02	0.02	0.02	0.04	0.04	0.05	0.07	0.07	0.10	0.11	
-40	6.68	6.49	5.74	4.60	2.94	1.54	0.67	0.21	0.03	0.02	0.02	0.03	0.03	0.04	0.05	0.07	0.09	0.11	
-30	39.2	37.4	31.1	23.7	16.1	8.75	3.98	1.57	0.47	0.07	0.04	0.03	0.03	0.03	0.04	0.06	0.08	0.11	
-20	125	109	90.1	70.8	52.6	34.5	13.9	4.41	1.37	0.31	0.07	0.05	0.03	0.03	0.03	0.06	0.08	0.11	
-10	291	239	176	122	84.6	53.6	24.3	7.63	2.21	0.57	0.12	0.07	0.04	0.03	0.03	0.06	0.08	0.11	
0	431	351	248	161	103	62.1	24.7	7.48	2.27	0.61	0.14	0.08	0.05	0.03	0.03	0.06	0.08	0.11	
10	328	263	190	133	92.3	58.5	25.1	8.51	3.11	1.25	0.61	0.39	0.25	0.16	0.11	0.10	0.09	0.11	
20	155	137	113	88.5	64.7	37.3	15.3	6.44	2.99	1.54	0.96	0.65	0.41	0.27	0.18	0.14	0.11	0.11	
30	57.8	57.7	52.3	35.8	20.8	11.7	6.75	4.14	2.54	1.65	1.16	0.79	0.53	0.35	0.24	0.17	0.13	0.11	
40	9.88	9.90	9.08	7.60	5.70	4.16	3.12	2.43	2.03	1.64	1.18	0.84	0.59	0.41	0.29	0.20	0.14	0.11	
50	2.93	2.94	2.81	2.60	2.34	2.12	1.92	1.72	1.52	1.33	1.10	0.83	0.61	0.44	0.32	0.22	0.16	0.11	
60	1.69	1.67	1.62	1.56	1.48	1.39	1.29	1.20	1.11	1.02	0.95	0.77	0.60	0.46	0.33	0.24	0.17	0.11	
70	1.05	1.04	1.02	0.99	0.96	0.92	0.90	0.87	0.83	0.81	0.77	0.71	0.57	0.44	0.34	0.25	0.17	0.11	
80	0.72	0.71	0.71	0.70	0.68	0.67	0.67	0.66	0.66	0.65	0.64	0.63	0.53	0.43	0.34	0.26	0.18	0.11	
90	0.53	0.52	0.52	0.51	0.51	0.50	0.51	0.52	0.53	0.54	0.55	0.55	0.48	0.41	0.33	0.26	0.18	0.11	
100	0.42	0.42	0.42	0.42	0.42	0.41	0.42	0.43	0.44	0.45	0.47	0.48	0.43	0.37	0.32	0.26	0.19	0.11	
110	0.40	0.40	0.41	0.41	0.41	0.41	0.41	0.41	0.41	0.42	0.43	0.43	0.39	0.34	0.30	0.24	0.19	0.11	
120	0.50	0.50	0.49	0.48	0.47	0.46	0.44	0.42	0.41	0.41	0.41	0.39	0.35	0.32	0.28	0.23	0.18	0.11	
130	0.79	0.77	0.75	0.72	0.68	0.62	0.57	0.51	0.46	0.42	0.40	0.36	0.33	0.30	0.27	0.23	0.17	0.11	
140	1.14	1.13	1.09	1.05	0.96	0.87	0.77	0.67	0.58	0.48	0.39	0.34	0.30	0.27	0.25	0.21	0.17	0.11	
150	1.38	1.38	1.35	1.29	1.21	1.11	1.00	0.87	0.66	0.50	0.38	0.31	0.27	0.25	0.23	0.20	0.16	0.11	
160	1.45	1.44	1.43	1.40	1.35	1.27	1.04	0.82	0.62	0.45	0.34	0.28	0.24	0.22	0.21	0.19	0.15	0.11	
170	1.37	1.40	1.42	1.32	1.17	1.00	0.81	0.63	0.46	0.33	0.26	0.23	0.20	0.19	0.18	0.17	0.14	0.11	
180	1.09	1.02	0.95	0.85	0.74	0.61	0.47	0.35	0.23	0.16	0.15	0.16	0.16	0.16	0.16	0.16	0.13	0.11	

H_b Range:-90 - 90DEGH_b Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-03-11

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: