

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	1467.4 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	70.9V x 73.0H
	At 50% of Imax	48.5V x 49.5H
	At 90% of Imax	19.4V x 20.3H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	909.6 lumens per klm.
	To 50% of Imax	620.7 lumens per klm.
	To 90% of Imax	130.5 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-03-13

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:BlazeMini Recessed-500mm-RGBW ALL-50D-Rev2	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:50 DEG	DIM.:500mm	SERIAL No.:IES000900
MFR.:	SUR.:	Shielding Angle:

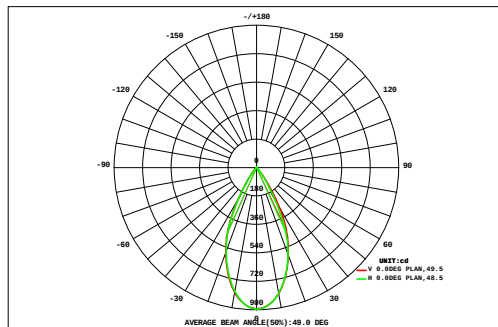

DATA OF LAMP		PHOTOMETRIC DATA	
MODEL		Imax(cd)	895.1
NOMINAL POWER(W)	24.8	AVAILABILITY(%)	90.9
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	554.4
NOMINAL FLUX(lm)	610	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	610.0
TEST VOLTAGE(V)	24	q @50%(H,V)	50,49DEG

		AREA FLUX DIAGRAM																UNIT:lm			F t	F a
		0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.08	0.08	0.08	0.08	0.08	0.07	0.06	0.05	0.04	0.03	0.01	1.00	0.00	
VERTICAL (DEG)	72	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.08	0.08	0.08	0.08	0.07	0.06	0.05	0.04	0.03	0.01	1.00	0.00		
	64	0.02	0.03	0.05	0.06	0.08	0.09	0.11	0.12	0.12	0.12	0.12	0.11	0.09	0.08	0.06	0.05	0.03	0.02	1.33	0.00	
	56	0.02	0.04	0.05	0.08	0.10	0.13	0.15	0.17	0.18	0.18	0.18	0.15	0.13	0.10	0.08	0.05	0.03	0.02	1.84	0.00	
	48	0.03	0.04	0.07	0.10	0.14	0.22	0.35	0.46	0.47	0.48	0.47	0.37	0.23	0.14	0.09	0.06	0.03	0.02	3.75	0.00	
	40	0.03	0.05	0.08	0.13	0.26	0.58	1.16	1.71	1.87	1.88	1.75	1.19	0.59	0.26	0.12	0.06	0.03	0.01	11.8	5.31	
	32	0.03	0.05	0.09	0.19	0.56	1.56	3.40	5.31	6.10	6.10	5.33	3.45	1.57	0.56	0.18	0.06	0.03	0.01	34.6	31.5	
	24	0.03	0.06	0.10	0.28	1.05	3.35	6.66	9.56	11.1	11.0	9.44	6.60	3.34	1.05	0.25	0.06	0.03	0.01	64.0	61.7	
		0.03	0.06	0.11	0.36	1.50	4.83	9.02	12.5	14.6	14.5	12.4	8.93	5.00	1.58	0.32	0.05	0.02	0.01	85.9	83.9	
		0.03	0.06	0.12	0.38	1.63	5.47	10.3	14.2	16.7	16.6	14.2	10.4	5.99	1.87	0.34	0.04	0.01	0.01	98.3	96.4	
		0.03	0.06	0.11	0.38	1.65	5.48	10.2	14.2	16.5	16.6	14.3	10.5	6.04	1.91	0.33	0.03	0.01	0.00	98.3	96.5	
		0.03	0.05	0.09	0.33	1.54	4.89	8.95	12.3	14.3	14.3	12.3	9.02	5.17	1.65	0.29	0.03	0.01	0.00	85.2	83.4	
	-24	0.02	0.04	0.06	0.23	1.07	3.43	6.51	9.09	10.7	10.7	9.12	6.58	3.52	1.09	0.19	0.02	0.01	0.00	62.3	60.4	
	-32	0.02	0.03	0.04	0.11	0.50	1.56	3.34	5.08	5.94	5.95	5.11	3.37	1.58	0.49	0.09	0.01	0.00	0.00	33.2	30.6	
	-40	0.02	0.02	0.02	0.03	0.16	0.49	1.05	1.60	1.78	1.78	1.60	1.04	0.48	0.15	0.03	0.01	0.00	0.00	10.3	4.72	
	-48	0.01	0.01	0.01	0.01	0.03	0.10	0.22	0.32	0.33	0.33	0.31	0.21	0.09	0.03	0.01	0.00	0.00	0.00	2.01	0.00	
	-56	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.03	0.03	0.03	0.03	0.02	0.01	0.01	0.01	0.00	0.00	0.00	0.24	0.00	
-64	0.01	0.01	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.12	0.00		
-72	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.11	0.00		
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)				16	24	32	40	48	56	64	72		
F t	0.41	0.65	1.05	2.72	10.3	32.3	61.5	86.8	101	101	86.7	62.0	33.9	11.0	2.45	0.60	0.28	0.14	594	---		
F a	0.00	0.00	0.00	0.00	5.05	29.3	58.9	84.3	98.3	98.1	84.1	59.4	30.9	6.08	0.00	0.00	0.00	0.00	---	554		

one-half-peak spread: U:24.7,D:24.1 , L:24.4,R:25.4


NEMA Beam Type: Type 5

H_(b) Range:-90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature:25.3DEG
 Operators:Fan
 Test Date:2023-03-13

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:BlazeMini Recessed-500mm-RGBW ALL-50D-Rev2	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:50 DEG	DIM.:500mm	SERIAL No.:IES000900
MFR.:	SUR.:	Shielding Angle:

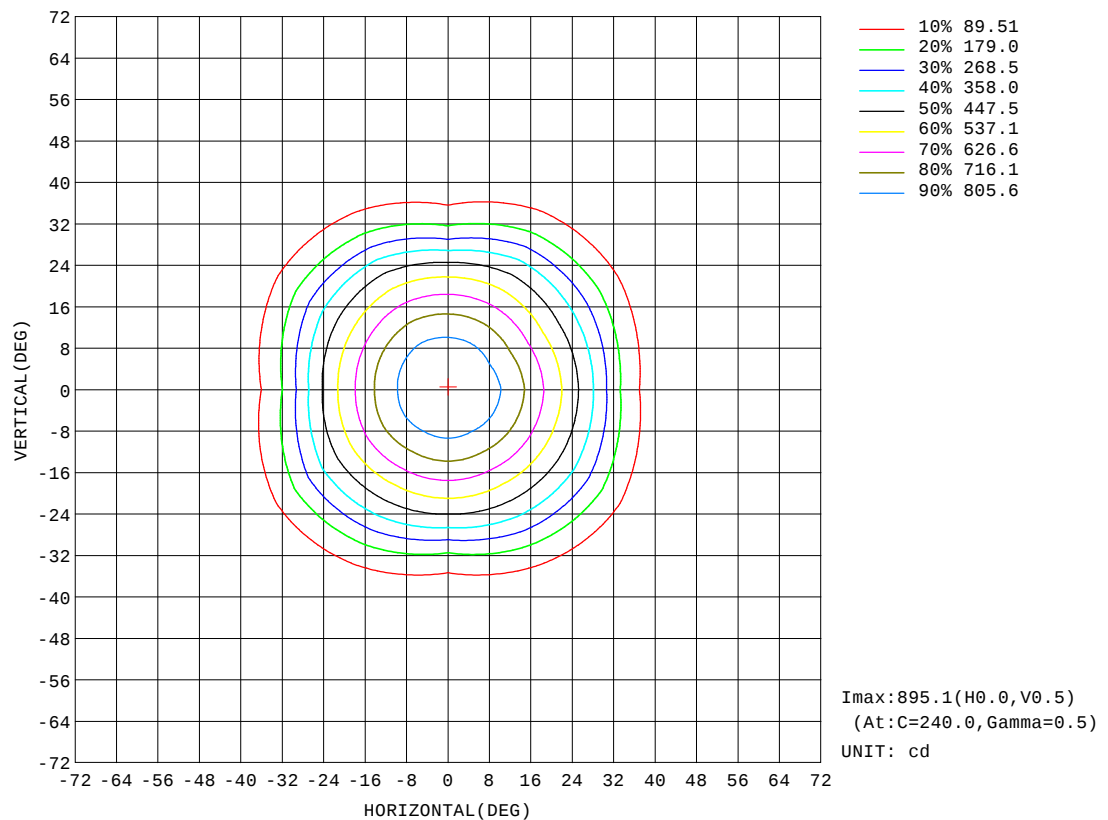


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-13

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:BlazeMini Recessed-500mm-RGBW ALL-50D-Rev2	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:50 DEG	DIM.:500mm	SERIAL No.:IES000900
MFR.:	SUR.:	Shielding Angle:

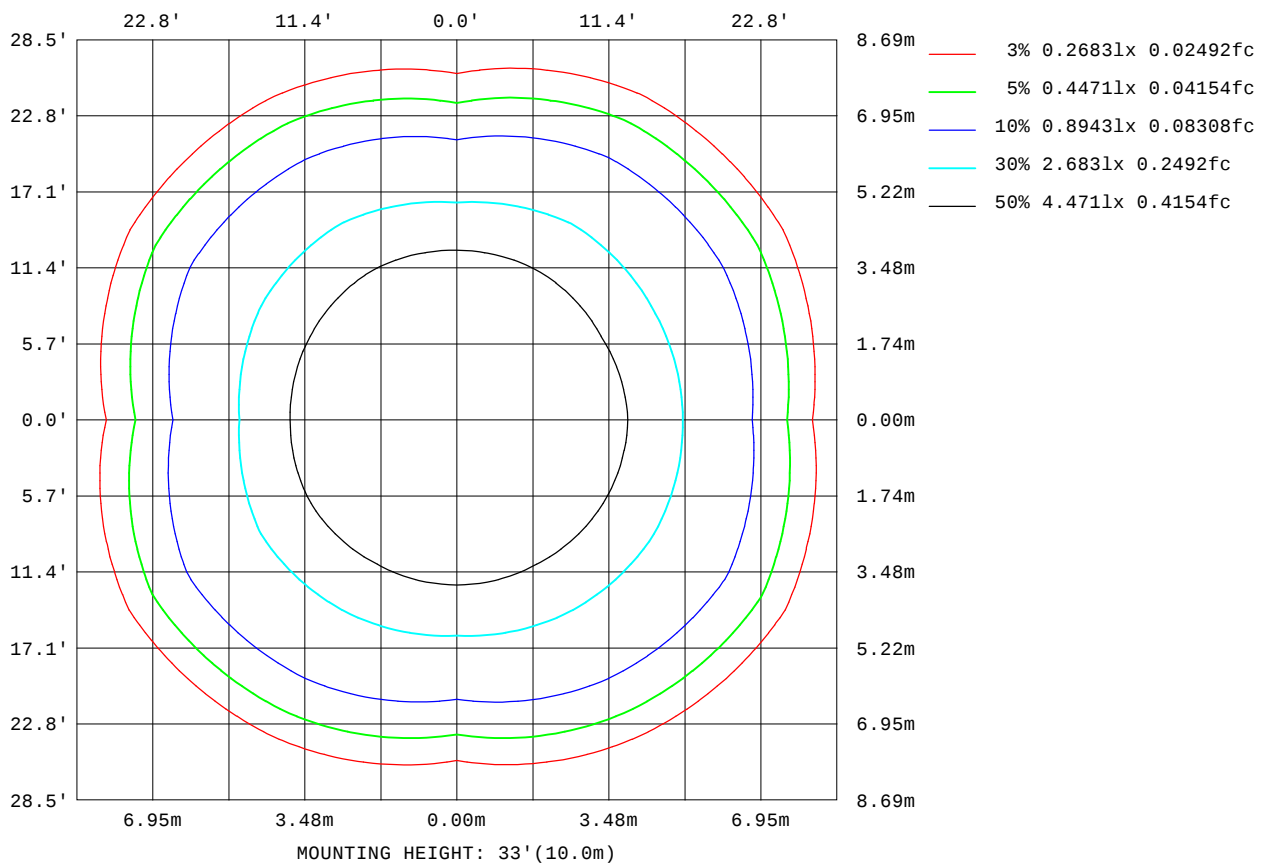

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-03-13

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

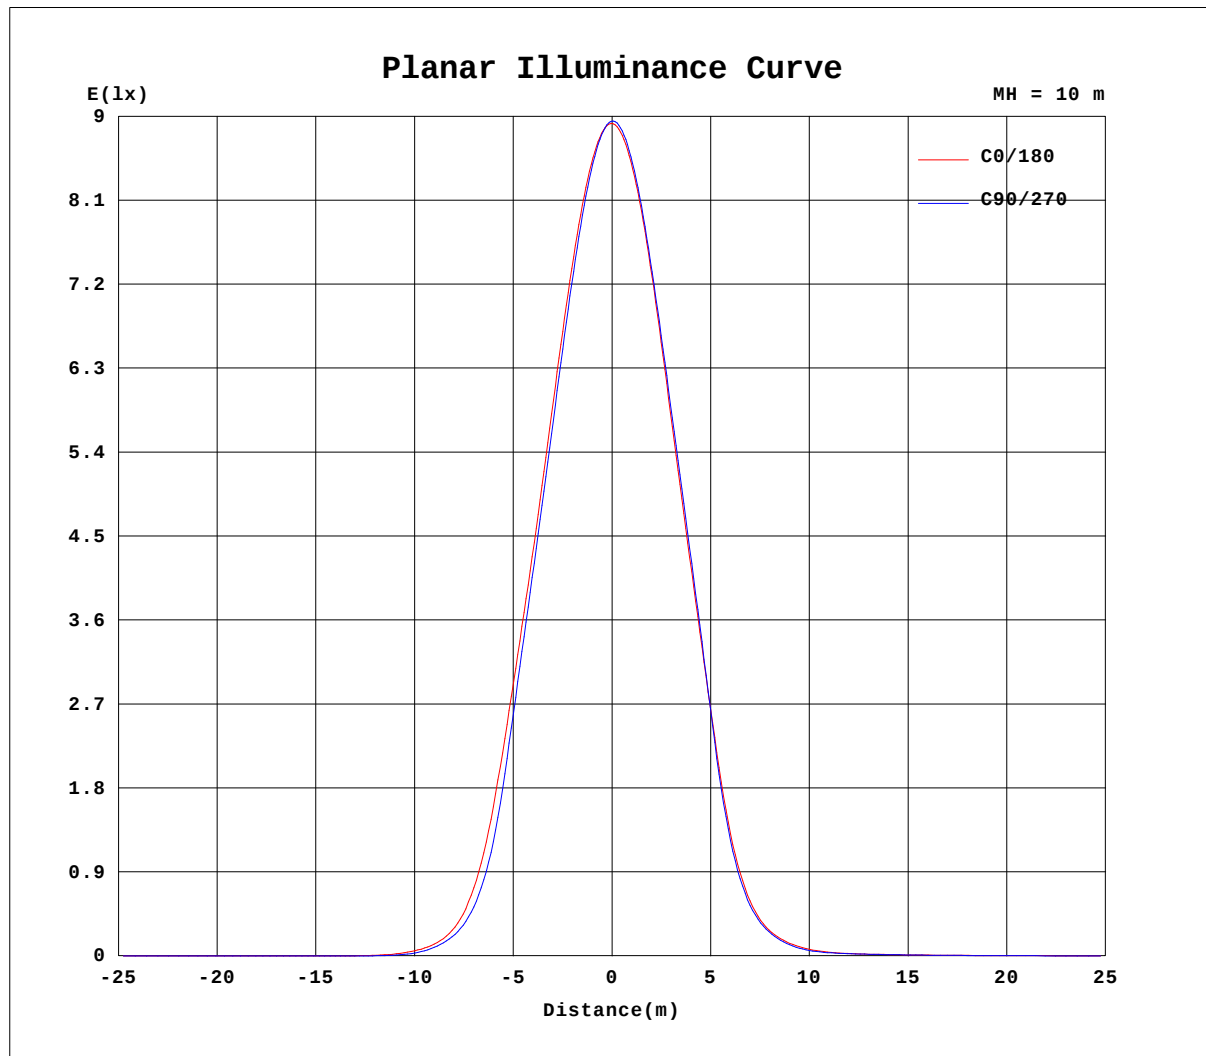


H(b) Range: -90 - 90DEG
H(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-03-13

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:BlazeMini Recessed-500mm-RGBW ALL-50D-Rev2	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:50 DEG	DIM.:500mm	SERIAL No.:IES000900
MFR.:	SUR.:	Shielding Angle:

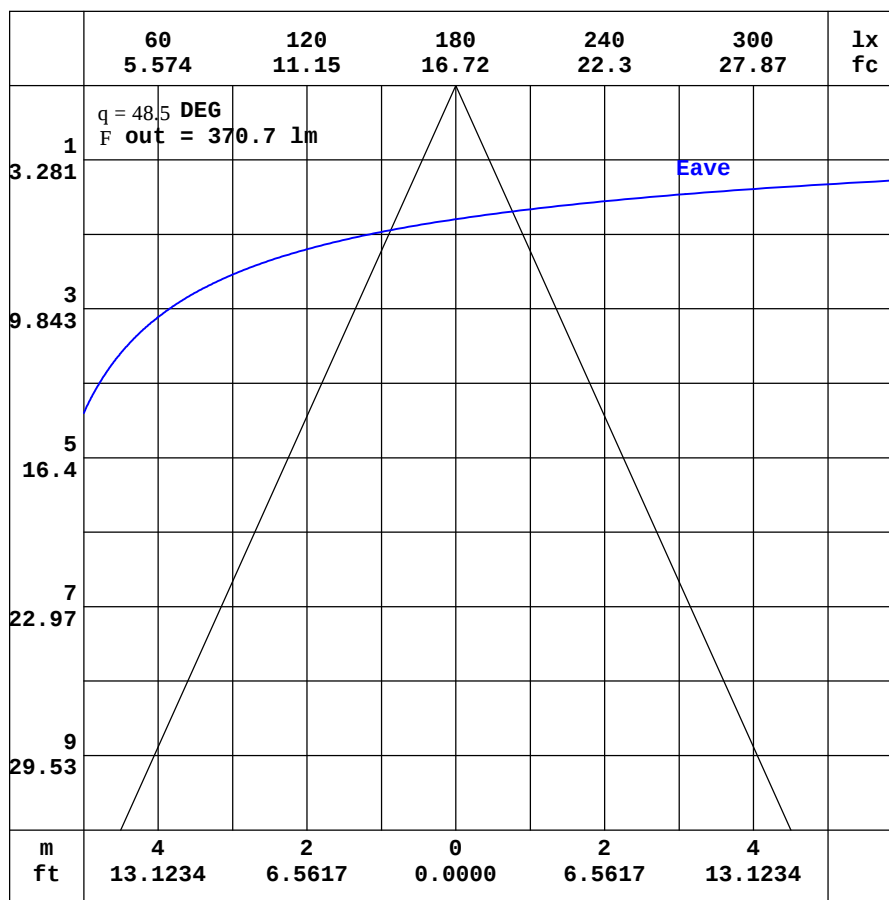

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-13

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeMini Recessed-500mm-RGBW ALL-50D-Rev2	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:50 DEG	DIM.:500mm	SERIAL No.:IES000900
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	2.07	1.88	1.82	1.83	1.96	2.18	2.50	2.90	3.35	3.81	4.25	4.65	4.98	5.17	5.18	5.10	4.97	4.87	4.84
-170	2.07	1.85	1.75	1.74	1.81	1.95	2.15	2.39	2.67	2.92	3.15	3.32	3.45	3.48	3.39	3.40	3.67	3.90	4.05
-160	2.07	1.83	1.69	1.64	1.65	1.70	1.78	1.87	1.95	2.02	2.03	2.00	1.96	2.31	2.64	2.91	3.12	3.28	3.37
-150	2.07	1.82	1.64	1.55	1.49	1.47	1.44	1.41	1.34	1.23	1.14	1.33	1.54	1.79	2.03	2.26	2.44	2.57	2.66
-140	2.07	1.80	1.59	1.47	1.36	1.28	1.17	1.06	0.90	0.84	0.91	1.01	1.12	1.25	1.38	1.52	1.63	1.71	1.76
-130	2.07	1.78	1.57	1.41	1.27	1.13	1.00	0.83	0.77	0.77	0.78	0.80	0.82	0.86	0.93	0.98	1.02	1.06	1.08
-120	2.07	1.78	1.55	1.36	1.20	1.04	0.88	0.76	0.75	0.75	0.75	0.74	0.74	0.74	0.74	0.75	0.76	0.78	0.79
-110	2.07	1.80	1.55	1.34	1.15	0.98	0.81	0.75	0.75	0.75	0.74	0.74	0.74	0.74	0.74	0.74	0.74	0.74	0.74
-100	2.07	1.81	1.57	1.34	1.13	0.93	0.74	0.73	0.73	0.74	0.73	0.73	0.73	0.73	0.73	0.73	0.74	0.74	0.74
-90	2.07	1.84	1.60	1.37	1.14	0.91	0.68	0.67	0.66	0.65	0.64	0.63	0.63	0.63	0.63	0.64	0.64	0.64	0.64
-80	2.07	1.88	1.66	1.44	1.20	0.92	0.62	0.57	0.55	0.53	0.51	0.50	0.48	0.47	0.46	0.46	0.46	0.46	0.46
-70	2.07	1.92	1.78	1.56	1.30	0.99	0.63	0.49	0.45	0.43	0.39	0.36	0.34	0.34	0.34	0.34	0.34	0.33	0.33
-60	2.07	1.98	1.89	1.71	1.47	1.16	0.77	0.41	0.38	0.37	0.36	0.35	0.35	0.36	0.38	0.40	0.42	0.44	0.44
-50	2.07	2.08	2.02	1.91	1.73	1.47	1.11	0.62	0.37	0.38	0.43	0.52	0.67	0.90	1.46	2.06	2.32	2.07	1.40
-40	2.07	2.15	2.17	2.15	2.09	1.95	1.72	1.33	0.76	0.64	1.63	4.54	9.82	17.4	26.3	33.5	38.5	39.6	35.9
-30	2.07	2.23	2.34	2.45	2.54	2.62	2.63	2.57	2.51	4.37	11.6	26.1	52.0	90.5	138	187	220	235	229
-20	2.07	2.30	2.51	2.76	3.06	3.41	3.84	4.30	5.78	12.2	30.3	75.1	161	261	359	440	504	548	564
-10	2.07	2.36	2.68	3.08	3.59	4.28	5.19	6.32	9.05	19.0	47.4	114	236	387	516	628	715	772	795
0	2.07	2.42	2.82	3.37	4.08	5.09	6.46	8.12	10.8	20.5	45.9	107	241	423	572	698	801	868	892
10	2.07	2.42	2.81	3.34	4.04	5.00	6.30	7.90	10.9	20.7	47.1	111	233	387	519	633	728	790	806
20	2.07	2.40	2.78	3.26	3.89	4.74	5.88	7.25	9.44	16.1	32.9	72.8	154	257	368	461	532	573	585
30	2.07	2.38	2.71	3.14	3.68	4.37	5.26	6.36	7.66	10.4	17.8	30.9	54.1	91.6	141	193	226	241	230
40	2.07	2.35	2.63	2.98	3.41	3.93	4.57	5.37	6.26	7.27	8.71	11.6	16.7	24.2	33.2	40.2	45.0	45.9	42.2
50	2.07	2.30	2.54	2.80	3.12	3.49	3.92	4.42	4.97	5.59	6.25	6.94	7.63	8.32	9.09	9.88	10.4	10.3	9.87
60	2.07	2.23	2.43	2.62	2.84	3.08	3.34	3.63	3.91	4.23	4.56	4.89	5.22	5.53	5.78	5.99	6.13	6.21	6.21
70	2.07	2.17	2.33	2.45	2.58	2.72	2.86	2.99	3.13	3.26	3.40	3.53	3.65	3.75	3.84	3.91	3.96	3.98	3.98
80	2.07	2.13	2.20	2.27	2.35	2.41	2.47	2.51	2.55	2.59	2.63	2.66	2.69	2.71	2.74	2.75	2.77	2.77	2.77
90	2.07	2.09	2.10	2.12	2.14	2.16	2.18	2.17	2.15	2.14	2.13	2.12	2.11	2.10	2.10	2.09	2.09	2.08	2.08
100	2.07	2.05	2.03	2.01	1.99	1.97	1.95	1.92	1.89	1.86	1.84	1.82	1.80	1.79	1.79	1.78	1.78	1.77	1.77
110	2.07	2.02	1.96	1.91	1.88	1.85	1.84	1.82	1.81	1.80	1.80	1.80	1.81	1.82	1.82	1.83	1.83	1.83	1.82
120	2.07	1.98	1.90	1.85	1.83	1.82	1.81	1.81	1.84	1.89	1.96	2.03	2.10	2.17	2.23	2.29	2.33	2.35	2.36
130	2.07	1.95	1.87	1.82	1.82	1.83	1.86	1.94	2.05	2.19	2.34	2.51	2.68	2.84	2.98	3.10	3.19	3.24	3.25
140	2.07	1.93	1.84	1.82	1.83	1.88	1.99	2.16	2.36	2.60	2.87	3.15	3.41	3.67	3.88	4.05	4.17	4.23	4.25
150	2.07	1.92	1.82	1.82	1.86	1.98	2.16	2.42	2.72	3.05	3.40	3.75	4.08	4.37	4.63	4.83	4.94	5.00	5.02
160	2.07	1.90	1.82	1.83	1.90	2.07	2.32	2.65	3.03	3.45	3.83	4.21	4.52	4.80	5.01	5.10	5.13	5.16	5.20
170	2.07	1.89	1.82	1.83	1.94	2.14	2.44	2.82	3.26	3.70	4.13	4.51	4.83	5.03	5.09	5.09	5.05	5.02	5.05
180	2.07	1.88	1.82	1.83	1.96	2.18	2.50	2.90	3.35	3.81	4.25	4.65	4.98	5.17	5.18	5.10	4.97	4.87	4.86

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-03-13

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeMini Recessed-500mm-RGBW ALL-50D-Rev2	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:50 DEG	DIM.:500mm	SERIAL No.:IES000900
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	4.33	3.99	3.67	3.34	2.98	2.57	2.14	1.74	1.40	1.13	0.94	0.81	0.77	0.74	0.73	0.72	0.68	0.64
-170	3.82	3.68	3.47	3.18	2.84	2.45	2.05	1.67	1.36	1.10	0.92	0.81	0.77	0.74	0.74	0.72	0.68	0.64
-160	3.31	3.18	3.00	2.76	2.45	2.12	1.78	1.48	1.22	1.02	0.88	0.80	0.77	0.75	0.74	0.73	0.68	0.64
-150	2.60	2.50	2.34	2.14	1.90	1.65	1.43	1.22	1.05	0.92	0.83	0.79	0.76	0.75	0.75	0.72	0.68	0.64
-140	1.73	1.67	1.58	1.44	1.32	1.18	1.07	0.97	0.89	0.84	0.80	0.77	0.76	0.75	0.75	0.72	0.68	0.64
-130	1.07	1.04	1.01	0.95	0.90	0.86	0.82	0.81	0.79	0.79	0.78	0.77	0.76	0.76	0.74	0.72	0.67	0.64
-120	0.78	0.77	0.76	0.75	0.74	0.75	0.76	0.76	0.77	0.77	0.78	0.77	0.77	0.75	0.74	0.70	0.66	0.64
-110	0.74	0.74	0.74	0.74	0.74	0.75	0.75	0.76	0.76	0.77	0.78	0.77	0.76	0.74	0.72	0.69	0.66	0.64
-100	0.74	0.74	0.74	0.74	0.73	0.73	0.74	0.75	0.75	0.75	0.76	0.75	0.74	0.71	0.69	0.67	0.65	0.64
-90	0.65	0.65	0.65	0.65	0.65	0.65	0.66	0.67	0.68	0.69	0.70	0.71	0.70	0.68	0.67	0.66	0.65	0.64
-80	0.46	0.47	0.48	0.48	0.49	0.50	0.52	0.54	0.57	0.59	0.61	0.63	0.64	0.64	0.65	0.66	0.65	0.64
-70	0.34	0.34	0.34	0.35	0.35	0.36	0.40	0.44	0.45	0.48	0.51	0.55	0.57	0.59	0.62	0.64	0.65	0.64
-60	0.44	0.42	0.40	0.38	0.37	0.36	0.36	0.37	0.38	0.40	0.43	0.47	0.50	0.54	0.57	0.62	0.64	0.64
-50	2.01	2.20	1.94	1.37	0.86	0.65	0.50	0.42	0.38	0.38	0.40	0.42	0.45	0.49	0.54	0.59	0.64	0.64
-40	39.4	38.0	32.8	25.4	16.7	9.37	4.30	1.51	0.59	0.44	0.42	0.42	0.43	0.46	0.51	0.57	0.63	0.64
-30	237	221	188	139	90.9	51.9	25.6	11.2	3.32	0.80	0.53	0.46	0.44	0.45	0.49	0.56	0.63	0.64
-20	548	504	442	363	266	165	76.7	29.1	9.49	2.13	0.71	0.55	0.46	0.45	0.47	0.54	0.63	0.64
-10	771	715	629	521	402	259	125	47.3	15.4	3.58	0.93	0.64	0.50	0.46	0.46	0.54	0.62	0.64
0	872	809	712	589	454	291	133	47.6	16.0	3.47	0.97	0.70	0.54	0.47	0.46	0.53	0.62	0.64
10	783	719	624	515	396	251	119	46.6	17.2	5.47	2.53	1.75	1.21	0.89	0.72	0.67	0.68	0.64
20	568	525	455	364	257	152	72.6	31.7	13.6	5.87	3.69	2.57	1.77	1.27	0.95	0.80	0.73	0.64
30	242	230	197	144	93.1	54.4	30.9	17.8	9.49	6.01	4.32	3.06	2.16	1.56	1.16	0.91	0.78	0.64
40	46.5	46.0	41.2	34.3	24.9	17.1	11.7	8.69	7.27	5.94	4.41	3.23	2.37	1.74	1.31	1.01	0.82	0.64
50	10.4	10.5	10.0	9.21	8.33	7.60	6.92	6.23	5.55	4.92	4.13	3.17	2.43	1.84	1.41	1.09	0.85	0.64
60	6.20	6.12	5.97	5.76	5.50	5.20	4.86	4.52	4.18	3.87	3.58	2.97	2.36	1.86	1.45	1.14	0.88	0.64
70	3.98	3.95	3.90	3.83	3.73	3.62	3.50	3.36	3.22	3.08	2.95	2.70	2.23	1.82	1.48	1.17	0.89	0.64
80	2.77	2.76	2.74	2.72	2.69	2.66	2.63	2.60	2.55	2.52	2.47	2.41	2.07	1.75	1.45	1.16	0.89	0.64
90	2.08	2.08	2.08	2.09	2.09	2.09	2.10	2.10	2.11	2.12	2.13	2.13	1.88	1.63	1.39	1.14	0.89	0.64
100	1.77	1.77	1.77	1.78	1.78	1.79	1.79	1.81	1.83	1.85	1.88	1.89	1.71	1.51	1.32	1.10	0.88	0.64
110	1.83	1.83	1.83	1.82	1.81	1.80	1.79	1.78	1.78	1.78	1.79	1.75	1.59	1.43	1.26	1.07	0.86	0.64
120	2.36	2.34	2.30	2.25	2.19	2.12	2.04	1.97	1.90	1.84	1.79	1.66	1.51	1.36	1.20	1.04	0.84	0.64
130	3.24	3.20	3.12	3.02	2.88	2.72	2.55	2.38	2.22	2.07	1.86	1.61	1.42	1.28	1.14	1.00	0.82	0.64
140	4.24	4.18	4.07	3.92	3.70	3.46	3.20	2.93	2.66	2.30	1.89	1.58	1.35	1.20	1.08	0.95	0.81	0.64
150	5.00	4.94	4.84	4.66	4.41	4.12	3.81	3.47	2.87	2.30	1.84	1.51	1.26	1.10	1.00	0.90	0.78	0.64
160	5.14	5.11	5.08	5.00	4.82	4.56	3.92	3.24	2.64	2.10	1.66	1.35	1.14	1.00	0.92	0.84	0.75	0.64
170	4.90	4.96	5.04	4.76	4.28	3.76	3.18	2.63	2.12	1.69	1.35	1.11	0.97	0.87	0.83	0.78	0.71	0.64
180	4.33	3.99	3.67	3.34	2.98	2.57	2.14	1.74	1.40	1.13	0.94	0.81	0.77	0.74	0.73	0.72	0.68	0.64

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-03-13

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks: