

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		1490.1 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	70.9V x 73.0H
	At 50% of Imax	47.8V x 49.0H
	At 90% of Imax	19.3V x 20.2H
Beam Flux	Total	999.9 lumens per klm.
	To 10% of Imax	910.4 lumens per klm.
	To 50% of Imax	616.8 lumens per klm.
	To 90% of Imax	133.2 lumens per klm.
Upward LOR		2.0 %
Downward LOR		97.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(B) Range:-90 - 90DEG
H(B) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-13

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:BlazeMini Recessed-500mm-RGBW GREEN-50D-Rev2	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:50 DEG	DIM.:500mm	SERIAL No.:IES000900-G
MFR.:	SUR.:	Shielding Angle:

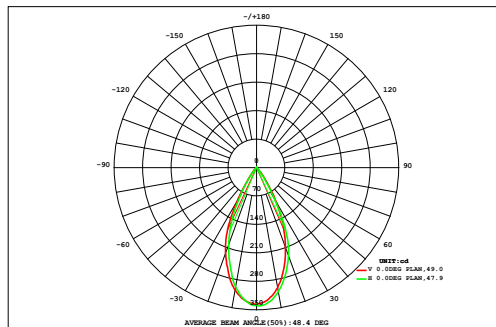

DATA OF LAMP		Eff:35.13lm/W	
MODEL		Imax(cd)	340.3
NOMINAL POWER(W)	6.5	AVAILABILITY(%)	91.0
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	207.9
NOMINAL FLUX(lm)	228.4	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	228.4
TEST VOLTAGE(V)	24	q @50% (H,V)	49,48DEG

72 64 56 48 40 32 24 -24 -32 -40 -48 -56 -64 -72 -72	AREA FLUX DIAGRAM																UNIT:lm			F t	F a
	0.01	0.01	0.01	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.36	0.00	
	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.04	0.04	0.04	0.04	0.04	0.03	0.03	0.02	0.02	0.01	0.01	0.49	0.00	
	0.01	0.01	0.02	0.03	0.04	0.05	0.06	0.06	0.07	0.07	0.06	0.06	0.05	0.04	0.03	0.02	0.01	0.01	0.68	0.00	
	0.01	0.02	0.02	0.04	0.05	0.08	0.13	0.16	0.16	0.16	0.16	0.13	0.08	0.05	0.03	0.02	0.01	0.01	1.33	0.00	
	0.01	0.02	0.03	0.05	0.09	0.21	0.43	0.65	0.69	0.68	0.63	0.43	0.22	0.10	0.05	0.02	0.01	0.01	4.34	1.94	
	0.01	0.02	0.03	0.07	0.20	0.62	1.41	2.19	2.44	2.36	2.01	1.27	0.59	0.22	0.07	0.02	0.01	0.00	13.5	12.4	
	0.01	0.02	0.04	0.10	0.41	1.40	2.79	3.87	4.39	4.28	3.56	2.40	1.20	0.41	0.10	0.02	0.01	0.00	25.0	24.2	
	0.01	0.02	0.04	0.13	0.59	2.02	3.70	4.93	5.66	5.57	4.64	3.24	1.75	0.59	0.13	0.02	0.01	0.00	33.1	32.3	
	0.01	0.02	0.04	0.13	0.63	2.23	4.06	5.49	6.35	6.29	5.29	3.74	2.04	0.68	0.14	0.02	0.00	0.00	37.2	36.5	
	0.01	0.02	0.04	0.13	0.63	2.18	3.98	5.43	6.28	6.20	5.21	3.67	2.02	0.67	0.14	0.01	0.00	0.00	36.6	35.9	
	0.01	0.02	0.03	0.12	0.58	1.92	3.44	4.65	5.35	5.26	4.38	3.07	1.69	0.58	0.12	0.01	0.00	0.00	31.2	30.5	
	0.01	0.01	0.02	0.08	0.40	1.33	2.46	3.37	3.87	3.78	3.13	2.16	1.15	0.40	0.08	0.01	0.00	0.00	22.3	21.5	
	0.01	0.01	0.01	0.04	0.18	0.60	1.26	1.86	2.13	2.07	1.71	1.13	0.56	0.20	0.04	0.00	0.00	0.00	11.8	10.8	
	0.01	0.01	0.01	0.01	0.06	0.19	0.43	0.64	0.70	0.68	0.60	0.40	0.20	0.07	0.01	0.00	0.00	0.00	4.00	1.80	
	0.00	0.00	0.00	0.00	0.01	0.04	0.10	0.14	0.15	0.14	0.13	0.09	0.04	0.01	0.00	0.00	0.00	0.00	0.86	0.00	
	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.00	
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.00	
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.00	
	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)				16	24	32	40	48	56	64	72		
F t	0.14	0.23	0.38	0.95	3.92	12.9	24.3	33.5	38.3	37.6	31.6	21.9	11.6	4.07	1.00	0.22	0.10	0.05	223	---	
F a	0.00	0.00	0.00	0.00	2.00	11.8	23.3	32.6	37.4	36.7	30.6	20.8	10.5	2.11	0.00	0.00	0.00	0.00	---	208	

one-half-peak spread: U:23.5,D:24.6 , L:24.8,R:24.5


NEMA Beam Type: Type 5

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-13

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:BlazeMini Recessed-500mm-RGBW GREEN-50D-Rev2	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:50 DEG	DIM.:500mm	SERIAL No.:IES000900-G
MFR.:	SUR.:	Shielding Angle:

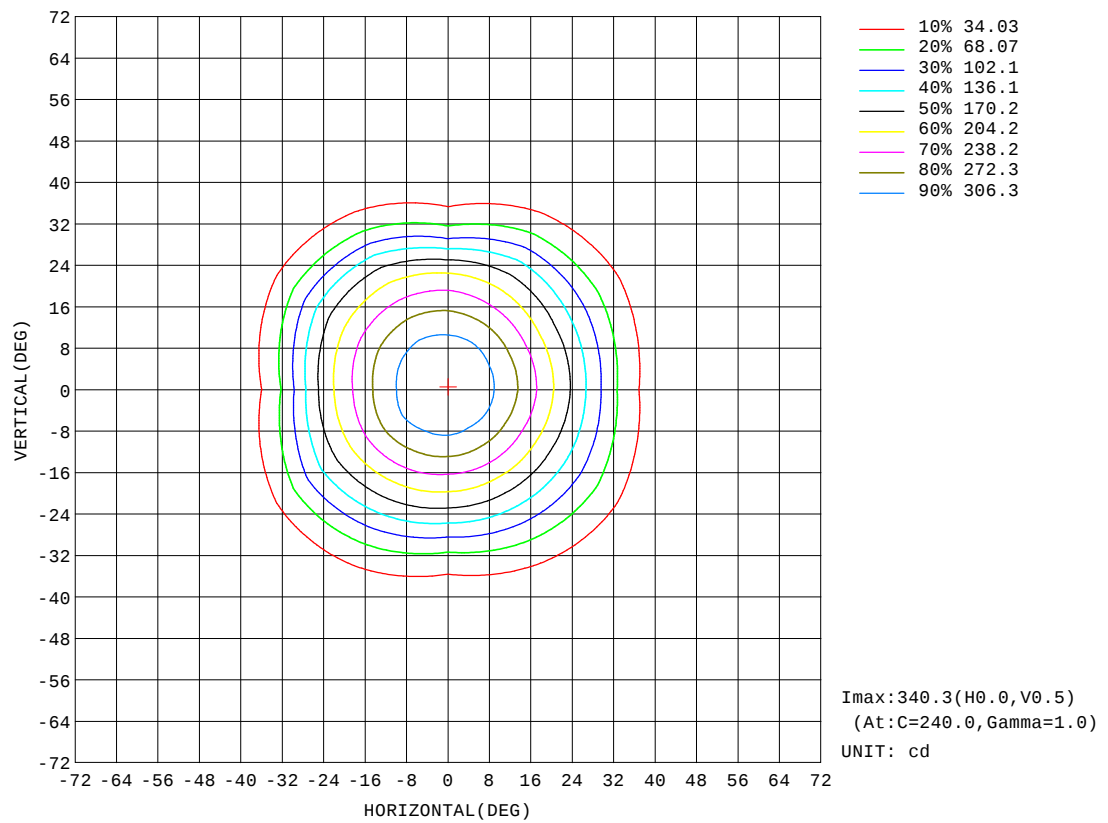


H(B) Range:-90 - 90DEG
H(B) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-13

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:BlazeMini Recessed-500mm-RGBW GREEN-50D-Rev2	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:50 DEG	DIM.:500mm	SERIAL No.:IES000900-G
MFR.:	SUR.:	Shielding Angle:

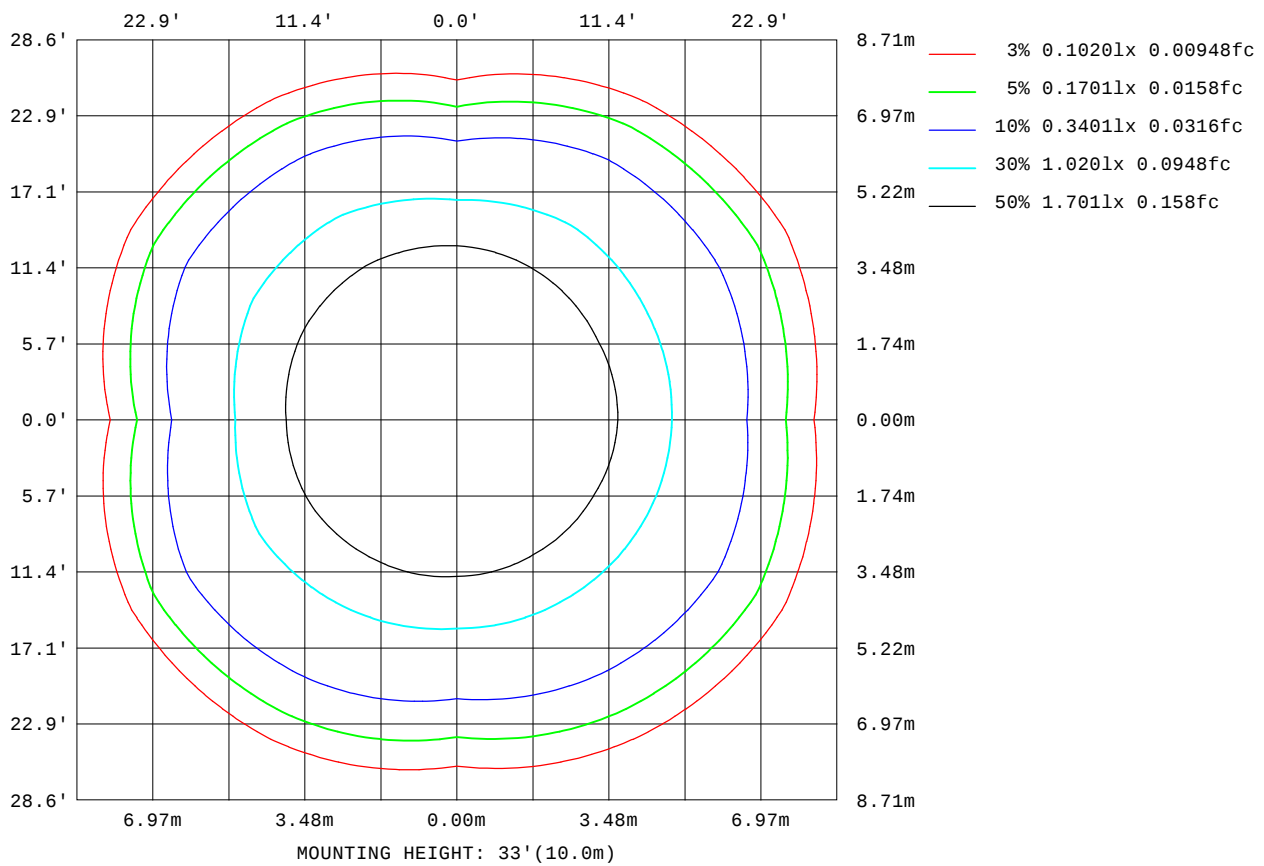

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-13

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

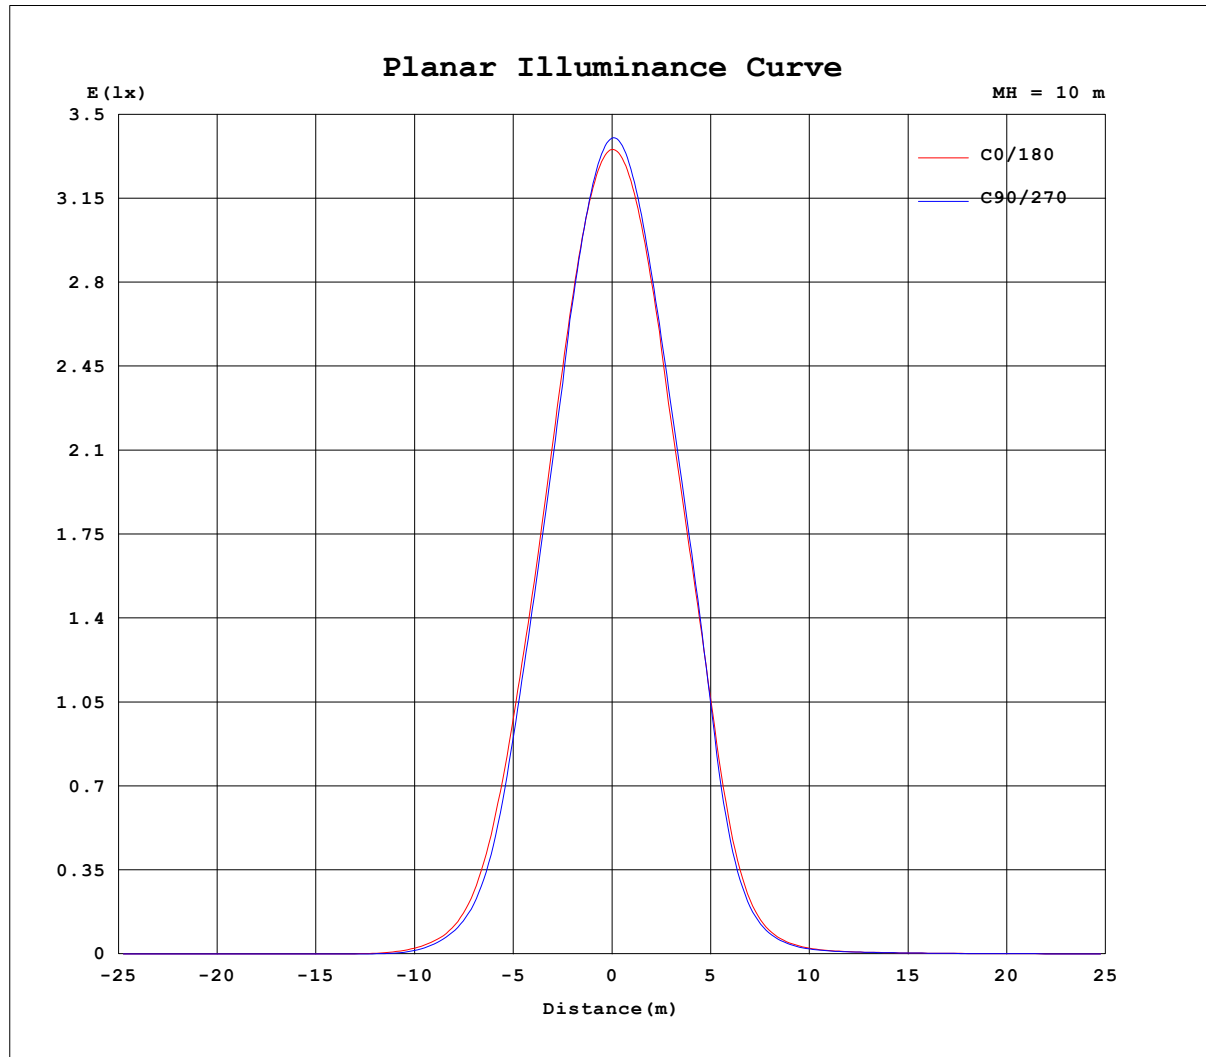


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-13

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:BlazeMini Recessed-500mm-RGBW GREEN-50D-Rev2	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:50 DEG	DIM.:500mm	SERIAL No.:IES000900-G
MFR.:	SUR.:	Shielding Angle:

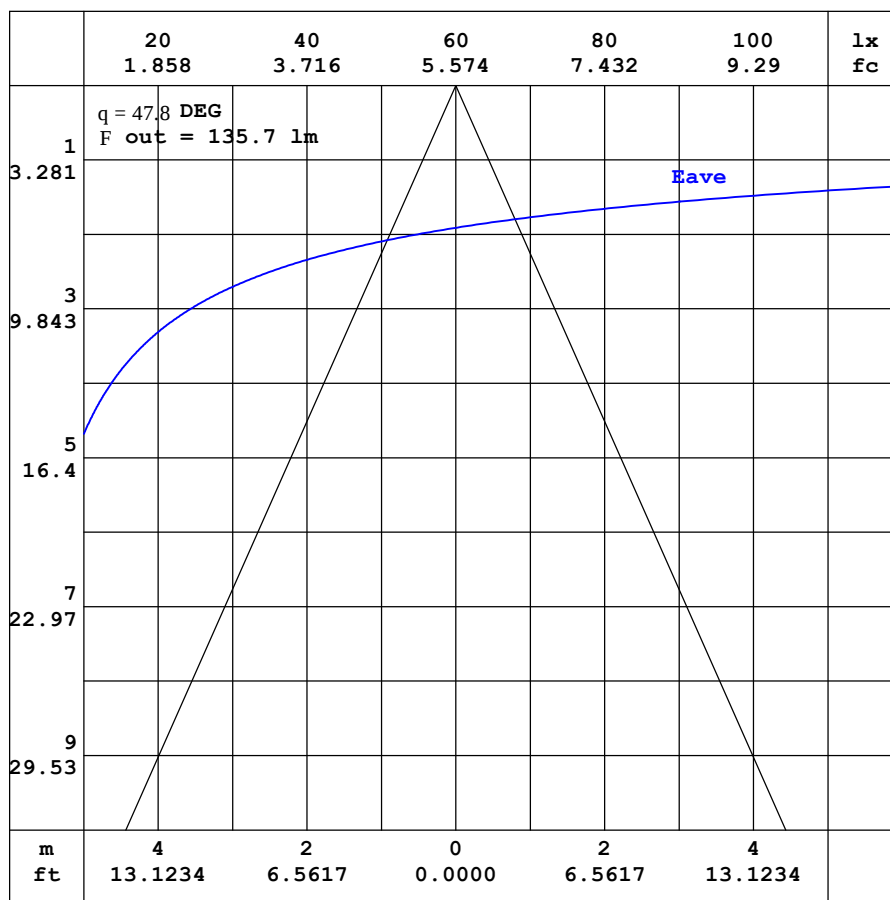

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-13

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeMini Recessed-500mm-RGBW GREEN-50D-Rev2	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:50 DEG	DIM.:500mm	SERIAL No.:IES000900-G
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.70	0.64	0.63	0.64	0.67	0.74	0.86	1.01	1.17	1.34	1.51	1.65	1.78	1.86	1.87	1.82	1.79	1.73	1.78
-170	0.70	0.63	0.60	0.60	0.61	0.66	0.73	0.82	0.92	1.02	1.10	1.17	1.22	1.24	1.22	1.23	1.33	1.41	1.48
-160	0.70	0.62	0.58	0.56	0.56	0.57	0.60	0.63	0.66	0.69	0.70	0.69	0.68	0.81	0.93	1.03	1.11	1.18	1.23
-150	0.70	0.60	0.56	0.52	0.50	0.49	0.48	0.47	0.44	0.41	0.37	0.44	0.52	0.61	0.70	0.78	0.87	0.93	0.97
-140	0.70	0.59	0.54	0.49	0.46	0.42	0.38	0.34	0.28	0.26	0.29	0.31	0.35	0.41	0.44	0.51	0.56	0.61	0.63
-130	0.70	0.59	0.53	0.47	0.42	0.37	0.31	0.26	0.23	0.23	0.23	0.23	0.24	0.25	0.28	0.30	0.32	0.34	0.36
-120	0.70	0.59	0.51	0.45	0.39	0.33	0.27	0.22	0.22	0.22	0.21	0.21	0.20	0.20	0.21	0.21	0.22	0.23	0.23
-110	0.70	0.59	0.51	0.44	0.38	0.31	0.24	0.22	0.21	0.21	0.21	0.20	0.20	0.20	0.20	0.20	0.21	0.21	0.21
-100	0.70	0.60	0.51	0.43	0.35	0.29	0.21	0.21	0.21	0.20	0.20	0.19	0.19	0.20	0.20	0.20	0.20	0.21	0.21
-90	0.70	0.61	0.53	0.44	0.36	0.27	0.18	0.18	0.17	0.17	0.16	0.16	0.15	0.16	0.17	0.17	0.18	0.18	0.19
-80	0.70	0.62	0.55	0.47	0.38	0.27	0.16	0.14	0.14	0.12	0.11	0.10	0.09	0.09	0.10	0.10	0.11	0.12	0.13
-70	0.70	0.64	0.59	0.51	0.41	0.30	0.17	0.11	0.10	0.09	0.08	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07
-60	0.70	0.66	0.63	0.56	0.48	0.36	0.22	0.09	0.08	0.08	0.07	0.07	0.08	0.08	0.08	0.09	0.09	0.10	0.11
-50	0.70	0.70	0.68	0.64	0.57	0.48	0.35	0.16	0.07	0.07	0.08	0.13	0.20	0.31	0.54	0.82	0.94	0.82	0.52
-40	0.70	0.73	0.74	0.73	0.71	0.66	0.57	0.43	0.19	0.14	0.50	1.57	3.80	7.36	11.5	14.4	16.5	17.1	15.8
-30	0.70	0.75	0.79	0.84	0.88	0.91	0.91	0.87	0.84	1.43	3.76	9.42	19.9	35.1	52.8	69.7	81.1	86.0	83.2
-20	0.70	0.78	0.86	0.96	1.07	1.21	1.36	1.53	2.03	4.13	10.6	28.1	61.9	101	135	164	186	199	201
-10	0.70	0.80	0.92	1.07	1.27	1.52	1.86	2.29	3.23	6.57	16.8	43.3	93.1	152	199	239	272	291	298
0	0.70	0.82	0.98	1.18	1.45	1.82	2.34	2.97	3.94	7.10	16.0	41.1	97.5	170	224	268	306	328	335
10	0.70	0.82	0.98	1.17	1.44	1.80	2.30	2.91	3.97	7.22	17.0	43.7	96.8	161	211	251	284	305	310
20	0.70	0.82	0.96	1.15	1.39	1.72	2.15	2.69	3.47	5.66	11.7	28.2	63.6	109	155	190	214	227	230
30	0.70	0.81	0.93	1.11	1.31	1.59	1.93	2.36	2.87	3.79	6.19	10.9	20.2	35.9	57.1	79.5	92.4	95.7	88.4
40	0.70	0.80	0.91	1.05	1.21	1.42	1.67	1.99	2.35	2.74	3.25	4.23	5.94	8.51	11.7	14.3	16.0	16.0	14.2
50	0.70	0.78	0.88	0.98	1.11	1.26	1.43	1.62	1.84	2.08	2.34	2.60	2.85	3.10	3.39	3.67	3.84	3.81	3.64
60	0.70	0.76	0.84	0.92	1.00	1.10	1.21	1.32	1.43	1.55	1.67	1.80	1.91	2.03	2.13	2.21	2.26	2.29	2.29
70	0.70	0.74	0.80	0.85	0.90	0.97	1.03	1.08	1.12	1.17	1.22	1.27	1.30	1.35	1.39	1.42	1.44	1.45	1.45
80	0.70	0.72	0.75	0.78	0.82	0.85	0.88	0.89	0.90	0.91	0.93	0.93	0.94	0.95	0.97	0.98	0.99	0.99	1.00
90	0.70	0.71	0.72	0.73	0.75	0.76	0.77	0.76	0.76	0.75	0.74	0.73	0.73	0.73	0.73	0.73	0.73	0.74	0.74
100	0.70	0.69	0.69	0.69	0.69	0.69	0.68	0.67	0.65	0.65	0.63	0.62	0.62	0.61	0.62	0.62	0.62	0.62	0.62
110	0.70	0.68	0.67	0.66	0.66	0.65	0.64	0.63	0.62	0.62	0.62	0.62	0.62	0.63	0.62	0.62	0.61	0.61	0.60
120	0.70	0.67	0.65	0.64	0.64	0.63	0.63	0.63	0.63	0.64	0.66	0.68	0.72	0.75	0.76	0.78	0.79	0.80	0.80
130	0.70	0.66	0.65	0.63	0.63	0.63	0.63	0.64	0.67	0.73	0.79	0.86	0.92	0.99	1.04	1.08	1.11	1.12	1.13
140	0.70	0.65	0.64	0.63	0.64	0.64	0.66	0.72	0.79	0.87	0.98	1.08	1.19	1.29	1.37	1.43	1.47	1.50	1.51
150	0.70	0.64	0.63	0.63	0.64	0.66	0.73	0.82	0.92	1.03	1.16	1.30	1.43	1.55	1.65	1.73	1.78	1.80	1.81
160	0.70	0.64	0.63	0.63	0.65	0.70	0.78	0.90	1.03	1.19	1.34	1.48	1.59	1.71	1.80	1.85	1.86	1.88	1.89
170	0.70	0.64	0.63	0.64	0.66	0.73	0.84	0.97	1.13	1.29	1.45	1.60	1.71	1.80	1.83	1.84	1.84	1.82	1.87
180	0.70	0.64	0.63	0.64	0.67	0.74	0.86	1.01	1.17	1.34	1.51	1.65	1.78	1.86	1.87	1.82	1.79	1.73	1.78

H_b Range:-90 - 90DEGH_b Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-03-13

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeMini Recessed-500mm-RGBW GREEN-50D-Rev2	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:50 DEG	DIM.:500mm	SERIAL No.:IES000900-G
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	1.54	1.42	1.29	1.18	1.05	0.91	0.74	0.59	0.45	0.35	0.27	0.22	0.21	0.21	0.21	0.20	0.17	0.16	
-170	1.37	1.32	1.25	1.15	1.02	0.88	0.72	0.58	0.45	0.35	0.28	0.23	0.21	0.21	0.21	0.21	0.17	0.16	
-160	1.19	1.14	1.07	1.00	0.88	0.76	0.63	0.51	0.41	0.32	0.27	0.22	0.22	0.21	0.21	0.21	0.17	0.16	
-150	0.95	0.89	0.83	0.75	0.67	0.58	0.50	0.42	0.34	0.29	0.24	0.22	0.22	0.21	0.21	0.20	0.17	0.16	
-140	0.61	0.58	0.55	0.49	0.44	0.39	0.35	0.31	0.28	0.25	0.23	0.22	0.22	0.22	0.21	0.20	0.17	0.16	
-130	0.35	0.34	0.31	0.28	0.27	0.25	0.24	0.23	0.23	0.23	0.23	0.22	0.22	0.22	0.21	0.19	0.17	0.16	
-120	0.23	0.22	0.22	0.21	0.20	0.21	0.21	0.22	0.22	0.22	0.22	0.22	0.22	0.22	0.20	0.18	0.17	0.16	
-110	0.21	0.21	0.21	0.20	0.20	0.20	0.20	0.21	0.21	0.22	0.22	0.22	0.22	0.22	0.21	0.20	0.18	0.17	0.16
-100	0.21	0.20	0.20	0.20	0.20	0.20	0.20	0.21	0.21	0.22	0.22	0.22	0.22	0.21	0.20	0.19	0.18	0.17	0.16
-90	0.18	0.18	0.18	0.17	0.17	0.16	0.17	0.18	0.19	0.20	0.20	0.21	0.20	0.19	0.18	0.18	0.17	0.16	
-80	0.12	0.12	0.12	0.12	0.13	0.12	0.13	0.14	0.15	0.16	0.17	0.18	0.18	0.18	0.18	0.17	0.17	0.16	
-70	0.07	0.08	0.08	0.08	0.08	0.08	0.09	0.10	0.11	0.12	0.14	0.15	0.16	0.17	0.17	0.17	0.16	0.16	
-60	0.11	0.10	0.10	0.10	0.10	0.09	0.09	0.09	0.10	0.10	0.11	0.13	0.14	0.14	0.16	0.16	0.17	0.16	
-50	0.78	0.87	0.75	0.51	0.30	0.21	0.14	0.11	0.10	0.10	0.10	0.11	0.12	0.13	0.14	0.16	0.16	0.16	
-40	16.7	15.8	13.6	10.8	7.21	4.09	1.85	0.59	0.17	0.11	0.11	0.11	0.12	0.12	0.14	0.15	0.16	0.16	
-30	82.8	75.4	63.2	47.7	32.6	19.8	10.7	4.97	1.42	0.26	0.15	0.13	0.11	0.12	0.13	0.14	0.16	0.16	
-20	194	175	149	118	85.8	54.5	27.7	11.9	4.17	0.87	0.23	0.16	0.13	0.12	0.13	0.14	0.16	0.16	
-10	286	259	221	178	133	85.1	43.4	18.6	6.72	1.48	0.32	0.20	0.14	0.13	0.13	0.14	0.15	0.16	
0	326	300	259	209	155	97.0	47.1	19.3	7.09	1.41	0.35	0.23	0.16	0.13	0.13	0.14	0.15	0.16	
10	299	272	232	186	138	87.2	43.9	18.9	7.40	1.14	0.92	0.62	0.41	0.29	0.22	0.19	0.17	0.16	
20	220	199	169	132	91.8	55.8	28.4	13.2	5.61	2.20	1.34	0.92	0.62	0.43	0.31	0.23	0.19	0.16	
30	91.8	86.1	73.6	53.1	34.5	20.8	12.4	7.27	3.60	2.18	1.57	1.10	0.76	0.54	0.38	0.28	0.21	0.16	
40	16.0	15.9	14.3	11.8	8.91	6.41	4.43	3.20	2.65	2.17	1.60	1.17	0.85	0.61	0.44	0.31	0.23	0.16	
50	3.82	3.85	3.67	3.37	3.04	2.77	2.52	2.27	2.03	1.80	1.51	1.15	0.86	0.64	0.47	0.34	0.24	0.16	
60	2.27	2.23	2.17	2.09	1.98	1.87	1.75	1.63	1.51	1.41	1.29	1.07	0.84	0.64	0.49	0.36	0.26	0.16	
70	1.44	1.43	1.41	1.37	1.33	1.28	1.24	1.20	1.15	1.10	1.06	0.96	0.79	0.63	0.49	0.37	0.26	0.16	
80	0.99	0.98	0.97	0.96	0.94	0.92	0.92	0.91	0.90	0.89	0.88	0.86	0.73	0.60	0.48	0.36	0.26	0.16	
90	0.73	0.73	0.73	0.72	0.72	0.71	0.72	0.73	0.73	0.74	0.75	0.76	0.66	0.56	0.46	0.36	0.26	0.16	
100	0.62	0.62	0.62	0.62	0.61	0.61	0.62	0.62	0.63	0.64	0.65	0.66	0.59	0.51	0.43	0.34	0.25	0.16	
110	0.61	0.62	0.62	0.63	0.63	0.63	0.62	0.62	0.62	0.62	0.62	0.61	0.54	0.48	0.40	0.33	0.24	0.16	
120	0.81	0.80	0.80	0.78	0.77	0.75	0.71	0.68	0.65	0.63	0.62	0.57	0.51	0.45	0.39	0.31	0.24	0.16	
130	1.13	1.13	1.11	1.08	1.03	0.97	0.91	0.84	0.78	0.71	0.63	0.54	0.48	0.42	0.37	0.30	0.24	0.16	
140	1.51	1.50	1.47	1.43	1.35	1.25	1.15	1.05	0.94	0.81	0.64	0.52	0.44	0.39	0.34	0.29	0.22	0.16	
150	1.81	1.80	1.78	1.71	1.61	1.50	1.38	1.25	1.02	0.81	0.63	0.49	0.40	0.35	0.31	0.27	0.21	0.16	
160	1.88	1.87	1.86	1.83	1.76	1.67	1.42	1.17	0.93	0.72	0.56	0.43	0.35	0.31	0.28	0.25	0.20	0.16	
170	1.79	1.81	1.83	1.72	1.55	1.35	1.14	0.93	0.73	0.57	0.44	0.34	0.29	0.26	0.24	0.23	0.18	0.16	
180	1.54	1.42	1.29	1.18	1.05	0.91	0.74	0.59	0.45	0.35	0.27	0.22	0.21	0.21	0.21	0.20	0.17	0.16	

H(°) Range:-90 - 90DEG

H(°) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-03-13

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: