

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		1501.7 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	70.6V x 72.8H
	At 50% of Imax	47.9V x 49.2H
	At 90% of Imax	19.3V x 20.1H
Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	913.6 lumens per klm.
	To 50% of Imax	620.5 lumens per klm.
	To 90% of Imax	130.7 lumens per klm.
Upward LOR		1.9 %
Downward LOR		98.1 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-13

V(θ) Range:-180 - 180DEG
V(θ) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:BlazeMini Recessed-500mm-RGBW RED-50D-Rev2	TYPE:RGBW-RED	WEIGHT:
SPEC.:50 DEG	DIM.:500mm	SERIAL No.:IES000900-R
MFR.:	SUR.:	Shielding Angle:

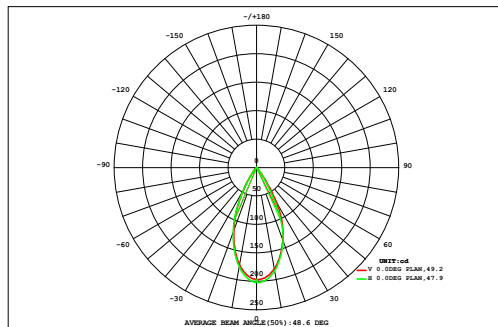

DATA OF LAMP		Eff:25.55lm/W	
MODEL		Imax(cd)	202.6
NOMINAL POWER(W)	5.28	AVAILABILITY(%)	91.3
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	123.1
NOMINAL FLUX(lm)	134.9	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	134.9
TEST VOLTAGE(V)	24	q @50%(H,V)	49,48DEG

72 64 56 48 40 32 24 -24 -32 -40 -48 -56 -64 -72	AREA FLUX DIAGRAM																UNIT:lm			F t	F a
	0.00	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.00	0.21	0.00	
	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.29	0.00	
	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.04	0.04	0.04	0.03	0.03	0.02	0.02	0.01	0.01	0.00	0.40	0.00	
	0.01	0.01	0.01	0.02	0.03	0.05	0.07	0.09	0.10	0.10	0.10	0.08	0.05	0.03	0.02	0.01	0.01	0.00	0.79	0.00	
	0.01	0.01	0.02	0.03	0.06	0.12	0.24	0.36	0.39	0.42	0.40	0.27	0.13	0.06	0.03	0.01	0.01	0.00	2.55	1.11	
	0.01	0.01	0.02	0.04	0.13	0.33	0.72	1.17	1.39	1.45	1.33	0.86	0.37	0.12	0.04	0.01	0.01	0.00	8.00	7.31	
	0.01	0.01	0.02	0.06	0.23	0.69	1.41	2.12	2.55	2.61	2.31	1.68	0.85	0.24	0.05	0.01	0.01	0.00	14.9	14.4	
	0.01	0.01	0.02	0.08	0.32	0.98	1.90	2.76	3.31	3.36	2.94	2.21	1.26	0.37	0.06	0.01	0.00	0.00	19.6	19.2	
	0.01	0.01	0.03	0.09	0.35	1.09	2.13	3.09	3.71	3.78	3.27	2.45	1.45	0.43	0.07	0.01	0.00	0.00	22.0	21.5	
	0.01	0.01	0.02	0.09	0.35	1.09	2.13	3.10	3.71	3.69	3.20	2.39	1.41	0.42	0.06	0.01	0.00	0.00	21.7	21.3	
	0.01	0.01	0.02	0.08	0.32	0.98	1.86	2.66	3.15	3.17	2.73	2.03	1.17	0.36	0.06	0.00	0.00	0.00	18.6	18.2	
	0.00	0.01	0.01	0.05	0.23	0.69	1.31	1.89	2.27	2.30	1.98	1.45	0.78	0.23	0.04	0.00	0.00	0.00	13.2	12.8	
	0.00	0.01	0.01	0.03	0.11	0.33	0.67	1.02	1.23	1.25	1.09	0.73	0.34	0.10	0.02	0.00	0.00	0.00	6.94	6.34	
	0.00	0.00	0.00	0.01	0.04	0.11	0.23	0.35	0.39	0.40	0.36	0.24	0.11	0.03	0.00	0.00	0.00	0.00	2.27	0.97	
	0.00	0.00	0.00	0.00	0.01	0.02	0.05	0.07	0.08	0.08	0.07	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.47	0.00	
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.00	
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)				16	24	32	40	48	56	64	72	
F t	0.08	0.13	0.22	0.62	2.21	6.54	12.8	18.8	22.4	22.7	19.9	14.5	8.00	2.45	0.48	0.12	0.05	0.02	132	---	
F a	0.00	0.00	0.00	0.00	0.99	5.84	12.2	18.2	21.8	22.1	19.3	13.9	7.36	1.39	0.00	0.00	0.00	0.00	---	123	

one-half-peak spread: U:24.1,D:24.1 , L:24.1,R:25.4


NEMA Beam Type: Type 5

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-13

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:BlazeMini Recessed-500mm-RGBW RED-50D-Rev2	TYPE:RGBW-RED	WEIGHT:
SPEC.:50 DEG	DIM.:500mm	SERIAL No.:IES000900-R
MFR.:	SUR.:	Shielding Angle:

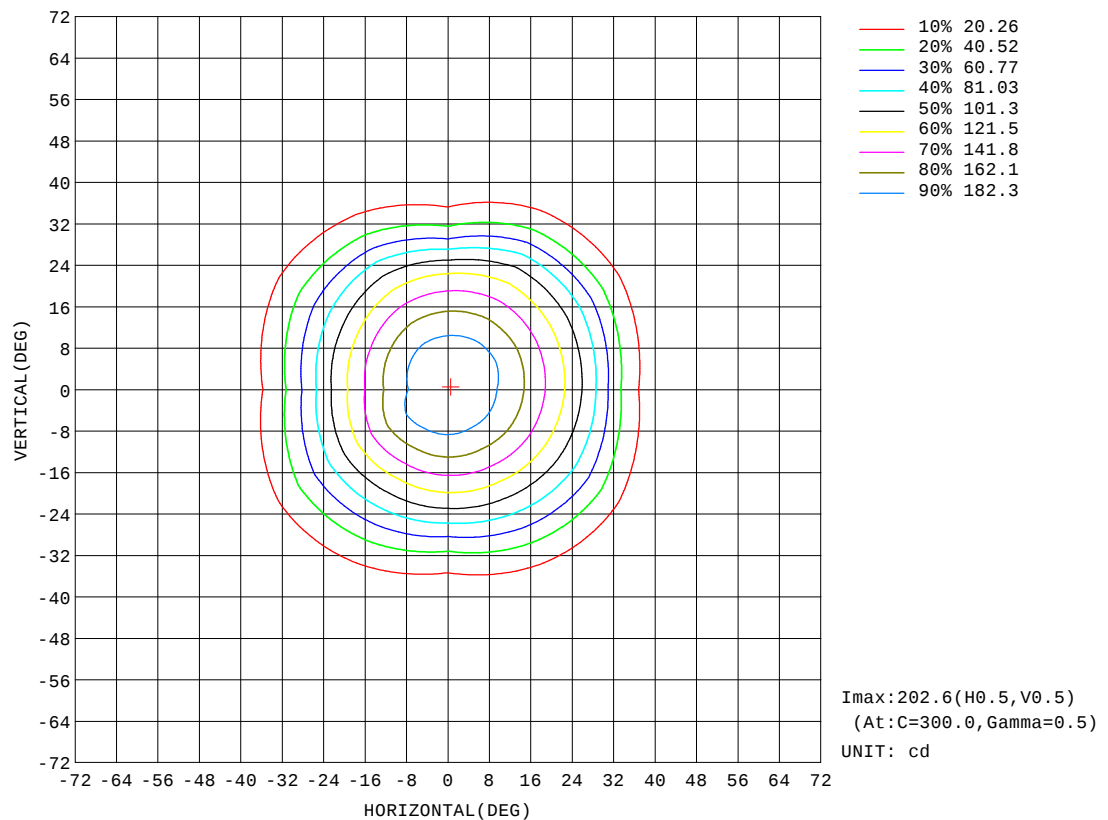


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-13

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:BlazeMini Recessed-500mm-RGBW RED-50D-Rev2	TYPE:RGBW-RED	WEIGHT:
SPEC.:50 DEG	DIM.:500mm	SERIAL No.:IES000900-R
MFR.:	SUR.:	Shielding Angle:

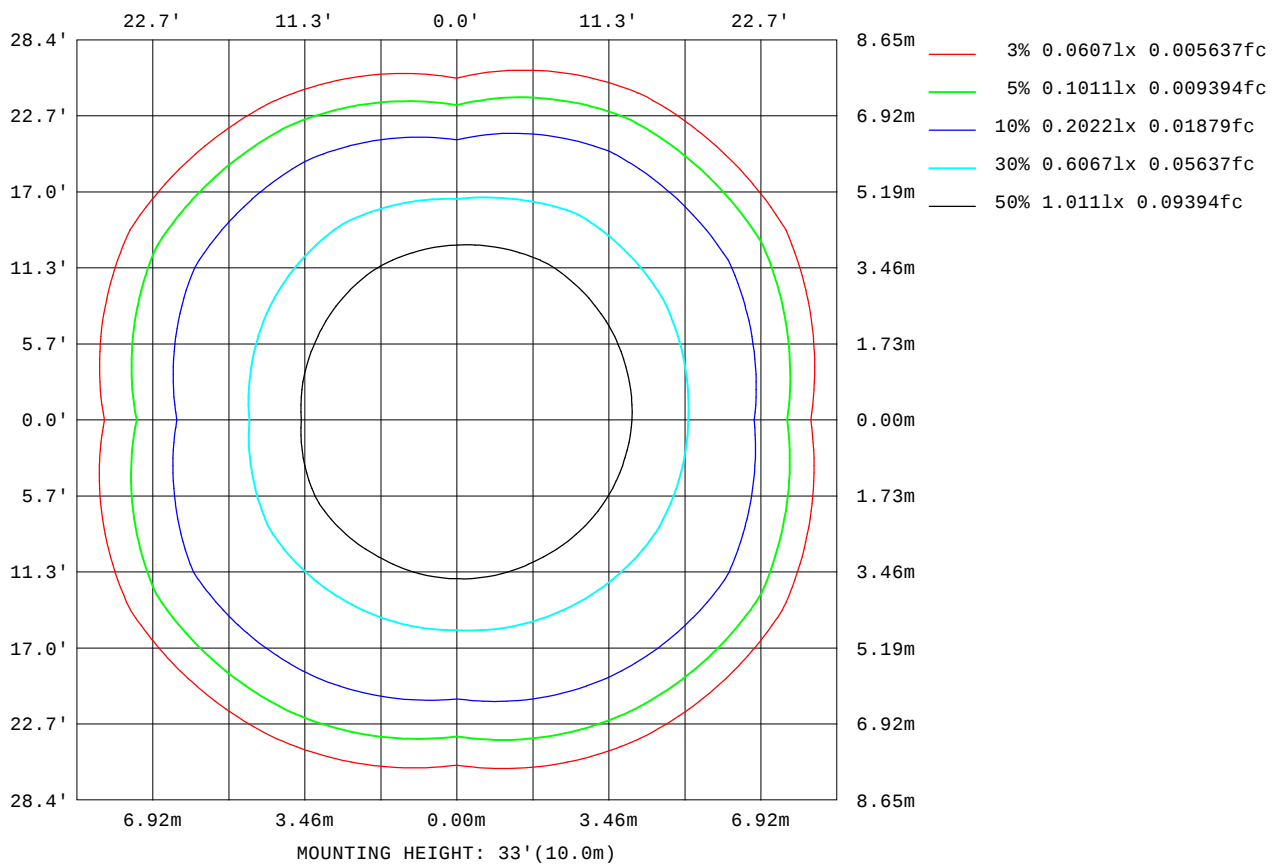

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-13

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

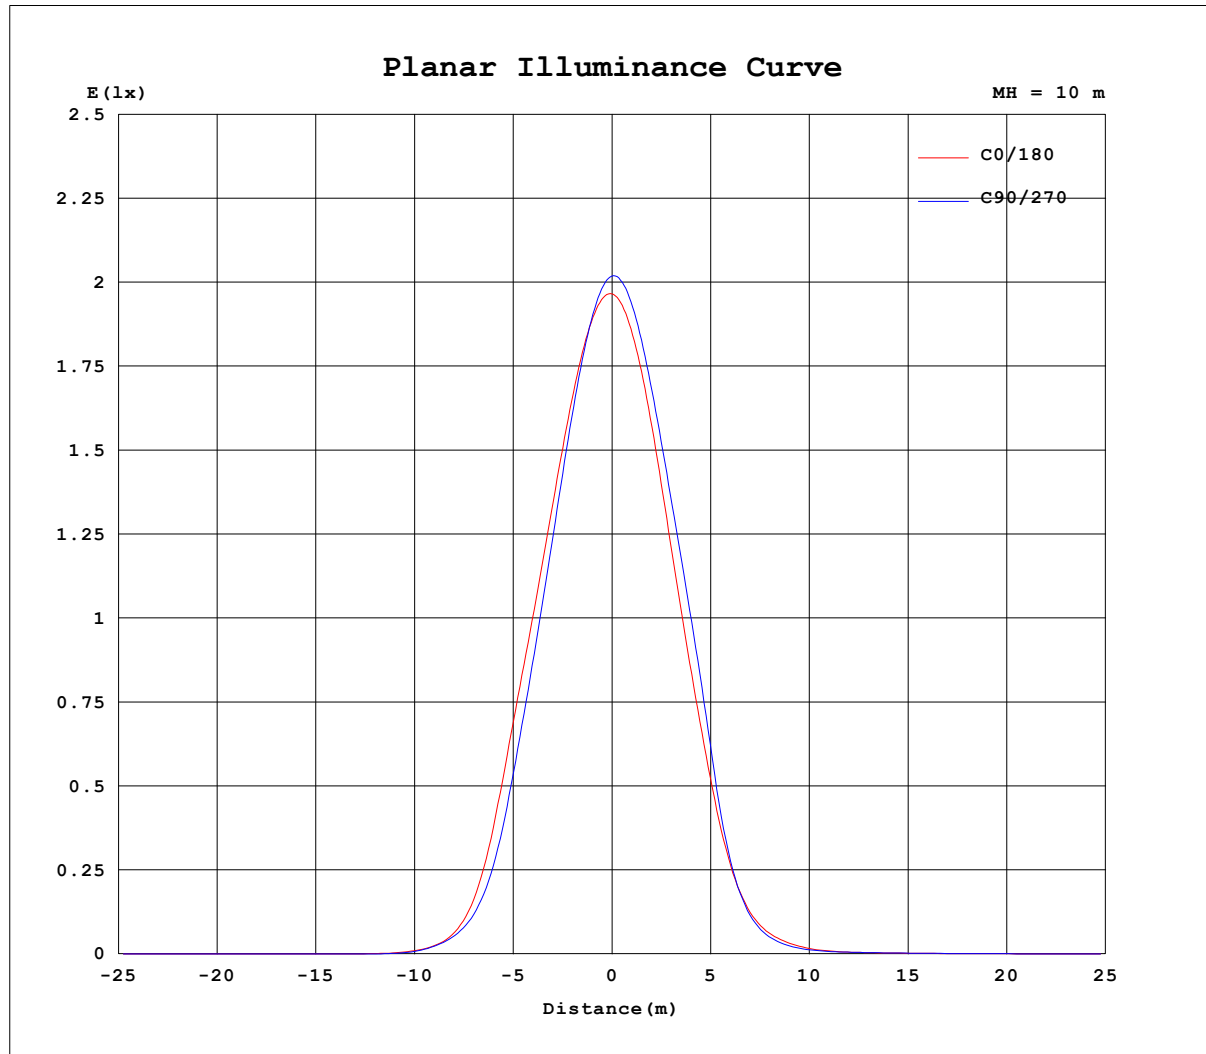


H(θ) Range: -90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-03-13

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:BlazeMini Recessed-500mm-RGBW RED-50D-Rev2	TYPE:RGBW-RED	WEIGHT:
SPEC.:50 DEG	DIM.:500mm	SERIAL No.:IES000900-R
MFR.:	SUR.:	Shielding Angle:

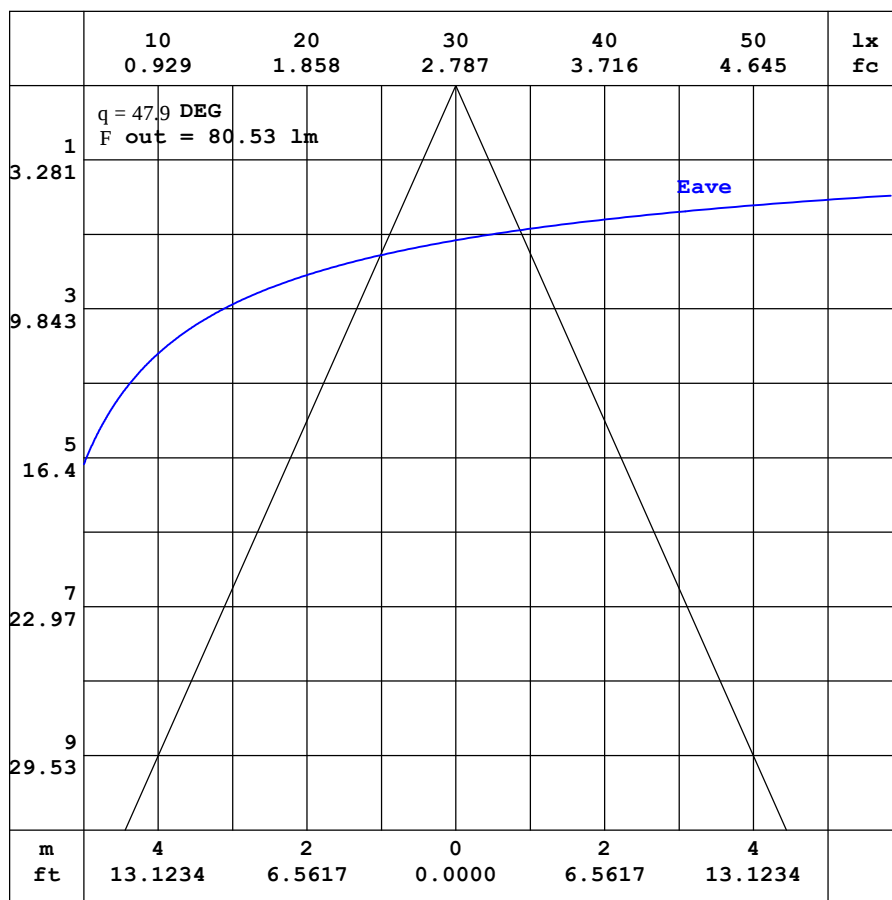

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-13

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeMini Recessed-500mm-RGBW RED-50D-Rev2	TYPE:RGBW-RED	WEIGHT:
SPEC.:50 DEG	DIM.:500mm	SERIAL No.:IES000900-R
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.35	0.32	0.32	0.34	0.37	0.42	0.50	0.59	0.70	0.79	0.89	0.97	1.05	1.05	1.04	1.03	1.00	1.00	1.02
-170	0.35	0.32	0.31	0.32	0.33	0.37	0.42	0.47	0.54	0.60	0.65	0.69	0.73	0.74	0.72	0.74	0.78	0.81	0.87
-160	0.35	0.31	0.30	0.29	0.29	0.31	0.34	0.36	0.38	0.40	0.40	0.40	0.40	0.48	0.55	0.60	0.63	0.68	0.71
-150	0.35	0.31	0.29	0.27	0.26	0.26	0.26	0.25	0.24	0.22	0.20	0.24	0.29	0.34	0.39	0.44	0.49	0.53	0.55
-140	0.35	0.30	0.28	0.26	0.24	0.22	0.20	0.17	0.14	0.13	0.14	0.16	0.18	0.20	0.23	0.28	0.30	0.32	0.34
-130	0.35	0.30	0.27	0.24	0.21	0.19	0.15	0.12	0.11	0.10	0.10	0.10	0.10	0.11	0.13	0.15	0.16	0.17	0.18
-120	0.35	0.30	0.26	0.23	0.20	0.16	0.13	0.10	0.10	0.09	0.09	0.09	0.08	0.08	0.08	0.09	0.09	0.10	0.10
-110	0.35	0.30	0.26	0.22	0.19	0.15	0.11	0.10	0.10	0.09	0.09	0.08	0.08	0.08	0.08	0.09	0.09	0.10	0.10
-100	0.35	0.30	0.26	0.22	0.18	0.14	0.11	0.10	0.09	0.09	0.08	0.08	0.07	0.08	0.08	0.09	0.09	0.09	0.10
-90	0.35	0.31	0.26	0.22	0.17	0.13	0.09	0.08	0.08	0.08	0.07	0.07	0.07	0.07	0.07	0.08	0.08	0.08	0.09
-80	0.35	0.31	0.27	0.23	0.20	0.14	0.09	0.07	0.06	0.06	0.05	0.04	0.03	0.03	0.03	0.03	0.04	0.04	0.05
-70	0.35	0.32	0.31	0.26	0.21	0.16	0.08	0.05	0.04	0.03	0.03	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.00
-60	0.35	0.33	0.32	0.30	0.24	0.19	0.11	0.04	0.03	0.02	0.02	0.02	0.02	0.03	0.03	0.02	0.02	0.01	0.01
-50	0.35	0.37	0.35	0.33	0.30	0.25	0.18	0.08	0.02	0.02	0.03	0.05	0.09	0.15	0.27	0.40	0.46	0.40	0.24
-40	0.35	0.38	0.39	0.39	0.38	0.35	0.30	0.22	0.09	0.06	0.32	1.07	2.36	4.11	6.18	7.80	8.99	9.40	8.81
-30	0.35	0.38	0.42	0.45	0.47	0.49	0.50	0.48	0.46	1.00	2.89	6.13	11.4	19.0	28.1	37.5	44.7	48.8	48.7
-20	0.35	0.40	0.45	0.52	0.58	0.67	0.76	0.85	1.23	2.91	7.01	16.0	32.2	51.6	71.8	90.2	105	116	121
-10	0.35	0.41	0.48	0.58	0.69	0.85	1.05	1.29	1.98	4.42	10.6	23.6	47.2	77.7	108	136	157	171	177
0	0.35	0.42	0.51	0.64	0.79	1.02	1.32	1.68	2.30	4.73	10.6	22.7	48.3	83.9	117	148	173	190	197
10	0.35	0.42	0.51	0.64	0.79	1.01	1.30	1.65	2.36	4.76	10.7	23.4	47.2	78.4	109	137	161	178	184
20	0.35	0.42	0.51	0.63	0.76	0.96	1.22	1.52	2.03	3.71	7.57	15.8	31.8	52.9	77.6	101	119	131	136
30	0.35	0.42	0.50	0.60	0.72	0.88	1.09	1.34	1.64	2.28	4.17	6.97	11.6	19.2	29.7	41.5	49.6	53.6	52.2
40	0.35	0.42	0.49	0.57	0.67	0.79	0.94	1.13	1.34	1.57	1.89	2.56	3.67	5.00	6.56	8.02	9.00	9.18	8.35
50	0.35	0.42	0.46	0.53	0.61	0.69	0.80	0.92	1.04	1.18	1.33	1.49	1.64	1.80	1.99	2.16	2.29	2.30	2.22
60	0.35	0.38	0.44	0.50	0.55	0.60	0.67	0.75	0.81	0.87	0.94	1.01	1.08	1.16	1.23	1.29	1.33	1.36	1.38
70	0.35	0.38	0.43	0.45	0.49	0.52	0.57	0.60	0.62	0.65	0.67	0.70	0.72	0.75	0.78	0.81	0.83	0.84	0.85
80	0.35	0.37	0.39	0.41	0.45	0.46	0.49	0.49	0.49	0.50	0.50	0.50	0.50	0.52	0.53	0.54	0.55	0.56	0.57
90	0.35	0.36	0.37	0.39	0.40	0.41	0.42	0.41	0.41	0.40	0.39	0.39	0.38	0.38	0.39	0.39	0.40	0.40	0.41
100	0.35	0.35	0.36	0.36	0.36	0.37	0.37	0.36	0.35	0.34	0.34	0.33	0.33	0.33	0.33	0.33	0.34	0.34	0.34
110	0.35	0.35	0.35	0.35	0.34	0.34	0.33	0.33	0.33	0.33	0.33	0.33	0.34	0.34	0.34	0.34	0.34	0.33	0.33
120	0.35	0.35	0.34	0.34	0.33	0.33	0.33	0.33	0.34	0.34	0.35	0.38	0.40	0.42	0.43	0.43	0.43	0.43	0.42
130	0.35	0.33	0.33	0.33	0.33	0.34	0.34	0.34	0.36	0.40	0.44	0.49	0.53	0.57	0.60	0.62	0.63	0.63	0.63
140	0.35	0.33	0.33	0.33	0.34	0.34	0.35	0.39	0.43	0.50	0.56	0.63	0.69	0.75	0.81	0.84	0.86	0.87	0.87
150	0.35	0.33	0.33	0.33	0.34	0.36	0.40	0.46	0.52	0.59	0.67	0.76	0.84	0.92	0.98	1.03	1.05	1.06	1.07
160	0.35	0.33	0.33	0.33	0.35	0.39	0.45	0.52	0.61	0.69	0.78	0.86	0.92	1.00	1.05	1.07	1.07	1.08	1.10
170	0.35	0.33	0.33	0.34	0.36	0.41	0.48	0.56	0.66	0.76	0.86	0.94	1.01	1.05	1.07	1.08	1.06	1.04	1.10
180	0.35	0.32	0.32	0.34	0.37	0.42	0.50	0.59	0.70	0.79	0.89	0.97	1.05	1.05	1.04	1.03	1.00	1.00	1.05

H(°) Range:-90 - 90DEG

H(°) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-03-13

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeMini Recessed-500mm-RGBW RED-50D-Rev2	TYPE:RGBW-RED	WEIGHT:
SPEC.:50 DEG	DIM.:500mm	SERIAL No.:IES000900-R
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.87	0.79	0.71	0.64	0.56	0.46	0.36	0.27	0.20	0.14	0.13	0.08	0.08	0.08	0.08	0.07	0.06	0.05	
-170	0.78	0.74	0.71	0.64	0.55	0.46	0.36	0.28	0.21	0.15	0.13	0.09	0.08	0.08	0.08	0.07	0.06	0.05	
-160	0.68	0.63	0.59	0.54	0.47	0.40	0.31	0.25	0.19	0.15	0.11	0.09	0.09	0.08	0.08	0.07	0.06	0.05	
-150	0.53	0.49	0.43	0.40	0.34	0.29	0.24	0.20	0.17	0.13	0.10	0.09	0.09	0.09	0.08	0.07	0.06	0.05	
-140	0.32	0.30	0.27	0.23	0.20	0.17	0.16	0.14	0.13	0.11	0.10	0.10	0.09	0.09	0.08	0.08	0.06	0.05	
-130	0.17	0.15	0.14	0.12	0.10	0.10	0.10	0.10	0.10	0.11	0.11	0.10	0.10	0.09	0.08	0.07	0.07	0.05	
-120	0.10	0.09	0.09	0.08	0.08	0.08	0.09	0.09	0.10	0.10	0.11	0.10	0.10	0.09	0.08	0.07	0.06	0.05	
-110	0.10	0.09	0.09	0.08	0.08	0.08	0.08	0.09	0.09	0.10	0.10	0.11	0.10	0.09	0.08	0.08	0.06	0.05	
-100	0.10	0.09	0.09	0.08	0.08	0.08	0.08	0.09	0.09	0.10	0.10	0.10	0.10	0.09	0.08	0.07	0.06	0.05	
-90	0.08	0.08	0.07	0.07	0.06	0.06	0.06	0.07	0.07	0.08	0.08	0.09	0.08	0.08	0.07	0.06	0.06	0.05	
-80	0.04	0.03	0.03	0.03	0.03	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.07	0.07	0.07	0.06	0.06	0.05	
-70	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.03	0.04	0.05	0.05	0.06	0.06	0.06	0.06	0.05	
-60	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.04	0.05	0.06	0.05	
-50	0.39	0.44	0.38	0.25	0.13	0.07	0.03	0.01	0.01	0.01	0.01	0.02	0.02	0.03	0.04	0.04	0.06	0.05	
-40	9.46	9.04	7.79	6.15	3.87	1.99	0.78	0.21	0.02	0.01	0.02	0.02	0.02	0.03	0.03	0.04	0.06	0.05	
-30	50.3	47.3	40.3	30.3	19.9	11.1	5.14	2.01	0.53	0.06	0.03	0.03	0.02	0.02	0.03	0.03	0.05	0.05	
-20	118	109	96.3	79.6	59.1	36.3	16.2	5.65	1.67	0.32	0.05	0.04	0.03	0.02	0.02	0.03	0.05	0.05	
-10	172	159	141	118	92.0	59.3	27.4	9.59	2.81	0.60	0.10	0.06	0.03	0.02	0.02	0.02	0.05	0.05	
0	193	181	161	136	107	69.0	29.8	9.74	2.85	0.58	0.12	0.07	0.04	0.02	0.02	0.02	0.04	0.05	
10	181	168	150	126	98.7	62.6	28.0	9.90	3.32	1.09	0.51	0.33	0.20	0.13	0.08	0.06	0.06	0.05	
20	135	128	113	93.1	66.2	38.0	16.8	6.61	2.77	1.28	0.80	0.53	0.34	0.22	0.14	0.09	0.07	0.05	
30	57.4	56.1	49.1	35.1	21.9	12.1	6.53	3.74	2.11	1.37	0.96	0.65	0.44	0.29	0.19	0.12	0.09	0.05	
40	9.60	9.68	8.73	7.18	5.18	3.64	2.59	1.99	1.68	1.36	0.98	0.69	0.49	0.33	0.22	0.14	0.10	0.05	
50	2.34	2.36	2.25	2.07	1.88	1.72	1.57	1.41	1.25	1.10	0.91	0.68	0.50	0.35	0.24	0.16	0.11	0.05	
60	1.37	1.36	1.32	1.26	1.20	1.13	1.06	0.98	0.91	0.84	0.77	0.63	0.48	0.35	0.25	0.18	0.12	0.05	
70	0.84	0.84	0.82	0.80	0.78	0.75	0.72	0.70	0.67	0.64	0.62	0.56	0.45	0.34	0.26	0.18	0.12	0.05	
80	0.56	0.56	0.55	0.54	0.53	0.52	0.51	0.51	0.51	0.51	0.50	0.49	0.41	0.33	0.25	0.19	0.12	0.05	
90	0.40	0.40	0.39	0.39	0.38	0.38	0.39	0.40	0.40	0.41	0.42	0.43	0.37	0.30	0.24	0.18	0.12	0.05	
100	0.34	0.34	0.34	0.33	0.33	0.33	0.34	0.34	0.35	0.36	0.37	0.37	0.33	0.28	0.22	0.17	0.11	0.05	
110	0.33	0.34	0.34	0.35	0.35	0.34	0.34	0.34	0.34	0.34	0.34	0.34	0.30	0.25	0.21	0.17	0.11	0.05	
120	0.43	0.43	0.43	0.43	0.42	0.40	0.38	0.36	0.35	0.34	0.34	0.31	0.27	0.23	0.19	0.15	0.10	0.05	
130	0.63	0.63	0.62	0.60	0.57	0.53	0.49	0.45	0.41	0.37	0.33	0.28	0.25	0.21	0.18	0.14	0.10	0.05	
140	0.87	0.86	0.84	0.81	0.76	0.70	0.64	0.56	0.50	0.41	0.33	0.26	0.22	0.19	0.16	0.13	0.10	0.05	
150	1.07	1.05	1.04	0.98	0.92	0.85	0.77	0.68	0.54	0.41	0.31	0.24	0.19	0.17	0.14	0.11	0.09	0.05	
160	1.09	1.07	1.07	1.05	1.01	0.94	0.78	0.63	0.49	0.38	0.27	0.20	0.16	0.14	0.12	0.10	0.08	0.05	
170	1.04	1.07	1.07	1.00	0.89	0.75	0.61	0.49	0.38	0.28	0.21	0.15	0.12	0.11	0.10	0.08	0.07	0.05	
180	0.87	0.79	0.71	0.64	0.56	0.46	0.36	0.27	0.20	0.14	0.13	0.08	0.08	0.08	0.08	0.07	0.06	0.05	

H(°) Range:-90 - 90DEG

H(°) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-03-13

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: