

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		2853.7 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	45.3V x 74.5H
	At 50% of Imax	16.1V x 45.2H
	At 90% of Imax	7.4V x 21.2H
Beam Flux	Total	1000.2 lumens per klm.
	To 10% of Imax	768.5 lumens per klm.
	To 50% of Imax	415.4 lumens per klm.
	To 90% of Imax	113.0 lumens per klm.
Upward LOR		2.3 %
Downward LOR		97.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Blazeline-609mm-TW-1800K-1545D-Rev1	TYPE:1800K	WEIGHT:
SPEC.:15X45 DEG	DIM.:609MM	SERIAL No.:IES002999
MFR.:	SUR.:1	Shielding Angle:

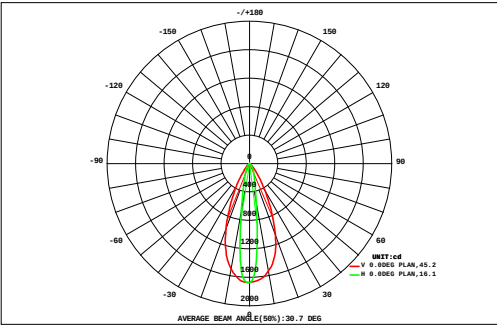

DATA OF LAMP			Eff:55.34lm/W	
MODEL			Imax(cd)	1674
NOMINAL POWER(W)	10.6		AVAILABILITY(%)	77.2
RATED VOLTAGE(V)	220		Avai. FLUX(lm)	452.7
NOMINAL FLUX(lm)	586.6		LOR(%)	100.0
LAMPS INSIDE	1		TOTAL FLUX(lm)	586.6
TEST VOLTAGE(V)	220		q @50%(H,V)	45,16DEG

AREA FLUX DIAGRAM																	UNIT:lm		F t	F a
72	0.02	0.04	0.05	0.06	0.07	0.09	0.10	0.11	0.12	0.12	0.11	0.10	0.09	0.07	0.06	0.04	0.03	0.02	1.31	0.00
64	0.03	0.05	0.06	0.08	0.11	0.14	0.17	0.20	0.22	0.22	0.21	0.18	0.15	0.11	0.08	0.06	0.04	0.02	2.13	0.00
56	0.03	0.06	0.09	0.12	0.17	0.23	0.30	0.35	0.38	0.38	0.36	0.32	0.25	0.18	0.12	0.08	0.04	0.02	3.48	0.00
48	0.04	0.07	0.11	0.18	0.26	0.38	0.50	0.60	0.66	0.67	0.64	0.55	0.42	0.29	0.17	0.10	0.06	0.03	5.72	0.00
40	0.05	0.09	0.15	0.25	0.41	0.61	0.86	1.09	1.22	1.25	1.17	0.96	0.70	0.45	0.24	0.12	0.06	0.03	9.71	0.00
32	0.05	0.10	0.19	0.36	0.68	1.06	1.47	1.98	2.25	2.30	2.10	1.63	1.21	0.75	0.35	0.16	0.07	0.04	16.8	0.00
24	0.06	0.12	0.23	0.52	1.18	2.18	2.83	3.60	4.12	4.17	3.75	3.09	2.44	1.29	0.52	0.19	0.08	0.04	30.4	17.3
	0.07	0.13	0.27	0.73	1.93	4.36	7.12	8.18	9.47	9.64	8.49	7.75	4.82	2.12	0.73	0.22	0.09	0.04	66.2	60.6
	0.07	0.14	0.31	0.92	2.77	7.20	14.2	20.4	24.9	25.3	21.2	15.5	7.98	3.04	0.93	0.25	0.09	0.04	145	140
	0.07	0.14	0.30	0.92	2.78	7.25	14.3	21.2	27.3	28.1	22.5	15.6	7.95	3.01	0.91	0.24	0.09	0.04	153	148
	0.06	0.13	0.27	0.73	1.97	4.48	7.42	9.11	11.2	11.8	9.91	7.87	4.71	2.03	0.69	0.20	0.08	0.04	72.7	67.2
	0.06	0.11	0.22	0.52	1.21	2.32	3.11	3.96	4.47	4.52	3.89	2.91	2.23	1.16	0.46	0.16	0.07	0.03	31.4	19.0
-24	0.05	0.09	0.17	0.34	0.70	1.15	1.60	2.06	2.22	2.16	1.89	1.36	0.97	0.60	0.28	0.12	0.06	0.03	15.9	0.00
-32	0.04	0.07	0.13	0.22	0.39	0.62	0.86	1.05	1.10	1.06	0.94	0.73	0.49	0.32	0.17	0.09	0.05	0.03	8.37	0.00
-40	0.03	0.06	0.09	0.14	0.22	0.33	0.44	0.51	0.52	0.50	0.46	0.37	0.27	0.18	0.11	0.06	0.04	0.02	4.37	0.00
-48	0.03	0.04	0.06	0.08	0.12	0.17	0.22	0.26	0.26	0.25	0.24	0.20	0.15	0.10	0.07	0.05	0.03	0.02	2.34	0.00
-56	0.02	0.03	0.04	0.04	0.06	0.08	0.11	0.12	0.13	0.13	0.12	0.10	0.08	0.06	0.04	0.03	0.02	0.01	1.22	0.00
-64	0.02	0.02	0.02	0.02	0.03	0.04	0.05	0.05	0.06	0.06	0.05	0.05	0.04	0.03	0.02	0.02	0.01	0.01	0.61	0.00
-72	0.02	0.02	0.02	0.02	0.03	0.04	0.05	0.05	0.06	0.06	0.05	0.05	0.04	0.03	0.02	0.02	0.01	0.01	0.61	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)	16	24	32	40	48	56	64	72			
F t	0.80	1.49	2.76	6.22	15.1	32.7	55.7	74.8	90.5	92.6	78.0	59.3	35.0	15.8	5.96	2.18	1.01	0.50	570	---
F a	0.00	0.00	0.00	0.00	4.27	24.0	46.2	64.8	80.6	82.7	68.1	49.9	26.6	5.49	0.00	0.00	0.00	0.00	---	453


one-half-peak spread: U:7.8,D:8.4 , L:21.2,R:24.4 Beam Type: Type 5 x 3 (H x V)

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM


NAME:Blazeline-609mm-TW-1800K-1545D-Rev1	TYPE:1800K	WEIGHT:
SPEC.:15X45 DEG	DIM.:609MM	SERIAL No.:IES002999
MFR.:	SUR.:1	Shielding Angle:

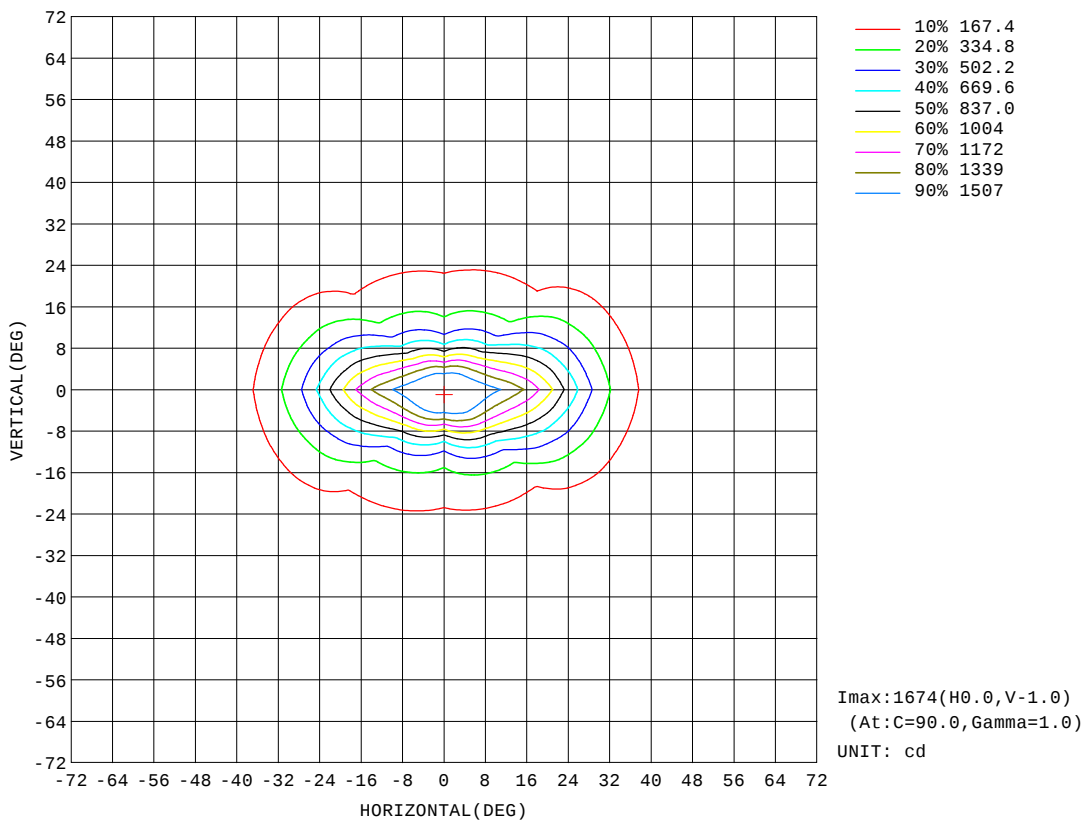

H _(b) Range:-90 - 90DEG	V(B) Range:-180 - 180DEG
H _(b) Interval: 0.5DEG	V(B) Interval: 0.5DEG
Test Speed: LOW	Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Temperature:25.3DEG	Humidity:65.0%
Operators:	Test Distance:8.630m [K=1.0000]
Test Date:2024-09-29	Remarks:

ISOLUX DIAGRAM


NAME:Blazeline-609mm-TW-1800K-1545D-Rev1	TYPE:1800K	WEIGHT:
SPEC.:15X45 DEG	DIM.:609MM	SERIAL No.:IES002999
MFR.:	SUR.:1	Shielding Angle:

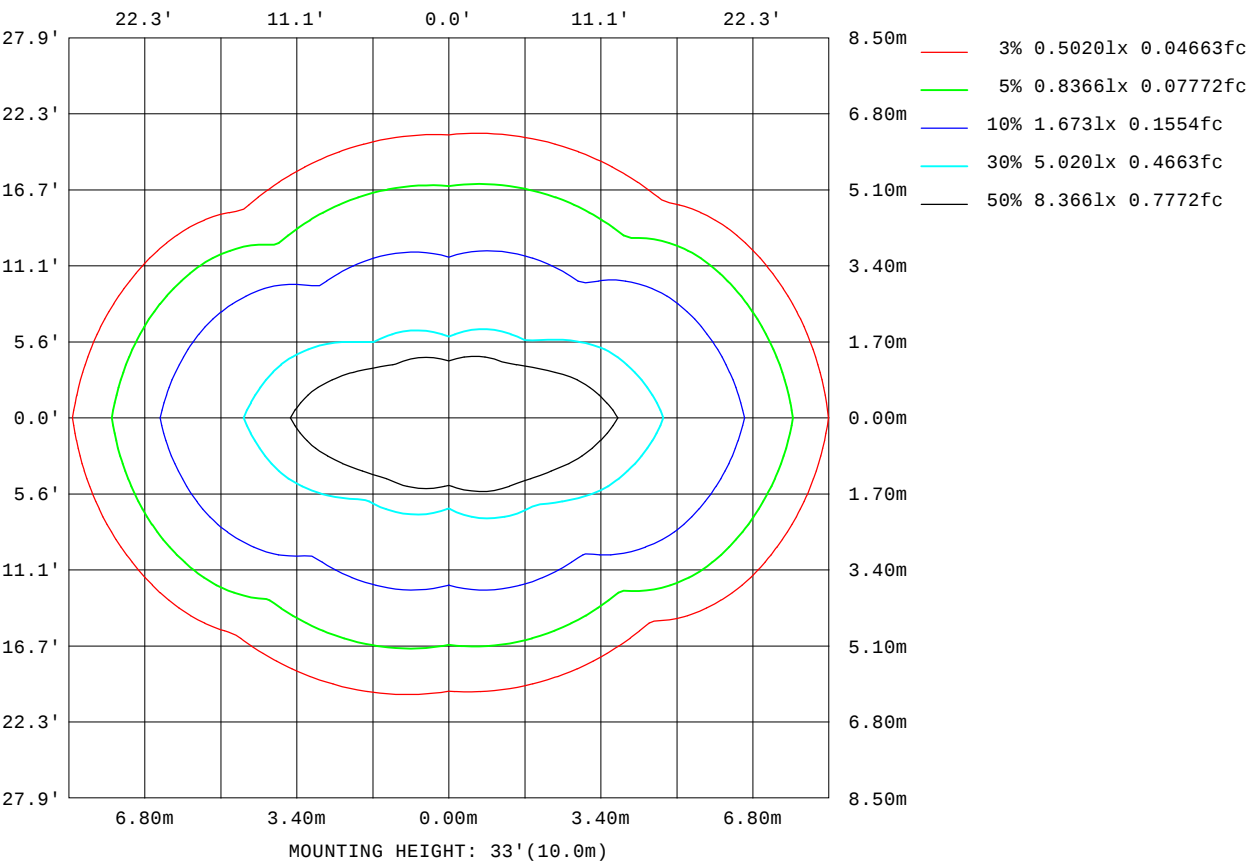

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators:
Test Date: 2024-09-29

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

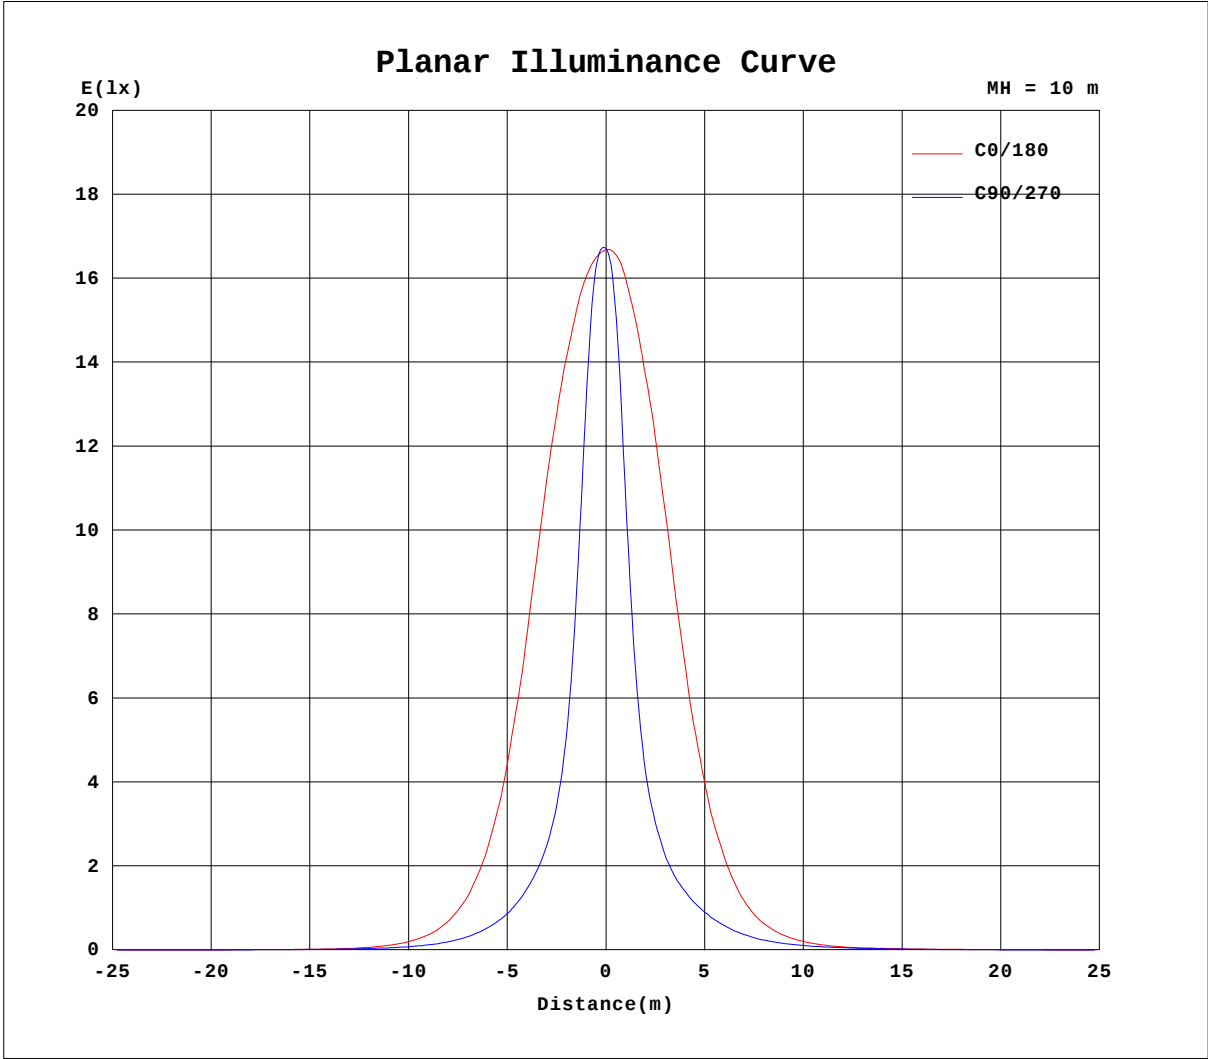


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators:
Test Date: 2024-09-29

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Blazeline-609mm-TW-1800K-1545D-Rev1	TYPE:1800K	WEIGHT:
SPEC.:15X45 DEG	DIM.:609MM	SERIAL No.:IES002999
MFR.:	SUR.:1	Shielding Angle:

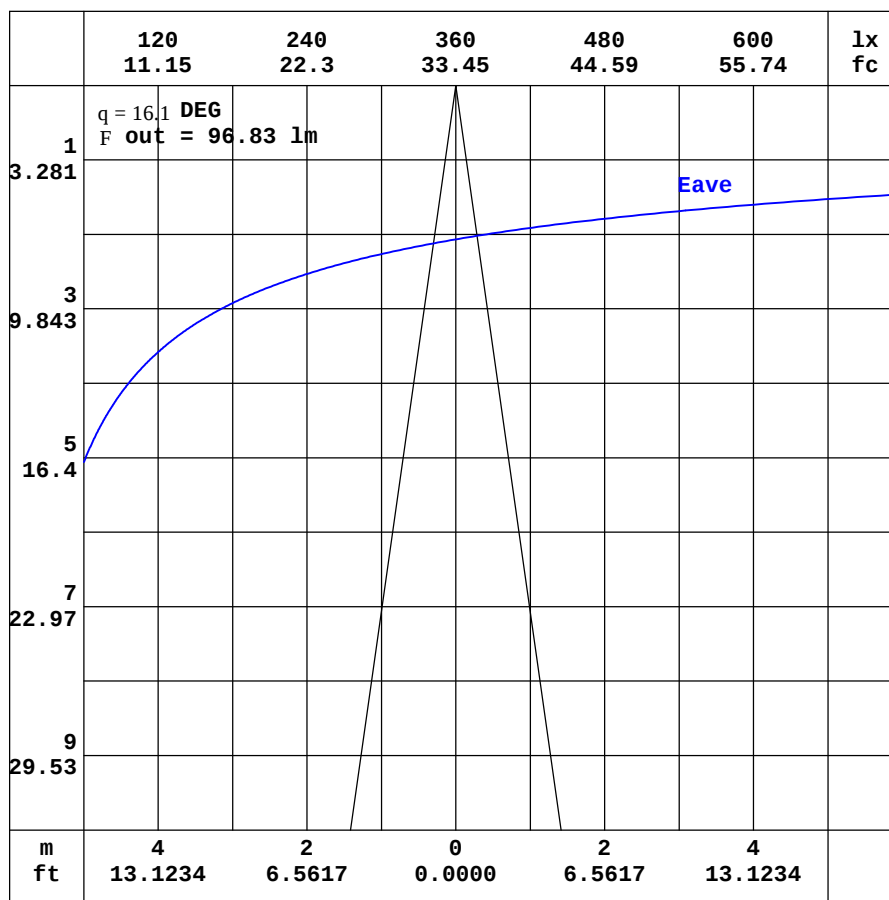

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline-609mm-TW-1800K-1545D-Rev1	TYPE:1800K	WEIGHT:
SPEC.:15X45 DEG	DIM.:609MM	SERIAL No.:IES002999
MFR.:	SUR.:1	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	2.17	1.99	1.90	1.92	2.01	2.20	2.48	2.83	3.21	3.57	3.88	4.12	4.30	4.35	4.34	4.28	4.22	4.17	4.10
-170	2.17	1.97	1.86	1.85	1.90	2.04	2.24	2.49	2.74	3.00	3.23	3.43	3.60	3.71	3.81	3.87	3.83	4.02	4.35
-160	2.17	1.96	1.83	1.79	1.79	1.86	1.97	2.10	2.24	2.37	2.49	2.61	2.71	2.82	2.86	3.14	3.42	3.61	3.72
-150	2.17	1.95	1.79	1.73	1.69	1.69	1.72	1.75	1.77	1.77	1.76	1.75	1.72	1.79	2.02	2.25	2.41	2.51	2.55
-140	2.17	1.94	1.77	1.68	1.61	1.56	1.51	1.47	1.41	1.32	1.19	1.05	1.03	1.13	1.23	1.32	1.39	1.42	1.41
-130	2.17	1.95	1.77	1.64	1.55	1.46	1.38	1.27	1.17	1.05	0.89	0.79	0.78	0.77	0.75	0.75	0.74	0.72	0.69
-120	2.17	1.95	1.77	1.62	1.50	1.40	1.30	1.19	1.07	0.93	0.80	0.80	0.78	0.76	0.74	0.71	0.67	0.65	0.62
-110	2.17	1.97	1.79	1.63	1.50	1.37	1.25	1.14	1.03	0.91	0.87	0.88	0.88	0.88	0.89	0.90	0.91	0.92	0.93
-100	2.17	1.99	1.81	1.65	1.51	1.37	1.24	1.12	1.00	0.88	0.88	0.88	0.89	0.89	0.90	0.90	0.91	0.92	0.92
-90	2.17	2.01	1.85	1.69	1.54	1.38	1.22	1.06	0.90	0.74	0.74	0.74	0.73	0.73	0.73	0.73	0.72	0.72	0.72
-80	2.17	2.06	1.93	1.79	1.64	1.51	1.37	1.20	0.99	0.74	0.72	0.72	0.73	0.74	0.74	0.75	0.75	0.74	0.74
-70	2.17	2.10	2.02	2.04	2.07	2.05	2.02	1.92	1.69	1.41	1.39	1.55	1.73	1.89	2.05	2.19	2.30	2.36	2.39
-60	2.17	2.15	2.25	2.51	2.82	3.08	3.17	3.20	3.19	3.09	3.08	3.72	4.40	5.05	5.68	6.19	6.53	6.71	6.71
-50	2.17	2.21	2.58	3.15	3.79	4.25	4.74	5.21	5.70	6.31	7.30	8.90	10.9	12.7	14.3	15.3	15.8	15.8	15.1
-40	2.17	2.30	2.92	3.96	4.78	5.71	6.74	7.84	9.46	11.9	15.2	19.3	24.1	29.0	33.4	36.7	38.5	38.5	36.4
-30	2.17	2.40	3.30	4.60	5.80	7.31	8.88	11.1	14.6	19.9	28.5	40.2	51.9	61.9	74.7	86.0	93.7	95.8	91.4
-20	2.17	2.49	3.66	5.21	6.88	8.87	11.1	14.7	20.5	32.0	52.5	81.8	118	152	160	184	215	229	212
-10	2.17	2.57	3.96	5.73	7.80	10.1	12.9	17.7	26.6	47.6	85.8	149	248	370	491	569	591	735	673
0	2.17	2.62	4.16	6.11	8.45	11.0	14.2	19.7	30.6	58.7	113	214	392	648	969	1283	1503	1639	1668
10	2.17	2.61	4.05	5.88	8.04	10.5	13.3	18.2	26.9	47.5	84.9	146	243	362	476	538	510	614	549
20	2.17	2.56	3.82	5.50	7.34	9.54	11.9	15.6	21.4	32.4	51.8	79.1	112	141	144	167	197	210	197
30	2.17	2.50	3.54	5.01	6.43	8.23	10.1	12.5	16.1	21.2	29.1	39.5	48.9	56.7	69.6	82.2	92.9	99.1	99.6
40	2.17	2.42	3.22	4.45	5.53	6.80	8.20	9.70	11.6	14.1	17.4	21.2	25.5	30.5	35.3	39.6	43.1	45.1	45.3
50	2.17	2.36	2.91	3.71	4.61	5.40	6.28	7.20	8.14	9.21	10.5	12.2	14.3	16.4	18.2	19.8	21.2	21.9	22.1
60	2.17	2.31	2.61	3.09	3.67	4.23	4.67	5.09	5.51	5.90	6.31	7.07	7.89	8.68	9.43	10.1	10.6	10.9	11.1
70	2.17	2.27	2.38	2.62	2.90	3.15	3.40	3.61	3.72	3.80	3.96	4.21	4.44	4.66	4.86	5.04	5.16	5.24	5.26
80	2.17	2.22	2.27	2.32	2.40	2.49	2.58	2.65	2.70	2.72	2.75	2.79	2.83	2.86	2.89	2.91	2.93	2.93	2.92
90	2.17	2.18	2.18	2.19	2.19	2.20	2.20	2.21	2.21	2.22	2.20	2.19	2.18	2.17	2.15	2.14	2.13	2.11	2.10
100	2.17	2.14	2.11	2.08	2.05	2.02	1.99	1.96	1.94	1.91	1.87	1.84	1.82	1.79	1.78	1.76	1.74	1.73	1.72
110	2.17	2.11	2.05	1.99	1.94	1.89	1.84	1.81	1.77	1.74	1.72	1.71	1.71	1.71	1.71	1.71	1.70	1.70	1.69
120	2.17	2.08	1.99	1.92	1.87	1.83	1.80	1.78	1.77	1.76	1.80	1.85	1.89	1.93	1.95	1.96	1.95	1.93	1.90
130	2.17	2.05	1.95	1.88	1.85	1.83	1.84	1.87	1.96	2.08	2.20	2.35	2.50	2.63	2.77	2.90	3.00	3.08	3.09
140	2.17	2.03	1.92	1.87	1.86	1.88	1.96	2.10	2.29	2.53	2.79	3.07	3.35	3.64	3.91	4.15	4.33	4.46	4.54
150	2.17	2.01	1.90	1.87	1.89	1.96	2.13	2.36	2.65	2.98	3.34	3.69	4.04	4.37	4.63	4.80	4.90	4.98	5.04
160	2.17	2.00	1.90	1.89	1.93	2.07	2.30	2.60	2.95	3.34	3.72	4.09	4.43	4.69	4.91	5.06	5.15	5.27	5.39
170	2.17	1.99	1.90	1.90	1.97	2.15	2.42	2.76	3.14	3.53	3.89	4.21	4.46	4.63	4.74	4.80	4.76	4.82	5.11
180	2.17	1.99	1.90	1.92	2.01	2.20	2.48	2.83	3.21	3.57	3.88	4.12	4.30	4.35	4.34	4.28	4.22	4.17	4.10

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:

Test Date:2024-09-29

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline-609mm-TW-1800K-1545D-Rev1	TYPE:1800K	WEIGHT:
SPEC.:15X45 DEG	DIM.: 609MM	SERIAL No.:IES002999
MFR.:	SUR.:1	Shielding Angle:

Table--2		UNIT: cd																	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	3.83	3.59	3.31	3.01	2.66	2.31	1.96	1.64	1.35	1.14	1.00	0.91	0.86	0.85	0.83	0.81	0.76	0.68	
-170	4.21	4.03	3.61	3.18	2.76	2.32	1.92	1.57	1.29	1.10	0.97	0.89	0.85	0.85	0.84	0.81	0.76	0.68	
-160	3.63	3.44	3.21	2.87	2.44	2.04	1.68	1.38	1.16	1.02	0.92	0.87	0.85	0.85	0.84	0.80	0.75	0.68	
-150	2.53	2.43	2.26	2.05	1.81	1.55	1.32	1.14	1.00	0.93	0.88	0.85	0.85	0.85	0.83	0.80	0.75	0.68	
-140	1.43	1.40	1.34	1.26	1.16	1.08	1.00	0.93	0.89	0.86	0.85	0.85	0.85	0.85	0.83	0.79	0.74	0.68	
-130	0.73	0.76	0.78	0.79	0.81	0.82	0.84	0.84	0.84	0.84	0.85	0.85	0.85	0.84	0.82	0.78	0.73	0.68	
-120	0.65	0.68	0.72	0.76	0.79	0.82	0.83	0.84	0.85	0.86	0.86	0.86	0.85	0.83	0.81	0.77	0.72	0.68	
-110	0.92	0.91	0.91	0.90	0.89	0.89	0.88	0.88	0.88	0.87	0.86	0.86	0.85	0.84	0.81	0.78	0.75	0.71	0.68
-100	0.92	0.91	0.91	0.90	0.89	0.89	0.89	0.88	0.87	0.84	0.83	0.80	0.78	0.76	0.73	0.71	0.69	0.68	
-90	0.72	0.72	0.72	0.71	0.71	0.71	0.71	0.71	0.71	0.70	0.70	0.70	0.70	0.69	0.69	0.69	0.68	0.68	
-80	0.74	0.74	0.74	0.73	0.73	0.71	0.70	0.69	0.70	0.76	0.80	0.80	0.78	0.74	0.70	0.68	0.68	0.68	
-70	2.36	2.30	2.19	2.05	1.90	1.73	1.56	1.39	1.31	1.34	1.34	1.31	1.20	1.07	0.92	0.76	0.68	0.68	
-60	6.59	6.32	5.92	5.40	4.80	4.19	3.59	3.02	2.76	2.55	2.33	2.09	1.88	1.65	1.26	0.95	0.69	0.68	
-50	15.1	14.7	13.8	12.5	11.0	9.37	7.67	6.19	5.13	4.34	3.77	3.24	2.67	2.21	1.77	1.18	0.75	0.68	
-40	36.6	35.0	32.0	28.0	23.6	19.1	15.4	11.9	9.13	6.94	5.43	4.49	3.68	2.83	2.19	1.42	0.81	0.68	
-30	91.9	86.2	75.7	62.7	49.8	43.0	33.9	23.7	15.4	10.6	7.61	5.72	4.64	3.54	2.57	1.73	0.88	0.68	
-20	231	213	174	146	144	114	78.3	48.3	27.7	15.4	9.97	7.03	5.41	4.18	2.91	1.97	0.95	0.68	
-10	798	667	614	525	396	262	157	85.5	44.5	21.5	12.0	8.15	6.01	4.67	3.19	2.13	0.99	0.68	
0	1637	1533	1356	1067	725	432	234	119	57.3	25.7	13.1	8.77	6.39	4.98	3.37	2.22	1.01	0.68	
10	630	526	568	519	400	268	162	89.2	47.0	23.2	13.1	8.79	6.41	4.92	3.35	2.21	1.03	0.68	
20	213	204	177	159	157	125	86.8	54.4	32.0	18.2	11.8	8.19	6.16	4.66	3.20	2.13	1.01	0.68	
30	102	98.0	89.1	77.7	65.0	55.5	43.3	30.6	20.3	13.9	9.81	7.21	5.63	4.20	2.98	1.96	0.98	0.68	
40	46.5	45.6	42.8	39.0	34.2	29.1	23.7	18.1	13.6	10.1	7.71	6.09	4.81	3.60	2.69	1.71	0.93	0.68	
50	22.4	22.1	21.1	19.6	17.8	15.7	13.4	11.0	8.81	7.18	5.92	4.84	3.85	3.04	2.33	1.50	0.89	0.68	
60	11.0	10.8	10.4	9.76	9.01	8.21	7.39	6.56	5.74	4.98	4.27	3.61	3.03	2.50	1.84	1.29	0.84	0.68	
70	5.26	5.20	5.09	4.92	4.72	4.51	4.28	4.02	3.73	3.38	3.03	2.69	2.30	1.88	1.49	1.10	0.84	0.68	
80	2.93	2.92	2.91	2.88	2.85	2.81	2.77	2.71	2.65	2.45	2.22	1.98	1.72	1.47	1.21	1.01	0.84	0.68	
90	2.10	2.10	2.10	2.10	2.10	2.10	2.10	2.10	2.10	1.95	1.79	1.63	1.47	1.31	1.16	1.00	0.84	0.68	
100	1.72	1.73	1.74	1.76	1.77	1.78	1.80	1.82	1.82	1.72	1.62	1.51	1.39	1.27	1.13	0.99	0.84	0.68	
110	1.70	1.71	1.71	1.72	1.73	1.73	1.74	1.74	1.71	1.62	1.52	1.42	1.32	1.22	1.11	0.99	0.84	0.68	
120	1.93	1.95	1.96	1.95	1.93	1.91	1.88	1.84	1.70	1.57	1.47	1.38	1.28	1.18	1.08	0.98	0.84	0.68	
130	3.07	2.99	2.88	2.75	2.61	2.48	2.34	2.12	1.84	1.62	1.45	1.33	1.23	1.15	1.05	0.95	0.83	0.68	
140	4.46	4.32	4.13	3.89	3.61	3.31	2.92	2.44	2.04	1.72	1.47	1.30	1.18	1.10	1.02	0.93	0.82	0.68	
150	5.00	4.92	4.79	4.60	4.33	3.80	3.20	2.64	2.16	1.77	1.47	1.26	1.13	1.05	0.98	0.90	0.81	0.68	
160	5.34	5.27	5.17	4.95	4.32	3.70	3.13	2.57	2.09	1.70	1.39	1.18	1.06	0.99	0.94	0.87	0.80	0.68	
170	5.10	5.21	4.72	4.21	3.70	3.19	2.68	2.22	1.81	1.48	1.23	1.07	0.96	0.92	0.89	0.84	0.78	0.68	
180	3.83	3.59	3.31	3.01	2.66	2.31	1.96	1.64	1.35	1.14	1.00	0.91	0.86	0.85	0.83	0.81	0.76	0.68	

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: