

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	9544.7 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	27.9V x 29.2H
	At 50% of Imax	14.3V x 14.6H
	At 90% of Imax	5.3V x 5.0H

Beam Flux	Total	1000.5 lumens per klm.
	To 10% of Imax	647.2 lumens per klm.
	To 50% of Imax	331.8 lumens per klm.
	To 90% of Imax	47.4 lumens per klm.

Upward LOR	2.3 %
Downward LOR	97.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Blazeline-609mm-TW-1800K-15D-Rev1	TYPE:1800K	WEIGHT:
SPEC.:15 DEG	DIM.:609MM	SERIAL No.:IES002993
MFR.:	SUR.:1	Shielding Angle:

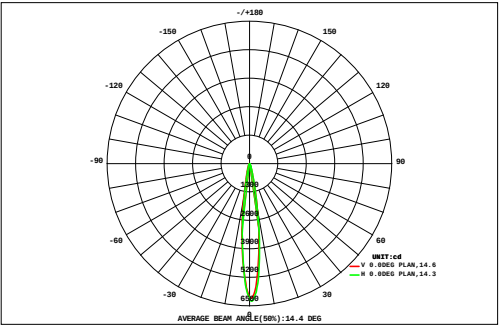

DATA OF LAMP		Eff:62.10lm/W	
MODEL		Imax(cd)	6282
NOMINAL POWER(W)	10.6	AVAILABILITY(%)	64.9
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	426.9
NOMINAL FLUX(lm)	658.2	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	658.2
TEST VOLTAGE(V)	220	q @50%(H,V)	15,14DEG


		AREA FLUX DIAGRAM															UNIT:lm			F t	F a
VERTICAL (DEG)	27	0.14	0.17	0.20	0.24	0.29	0.33	0.38	0.42	0.44	0.46	0.45	0.43	0.39	0.35	0.30	0.25	0.21	0.17	5.60	0.00
	24	0.16	0.20	0.24	0.30	0.36	0.43	0.50	0.56	0.61	0.62	0.61	0.57	0.52	0.46	0.39	0.32	0.25	0.19	7.29	0.00
	21	0.19	0.24	0.29	0.37	0.46	0.56	0.68	0.79	0.87	0.89	0.86	0.79	0.69	0.59	0.50	0.40	0.30	0.22	9.68	0.00
	18	0.23	0.29	0.36	0.45	0.58	0.75	0.96	1.17	1.33	1.36	1.26	1.10	0.93	0.77	0.62	0.47	0.35	0.25	13.2	0.00
	15	0.26	0.34	0.44	0.58	0.76	1.04	1.45	1.97	2.41	2.44	2.07	1.62	1.26	0.98	0.74	0.54	0.39	0.28	19.6	8.84
	12	0.30	0.40	0.54	0.73	1.01	1.52	2.51	3.80	4.88	4.89	3.87	2.69	1.77	1.22	0.86	0.61	0.43	0.30	32.3	24.5
	9	0.34	0.46	0.63	0.90	1.35	2.35	4.29	6.91	8.98	8.96	6.90	4.42	2.65	1.54	0.99	0.68	0.46	0.31	53.1	45.9
	6	0.37	0.51	0.72	1.05	1.69	3.22	6.23	9.98	13.2	13.2	10.1	6.79	3.83	1.96	1.11	0.71	0.48	0.32	75.4	68.8
	3	0.39	0.54	0.78	1.15	1.89	3.69	7.16	11.5	15.5	15.7	12.7	8.60	4.80	2.29	1.17	0.72	0.47	0.31	89.3	83.3
	0	0.39	0.55	0.80	1.17	1.90	3.60	6.94	11.2	14.8	15.3	12.4	8.41	4.66	2.20	1.12	0.68	0.44	0.29	86.9	80.7
	-3	0.38	0.53	0.77	1.11	1.73	3.05	5.67	9.07	11.1	11.1	9.25	6.26	3.44	1.71	0.95	0.61	0.40	0.27	67.4	60.9
	-6	0.35	0.49	0.70	1.00	1.45	2.29	3.77	5.48	6.52	6.55	5.51	3.65	2.10	1.20	0.76	0.51	0.35	0.23	42.9	35.9
-9	0.31	0.43	0.61	0.85	1.18	1.64	2.22	2.86	3.20	3.16	2.70	1.88	1.21	0.82	0.57	0.41	0.29	0.20	24.5	16.0	
-12	0.27	0.37	0.51	0.70	0.93	1.15	1.37	1.55	1.59	1.52	1.35	1.07	0.79	0.56	0.42	0.31	0.23	0.16	14.8	2.05	
-15	0.23	0.30	0.41	0.54	0.68	0.81	0.91	0.96	0.95	0.90	0.82	0.69	0.54	0.41	0.31	0.23	0.18	0.13	9.99	0.00	
-18	0.19	0.24	0.32	0.40	0.48	0.56	0.62	0.64	0.62	0.58	0.54	0.46	0.38	0.30	0.23	0.17	0.14	0.11	6.97	0.00	
-21	0.15	0.19	0.24	0.29	0.34	0.38	0.42	0.43	0.41	0.39	0.36	0.32	0.27	0.22	0.17	0.13	0.11	0.09	4.89	0.00	
-24	0.12	0.15	0.18	0.21	0.24	0.26	0.28	0.28	0.27	0.26	0.24	0.22	0.19	0.16	0.13	0.11	0.09	0.07	3.46	0.00	
-27		-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL(DEG)			6	9	12	15	18	21	24	27	
F t	4.76	6.40	8.73	12.0	17.3	27.6	46.3	69.5	87.7	88.2	71.9	49.9	30.4	17.7	11.3	7.87	5.55	3.91	567	---	
F a	0.00	0.00	0.00	0.00	5.07	19.3	39.0	62.8	81.3	81.9	65.3	42.6	22.6	7.09	0.00	0.00	0.00	0.00	---	427	

one-half-peak spread: U:7.2,D:7.2 , L:7.1,R:7.1NEMA Beam Type: Type 3 x 2 (H x V)

H _b Range:-90 - 90DEG	V(B) Range:-180 - 180DEG
H _b Interval: 0.5DEG	V(B) Interval: 0.5DEG
Test Speed: LOW	Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Temperature:25.3DEG	Humidity:65.0%
Operators:	Test Distance:8.630m [K=1.0000]
Test Date:2024-09-29	Remarks:

ISOCANDELA DIAGRAM

NAME:Blazeline-609mm-TW-1800K-15D-Rev1	TYPE:1800K	WEIGHT:
SPEC.:15 DEG	DIM.:609MM	SERIAL No.:IES002993
MFR.:	SUR.:1	Shielding Angle:

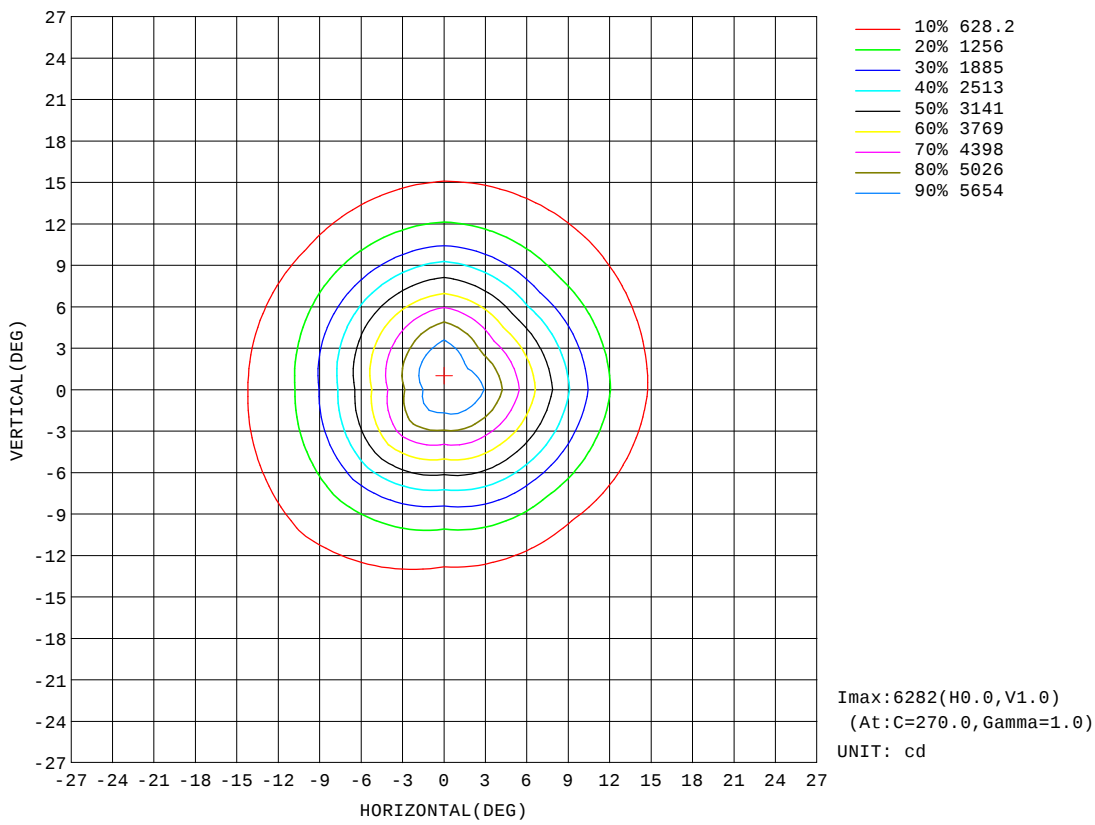


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators:
Test Date: 2024-09-29

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Blazeline-609mm-TW-1800K-15D-Rev1	TYPE:1800K	WEIGHT:
SPEC.:15 DEG	DIM.:609MM	SERIAL No.:IES002993
MFR.:	SUR.:1	Shielding Angle:

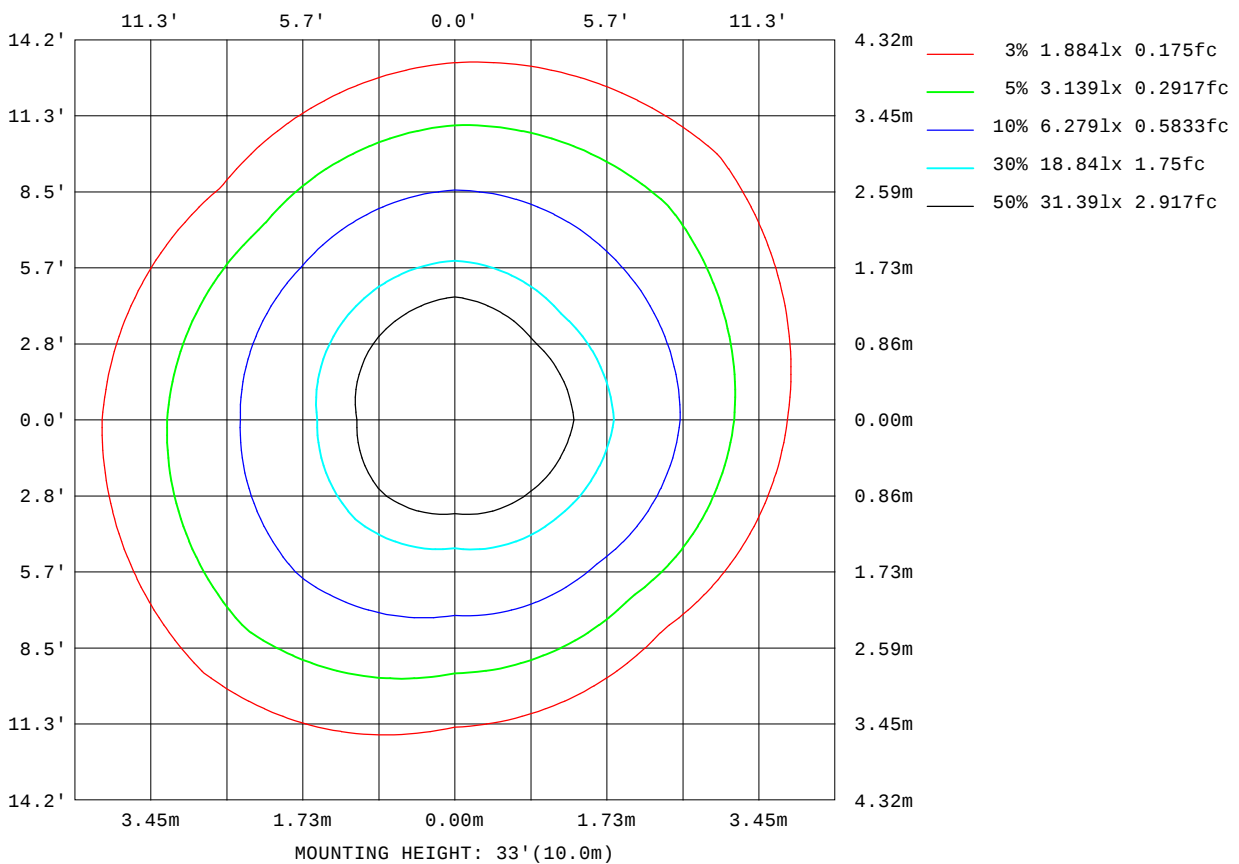

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators:
Test Date: 2024-09-29

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

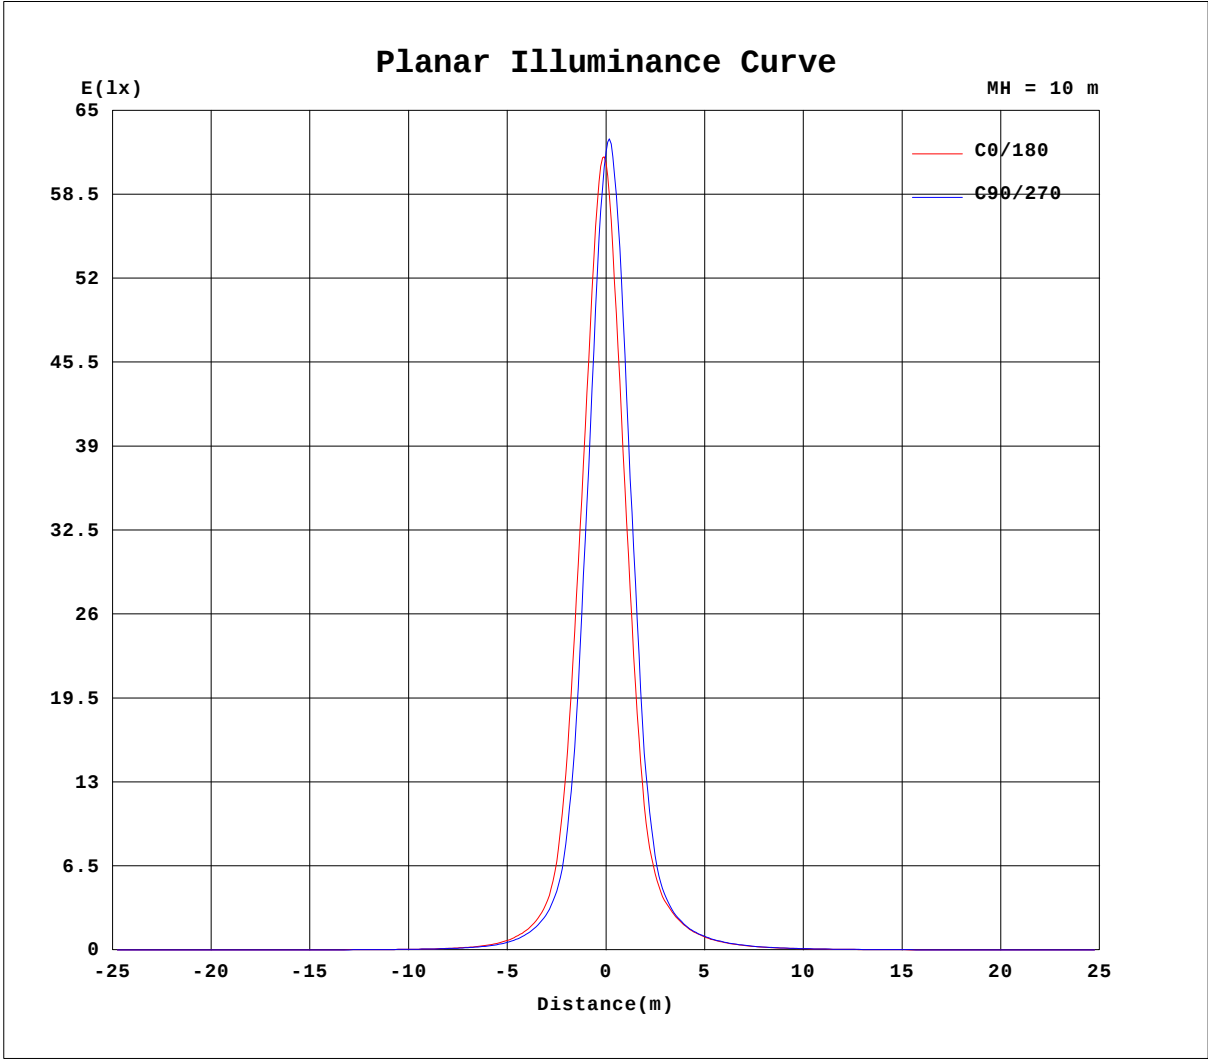


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators:
Test Date: 2024-09-29

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Blazeline-609mm-TW-1800K-15D-Rev1	TYPE:1800K	WEIGHT:
SPEC.:15 DEG	DIM.:609MM	SERIAL No.:IES002993
MFR.:	SUR.:1	Shielding Angle:

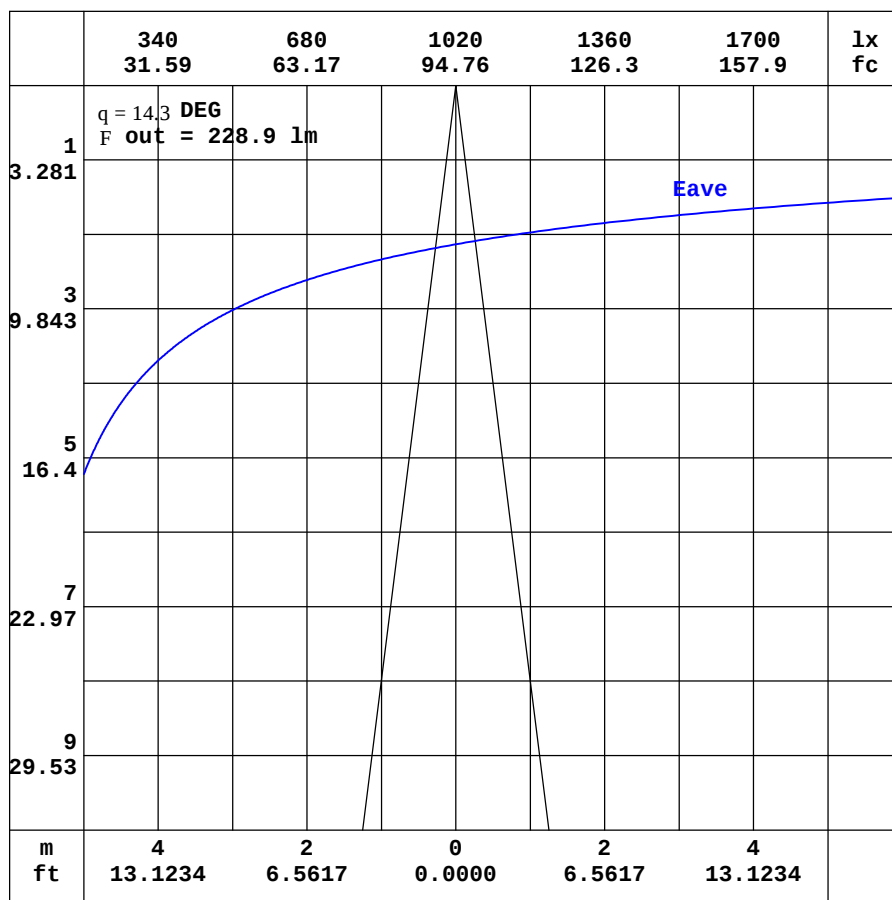

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline-609mm-TW-1800K-15D-Rev1	TYPE:1800K	WEIGHT:
SPEC.:15 DEG	DIM.:609MM	SERIAL No.:IES002993
MFR.:	SUR.:1	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	2.44	2.15	1.87	1.73	1.74	1.82	2.09	2.67	3.57	4.52	5.22	5.47	5.41	5.24	5.10	5.02	4.82	4.73	4.75
-170	2.44	2.14	1.86	1.71	1.69	1.72	1.87	2.28	2.94	3.66	4.22	4.50	4.56	4.60	4.71	4.87	4.91	5.04	5.38
-160	2.44	2.13	1.85	1.69	1.65	1.62	1.65	1.84	2.20	2.64	3.04	3.29	3.42	3.52	3.64	4.07	4.46	4.72	4.87
-150	2.44	2.13	1.87	1.68	1.62	1.56	1.49	1.48	1.56	1.71	1.85	1.94	1.95	2.06	2.46	2.82	3.11	3.29	3.37
-140	2.44	2.15	1.89	1.70	1.60	1.53	1.44	1.32	1.20	1.11	1.02	0.90	0.92	1.12	1.32	1.52	1.68	1.78	1.81
-130	2.44	2.17	1.93	1.74	1.60	1.52	1.45	1.33	1.18	0.99	0.78	0.64	0.64	0.63	0.65	0.69	0.73	0.74	0.74
-120	2.44	2.18	1.97	1.80	1.65	1.54	1.46	1.39	1.30	1.18	1.05	0.96	0.88	0.81	0.74	0.70	0.67	0.65	0.64
-110	2.44	2.21	2.02	1.86	1.72	1.60	1.50	1.42	1.36	1.29	1.27	1.26	1.25	1.24	1.23	1.22	1.21	1.21	1.21
-100	2.44	2.24	2.07	1.92	1.78	1.65	1.54	1.45	1.36	1.28	1.28	1.28	1.29	1.29	1.30	1.30	1.30	1.31	1.31
-90	2.44	2.28	2.13	1.97	1.81	1.66	1.50	1.35	1.19	1.04	1.04	1.05	1.06	1.06	1.07	1.08	1.09	1.09	1.10
-80	2.44	2.33	2.19	2.04	1.89	1.74	1.55	1.33	1.09	0.83	0.78	0.75	0.74	0.73	0.72	0.71	0.71	0.70	0.70
-70	2.44	2.37	2.28	2.24	2.12	1.95	1.76	1.52	1.25	1.00	0.98	1.10	1.24	1.36	1.48	1.58	1.64	1.68	1.67
-60	2.44	2.42	2.47	2.47	2.43	2.33	2.29	2.28	2.31	2.37	2.52	3.08	3.63	4.14	4.61	4.98	5.26	5.40	5.41
-50	2.44	2.48	2.65	2.76	2.83	3.03	3.36	3.83	4.50	5.24	5.99	7.11	8.63	10.1	11.3	12.1	12.6	12.8	12.6
-40	2.44	2.56	2.84	3.09	3.42	4.01	4.93	6.25	7.84	9.80	12.0	14.3	16.7	19.2	21.5	23.3	24.3	24.2	23.2
-30	2.44	2.65	3.04	3.42	4.09	5.18	6.92	9.25	12.2	15.7	19.5	23.9	29.4	36.5	44.8	52.9	58.7	60.1	55.6
-20	2.44	2.73	3.22	3.79	4.80	6.47	9.09	12.5	16.8	21.7	28.1	37.5	52.1	75.2	112	157	198	218	201
-10	2.44	2.80	3.39	4.13	5.42	7.56	10.8	15.3	20.6	27.2	37.2	53.6	82.8	135	227	390	680	1114	1286
0	2.44	2.85	3.52	4.39	5.85	8.28	12.0	17.1	23.1	30.8	43.1	64.1	102	168	290	547	1515	3897	6092
10	2.44	2.84	3.49	4.32	5.71	8.01	11.5	16.2	22.0	28.9	39.1	55.7	84.3	129	204	335	640	1434	2099
20	2.44	2.81	3.41	4.15	5.35	7.30	10.3	14.3	19.3	24.9	31.9	41.8	56.8	78.5	106	149	205	267	304
30	2.44	2.76	3.31	3.92	4.86	6.30	8.54	11.6	15.4	19.8	24.6	29.9	36.1	44.4	56.7	71.1	86.4	99.4	107
40	2.44	2.70	3.17	3.68	4.34	5.32	6.73	8.74	11.2	14.1	17.6	21.1	24.6	28.3	32.2	36.1	40.0	43.1	44.9
50	2.44	2.64	3.02	3.41	3.83	4.42	5.21	6.25	7.63	9.24	11.0	13.0	15.3	17.5	19.6	21.4	22.9	23.9	24.5
60	2.44	2.60	2.87	3.14	3.42	3.72	4.09	4.55	5.11	5.76	6.51	7.47	8.46	9.43	10.4	11.1	11.7	12.2	12.5
70	2.44	2.55	2.68	2.89	3.06	3.22	3.37	3.53	3.70	3.88	4.12	4.38	4.65	4.91	5.18	5.42	5.61	5.75	5.83
80	2.44	2.50	2.57	2.65	2.73	2.83	2.92	2.98	3.04	3.07	3.12	3.17	3.21	3.26	3.29	3.32	3.35	3.37	3.38
90	2.44	2.45	2.47	2.48	2.49	2.51	2.52	2.54	2.55	2.56	2.56	2.55	2.54	2.54	2.53	2.52	2.52	2.51	2.50
100	2.44	2.40	2.36	2.33	2.29	2.24	2.20	2.16	2.11	2.07	2.02	1.98	1.93	1.90	1.87	1.84	1.82	1.80	1.79
110	2.44	2.35	2.27	2.17	2.07	1.98	1.90	1.83	1.78	1.74	1.71	1.69	1.68	1.68	1.68	1.68	1.68	1.68	1.69
120	2.44	2.30	2.17	2.02	1.89	1.79	1.73	1.70	1.68	1.66	1.65	1.66	1.68	1.72	1.76	1.79	1.82	1.84	1.85
130	2.44	2.27	2.07	1.90	1.78	1.72	1.70	1.69	1.69	1.74	1.82	1.97	2.18	2.40	2.64	2.85	3.01	3.11	3.13
140	2.44	2.22	2.00	1.82	1.73	1.71	1.72	1.76	1.89	2.15	2.54	3.05	3.63	4.16	4.59	4.90	5.11	5.23	5.27
150	2.44	2.19	1.94	1.77	1.72	1.72	1.77	1.96	2.34	2.95	3.71	4.45	5.04	5.42	5.66	5.81	5.90	5.96	5.99
160	2.44	2.17	1.91	1.74	1.72	1.75	1.89	2.26	2.91	3.79	4.65	5.26	5.60	5.79	5.98	6.12	6.24	6.39	6.53
170	2.44	2.15	1.88	1.73	1.73	1.79	2.01	2.53	3.37	4.33	5.10	5.51	5.60	5.64	5.71	5.85	6.04	6.11	6.42
180	2.44	2.15	1.87	1.73	1.74	1.82	2.09	2.67	3.57	4.52	5.22	5.47	5.41	5.24	5.10	5.02	4.82	4.73	4.75

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:

Test Date:2024-09-29

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline-609mm-TW-1800K-15D-Rev1	TYPE:1800K	WEIGHT:
SPEC.:15 DEG	DIM.:609MM	SERIAL No.:IES002993
MFR.:	SUR.:1	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	4.41	4.39	4.16	3.75	3.31	2.81	2.23	1.60	1.06	0.74	0.70	0.82	1.04	1.23	1.33	1.27	1.12	0.89
-170	5.10	4.95	4.58	4.03	3.44	2.81	2.15	1.52	1.01	0.72	0.70	0.82	1.04	1.23	1.32	1.27	1.12	0.89
-160	4.73	4.47	4.10	3.59	2.96	2.34	1.74	1.21	0.84	0.68	0.71	0.87	1.08	1.25	1.32	1.27	1.11	0.89
-150	3.30	3.10	2.81	2.43	2.01	1.57	1.16	0.85	0.68	0.67	0.76	0.95	1.15	1.29	1.31	1.25	1.10	0.89
-140	1.77	1.66	1.49	1.28	1.07	0.86	0.71	0.64	0.65	0.74	0.91	1.09	1.23	1.32	1.30	1.23	1.09	0.89
-130	0.74	0.71	0.67	0.63	0.61	0.61	0.62	0.69	0.82	0.97	1.12	1.23	1.31	1.32	1.29	1.20	1.07	0.89
-120	0.65	0.67	0.69	0.74	0.80	0.87	0.95	1.04	1.13	1.21	1.28	1.32	1.32	1.30	1.25	1.17	1.05	0.89
-110	1.21	1.21	1.22	1.23	1.25	1.26	1.28	1.30	1.32	1.33	1.33	1.32	1.29	1.25	1.20	1.12	1.01	0.89
-100	1.32	1.32	1.33	1.33	1.33	1.34	1.34	1.35	1.35	1.33	1.31	1.29	1.25	1.21	1.14	1.05	0.96	0.89
-90	1.10	1.10	1.10	1.10	1.10	1.11	1.11	1.11	1.11	1.09	1.06	1.04	1.01	0.99	0.96	0.94	0.92	0.89
-80	0.70	0.70	0.70	0.70	0.71	0.71	0.72	0.75	0.77	0.81	0.84	0.87	0.88	0.89	0.89	0.87	0.87	0.89
-70	1.66	1.61	1.53	1.42	1.30	1.18	1.05	0.93	0.84	0.80	0.81	0.84	0.86	0.88	0.88	0.88	0.86	0.89
-60	5.28	5.02	4.66	4.22	3.73	3.22	2.71	2.22	1.86	1.55	1.29	1.09	0.95	0.93	0.90	0.89	0.87	0.89
-50	12.2	11.6	10.7	9.60	8.40	7.12	5.89	4.82	3.91	3.06	2.32	1.75	1.33	1.05	0.97	0.91	0.88	0.89
-40	22.3	20.7	18.7	16.6	14.5	12.3	10.4	8.59	6.90	5.30	3.90	2.73	1.89	1.34	1.03	0.94	0.88	0.89
-30	51.9	44.7	36.6	28.9	22.7	18.7	15.6	12.7	10.2	7.89	5.76	3.96	2.56	1.68	1.16	0.98	0.88	0.89
-20	179	137	93.3	61.7	43.4	30.8	22.5	17.1	13.2	10.2	7.57	5.13	3.26	2.01	1.30	1.02	0.88	0.89
-10	1055	510	269	154	87.0	51.0	31.9	21.6	15.7	11.9	8.88	6.08	3.82	2.27	1.42	1.05	0.89	0.89
0	4630	2081	593	253	130	67.8	39.0	24.5	17.1	12.7	9.51	6.56	4.10	2.40	1.48	1.07	0.90	0.89
10	1459	735	396	228	129	73.4	43.7	27.9	19.3	14.1	10.2	6.92	4.34	2.58	1.61	1.15	0.93	0.89
20	293	249	197	143	91.3	58.3	38.4	26.5	19.1	13.9	9.92	6.64	4.22	2.60	1.66	1.22	0.96	0.89
30	106	96.7	82.8	67.6	53.6	40.1	29.7	22.2	16.6	12.2	8.64	5.87	3.81	2.48	1.67	1.26	0.99	0.89
40	44.4	42.2	38.8	34.8	30.5	26.1	21.4	16.7	12.7	9.46	6.84	4.76	3.28	2.28	1.63	1.28	1.02	0.89
50	24.1	23.2	21.7	19.9	17.9	15.6	13.4	11.0	8.70	6.70	5.02	3.73	2.76	2.07	1.64	1.29	1.04	0.89
60	12.3	11.8	11.3	10.5	9.62	8.65	7.69	6.72	5.59	4.54	3.66	2.94	2.36	1.94	1.59	1.29	1.04	0.89
70	5.77	5.64	5.46	5.23	4.97	4.70	4.43	4.15	3.81	3.32	2.87	2.50	2.15	1.83	1.54	1.28	1.04	0.89
80	3.37	3.36	3.33	3.30	3.27	3.23	3.18	3.14	3.06	2.79	2.51	2.24	1.97	1.72	1.47	1.24	1.04	0.89
90	2.50	2.49	2.49	2.48	2.48	2.47	2.46	2.46	2.45	2.28	2.11	1.93	1.76	1.59	1.41	1.24	1.06	0.89
100	1.79	1.80	1.81	1.82	1.84	1.86	1.88	1.91	1.93	1.88	1.82	1.74	1.65	1.55	1.42	1.27	1.09	0.89
110	1.69	1.69	1.69	1.70	1.70	1.70	1.71	1.72	1.72	1.68	1.65	1.62	1.57	1.51	1.42	1.29	1.11	0.89
120	1.85	1.84	1.82	1.80	1.77	1.74	1.71	1.71	1.66	1.62	1.59	1.56	1.52	1.48	1.41	1.30	1.13	0.89
130	3.11	3.01	2.85	2.65	2.43	2.22	2.04	1.83	1.64	1.54	1.51	1.50	1.50	1.46	1.41	1.31	1.14	0.89
140	5.22	5.09	4.88	4.56	4.12	3.60	2.91	2.21	1.76	1.50	1.40	1.39	1.42	1.44	1.40	1.31	1.14	0.89
150	5.96	5.89	5.79	5.63	5.38	4.66	3.68	2.73	1.96	1.49	1.29	1.27	1.33	1.39	1.38	1.31	1.14	0.89
160	6.45	6.32	6.18	5.91	5.23	4.51	3.71	2.83	2.00	1.41	1.16	1.13	1.23	1.33	1.37	1.31	1.14	0.89
170	6.37	6.38	5.73	5.09	4.47	3.84	3.15	2.40	1.69	1.16	0.96	0.97	1.12	1.27	1.35	1.29	1.13	0.89
180	4.41	4.39	4.16	3.75	3.31	2.81	2.23	1.60	1.06	0.74	0.70	0.82	1.04	1.23	1.33	1.27	1.12	0.89

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:

Test Date:2024-09-29

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: