

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	9856.5 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	27.6V x 28.5H
	At 50% of Imax	14.3V x 14.5H
	At 90% of Imax	4.7V x 5.5H

Beam Flux	Total	1000.4 lumens per klm.
	To 10% of Imax	656.2 lumens per klm.
	To 50% of Imax	328.7 lumens per klm.
	To 90% of Imax	48.1 lumens per klm.

Upward LOR	2.3 %
Downward LOR	97.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Blazeline-609mm-TW-6000K-15D-Rev2	TYPE:6000K	WEIGHT:
SPEC.:15 DEG	DIM.:609MM	SERIAL No.:IES002994
MFR.:	SUR.:1	Shielding Angle:

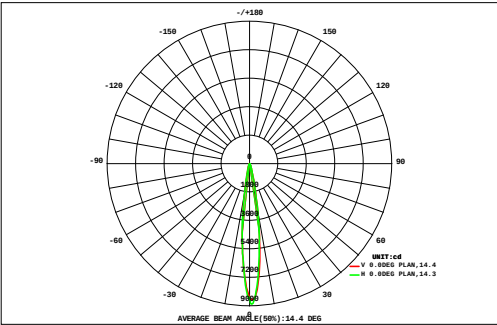

DATA OF LAMP		Eff:86.75lm/W	
MODEL		Imax(cd)	8892
NOMINAL POWER(W)	10.4	AVAILABILITY(%)	65.5
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	591.0
NOMINAL FLUX(lm)	902.2	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	902.2
TEST VOLTAGE(V)	220	q @50%(H,V)	14,14DEG

		AREA FLUX DIAGRAM																UNIT:lm			F t	F a
		0.36	0.42	0.48	0.53	0.59	0.65	0.70	0.74	0.76	0.74	0.69	0.62	0.54	0.46	0.39	0.33	0.28	0.23	9.52	0.00	
VERTICAL (DEG)	18	0.41	0.49	0.57	0.65	0.74	0.84	0.93	1.01	1.06	1.04	0.95	0.84	0.71	0.59	0.48	0.39	0.32	0.27	12.3	1.43	
	16	0.45	0.55	0.67	0.79	0.94	1.12	1.34	1.55	1.70	1.69	1.51	1.26	0.99	0.76	0.59	0.47	0.39	0.32	17.1	9.69	
	14	0.48	0.61	0.76	0.97	1.24	1.59	2.01	2.45	2.80	2.80	2.46	1.99	1.51	1.08	0.77	0.59	0.47	0.38	25.0	19.7	
	12	0.52	0.66	0.86	1.17	1.61	2.22	3.02	3.83	4.43	4.46	3.91	3.11	2.25	1.55	1.09	0.77	0.58	0.45	36.5	32.2	
	10	0.54	0.71	0.97	1.39	2.05	3.04	4.24	5.32	6.05	6.09	5.44	4.41	3.24	2.26	1.51	1.01	0.70	0.52	49.5	45.6	
	8	0.56	0.74	1.07	1.59	2.51	3.85	5.41	6.85	7.87	7.89	6.94	5.67	4.40	3.09	2.00	1.28	0.84	0.59	63.2	59.9	
	6	0.56	0.75	1.12	1.73	2.85	4.42	6.29	8.18	9.49	9.51	8.35	7.04	5.47	3.84	2.46	1.53	0.98	0.66	75.2	72.3	
	4	0.54	0.73	1.10	1.74	2.93	4.55	6.56	8.53	10.2	10.4	9.58	8.11	6.24	4.36	2.79	1.70	1.08	0.71	81.9	78.9	
	2	0.51	0.70	1.06	1.68	2.86	4.45	6.38	8.19	9.66	10.1	9.49	8.06	6.19	4.33	2.77	1.70	1.09	0.72	80.0	77.1	
	0	0.49	0.66	0.98	1.56	2.64	4.15	5.85	7.37	8.24	8.50	8.06	6.88	5.32	3.74	2.42	1.52	1.00	0.69	70.1	67.1	
	-2	0.44	0.59	0.86	1.32	2.17	3.45	4.84	5.92	6.45	6.60	6.30	5.36	4.18	2.93	1.95	1.29	0.88	0.63	56.2	52.8	
	-4	0.40	0.52	0.71	1.04	1.62	2.51	3.47	4.23	4.63	4.72	4.47	3.83	2.96	2.13	1.49	1.06	0.76	0.57	41.1	37.2	
	-6	0.34	0.44	0.57	0.79	1.13	1.63	2.18	2.67	2.91	2.97	2.86	2.46	1.97	1.49	1.12	0.85	0.65	0.51	27.5	22.9	
	-8	0.29	0.36	0.45	0.59	0.78	1.04	1.33	1.57	1.70	1.74	1.71	1.54	1.29	1.06	0.86	0.69	0.56	0.44	18.0	11.8	
	-10	0.24	0.29	0.36	0.45	0.57	0.70	0.84	0.95	1.03	1.06	1.05	0.99	0.89	0.78	0.67	0.57	0.47	0.38	12.3	2.31	
	-12	0.20	0.23	0.29	0.36	0.43	0.51	0.58	0.64	0.68	0.70	0.72	0.70	0.65	0.59	0.53	0.47	0.40	0.33	9.01	0.00	
	-14	0.16	0.19	0.23	0.28	0.33	0.39	0.43	0.47	0.49	0.51	0.52	0.52	0.50	0.46	0.42	0.37	0.32	0.27	6.88	0.00	
	-16	-18	-16	-14	-12	-10	-8	-6	-4	HORIZONTAL (DEG)				4	6	8	10	12	14	16	18	
F t	7.48	9.64	13.1	18.6	28.0	41.1	56.4	70.5	80.2	81.5	75.0	63.4	49.3	35.5	24.3	16.6	11.8	8.69	691	---		
F a	0.00	0.00	2.95	12.8	23.4	36.8	52.9	67.2	77.3	78.7	71.7	59.8	45.3	30.9	19.1	9.89	2.31	0.00	---	591		


one-half-peak spread: U:7.3,D:7.1 , L:7.2,R:7.3 NEMA Beam Type: Type 2

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:Blazeline-609mm-TW-6000K-15D-Rev2	TYPE:6000K	WEIGHT:
SPEC.:15 DEG	DIM.:609MM	SERIAL No.:IES002994
MFR.:	SUR.:1	Shielding Angle:

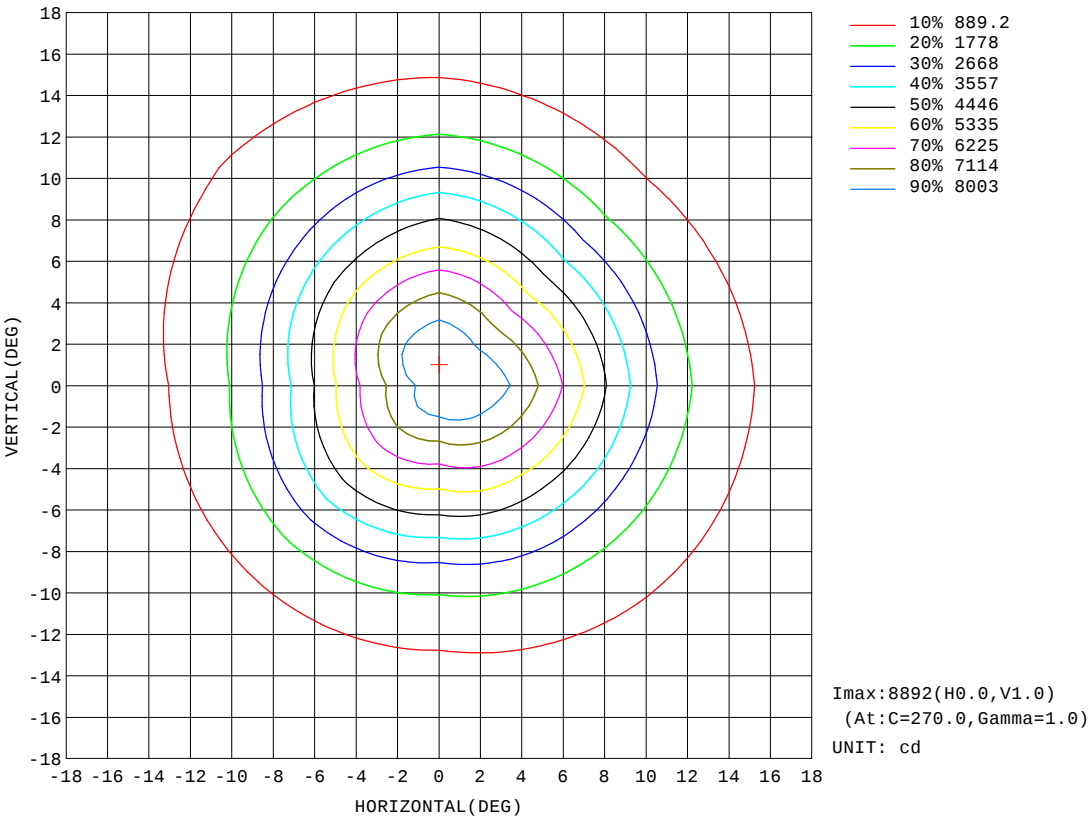


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Blazeline-609mm-TW-6000K-15D-Rev2	TYPE:6000K	WEIGHT:
SPEC.:15 DEG	DIM.:609MM	SERIAL No.:IES002994
MFR.:	SUR.:1	Shielding Angle:

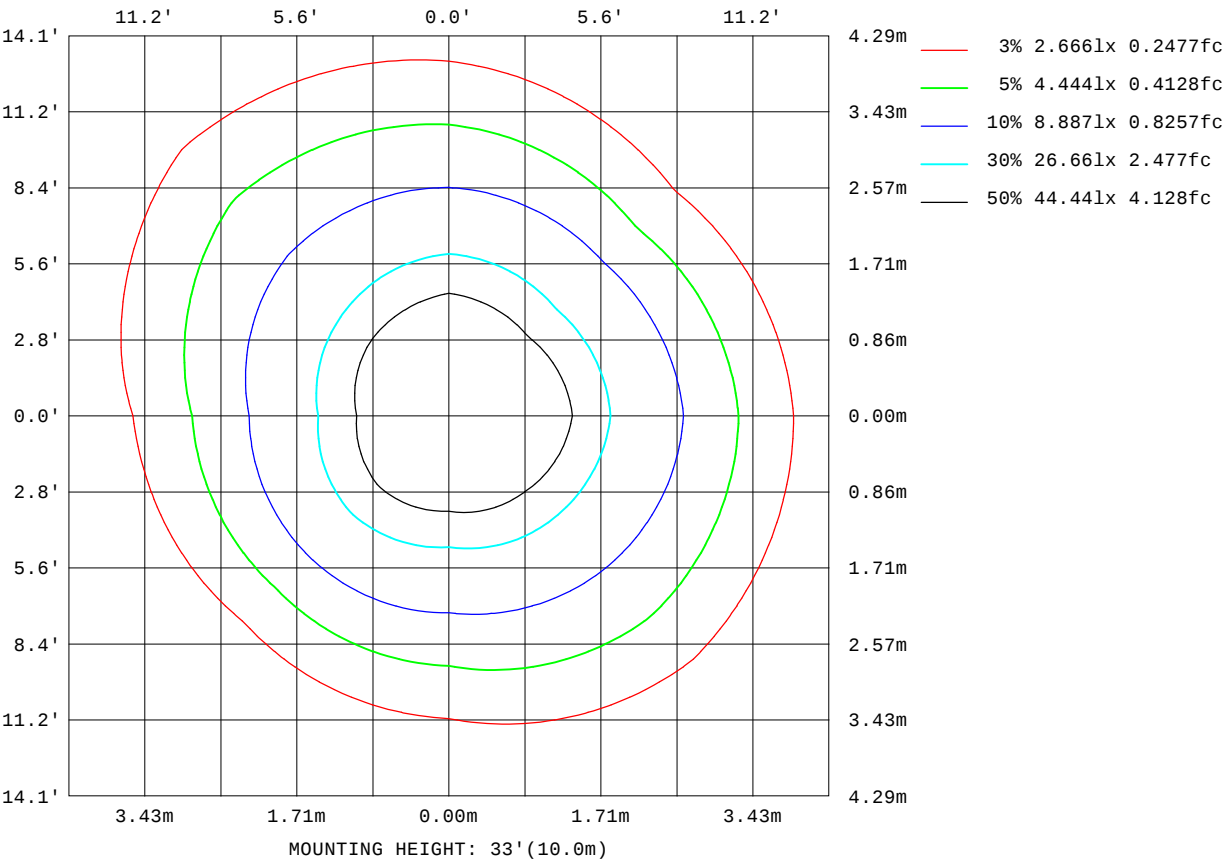

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

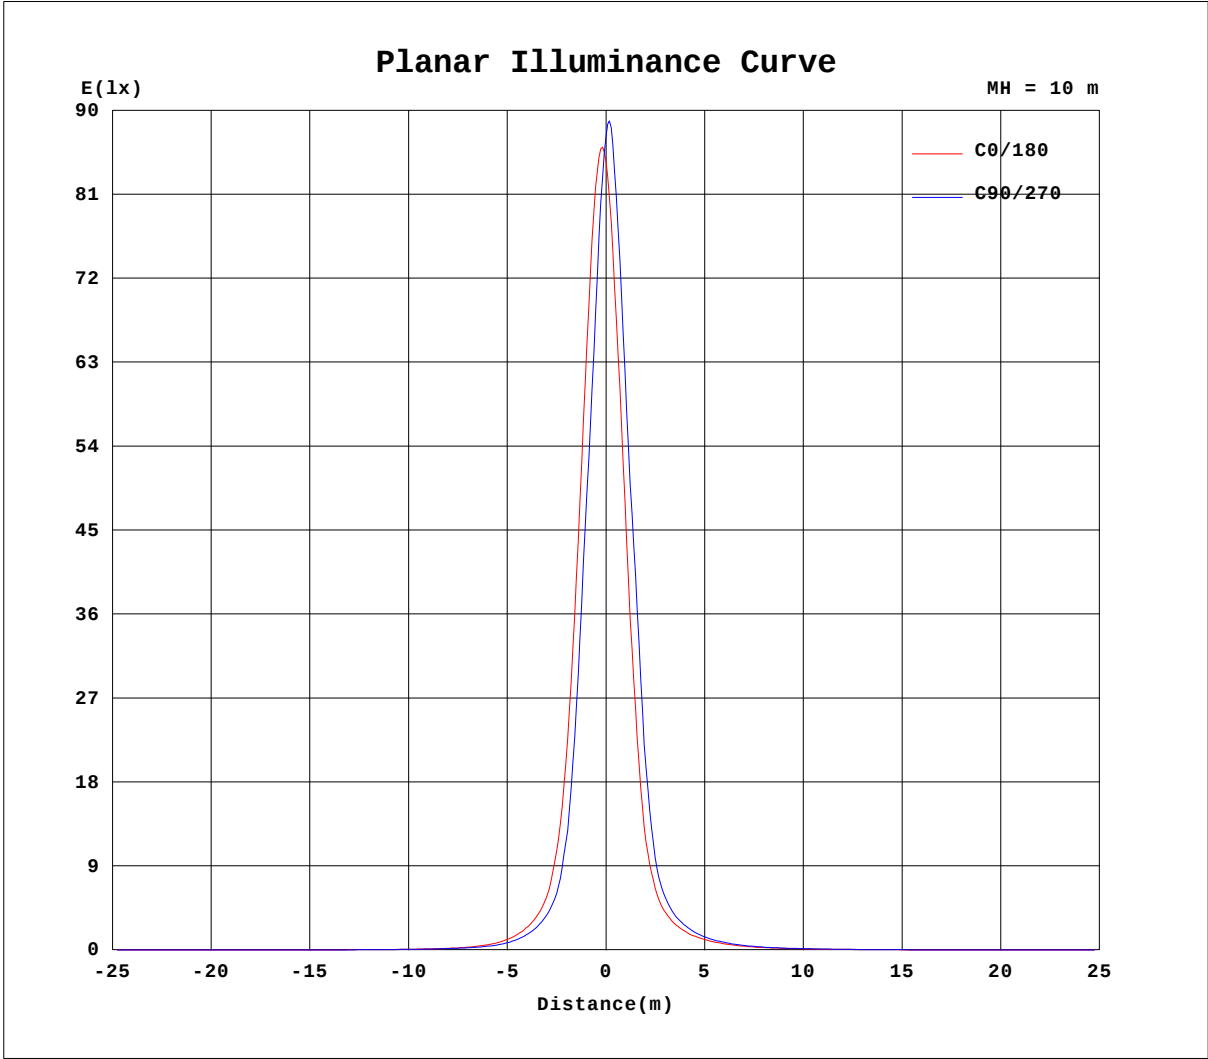


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators:
Test Date: 2024-09-29

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Blazeline-609mm-TW-6000K-15D-Rev2	TYPE:6000K	WEIGHT:
SPEC.:15 DEG	DIM.:609MM	SERIAL No.:IES002994
MFR.:	SUR.:1	Shielding Angle:

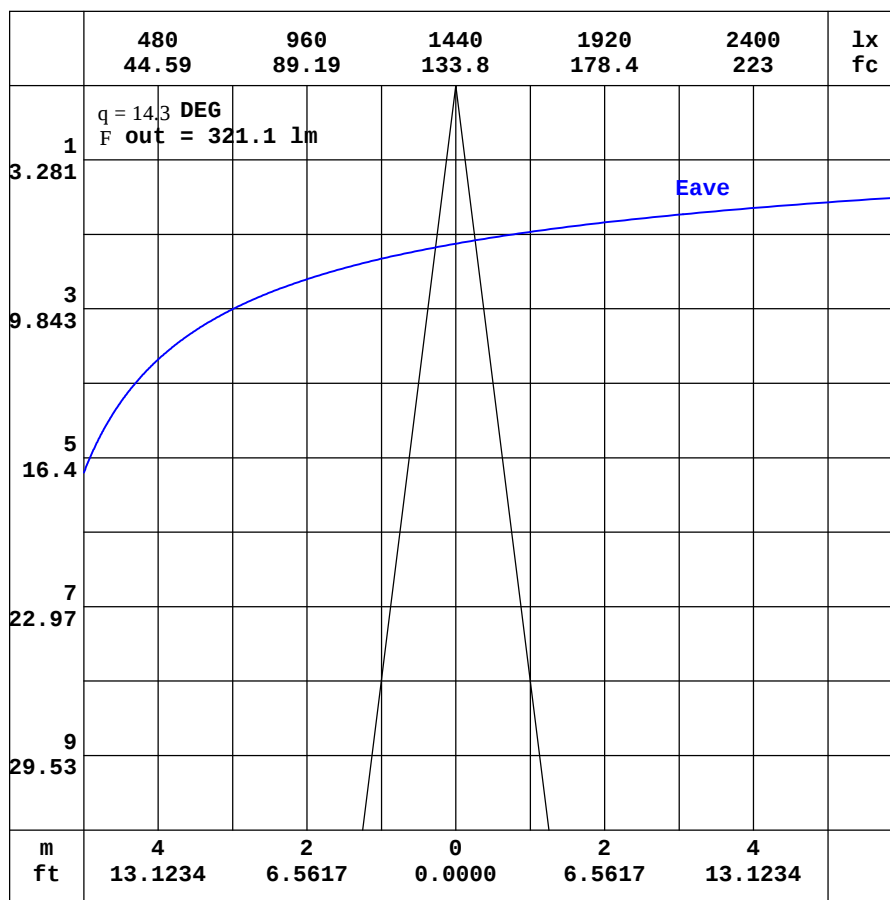

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

$H(b)$ Range: -90 - 90DEG
 $H(b)$ Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators:
 Test Date: 2024-09-29

$V(B)$ Range: -180 - 180DEG
 $V(B)$ Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline-609mm-TW-6000K-15D-Rev2	TYPE:6000K	WEIGHT:
SPEC.:15 DEG	DIM.:609MM	SERIAL No.:IES002994
MFR.:	SUR.:1	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	3.34	2.94	2.57	2.36	2.38	2.50	2.87	3.70	4.94	6.25	7.19	7.52	7.42	7.16	6.96	6.84	6.55	6.33	6.33
-170	3.34	2.92	2.55	2.32	2.31	2.36	2.57	3.14	4.05	5.05	5.80	6.19	6.27	6.32	6.48	6.69	6.73	6.85	7.30
-160	3.34	2.92	2.55	2.30	2.25	2.22	2.26	2.50	3.00	3.62	4.16	4.51	4.69	4.84	5.02	5.62	6.13	6.46	6.62
-150	3.34	2.92	2.56	2.30	2.21	2.13	2.04	2.00	2.11	2.30	2.50	2.62	2.64	2.81	3.38	3.87	4.27	4.52	4.62
-140	3.34	2.94	2.59	2.33	2.18	2.09	1.96	1.78	1.60	1.46	1.33	1.14	1.18	1.47	1.79	2.08	2.31	2.46	2.52
-130	3.34	2.96	2.64	2.39	2.20	2.08	1.97	1.81	1.59	1.32	1.00	0.79	0.79	0.80	0.85	0.92	0.99	1.03	1.05
-120	3.34	2.99	2.70	2.46	2.27	2.12	2.00	1.91	1.77	1.60	1.40	1.28	1.16	1.07	0.99	0.93	0.90	0.89	0.88
-110	3.34	3.03	2.77	2.55	2.36	2.21	2.08	1.97	1.87	1.78	1.74	1.73	1.71	1.69	1.67	1.65	1.64	1.64	1.64
-100	3.34	3.07	2.84	2.63	2.44	2.27	2.12	1.99	1.87	1.76	1.77	1.78	1.79	1.79	1.79	1.79	1.79	1.79	1.79
-90	3.34	3.13	2.91	2.70	2.49	2.28	2.07	1.85	1.64	1.43	1.44	1.44	1.45	1.45	1.46	1.47	1.47	1.48	1.49
-80	3.34	3.18	2.99	2.79	2.58	2.36	2.10	1.80	1.47	1.11	1.05	1.02	0.99	0.98	0.97	0.97	0.96	0.95	0.95
-70	3.34	3.24	3.11	3.03	2.86	2.62	2.35	2.02	1.65	1.30	1.26	1.41	1.58	1.74	1.90	2.04	2.15	2.21	2.23
-60	3.34	3.30	3.34	3.32	3.25	3.12	3.02	2.97	2.94	2.94	3.05	3.74	4.46	5.16	5.82	6.38	6.83	7.13	7.26
-50	3.34	3.38	3.57	3.70	3.78	4.00	4.36	4.89	5.61	6.43	7.14	8.34	10.1	11.9	13.5	14.8	15.8	16.5	16.8
-40	3.34	3.49	3.82	4.13	4.54	5.25	6.33	7.93	9.77	11.8	14.0	15.7	17.7	20.4	23.0	25.6	28.0	29.9	31.0
-30	3.34	3.60	4.08	4.56	5.40	6.75	8.90	11.7	15.1	18.7	22.1	25.1	27.6	30.9	38.5	48.2	58.7	68.1	73.4
-20	3.34	3.71	4.33	5.05	6.32	8.37	11.7	15.8	20.8	25.9	31.7	38.8	48.5	62.1	80.6	120	177	235	268
-10	3.34	3.79	4.55	5.50	7.13	9.82	14.0	19.4	25.7	33.0	43.0	58.2	84.0	126	197	339	655	1386	1827
0	3.34	3.86	4.73	5.84	7.71	10.8	15.6	21.9	29.2	38.4	52.3	75.6	116	184	307	598	1827	5295	8446
10	3.34	3.85	4.69	5.76	7.56	10.5	15.2	21.3	29.0	38.4	52.5	75.9	119	190	314	538	1032	2019	3056
20	3.34	3.81	4.60	5.55	7.12	9.67	13.8	19.1	26.1	34.5	45.7	62.6	90.2	136	204	278	350	400	406
30	3.34	3.76	4.46	5.26	6.50	8.45	11.5	15.7	21.1	28.0	36.1	46.1	59.6	77.1	96.3	117	134	144	143
40	3.34	3.68	4.28	4.97	5.83	7.15	9.10	11.9	15.5	19.9	25.4	31.7	38.0	43.9	49.4	54.5	58.6	60.7	60.6
50	3.34	3.60	4.09	4.61	5.18	5.97	7.07	8.58	10.5	13.0	15.7	18.8	22.1	25.3	28.1	30.4	32.1	33.2	33.4
60	3.34	3.55	3.89	4.25	4.64	5.05	5.56	6.21	7.03	8.05	9.19	10.5	11.8	13.2	14.4	15.5	16.2	16.7	16.9
70	3.34	3.49	3.66	3.93	4.16	4.38	4.60	4.83	5.09	5.36	5.68	6.04	6.40	6.76	7.12	7.42	7.66	7.83	7.91
80	3.34	3.42	3.52	3.62	3.74	3.87	3.98	4.08	4.15	4.22	4.29	4.36	4.42	4.48	4.53	4.58	4.61	4.64	4.65
90	3.34	3.36	3.38	3.40	3.43	3.45	3.47	3.49	3.52	3.54	3.53	3.53	3.52	3.52	3.51	3.51	3.50	3.50	3.49
100	3.34	3.29	3.24	3.19	3.14	3.08	3.02	2.96	2.91	2.85	2.79	2.73	2.67	2.62	2.58	2.55	2.52	2.50	2.49
110	3.34	3.22	3.10	2.97	2.84	2.72	2.61	2.52	2.45	2.41	2.36	2.34	2.33	2.32	2.31	2.31	2.31	2.30	2.30
120	3.34	3.16	2.97	2.77	2.59	2.46	2.38	2.35	2.33	2.32	2.32	2.32	2.32	2.32	2.32	2.32	2.32	2.32	2.32
130	3.34	3.10	2.84	2.61	2.43	2.36	2.34	2.35	2.37	2.47	2.60	2.81	3.07	3.36	3.65	3.90	4.10	4.20	4.20
140	3.34	3.05	2.74	2.49	2.36	2.35	2.37	2.46	2.67	3.04	3.58	4.27	5.02	5.71	6.27	6.67	6.94	7.09	7.14
150	3.34	3.01	2.67	2.42	2.36	2.37	2.47	2.75	3.29	4.12	5.14	6.13	6.88	7.37	7.68	7.88	8.00	8.08	8.13
160	3.34	2.97	2.61	2.38	2.36	2.42	2.63	3.15	4.05	5.25	6.40	7.20	7.62	7.86	8.11	8.31	8.46	8.66	8.85
170	3.34	2.95	2.58	2.36	2.37	2.47	2.79	3.51	4.67	5.99	7.01	7.54	7.65	7.69	7.76	7.96	8.15	8.26	8.73
180	3.34	2.94	2.57	2.36	2.38	2.50	2.87	3.70	4.94	6.25	7.19	7.52	7.42	7.16	6.96	6.84	6.55	6.33	6.35

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature: 25.3DEG

Operators:

Test Date: 2024-09-29

V(B) Range: -180 - 180DEG

V(B) Interval: 0.5DEG

Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity: 65.0%

Test Distance: 8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline-609mm-TW-6000K-15D-Rev2	TYPE:6000K	WEIGHT:
SPEC.:15 DEG	DIM.:609MM	SERIAL No.:IES002994
MFR.:	SUR.:1	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	5.83	5.80	5.53	5.01	4.44	3.78	2.99	2.14	1.40	0.99	0.94	1.11	1.40	1.66	1.75	1.71	1.52	1.22
-170	6.84	6.54	6.06	5.37	4.60	3.77	2.90	2.05	1.37	0.98	0.95	1.12	1.42	1.67	1.75	1.71	1.52	1.22
-160	6.38	6.00	5.48	4.80	3.98	3.17	2.37	1.66	1.17	0.95	0.97	1.19	1.47	1.70	1.75	1.70	1.51	1.22
-150	4.49	4.22	3.81	3.32	2.76	2.17	1.62	1.21	0.97	0.94	1.07	1.32	1.57	1.74	1.75	1.68	1.49	1.22
-140	2.46	2.31	2.08	1.80	1.52	1.26	1.05	0.94	0.94	1.06	1.27	1.50	1.68	1.75	1.74	1.66	1.46	1.22
-130	1.05	1.02	0.97	0.92	0.90	0.91	0.92	1.02	1.18	1.36	1.53	1.67	1.74	1.75	1.72	1.62	1.43	1.22
-120	0.90	0.93	0.98	1.04	1.13	1.23	1.34	1.45	1.56	1.66	1.72	1.75	1.75	1.73	1.67	1.56	1.41	1.22
-110	1.64	1.65	1.66	1.68	1.70	1.72	1.73	1.74	1.75	1.76	1.76	1.75	1.72	1.67	1.59	1.48	1.36	1.22
-100	1.79	1.79	1.79	1.79	1.78	1.78	1.78	1.78	1.78	1.75	1.71	1.66	1.61	1.55	1.49	1.41	1.32	1.22
-90	1.50	1.52	1.54	1.55	1.57	1.59	1.60	1.62	1.64	1.59	1.54	1.50	1.45	1.40	1.36	1.31	1.26	1.22
-80	0.96	0.96	0.97	0.98	0.99	1.00	1.02	1.05	1.08	1.12	1.15	1.18	1.19	1.20	1.20	1.19	1.19	1.22
-70	2.23	2.19	2.10	1.98	1.83	1.66	1.49	1.33	1.22	1.16	1.13	1.16	1.18	1.19	1.19	1.18	1.17	1.22
-60	7.20	6.96	6.56	6.02	5.38	4.71	3.98	3.29	2.71	2.22	1.82	1.52	1.32	1.27	1.23	1.20	1.17	1.22
-50	16.8	16.4	15.5	14.2	12.7	10.8	8.96	7.23	5.75	4.44	3.29	2.43	1.83	1.45	1.31	1.23	1.17	1.22
-40	31.8	31.3	29.6	27.0	23.7	20.3	16.8	13.4	10.3	7.69	5.59	3.81	2.60	1.83	1.40	1.27	1.17	1.22
-30	77.2	74.0	65.8	55.1	44.5	34.4	26.2	20.2	15.5	11.6	8.20	5.59	3.53	2.29	1.58	1.34	1.18	1.22
-20	283	253	194	135	86.9	56.8	38.4	27.3	20.1	15.0	10.8	7.20	4.51	2.73	1.77	1.38	1.19	1.22
-10	1587	919	510	288	156	86.3	51.5	33.4	23.4	17.2	12.6	8.43	5.28	3.07	1.92	1.42	1.20	1.22
0	6970	3018	943	392	197	101	57.2	35.5	24.5	17.9	13.3	9.01	5.63	3.23	2.00	1.44	1.21	1.22
10	2046	893	443	259	153	90.0	55.2	36.3	25.8	19.1	13.9	9.36	5.89	3.47	2.17	1.56	1.26	1.22
20	351	268	190	135	95.0	65.0	45.0	32.8	24.6	18.4	13.3	8.92	5.66	3.48	2.24	1.65	1.30	1.22
30	132	114	93.0	73.6	57.1	44.5	35.0	27.6	21.3	16.0	11.4	7.81	5.07	3.33	2.24	1.72	1.34	1.22
40	57.8	53.3	47.7	42.0	36.7	31.6	26.4	21.1	16.3	12.3	9.00	6.30	4.37	3.07	2.21	1.74	1.37	1.22
50	32.3	30.6	28.4	25.9	23.0	20.0	17.1	14.1	11.2	8.74	6.62	4.95	3.71	2.79	2.21	1.75	1.39	1.22
60	16.6	15.9	15.0	13.9	12.6	11.3	10.0	8.80	7.36	6.01	4.88	3.95	3.19	2.63	2.16	1.75	1.40	1.22
70	7.80	7.61	7.34	7.02	6.65	6.29	5.92	5.57	5.11	4.46	3.88	3.38	2.93	2.50	2.10	1.73	1.40	1.22
80	4.63	4.60	4.56	4.52	4.46	4.41	4.35	4.29	4.20	3.81	3.44	3.07	2.70	2.35	2.01	1.69	1.42	1.22
90	3.48	3.47	3.46	3.45	3.44	3.43	3.42	3.41	3.39	3.15	2.91	2.67	2.43	2.18	1.94	1.70	1.46	1.22
100	2.49	2.50	2.50	2.52	2.54	2.57	2.60	2.64	2.66	2.60	2.50	2.40	2.27	2.12	1.94	1.73	1.50	1.22
110	2.30	2.30	2.30	2.30	2.30	2.30	2.31	2.33	2.32	2.28	2.25	2.20	2.15	2.06	1.94	1.75	1.52	1.22
120	2.48	2.46	2.42	2.38	2.34	2.30	2.29	2.29	2.23	2.18	2.14	2.10	2.06	2.01	1.93	1.78	1.54	1.22
130	4.17	4.04	3.81	3.52	3.21	2.90	2.64	2.38	2.15	2.05	2.03	2.02	2.00	1.97	1.91	1.78	1.55	1.22
140	7.09	6.93	6.65	6.21	5.60	4.85	3.87	2.90	2.28	1.97	1.86	1.88	1.92	1.92	1.88	1.78	1.55	1.22
150	8.11	8.04	7.92	7.72	7.40	6.39	5.01	3.66	2.58	1.95	1.70	1.69	1.80	1.88	1.85	1.77	1.56	1.22
160	8.76	8.61	8.45	8.10	7.17	6.18	5.08	3.84	2.68	1.87	1.52	1.51	1.65	1.80	1.82	1.76	1.55	1.22
170	8.67	8.75	7.82	6.92	6.08	5.24	4.29	3.26	2.27	1.54	1.27	1.30	1.52	1.72	1.78	1.74	1.54	1.22
180	5.83	5.80	5.53	5.01	4.44	3.78	2.99	2.14	1.40	0.99	0.94	1.11	1.40	1.66	1.75	1.71	1.52	1.22

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: