

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	2510.2 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	60.5V x 60.4H
	At 50% of Imax	31.1V x 31.7H
	At 90% of Imax	13.1V x 12.8H

Beam Flux	Total	1000.2 lumens per klm.
	To 10% of Imax	788.8 lumens per klm.
	To 50% of Imax	421.6 lumens per klm.
	To 90% of Imax	89.8 lumens per klm.

Upward LOR	2.3 %
Downward LOR	97.7 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Blazeline-609mm-TW-6000K-30D-Rev2	TYPE:6000K	WEIGHT:
SPEC.:30 DEG	DIM.:609MM	SERIAL No.:IES002996
MFR.:	SUR.:1	Shielding Angle:

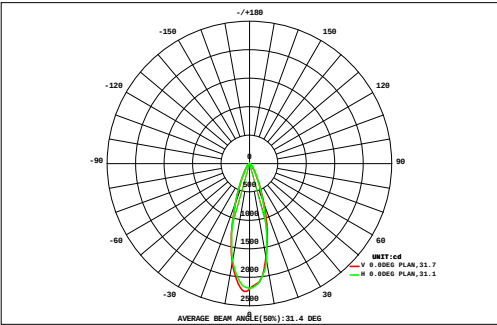

DATA OF LAMP		Eff:86.11lm/W	
MODEL		Imax(cd)	2248
NOMINAL POWER(W)	10.4	AVAILABILITY(%)	78.8
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	705.4
NOMINAL FLUX(lm)	895.5	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	895.5
TEST VOLTAGE(V)	220	q @50%(H,V)	32,31DEG


		AREA FLUX DIAGRAM															UNIT:lm				F t	F a
		45	40	35	30	25	20	15	10	5	0	5	10	15	20	25	30	35	40	45		
VERTICAL (DEG)	45	0.13	0.20	0.28	0.36	0.45	0.52	0.59	0.63	0.64	0.62	0.57	0.51	0.43	0.35	0.27	0.20	0.15	0.11	7.00	0.00	
	40	0.18	0.27	0.39	0.51	0.63	0.75	0.85	0.92	0.95	0.92	0.84	0.73	0.60	0.48	0.37	0.27	0.20	0.14	10.00	0.00	
	35	0.23	0.35	0.51	0.69	0.88	1.07	1.24	1.37	1.43	1.39	1.26	1.07	0.85	0.65	0.48	0.35	0.25	0.17	14.2	0.00	
	30	0.28	0.43	0.63	0.89	1.20	1.51	1.85	2.15	2.32	2.27	2.00	1.62	1.23	0.89	0.64	0.46	0.32	0.21	20.9	10.9	
	25	0.33	0.51	0.76	1.12	1.60	2.18	2.87	3.56	3.99	3.92	3.38	2.60	1.83	1.26	0.86	0.58	0.39	0.25	32.0	24.9	
	20	0.37	0.58	0.90	1.37	2.09	3.16	4.56	5.96	6.75	6.56	5.57	4.16	2.79	1.81	1.15	0.73	0.46	0.29	49.3	43.4	
	15	0.40	0.64	1.02	1.64	2.70	4.47	7.02	9.51	10.8	10.3	8.30	6.11	4.15	2.53	1.50	0.89	0.54	0.33	72.8	67.7	
	10	0.42	0.68	1.11	1.88	3.32	5.88	9.56	12.8	14.4	14.1	11.3	8.32	5.59	3.28	1.84	1.04	0.60	0.36	96.4	91.9	
	5	0.42	0.69	1.14	2.01	3.71	6.80	10.9	14.5	16.4	15.9	13.8	10.1	6.68	3.83	2.08	1.14	0.64	0.37	111	107	
	0	0.40	0.66	1.11	2.00	3.75	6.86	10.9	14.8	16.5	15.9	13.8	10.5	6.89	3.91	2.13	1.16	0.65	0.38	112	108	
	-5	0.37	0.61	1.02	1.82	3.40	6.09	9.48	13.0	14.6	14.0	12.2	9.45	6.06	3.49	1.96	1.10	0.63	0.37	99.6	95.1	
	-10	0.34	0.53	0.87	1.49	2.72	4.78	7.32	9.57	11.0	11.0	9.62	7.24	4.67	2.82	1.66	0.98	0.58	0.35	77.5	72.6	
	-15	0.29	0.45	0.70	1.14	1.94	3.28	4.94	6.38	7.17	7.16	6.28	4.77	3.28	2.13	1.33	0.83	0.51	0.31	52.9	47.4	
	-20	0.24	0.36	0.54	0.82	1.27	2.00	2.91	3.74	4.21	4.19	3.71	2.95	2.19	1.54	1.04	0.68	0.44	0.27	33.1	26.4	
	-25	0.19	0.28	0.40	0.57	0.83	1.19	1.63	2.03	2.26	2.29	2.11	1.78	1.42	1.09	0.79	0.54	0.35	0.23	20.0	10.3	
	-30	0.15	0.21	0.29	0.40	0.55	0.75	0.95	1.14	1.25	1.29	1.23	1.10	0.93	0.76	0.58	0.41	0.28	0.18	12.5	0.00	
-35	0.11	0.16	0.21	0.28	0.38	0.48	0.59	0.68	0.74	0.77	0.76	0.70	0.62	0.51	0.41	0.30	0.21	0.14	8.06	0.00		
-40	0.08	0.11	0.15	0.20	0.26	0.32	0.38	0.43	0.47	0.48	0.48	0.45	0.40	0.34	0.28	0.21	0.15	0.10	5.29	0.00		
-45	0.08	0.11	0.15	0.20	0.26	0.32	0.38	0.43	0.47	0.48	0.48	0.45	0.40	0.34	0.28	0.21	0.15	0.10	5.29	0.00		
		-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)		10	15	20	25	30	35	40	45			
F t		4.94	7.71	12.0	19.2	31.7	52.1	78.6	103	116	113	97.3	74.2	50.6	31.6	19.4	11.9	7.34	4.56	835	---	
F a		0.00	0.00	0.00	9.54	24.5	45.7	72.8	97.4	110	108	91.5	68.1	44.0	24.1	9.91	0.00	0.00	0.00	---	705	

one-half-peak spread: U:16.0,D:15.3 , L:14.0,R:17.9 NEMA Beam Type: Type 4

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29
V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:Blazeline-609mm-TW-6000K-30D-Rev2	TYPE:6000K	WEIGHT:
SPEC.:30 DEG	DIM.:609MM	SERIAL No.:IES002996
MFR.:	SUR.:1	Shielding Angle:

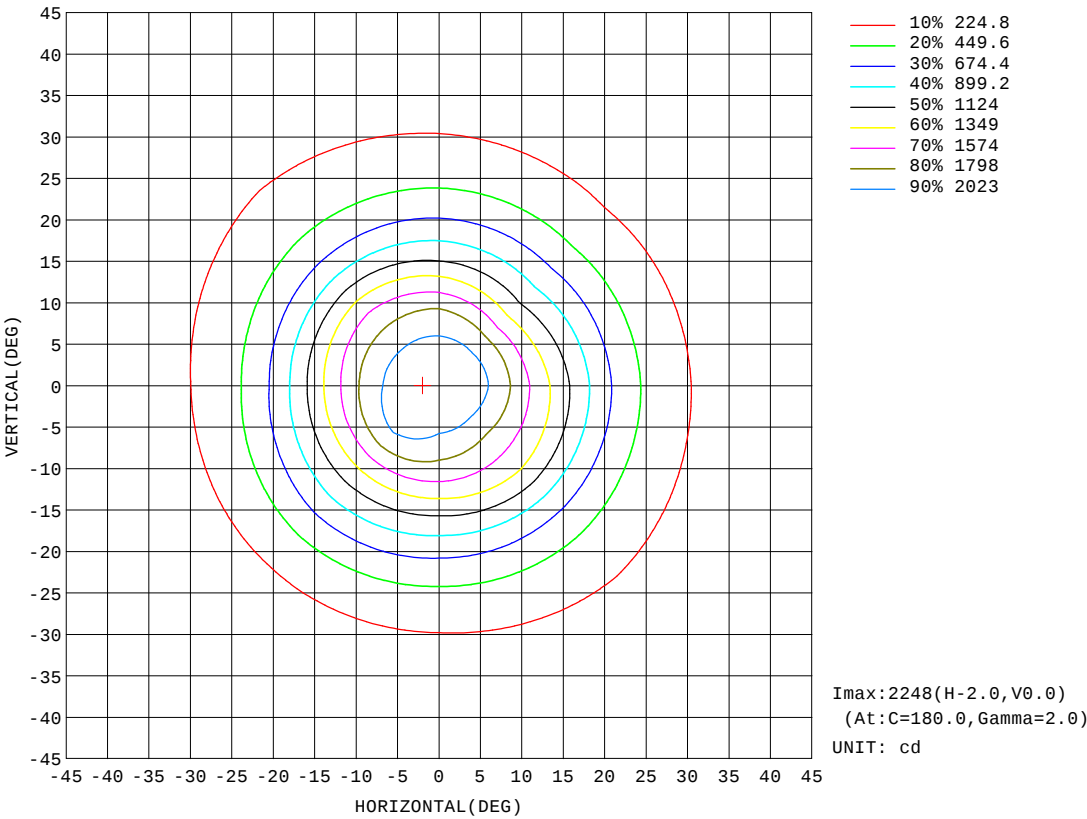


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Blazeline-609mm-TW-6000K-30D-Rev2	TYPE:6000K	WEIGHT:
SPEC.:30 DEG	DIM.:609MM	SERIAL No.:IES002996
MFR.:	SUR.:1	Shielding Angle:

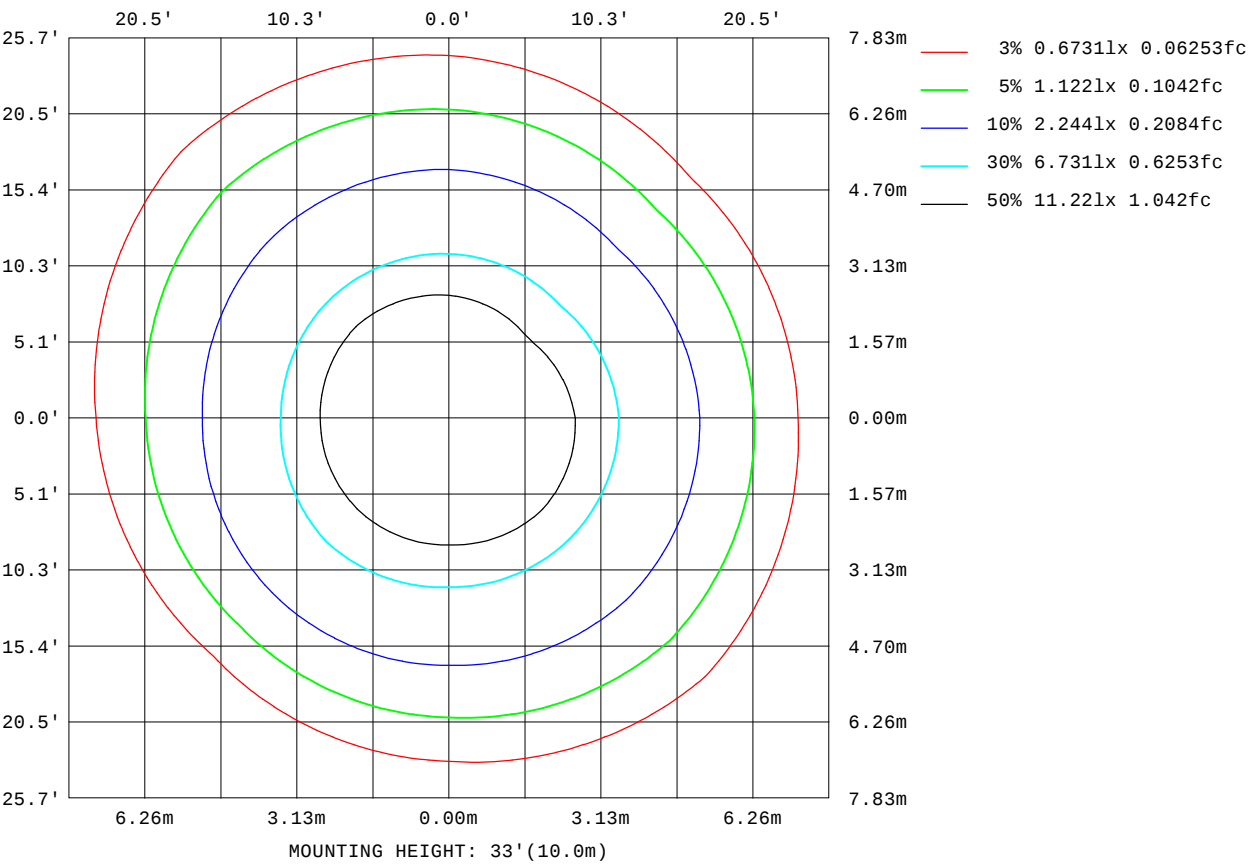

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

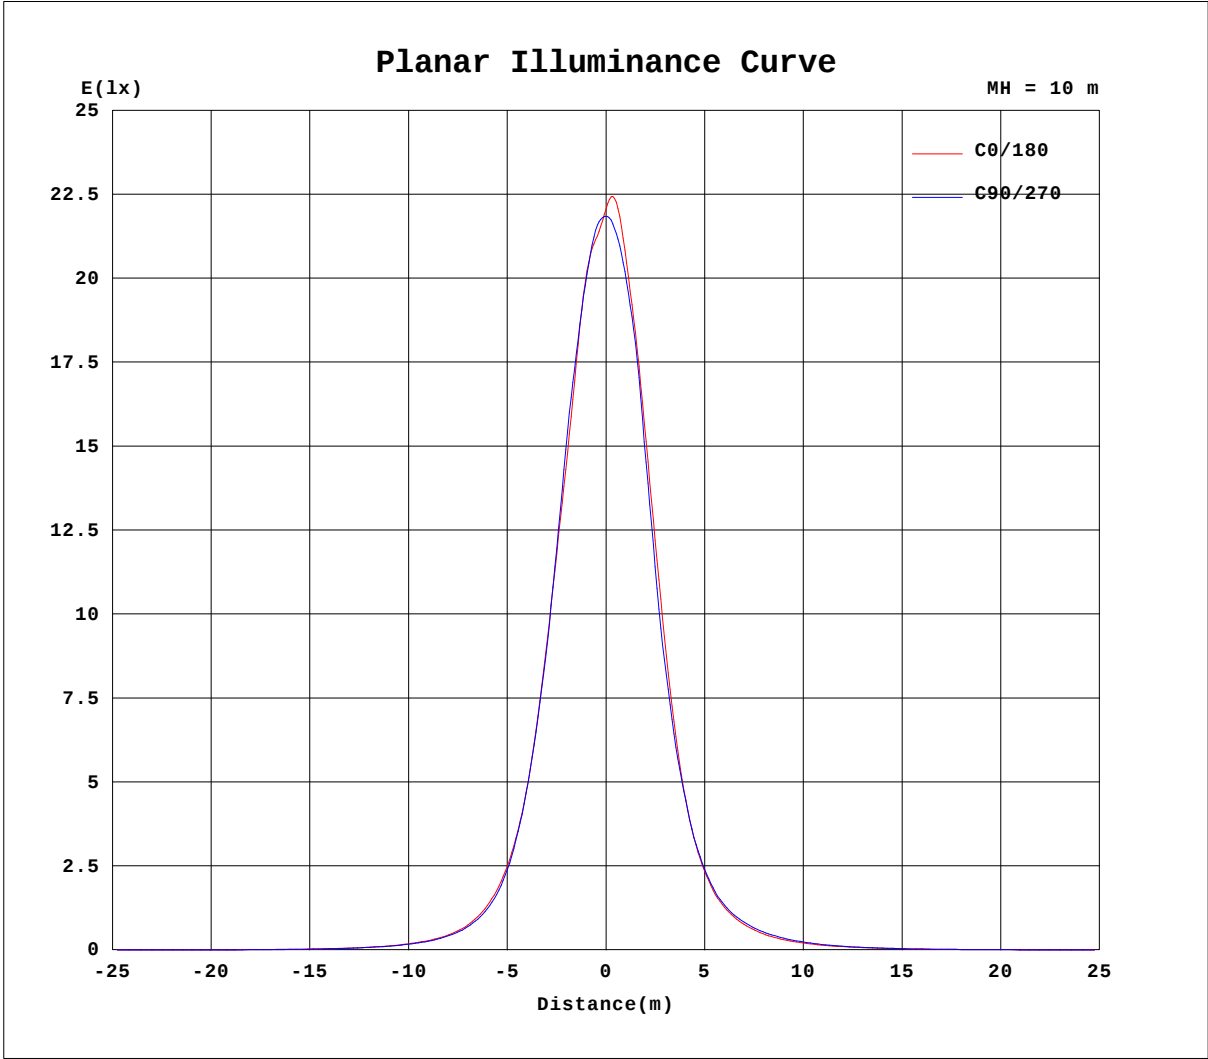


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators:
Test Date: 2024-09-29

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Blazeline-609mm-TW-6000K-30D-Rev2	TYPE:6000K	WEIGHT:
SPEC.:30 DEG	DIM.:609MM	SERIAL No.:IES002996
MFR.:	SUR.:1	Shielding Angle:

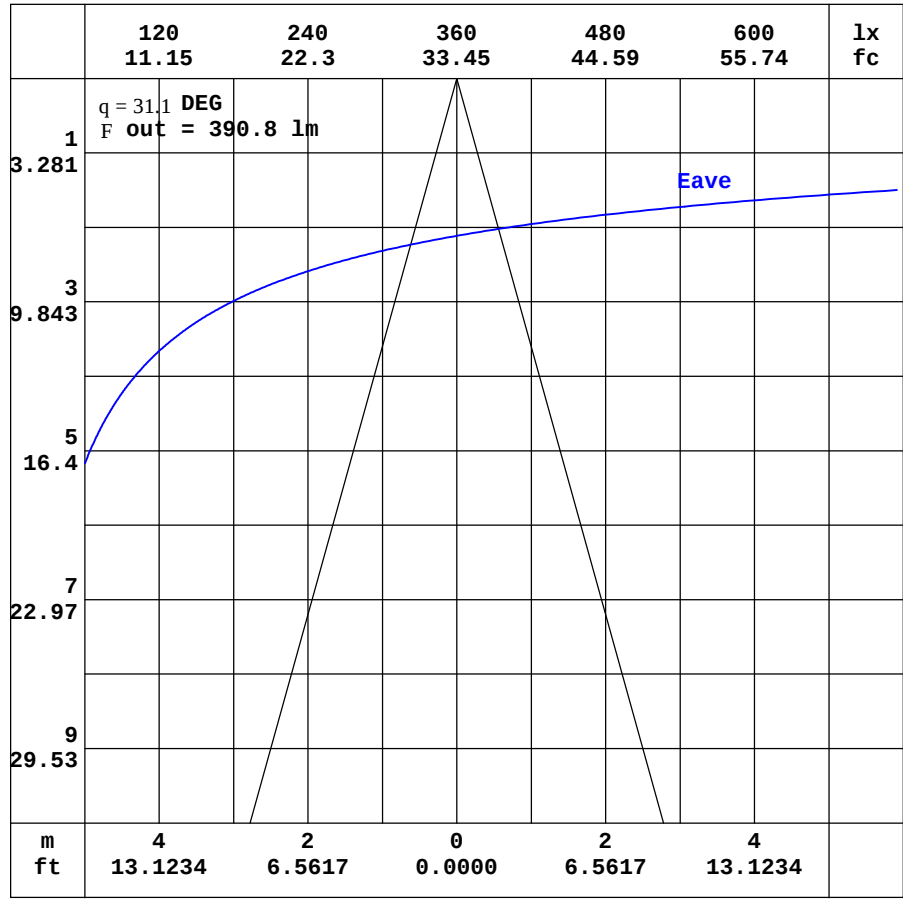

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H _(b) Range:-90 - 90DEG	V(B) Range:-180 - 180DEG
H _(b) Interval: 0.5DEG	V(B) Interval: 0.5DEG
Test Speed: LOW	Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Temperature:25.3DEG	Humidity:65.0%
Operators:	Test Distance:8.630m [K=1.0000]
Test Date:2024-09-29	Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline-609mm-TW-6000K-30D-Rev2	TYPE:6000K	WEIGHT:
SPEC.:30 DEG	DIM.:609MM	SERIAL No.:IES002996
MFR.:	SUR.:1	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	3.36	3.07	2.86	2.79	2.85	3.08	3.51	4.14	4.91	5.73	6.44	6.96	7.28	7.38	7.36	7.26	7.10	6.97	7.04
-170	3.36	3.04	2.81	2.71	2.73	2.87	3.17	3.62	4.17	4.75	5.27	5.67	5.92	6.05	6.09	6.02	5.83	6.10	6.33
-160	3.36	3.02	2.77	2.63	2.59	2.64	2.79	3.03	3.34	3.66	3.96	4.18	4.33	4.41	4.40	4.78	5.20	5.47	5.62
-150	3.36	3.00	2.74	2.56	2.48	2.44	2.44	2.50	2.58	2.65	2.70	2.69	2.64	2.71	3.13	3.52	3.82	4.01	4.10
-140	3.36	3.00	2.72	2.51	2.38	2.28	2.19	2.11	2.03	1.93	1.77	1.57	1.56	1.77	1.99	2.20	2.36	2.48	2.52
-130	3.36	3.00	2.72	2.50	2.32	2.18	2.05	1.90	1.74	1.54	1.32	1.20	1.22	1.26	1.32	1.37	1.42	1.46	1.48
-120	3.36	3.01	2.73	2.49	2.30	2.12	1.97	1.81	1.65	1.46	1.28	1.26	1.23	1.22	1.22	1.22	1.22	1.22	1.23
-110	3.36	3.04	2.75	2.52	2.30	2.12	1.94	1.77	1.62	1.46	1.40	1.40	1.39	1.40	1.39	1.39	1.39	1.39	1.40
-100	3.36	3.07	2.80	2.55	2.32	2.11	1.91	1.73	1.55	1.39	1.38	1.39	1.40	1.41	1.41	1.42	1.42	1.42	1.42
-90	3.36	3.11	2.86	2.62	2.37	2.12	1.87	1.62	1.38	1.13	1.12	1.12	1.12	1.11	1.11	1.11	1.11	1.10	1.10
-80	3.36	3.17	2.96	2.74	2.51	2.29	2.04	1.75	1.43	1.09	1.06	1.06	1.07	1.08	1.09	1.10	1.11	1.12	1.13
-70	3.36	3.23	3.10	3.02	2.88	2.70	2.46	2.15	1.81	1.42	1.36	1.48	1.63	1.79	1.94	2.08	2.19	2.28	2.31
-60	3.36	3.30	3.35	3.38	3.39	3.31	3.21	3.09	2.98	2.92	3.04	3.88	4.83	5.91	7.04	8.08	8.98	9.64	10.0
-50	3.36	3.40	3.60	3.85	4.01	4.20	4.46	4.95	5.77	6.94	8.43	10.6	13.9	17.6	21.3	24.8	27.8	30.0	31.3
-40	3.36	3.51	3.90	4.33	4.78	5.38	6.43	8.28	11.2	14.9	19.1	24.1	31.0	39.5	49.0	58.6	67.5	74.2	77.8
-30	3.36	3.63	4.21	4.83	5.62	6.89	9.22	13.4	19.2	26.1	35.2	46.4	60.8	81.2	111	146	181	208	220
-20	3.36	3.74	4.49	5.33	6.51	8.54	12.5	19.3	27.7	39.4	55.5	79.3	116	176	282	432	590	706	735
-10	3.36	3.83	4.73	5.78	7.32	10.1	15.6	24.4	35.3	52.0	76.5	117	186	325	578	944	1326	1649	1723
0	3.36	3.90	4.92	6.13	7.91	11.1	17.6	27.5	40.1	59.5	89.4	139	223	391	716	1224	1763	2145	2207
10	3.36	3.89	4.87	6.05	7.74	10.7	16.7	26.5	39.5	59.5	88.4	134	205	330	550	906	1359	1634	1724
20	3.36	3.85	4.76	5.83	7.31	9.74	14.4	22.8	34.2	51.1	74.7	107	154	217	305	418	550	656	686
30	3.36	3.79	4.59	5.53	6.73	8.53	11.6	17.2	25.8	37.5	54.2	75.5	102	132	160	188	213	230	233
40	3.36	3.71	4.37	5.17	6.09	7.28	9.06	11.9	16.6	23.4	32.5	44.6	57.9	70.2	81.4	90.8	98.1	102	102
50	3.36	3.62	4.13	4.77	5.42	6.20	7.16	8.48	10.3	12.9	16.6	21.1	26.1	31.4	36.2	40.3	43.3	44.8	44.7
60	3.36	3.55	3.91	4.32	4.79	5.26	5.78	6.38	7.05	7.85	8.83	9.98	11.3	12.7	14.1	15.3	16.2	16.7	16.9
70	3.36	3.49	3.67	3.94	4.19	4.47	4.74	5.00	5.27	5.54	5.83	6.13	6.42	6.68	6.94	7.15	7.32	7.42	7.45
80	3.36	3.43	3.50	3.58	3.70	3.84	3.96	4.06	4.15	4.24	4.32	4.39	4.45	4.51	4.56	4.60	4.63	4.65	4.65
90	3.36	3.37	3.38	3.38	3.39	3.40	3.40	3.41	3.42	3.43	3.42	3.41	3.40	3.39	3.39	3.38	3.37	3.36	3.36
100	3.36	3.31	3.27	3.22	3.18	3.14	3.11	3.07	3.03	3.01	2.98	2.94	2.91	2.88	2.86	2.84	2.82	2.80	2.79
110	3.36	3.26	3.16	3.08	3.00	2.94	2.88	2.84	2.81	2.78	2.76	2.74	2.74	2.73	2.73	2.73	2.73	2.73	2.72
120	3.36	3.21	3.08	2.96	2.87	2.81	2.79	2.77	2.77	2.77	2.83	2.91	3.00	3.09	3.18	3.26	3.31	3.34	3.35
130	3.36	3.17	3.01	2.88	2.80	2.78	2.79	2.83	2.96	3.14	3.36	3.62	3.88	4.15	4.39	4.59	4.75	4.84	4.88
140	3.36	3.13	2.95	2.82	2.79	2.80	2.89	3.10	3.39	3.77	4.22	4.68	5.14	5.56	5.92	6.21	6.42	6.55	6.61
150	3.36	3.11	2.91	2.80	2.79	2.87	3.09	3.45	3.93	4.52	5.14	5.76	6.29	6.74	7.09	7.34	7.51	7.64	7.72
160	3.36	3.09	2.88	2.79	2.81	2.96	3.29	3.79	4.44	5.17	5.89	6.52	7.02	7.34	7.54	7.69	7.81	7.95	8.09
170	3.36	3.07	2.86	2.79	2.84	3.05	3.44	4.04	4.79	5.58	6.32	6.90	7.26	7.47	7.52	7.51	7.38	7.37	7.49
180	3.36	3.07	2.86	2.79	2.85	3.08	3.51	4.14	4.91	5.73	6.44	6.96	7.28	7.38	7.36	7.26	7.10	6.97	7.04

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:

Test Date:2024-09-29

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline-609mm-TW-6000K-30D-Rev2	TYPE:6000K	WEIGHT:
SPEC.:30 DEG	DIM.:609MM	SERIAL No.:IES002996
MFR.:	SUR.:1	Shielding Angle:

Table--2																		UNIT: cd	
H(DEC) V(DEC)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	6.38	6.00	5.62	5.09	4.45	3.76	3.08	2.43	1.86	1.47	1.25	1.24	1.29	1.37	1.38	1.36	1.25	1.08	
-170	6.16	5.88	5.49	4.99	4.36	3.67	2.98	2.34	1.81	1.45	1.26	1.24	1.29	1.38	1.38	1.36	1.25	1.08	
-160	5.47	5.20	4.84	4.36	3.77	3.15	2.56	2.02	1.62	1.36	1.25	1.25	1.31	1.38	1.38	1.36	1.24	1.08	
-150	4.03	3.85	3.57	3.21	2.81	2.38	1.98	1.64	1.41	1.27	1.25	1.27	1.34	1.38	1.39	1.35	1.23	1.08	
-140	2.50	2.40	2.26	2.07	1.87	1.67	1.49	1.35	1.28	1.25	1.26	1.32	1.38	1.39	1.39	1.33	1.21	1.08	
-130	1.48	1.46	1.42	1.38	1.33	1.29	1.27	1.26	1.26	1.29	1.33	1.37	1.39	1.40	1.37	1.30	1.19	1.08	
-120	1.23	1.24	1.24	1.25	1.26	1.27	1.29	1.31	1.34	1.37	1.39	1.40	1.40	1.38	1.33	1.26	1.17	1.08	
-110	1.39	1.40	1.40	1.40	1.40	1.40	1.40	1.41	1.42	1.42	1.41	1.40	1.37	1.33	1.27	1.21	1.14	1.08	
-100	1.42	1.42	1.42	1.42	1.41	1.40	1.39	1.38	1.37	1.35	1.32	1.29	1.26	1.22	1.19	1.15	1.12	1.08	
-90	1.10	1.11	1.11	1.11	1.12	1.12	1.12	1.13	1.13	1.13	1.12	1.11	1.11	1.10	1.10	1.09	1.09	1.08	
-80	1.12	1.12	1.11	1.11	1.10	1.10	1.10	1.10	1.10	1.12	1.13	1.13	1.13	1.12	1.10	1.08	1.08	1.08	
-70	2.31	2.25	2.15	2.03	1.88	1.74	1.59	1.46	1.36	1.32	1.28	1.27	1.27	1.24	1.18	1.13	1.08	1.08	
-60	10.1	9.75	9.10	8.15	6.96	5.75	4.54	3.51	2.72	2.18	1.82	1.60	1.47	1.38	1.31	1.19	1.10	1.08	
-50	31.9	31.2	29.4	26.6	23.1	19.1	15.0	11.0	7.45	4.88	3.25	2.32	1.83	1.58	1.44	1.28	1.13	1.08	
-40	79.6	77.6	72.2	64.0	54.7	44.8	34.5	24.9	17.3	11.1	6.47	3.77	2.44	1.84	1.54	1.37	1.15	1.08	
-30	217	199	172	143	115	86.4	61.9	43.3	29.3	19.2	11.7	6.13	3.34	2.17	1.69	1.46	1.17	1.08	
-20	694	574	433	310	210	142	95.5	63.6	41.8	26.7	16.8	8.98	4.41	2.52	1.82	1.51	1.19	1.08	
-10	1594	1347	934	576	345	206	125	79.6	51.0	32.1	20.0	11.4	5.29	2.81	1.92	1.55	1.20	1.08	
0	2072	1663	1199	741	417	236	136	83.1	53.1	33.4	20.9	12.3	5.65	2.94	1.98	1.57	1.21	1.08	
10	1485	1104	823	529	316	190	116	75.1	49.3	31.6	20.1	11.8	5.78	3.18	2.16	1.68	1.26	1.08	
20	634	514	372	253	176	121	83.9	58.2	39.8	26.4	17.4	9.95	5.38	3.24	2.28	1.77	1.30	1.08	
30	218	191	157	123	93.6	71.6	54.3	40.0	28.5	19.9	13.1	7.75	4.74	3.18	2.34	1.82	1.32	1.08	
40	95.9	86.8	75.4	63.7	52.1	41.3	32.3	24.8	18.6	13.3	8.88	5.95	4.15	3.05	2.33	1.82	1.34	1.08	
50	42.7	39.4	35.2	30.7	26.1	21.6	17.6	14.2	11.0	8.33	6.26	4.75	3.67	2.89	2.31	1.78	1.35	1.08	
60	16.4	15.6	14.6	13.3	12.0	10.6	9.44	8.35	7.04	5.85	4.84	3.99	3.28	2.71	2.20	1.72	1.33	1.08	
70	7.38	7.24	7.04	6.79	6.51	6.22	5.92	5.62	5.18	4.54	3.95	3.43	2.96	2.49	2.05	1.68	1.32	1.08	
80	4.63	4.60	4.55	4.50	4.44	4.37	4.29	4.21	4.09	3.71	3.34	2.97	2.61	2.27	1.91	1.60	1.33	1.08	
90	3.36	3.35	3.35	3.35	3.35	3.35	3.35	3.35	3.34	3.09	2.84	2.59	2.34	2.09	1.84	1.58	1.33	1.08	
100	2.79	2.80	2.81	2.83	2.84	2.86	2.88	2.91	2.92	2.76	2.60	2.42	2.24	2.04	1.82	1.60	1.35	1.08	
110	2.72	2.72	2.71	2.70	2.70	2.70	2.70	2.70	2.66	2.53	2.41	2.29	2.15	1.99	1.81	1.60	1.35	1.08	
120	3.34	3.30	3.24	3.16	3.06	2.96	2.87	2.79	2.59	2.43	2.29	2.17	2.05	1.93	1.78	1.59	1.36	1.08	
130	4.85	4.76	4.60	4.40	4.15	3.87	3.59	3.20	2.77	2.45	2.22	2.08	1.96	1.85	1.74	1.57	1.35	1.08	
140	6.57	6.45	6.25	5.98	5.62	5.19	4.53	3.72	3.05	2.55	2.20	1.99	1.87	1.77	1.68	1.55	1.35	1.08	
150	7.68	7.59	7.42	7.18	6.84	6.02	5.00	4.04	3.22	2.57	2.15	1.88	1.75	1.68	1.61	1.51	1.33	1.08	
160	8.04	7.99	7.91	7.64	6.77	5.85	4.89	3.94	3.10	2.43	1.98	1.73	1.61	1.59	1.53	1.47	1.31	1.08	
170	7.53	7.66	7.18	6.57	5.85	5.05	4.21	3.38	2.63	2.05	1.66	1.50	1.46	1.48	1.46	1.42	1.28	1.08	
180	6.38	6.00	5.62	5.09	4.45	3.76	3.08	2.43	1.86	1.47	1.25	1.24	1.29	1.37	1.38	1.36	1.25	1.08	

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: