

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	832.8 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	105.0V x 104.9H
	At 50% of Imax	65.0V x 65.4H
	At 90% of Imax	29.0V x 30.1H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	893.3 lumens per klm.
	To 50% of Imax	587.7 lumens per klm.
	To 90% of Imax	145.0 lumens per klm.

Upward LOR	2.4 %
Downward LOR	97.6 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Blazeline-609mm-TW-1800K-65D-Rev1	TYPE:1800K	WEIGHT:
SPEC.:65 DEG	DIM.:609MM	SERIAL No.:IES002997
MFR.:	SUR.:1	Shielding Angle:

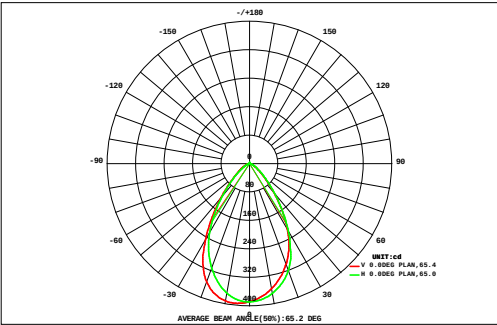

DATA OF LAMP		Eff:46.31lm/W	
MODEL		Imax(cd)	408.8
NOMINAL POWER(W)	10.6	AVAILABILITY(%)	89.4
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	438.7
NOMINAL FLUX(lm)	490.9	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	490.9
TEST VOLTAGE(V)	220	q @50%(H,V)	65,65DEG


VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.07	0.08	0.08	0.07	0.07	0.06	0.05	0.03	0.02	0.01	0.00	0.83	0.00
90	0.01	0.02	0.04	0.05	0.08	0.10	0.13	0.15	0.16	0.16	0.15	0.13	0.10	0.07	0.05	0.02	0.01	0.00	1.43	0.00
80	0.01	0.02	0.05	0.09	0.14	0.21	0.29	0.37	0.41	0.41	0.37	0.30	0.22	0.14	0.08	0.04	0.01	0.00	3.17	0.00
70	0.01	0.03	0.07	0.15	0.26	0.43	0.64	0.84	0.96	0.97	0.86	0.66	0.44	0.26	0.13	0.05	0.02	0.00	6.77	0.59
60	0.01	0.03	0.10	0.23	0.46	0.81	1.32	1.85	2.22	2.25	1.93	1.39	0.86	0.45	0.21	0.08	0.02	0.00	14.2	10.7
50	0.01	0.04	0.13	0.34	0.74	1.46	2.57	3.86	4.74	4.88	4.15	2.82	1.54	0.72	0.30	0.11	0.03	0.00	28.4	26.3
40	0.01	0.05	0.16	0.45	1.09	2.43	4.44	6.49	7.93	8.36	7.40	5.00	2.50	1.05	0.40	0.13	0.03	0.00	47.9	46.3
30	0.01	0.05	0.19	0.56	1.48	3.55	6.43	8.47	10.0	10.8	9.93	6.83	3.47	1.36	0.48	0.15	0.03	0.00	63.8	62.4
20	0.01	0.05	0.21	0.63	1.77	4.40	7.97	10.3	11.3	11.5	10.1	7.36	3.97	1.55	0.52	0.17	0.04	0.00	71.9	70.6
10	0.01	0.05	0.21	0.64	1.83	4.63	8.60	11.3	11.9	11.0	9.19	6.82	3.83	1.52	0.51	0.16	0.03	0.00	72.3	71.0
0	0.01	0.05	0.19	0.58	1.62	4.09	7.94	11.0	11.1	9.68	7.61	5.64	3.16	1.29	0.46	0.15	0.03	0.00	64.5	63.1
-10	0.01	0.04	0.16	0.47	1.23	3.00	5.91	8.30	8.67	7.70	6.04	4.06	2.21	0.95	0.36	0.12	0.03	0.00	49.3	47.7
-20	0.01	0.04	0.12	0.34	0.82	1.83	3.37	4.75	5.31	4.91	3.83	2.45	1.32	0.62	0.27	0.09	0.02	0.00	30.1	28.0
-30	0.01	0.03	0.09	0.22	0.48	0.95	1.58	2.17	2.44	2.31	1.83	1.22	0.70	0.37	0.17	0.07	0.02	0.00	14.6	11.4
-40	0.01	0.02	0.06	0.13	0.25	0.43	0.66	0.86	0.96	0.92	0.76	0.55	0.35	0.20	0.10	0.04	0.01	0.00	6.32	0.65
-50	0.01	0.02	0.04	0.07	0.11	0.18	0.25	0.32	0.35	0.35	0.30	0.23	0.16	0.10	0.05	0.02	0.01	0.00	2.55	0.00
-60	0.01	0.01	0.02	0.03	0.04	0.06	0.08	0.10	0.11	0.10	0.09	0.07	0.05	0.03	0.02	0.01	0.01	0.00	0.84	0.00
-70	0.01	0.01	0.02	0.02	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.00	0.00	0.24	0.00
-80	0.01	0.01	0.02	0.02	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.00	0.00	0.24	0.00
-90	0.01	0.01	0.02	0.02	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.00	0.00	0.24	0.00
-90 -80 -70 -60 -50 -40 -30 -20 HORIZONTAL (DEG) 20 30 40 50 60 70 80 90																				
F t	0.12	0.60	1.89	5.01	12.5	28.6	52.3	71.2	78.7	76.4	64.7	45.6	25.0	10.7	4.16	1.45	0.36	0.04	479	---
F a	0.00	0.00	0.00	0.71	9.27	25.9	49.7	68.7	76.2	73.8	62.0	42.9	22.1	7.25	0.14	0.00	0.00	0.00	---	439

one-half-peak spread: U:32.6,D:32.7 , L:28.1,R:37.7 NEMA Beam Type: Type 6

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29
V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM


NAME:Blazeline-609mm-TW-1800K-65D-Rev1	TYPE:1800K	WEIGHT:
SPEC.:65 DEG	DIM.:609MM	SERIAL No.:IES002997
MFR.:	SUR.:1	Shielding Angle:

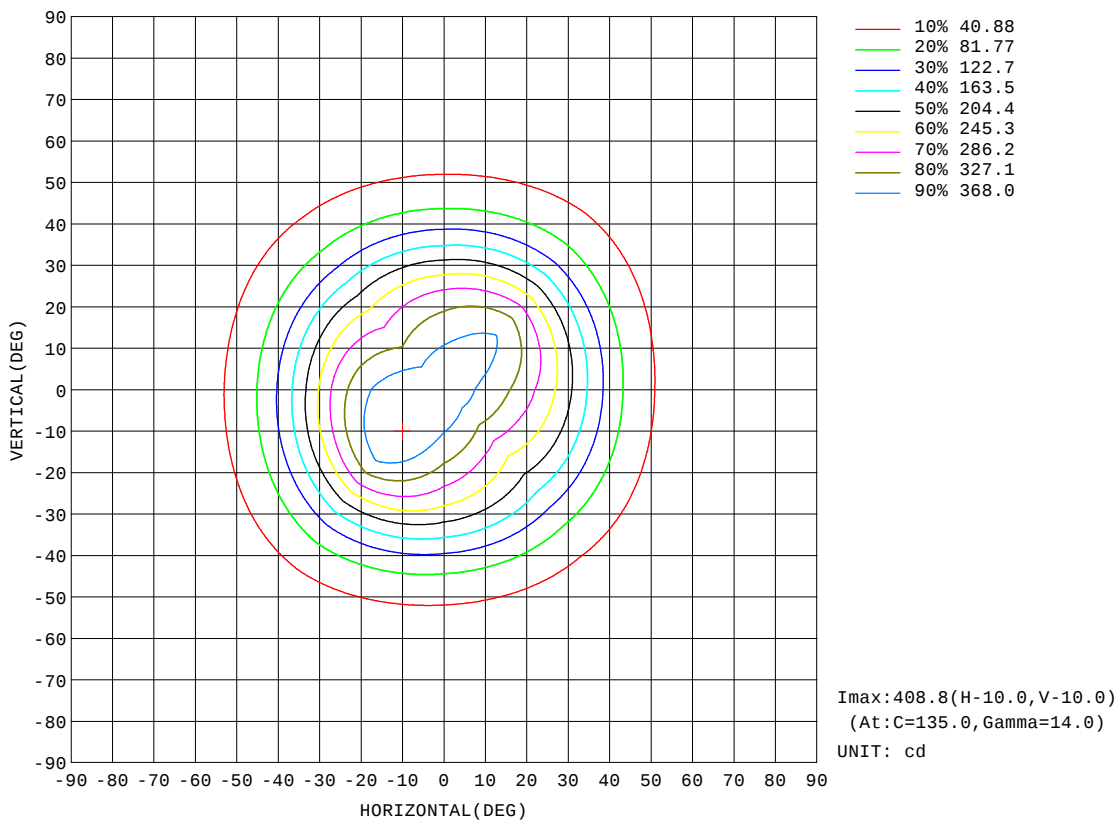

H _(b) Range:-90 - 90DEG	V(B) Range:-180 - 180DEG
H _(b) Interval: 0.5DEG	V(B) Interval: 0.5DEG
Test Speed: LOW	Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Temperature:25.3DEG	Humidity:65.0%
Operators:	Test Distance:8.630m [K=1.0000]
Test Date:2024-09-29	Remarks:

ISOLUX DIAGRAM


NAME:Blazeline-609mm-TW-1800K-65D-Rev1	TYPE:1800K	WEIGHT:
SPEC.:65 DEG	DIM.:609MM	SERIAL No.:IES002997
MFR.:	SUR.:1	Shielding Angle:

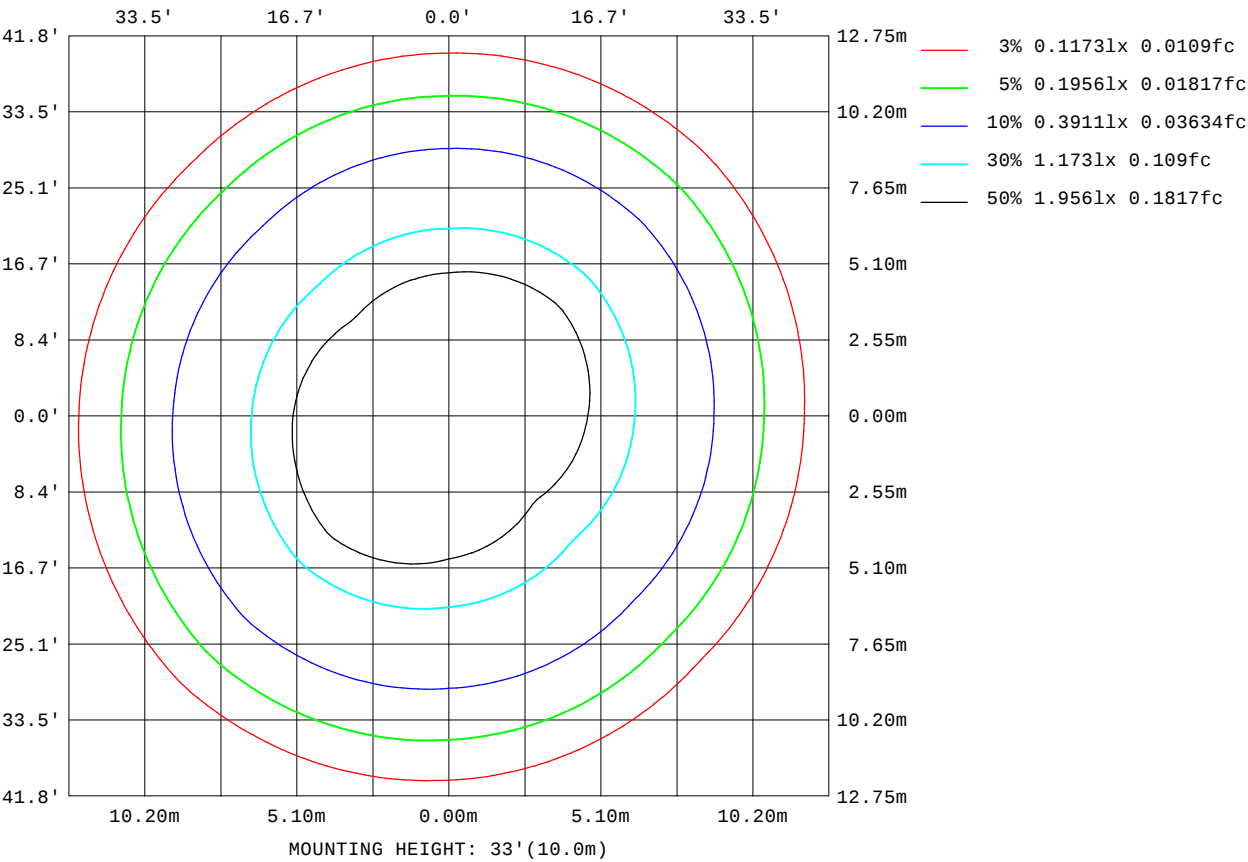

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

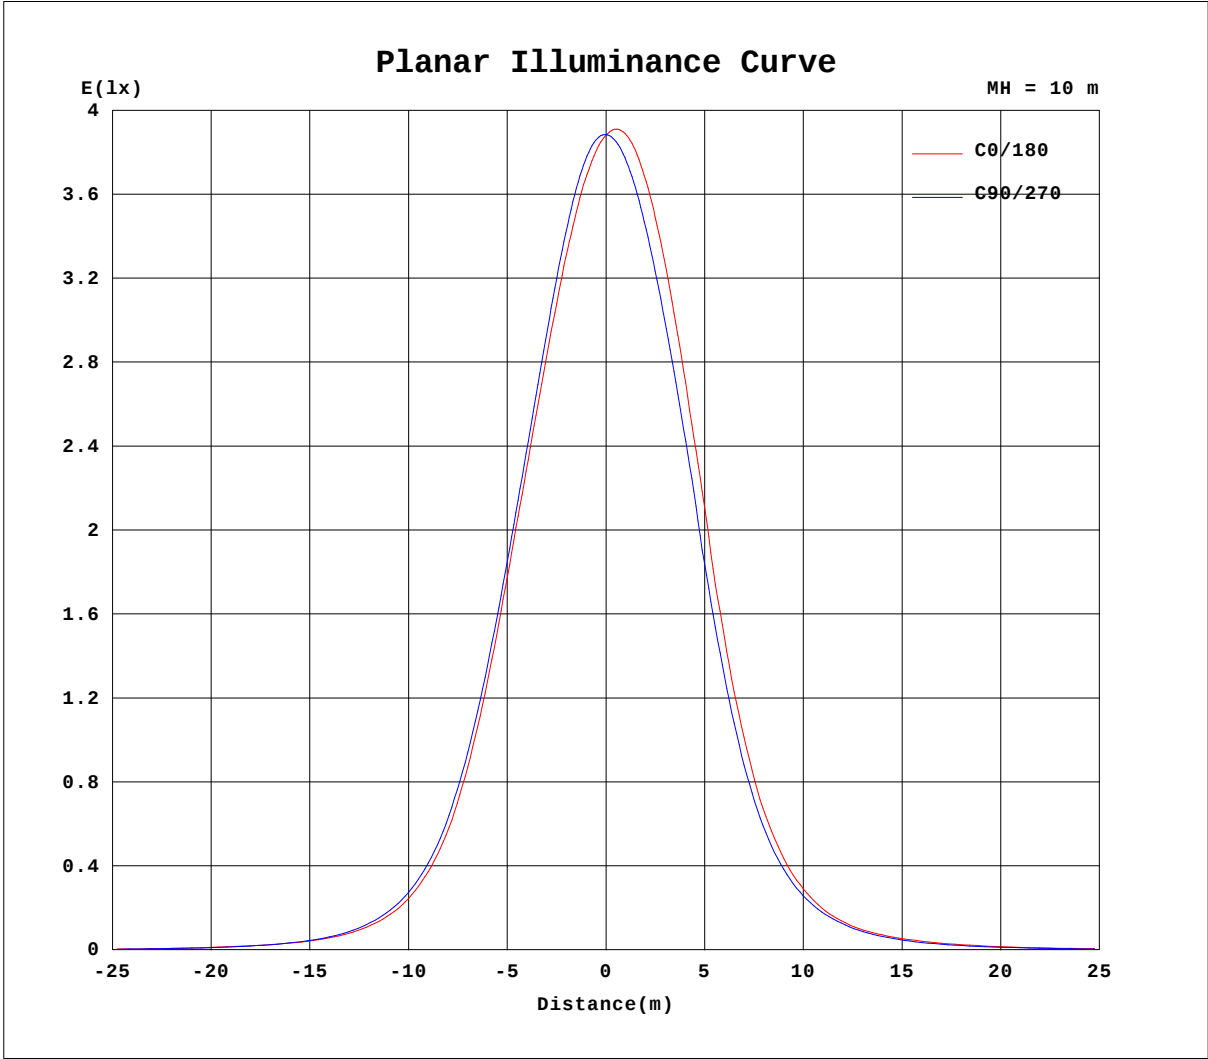


H(b) Range:-90 - 90DEG
H(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Blazeline-609mm-TW-1800K-65D-Rev1	TYPE:1800K	WEIGHT:
SPEC.:65 DEG	DIM.:609MM	SERIAL No.:IES002997
MFR.:	SUR.:1	Shielding Angle:

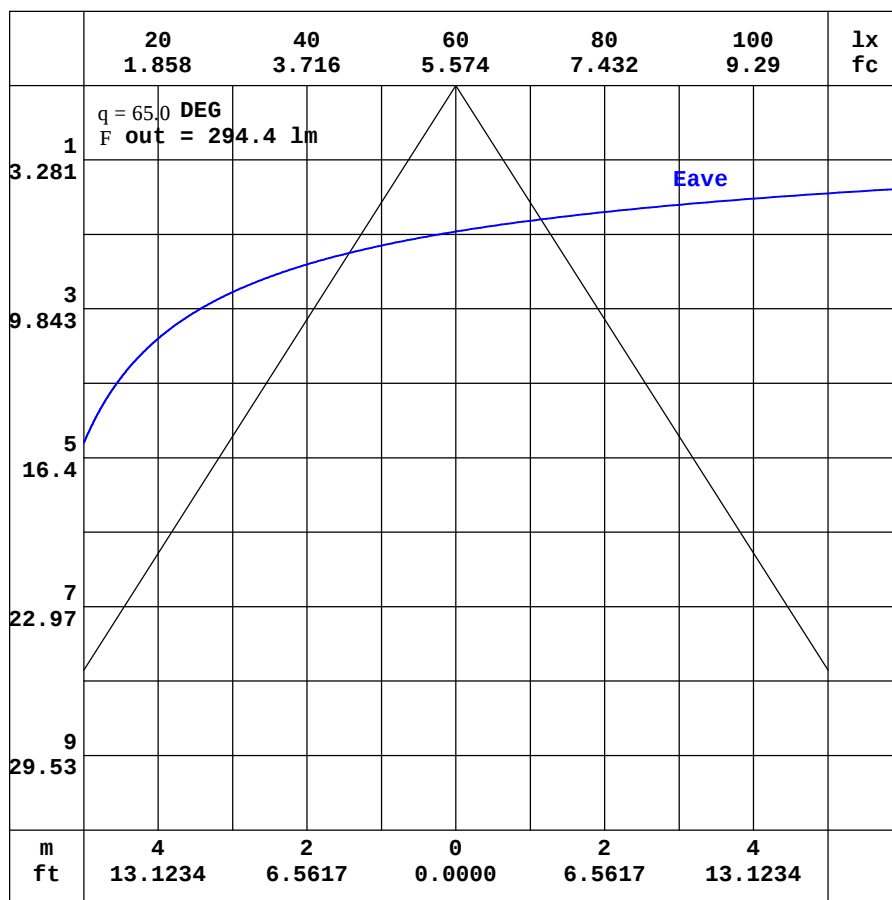

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline-609mm-TW-1800K-65D-Rev1	TYPE:1800K	WEIGHT:
SPEC.:65 DEG	DIM.:609MM	SERIAL No.:IES002997
MFR.:	SUR.:1	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	2.21	2.05	1.99	2.00	2.06	2.18	2.32	2.49	2.68	2.88	3.08	3.28	3.44	3.59	3.69	3.74	3.74	3.73	3.73
-170	2.21	2.02	1.93	1.91	1.95	2.02	2.12	2.24	2.37	2.51	2.64	2.75	2.84	2.87	2.89	2.87	2.83	3.03	3.14
-160	2.21	2.00	1.88	1.83	1.82	1.85	1.90	1.97	2.04	2.11	2.17	2.20	2.21	2.18	2.07	2.19	2.35	2.46	2.51
-150	2.21	1.98	1.83	1.75	1.70	1.68	1.68	1.69	1.71	1.71	1.71	1.68	1.62	1.60	1.72	1.81	1.89	1.94	1.96
-140	2.21	1.96	1.78	1.67	1.59	1.53	1.48	1.43	1.40	1.35	1.29	1.22	1.22	1.30	1.37	1.43	1.47	1.50	1.50
-130	2.21	1.96	1.75	1.61	1.49	1.39	1.30	1.21	1.12	1.04	0.95	0.92	0.97	1.01	1.05	1.08	1.10	1.10	1.10
-120	2.21	1.96	1.75	1.56	1.42	1.29	1.16	1.04	0.92	0.79	0.70	0.72	0.74	0.76	0.77	0.79	0.78	0.78	0.77
-110	2.21	1.97	1.75	1.56	1.38	1.21	1.07	0.92	0.77	0.63	0.58	0.59	0.60	0.60	0.60	0.60	0.60	0.59	0.58
-100	2.21	1.99	1.78	1.58	1.38	1.20	1.02	0.85	0.68	0.52	0.50	0.50	0.50	0.50	0.50	0.50	0.49	0.49	0.48
-90	2.21	2.02	1.82	1.63	1.43	1.24	1.04	0.85	0.65	0.46	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45
-80	2.21	2.06	1.90	1.74	1.58	1.43	1.29	1.12	0.94	0.76	0.83	0.92	1.02	1.10	1.18	1.25	1.31	1.34	1.35
-70	2.21	2.10	2.01	2.02	2.05	2.11	2.28	2.54	2.79	3.04	3.49	4.06	4.61	5.14	5.60	5.98	6.26	6.42	6.46
-60	2.21	2.16	2.25	2.48	2.93	3.62	4.41	5.28	6.37	7.62	9.08	10.9	12.8	14.5	16.1	17.4	18.3	18.8	18.8
-50	2.21	2.23	2.56	3.16	4.25	5.57	7.31	9.53	12.3	15.7	19.8	25.1	30.7	36.4	41.5	45.8	48.7	49.9	49.4
-40	2.21	2.31	2.88	4.05	5.72	7.98	11.1	15.4	21.0	28.8	39.0	52.6	68.1	83.6	98.1	110	118	121	119
-30	2.21	2.42	3.21	4.89	7.14	10.6	15.4	22.3	31.9	45.7	66.1	94.2	129	167	198	222	234	236	225
-20	2.21	2.52	3.55	5.66	8.60	13.1	19.7	29.2	42.6	64.3	97.3	142	197	258	317	344	346	334	312
-10	2.21	2.60	3.85	6.22	9.70	15.0	22.8	33.7	50.4	79.2	121	177	244	311	361	393	409	390	370
0	2.21	2.66	4.02	6.53	10.3	15.9	24.2	35.4	52.7	82.7	126	184	249	311	353	379	392	394	388
10	2.21	2.64	3.92	6.32	9.82	15.1	22.7	33.1	48.5	74.5	112	161	216	268	302	320	329	355	371
20	2.21	2.60	3.70	5.86	8.86	13.3	19.7	28.4	39.9	57.8	84.2	119	160	199	230	259	286	306	319
30	2.21	2.53	3.43	5.18	7.53	11.0	15.7	21.9	30.1	40.7	55.7	75.3	97.9	123	152	178	198	212	218
40	2.21	2.45	3.17	4.43	6.22	8.58	11.6	15.6	20.5	26.7	34.1	43.1	53.8	66.1	78.7	90.9	101	107	110
50	2.21	2.38	2.91	3.64	4.84	6.33	8.17	10.4	13.0	15.9	19.1	23.2	27.9	32.7	37.4	41.6	45.0	47.3	48.2
60	2.21	2.34	2.64	3.07	3.65	4.45	5.43	6.48	7.67	8.91	10.3	12.0	13.7	15.4	17.0	18.4	19.6	20.3	20.7
70	2.21	2.29	2.40	2.65	2.90	3.15	3.46	3.83	4.25	4.69	5.22	5.82	6.38	6.89	7.38	7.80	8.11	8.33	8.42
80	2.21	2.25	2.30	2.34	2.40	2.51	2.60	2.68	2.74	2.78	2.84	2.90	2.96	3.02	3.07	3.12	3.16	3.19	3.19
90	2.21	2.21	2.22	2.22	2.22	2.22	2.22	2.22	2.22	2.23	2.22	2.21	2.20	2.19	2.18	2.17	2.16	2.15	2.14
100	2.21	2.18	2.15	2.12	2.10	2.08	2.06	2.04	2.03	2.02	2.00	1.98	1.97	1.96	1.95	1.95	1.94	1.94	1.93
110	2.21	2.15	2.10	2.05	2.02	1.99	1.98	1.97	1.96	1.95	1.95	1.95	1.96	1.97	1.98	1.99	2.01	2.02	2.03
120	2.21	2.12	2.05	2.00	1.98	1.97	1.97	1.97	1.97	1.98	2.00	2.06	2.11	2.17	2.22	2.27	2.31	2.34	2.37
130	2.21	2.10	2.02	1.98	1.98	1.98	2.00	2.03	2.08	2.15	2.21	2.31	2.42	2.52	2.61	2.69	2.76	2.81	2.84
140	2.21	2.08	2.00	1.98	1.99	2.01	2.07	2.15	2.24	2.37	2.50	2.63	2.77	2.91	3.02	3.12	3.19	3.24	3.27
150	2.21	2.06	1.99	1.98	2.01	2.06	2.16	2.27	2.42	2.58	2.75	2.93	3.10	3.24	3.37	3.46	3.53	3.58	3.62
160	2.21	2.06	1.99	1.99	2.03	2.12	2.24	2.38	2.56	2.75	2.95	3.14	3.32	3.45	3.54	3.65	3.73	3.80	3.85
170	2.21	2.05	1.99	2.00	2.05	2.16	2.29	2.46	2.65	2.85	3.06	3.26	3.42	3.56	3.66	3.73	3.75	3.80	3.87
180	2.21	2.05	1.99	2.00	2.06	2.18	2.32	2.49	2.68	2.88	3.08	3.28	3.44	3.59	3.69	3.74	3.74	3.73	3.73

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:

Test Date:2024-09-29

V(B) Range: -180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline-609mm-TW-1800K-65D-Rev1	TYPE:1800K	WEIGHT:
SPEC.:65 DEG	DIM.:609MM	SERIAL No.:IES002997
MFR.:	SUR.:1	Shielding Angle:

Table--2		UNIT: cd																	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	3.47	3.22	2.92	2.62	2.33	2.05	1.79	1.55	1.29	1.11	0.94	0.80	0.69	0.60	0.55	0.50	0.46	0.46	
-170	3.11	2.97	2.73	2.49	2.24	1.99	1.73	1.48	1.26	1.08	0.92	0.79	0.68	0.60	0.55	0.50	0.46	0.46	
-160	2.51	2.45	2.35	2.19	1.98	1.76	1.55	1.34	1.17	1.01	0.87	0.76	0.67	0.59	0.54	0.50	0.46	0.46	
-150	1.97	1.93	1.86	1.75	1.61	1.46	1.31	1.16	1.03	0.91	0.80	0.71	0.64	0.58	0.53	0.50	0.46	0.46	
-140	1.50	1.47	1.41	1.35	1.26	1.16	1.06	0.97	0.88	0.80	0.72	0.66	0.60	0.56	0.52	0.50	0.46	0.46	
-130	1.09	1.08	1.05	1.01	0.96	0.90	0.85	0.80	0.75	0.70	0.65	0.61	0.57	0.54	0.51	0.49	0.46	0.46	
-120	0.78	0.77	0.76	0.74	0.73	0.71	0.69	0.68	0.65	0.62	0.59	0.57	0.54	0.52	0.51	0.47	0.46	0.46	
-110	0.59	0.59	0.60	0.60	0.60	0.59	0.59	0.59	0.58	0.57	0.56	0.54	0.52	0.51	0.48	0.47	0.46	0.46	
-100	0.49	0.50	0.51	0.52	0.52	0.53	0.54	0.54	0.54	0.53	0.51	0.50	0.49	0.48	0.47	0.47	0.46	0.46	
-90	0.45	0.46	0.46	0.47	0.47	0.47	0.48	0.48	0.49	0.48	0.48	0.48	0.47	0.47	0.47	0.47	0.46	0.46	
-80	1.33	1.29	1.23	1.16	1.08	0.99	0.90	0.81	0.74	0.71	0.68	0.66	0.62	0.58	0.52	0.48	0.47	0.46	
-70	6.31	6.06	5.71	5.27	4.79	4.28	3.73	3.19	2.70	2.30	1.90	1.51	1.18	0.92	0.75	0.60	0.48	0.46	
-60	18.2	17.3	15.9	14.3	12.7	11.0	9.26	7.65	6.39	5.26	4.20	3.20	2.41	1.68	1.09	0.77	0.51	0.46	
-50	47.5	44.1	39.5	34.4	29.0	23.9	19.2	15.5	12.5	9.92	7.58	5.62	3.96	2.71	1.68	0.97	0.59	0.46	
-40	113	104	91.4	77.1	62.7	49.0	37.6	28.7	21.8	16.5	12.2	8.64	5.93	3.79	2.34	1.21	0.65	0.46	
-30	213	195	172	145	116	91.1	68.3	49.3	34.8	24.5	17.6	12.2	8.02	5.04	2.94	1.51	0.71	0.46	
-20	291	264	234	205	178	144	107	74.7	50.3	33.5	22.7	15.5	10.0	6.12	3.41	1.75	0.76	0.46	
-10	346	310	288	262	231	189	142	97.6	63.8	41.0	26.8	18.0	11.6	6.89	3.78	1.92	0.80	0.46	
0	376	357	332	301	262	213	159	108	69.8	44.3	28.6	19.2	12.3	7.25	3.94	2.00	0.81	0.46	
10	377	381	354	316	266	209	152	102	66.4	42.6	27.8	18.6	11.9	7.10	3.90	2.00	0.84	0.46	
20	327	325	309	274	220	167	118	81.4	54.4	36.1	24.5	16.6	10.7	6.51	3.65	1.90	0.84	0.46	
30	221	213	195	170	140	106	78.3	56.0	39.4	27.6	19.6	13.5	8.83	5.57	3.27	1.73	0.82	0.46	
40	110	105	95.9	84.0	71.2	58.1	45.6	34.5	26.0	19.4	14.2	9.98	6.84	4.40	2.76	1.50	0.79	0.46	
50	47.9	46.0	42.8	38.7	34.1	29.2	24.4	19.8	15.8	12.3	9.35	6.92	4.90	3.37	2.19	1.31	0.74	0.46	
60	20.5	19.9	18.8	17.5	15.9	14.2	12.4	10.6	8.82	7.22	5.76	4.41	3.34	2.44	1.68	1.15	0.68	0.46	
70	8.35	8.15	7.85	7.45	6.97	6.45	5.88	5.28	4.65	3.94	3.31	2.74	2.23	1.77	1.37	0.98	0.66	0.46	
80	3.19	3.17	3.13	3.08	3.03	2.96	2.89	2.82	2.74	2.49	2.22	1.96	1.67	1.39	1.11	0.87	0.66	0.46	
90	2.14	2.15	2.16	2.16	2.17	2.18	2.18	2.19	2.20	2.00	1.81	1.62	1.42	1.23	1.04	0.85	0.65	0.46	
100	1.94	1.95	1.95	1.96	1.97	1.98	1.99	2.00	2.00	1.84	1.67	1.51	1.34	1.17	1.00	0.83	0.65	0.46	
110	2.03	2.03	2.03	2.02	2.01	2.00	1.99	1.99	1.93	1.77	1.60	1.44	1.28	1.13	0.96	0.80	0.63	0.46	
120	2.36	2.35	2.33	2.30	2.27	2.23	2.18	2.13	1.95	1.75	1.56	1.40	1.23	1.08	0.93	0.77	0.62	0.46	
130	2.82	2.79	2.75	2.69	2.62	2.55	2.47	2.28	2.02	1.78	1.56	1.36	1.18	1.03	0.88	0.74	0.60	0.46	
140	3.25	3.21	3.14	3.07	2.97	2.87	2.67	2.36	2.06	1.79	1.54	1.32	1.13	0.97	0.83	0.71	0.58	0.46	
150	3.59	3.54	3.46	3.38	3.26	2.99	2.65	2.33	2.03	1.74	1.48	1.25	1.06	0.90	0.77	0.66	0.55	0.46	
160	3.79	3.73	3.67	3.54	3.20	2.85	2.52	2.18	1.88	1.61	1.36	1.14	0.96	0.81	0.71	0.61	0.52	0.46	
170	3.80	3.74	3.47	3.16	2.86	2.55	2.23	1.92	1.64	1.39	1.18	0.99	0.83	0.71	0.64	0.55	0.49	0.46	
180	3.47	3.22	2.92	2.62	2.33	2.05	1.79	1.55	1.29	1.11	0.94	0.80	0.69	0.60	0.55	0.50	0.46	0.46	

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: