

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	10003.5 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	27.1V x 28.1H
	At 50% of Imax	13.7V x 14.2H
	At 90% of Imax	5.0V x 4.9H

Beam Flux	Total	1000.5 lumens per klm.
	To 10% of Imax	652.0 lumens per klm.
	To 50% of Imax	335.7 lumens per klm.
	To 90% of Imax	62.4 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-28

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Blazeline-609mm-TW-2200K-15D-Rev1	TYPE:2200K	WEIGHT:
SPEC.:15 DEG	DIM.:609MM	SERIAL No.:IES002954
MFR.:	SUR.:1	Shielding Angle:

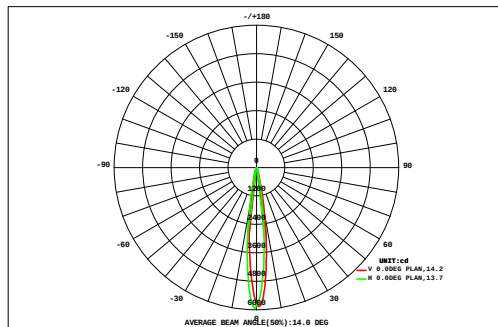

DATA OF LAMP		Eff:55.84lm/W	
MODEL		Imax(cd)	5921
NOMINAL POWER(W)	10.8	AVAILABILITY(%)	65.1
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	385.6
NOMINAL FLUX(lm)	591.9	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	591.9
TEST VOLTAGE(V)	220	q @50%(H,V)	14,14DEG

		AREA FLUX DIAGRAM														UNIT:lm			F t	F a	
		0.14	0.16	0.19	0.22	0.26	0.30	0.33	0.37	0.39	0.40	0.40	0.39	0.37	0.34	0.31	0.28	0.25	0.21	5.29	0.00
VERTICAL (DEG)	18	0.16	0.19	0.22	0.27	0.32	0.37	0.43	0.48	0.52	0.53	0.50	0.46	0.42	0.38	0.33	0.29	0.24	6.64	0.00	
	16	0.19	0.22	0.26	0.32	0.40	0.48	0.58	0.67	0.74	0.76	0.74	0.68	0.60	0.53	0.46	0.40	0.33	0.27	8.64	1.61
	14	0.22	0.27	0.32	0.39	0.51	0.66	0.85	1.04	1.17	1.20	1.13	0.99	0.82	0.68	0.56	0.46	0.38	0.30	12.0	7.58
	12	0.26	0.32	0.40	0.51	0.68	0.97	1.34	1.69	1.94	1.98	1.80	1.50	1.19	0.90	0.70	0.55	0.43	0.34	17.5	13.7
	10	0.29	0.37	0.48	0.66	0.97	1.43	2.04	2.64	3.05	3.09	2.78	2.25	1.69	1.29	0.93	0.66	0.49	0.37	25.5	22.5
	8	0.33	0.42	0.57	0.84	1.33	2.03	2.89	3.73	4.35	4.43	3.93	3.17	2.46	1.79	1.22	0.80	0.55	0.40	35.3	32.8
	6	0.36	0.47	0.66	1.03	1.68	2.61	3.67	4.66	5.55	5.70	5.05	4.25	3.28	2.33	1.54	0.96	0.61	0.43	44.9	42.5
	4	0.38	0.51	0.73	1.15	1.92	2.96	4.16	5.35	6.40	6.69	6.19	5.16	3.95	2.79	1.80	1.09	0.66	0.44	52.3	50.4
	2	0.40	0.53	0.77	1.23	2.05	3.17	4.47	5.83	6.94	7.10	6.53	5.40	4.13	2.91	1.85	1.11	0.65	0.44	55.5	53.5
	0	0.40	0.54	0.78	1.24	2.04	3.17	4.51	5.83	6.45	6.47	5.90	4.90	3.77	2.65	1.67	0.99	0.60	0.41	52.3	50.2
-	2	0.40	0.53	0.75	1.14	1.82	2.82	3.98	4.83	5.26	5.26	4.84	4.10	3.16	2.17	1.37	0.82	0.52	0.37	44.1	41.8
	4	0.38	0.50	0.68	0.98	1.50	2.23	2.97	3.57	3.89	3.90	3.63	3.09	2.37	1.61	1.02	0.64	0.44	0.32	33.7	31.3
	6	0.36	0.46	0.60	0.82	1.15	1.56	1.99	2.38	2.58	2.60	2.44	2.06	1.57	1.07	0.71	0.49	0.36	0.27	23.5	20.6
	8	0.32	0.41	0.52	0.67	0.84	1.05	1.29	1.48	1.58	1.58	1.48	1.26	0.96	0.70	0.50	0.38	0.29	0.23	15.5	11.9
	10	0.29	0.36	0.44	0.53	0.62	0.72	0.82	0.90	0.94	0.93	0.86	0.75	0.61	0.48	0.38	0.29	0.23	0.19	10.3	5.09
	12	0.25	0.31	0.37	0.42	0.47	0.52	0.56	0.59	0.59	0.58	0.55	0.49	0.42	0.35	0.29	0.23	0.19	0.15	7.32	0.00
-18	14	0.21	0.25	0.29	0.33	0.36	0.39	0.41	0.42	0.42	0.40	0.38	0.35	0.31	0.27	0.22	0.18	0.15	0.12	5.48	0.00
	16	0.18	0.21	0.24	0.27	0.30	0.33	0.36	0.39	0.41	0.41	0.40	0.38	0.35	0.31	0.27	0.22	0.18	0.15	5.48	0.00
		-18	-16	-14	-12	-10	-8	-6	-4	HORIZONTAL (DEG)				4	6	8	10	12	14	16	18
F t		5.33	6.82	9.03	12.7	18.9	27.4	37.3	46.5	52.8	53.6	49.2	41.3	32.1	23.3	15.9	10.7	7.42	5.51	456	---
F a		0.00	0.00	2.40	8.81	15.5	24.6	34.8	44.1	50.5	51.4	47.0	38.7	29.4	19.9	12.0	5.80	0.73	0.00	---	386

one-half-peak spread: U:7.0,D:6.9 , L:7.2,R:7.1


NEMA Beam Type: Type 2

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-28

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM


NAME:Blazeline-609mm-TW-2200K-15D-Rev1	TYPE:2200K	WEIGHT:
SPEC.:15 DEG	DIM.:609MM	SERIAL No.:IES002954
MFR.:	SUR.:1	Shielding Angle:

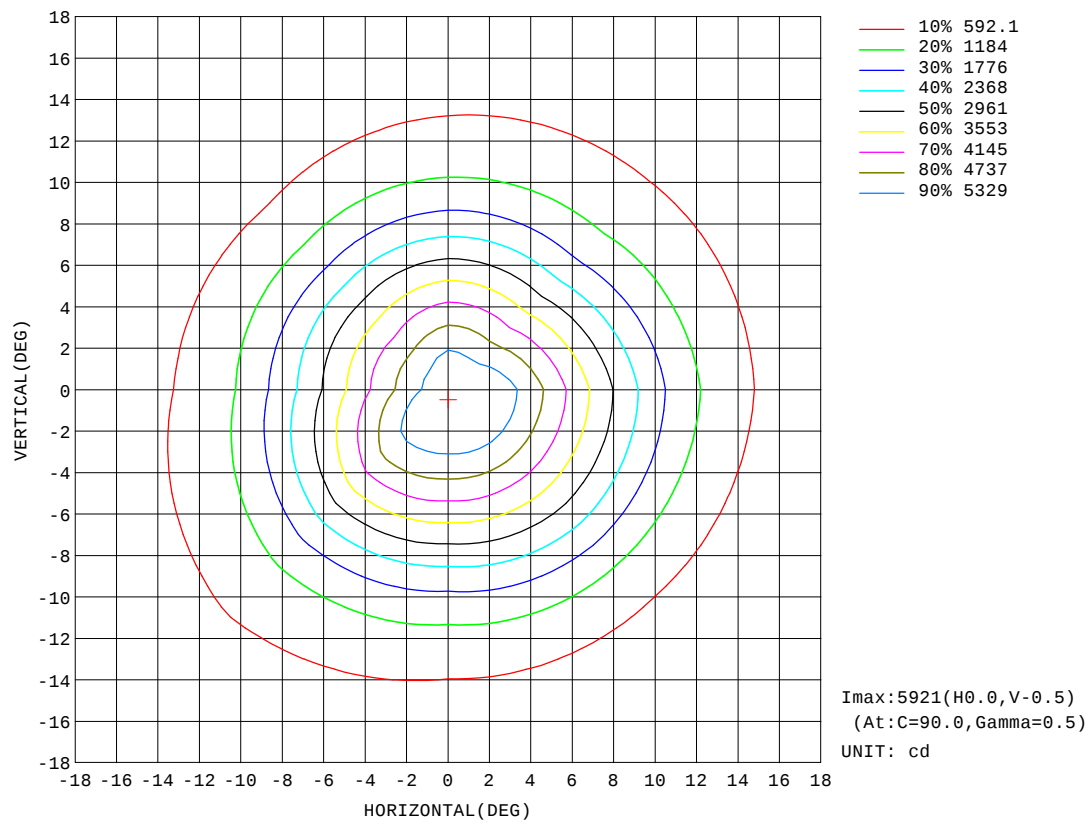

H _(b) Range:-90 - 90DEG	V(B) Range:-180 - 180DEG
H _(b) Interval: 0.5DEG	V(B) Interval: 0.5DEG
Test Speed: LOW	Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Temperature:25.3DEG	Humidity:65.0%
Operators:	Test Distance:8.630m [K=1.0000]
Test Date:2024-09-28	Remarks:

ISOLUX DIAGRAM


NAME:Blazeline-609mm-TW-2200K-15D-Rev1	TYPE:2200K	WEIGHT:
SPEC.:15 DEG	DIM.:609MM	SERIAL No.:IES002954
MFR.:	SUR.:1	Shielding Angle:

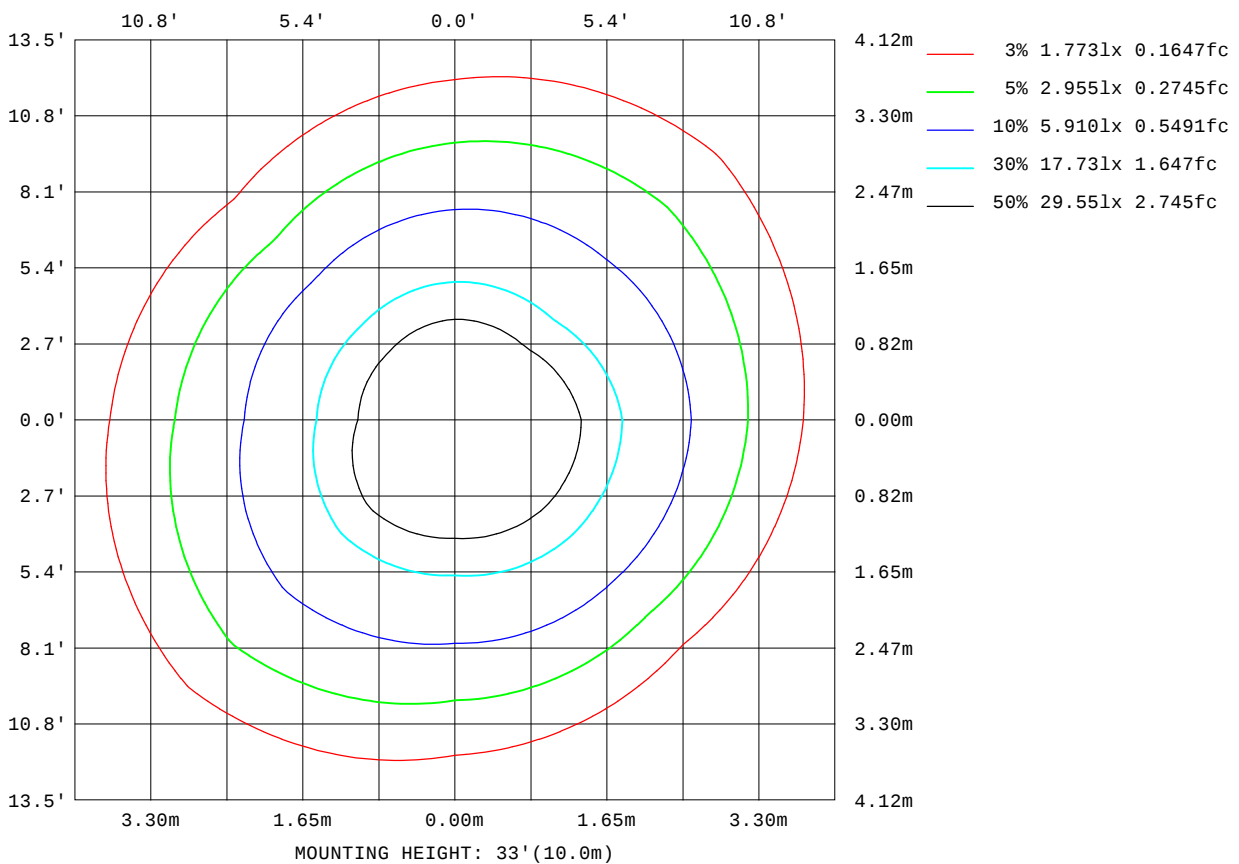

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators:
Test Date: 2024-09-28

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

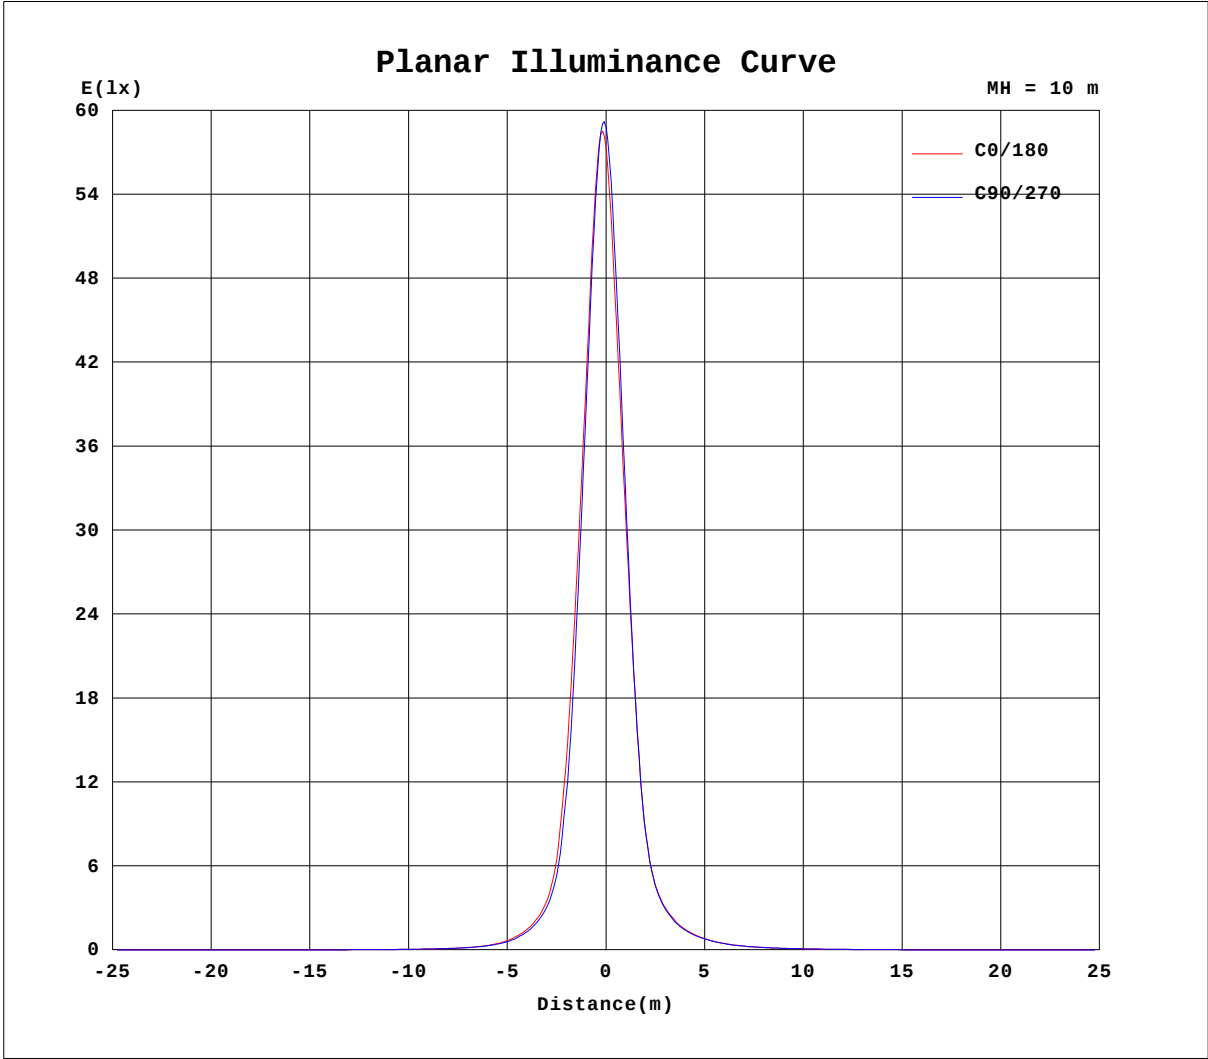


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators:
Test Date: 2024-09-28

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Blazeline-609mm-TW-2200K-15D-Rev1	TYPE:2200K	WEIGHT:
SPEC.:15 DEG	DIM.:609MM	SERIAL No.:IES002954
MFR.:	SUR.:1	Shielding Angle:

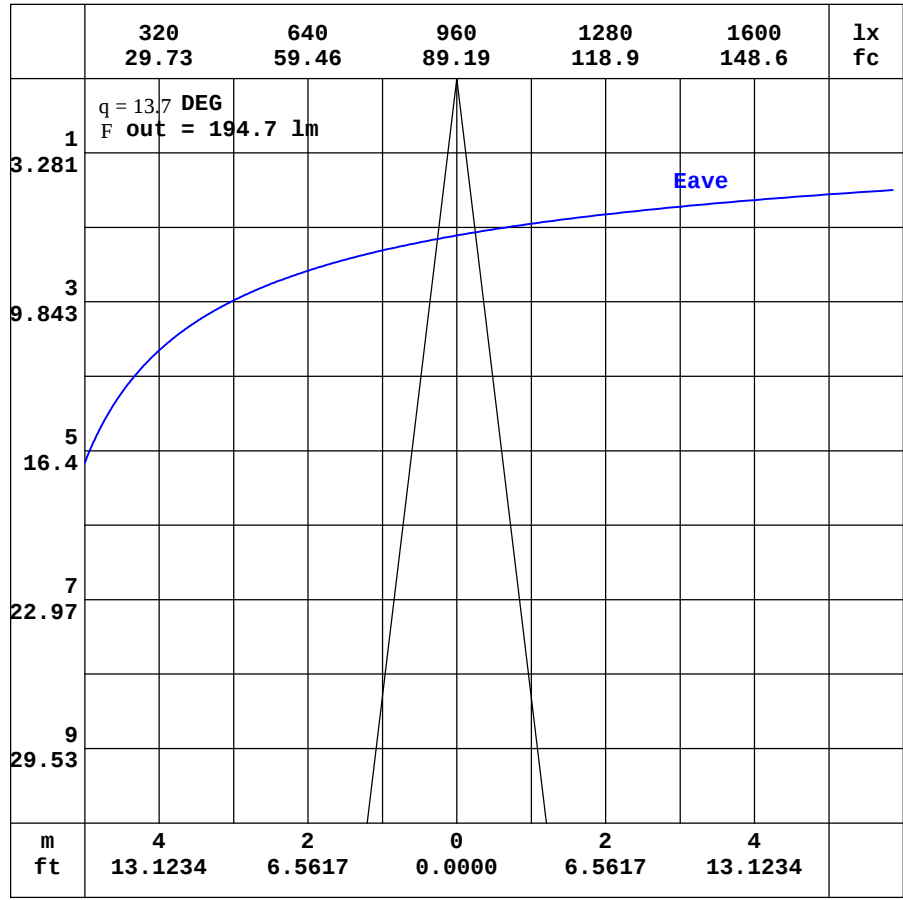

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-28

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline-609mm-TW-2200K-15D-Rev1	TYPE:2200K	WEIGHT:
SPEC.:15 DEG	DIM.:609MM	SERIAL No.:IES002954
MFR.:	SUR.:1	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	2.10	1.85	1.59	1.46	1.48	1.56	1.83	2.39	3.22	4.06	4.66	4.82	4.74	4.55	4.40	4.31	4.08	3.97	4.00
-170	2.10	1.83	1.58	1.45	1.44	1.48	1.64	2.04	2.64	3.26	3.74	3.94	3.96	3.96	4.05	4.17	4.23	4.33	4.57
-160	2.10	1.83	1.57	1.43	1.41	1.41	1.45	1.63	1.97	2.36	2.67	2.87	2.93	3.00	3.09	3.43	3.74	3.93	4.02
-150	2.10	1.83	1.59	1.43	1.38	1.35	1.31	1.30	1.39	1.52	1.62	1.66	1.64	1.70	2.03	2.31	2.53	2.66	2.69
-140	2.10	1.84	1.62	1.45	1.37	1.32	1.26	1.17	1.07	0.98	0.90	0.76	0.75	0.89	1.04	1.18	1.30	1.36	1.36
-130	2.10	1.85	1.65	1.48	1.37	1.32	1.26	1.18	1.05	0.90	0.71	0.57	0.55	0.54	0.54	0.54	0.54	0.53	0.52
-120	2.10	1.87	1.70	1.54	1.42	1.32	1.27	1.23	1.15	1.06	0.96	0.89	0.82	0.76	0.70	0.66	0.62	0.60	0.59
-110	2.10	1.90	1.74	1.60	1.48	1.39	1.31	1.24	1.19	1.15	1.14	1.13	1.12	1.12	1.12	1.12	1.12	1.12	1.13
-100	2.10	1.93	1.78	1.65	1.53	1.43	1.34	1.26	1.19	1.13	1.13	1.14	1.14	1.14	1.14	1.15	1.15	1.15	1.15
-90	2.10	1.97	1.83	1.70	1.56	1.43	1.29	1.16	1.03	0.89	0.89	0.89	0.89	0.88	0.88	0.88	0.88	0.88	0.87
-80	2.10	2.01	1.90	1.78	1.65	1.51	1.34	1.14	0.93	0.71	0.66	0.65	0.64	0.63	0.63	0.62	0.62	0.62	0.61
-70	2.10	2.05	1.98	1.93	1.83	1.70	1.53	1.32	1.13	0.94	0.95	1.10	1.24	1.38	1.51	1.63	1.71	1.76	1.78
-60	2.10	2.10	2.13	2.14	2.11	2.04	2.02	2.06	2.12	2.22	2.38	2.90	3.43	3.94	4.42	4.83	5.15	5.36	5.43
-50	2.10	2.16	2.29	2.40	2.47	2.66	2.97	3.42	4.01	4.68	5.42	6.42	7.79	9.12	10.3	11.2	11.8	12.1	12.1
-40	2.10	2.22	2.46	2.67	2.97	3.51	4.32	5.47	6.88	8.53	10.4	12.3	14.6	17.2	19.5	21.4	22.5	22.6	21.9
-30	2.10	2.31	2.63	2.97	3.56	4.52	6.02	7.99	10.5	13.4	16.7	20.7	26.0	32.8	40.9	49.2	55.7	58.2	54.9
-20	2.10	2.37	2.80	3.28	4.15	5.56	7.74	10.6	14.3	18.4	23.9	32.0	45.3	67.7	105	152	196	223	213
-10	2.10	2.42	2.94	3.55	4.65	6.49	9.22	12.9	17.3	22.7	30.8	44.7	70.1	117	204	367	718	1317	1657
0	2.10	2.46	3.05	3.76	5.01	7.10	10.2	14.3	19.2	25.2	34.7	51.8	81.8	134	229	438	1266	3501	5734
10	2.10	2.46	3.02	3.70	4.87	6.80	9.70	13.6	18.3	23.8	31.6	44.6	66.8	101	156	247	414	873	1257
20	2.10	2.44	2.96	3.57	4.56	6.16	8.62	11.9	16.0	20.5	26.0	33.3	44.6	60.8	80.5	110	152	194	221
30	2.10	2.40	2.87	3.38	4.15	5.34	7.17	9.61	12.7	16.3	20.2	24.3	28.8	34.9	43.6	54.3	65.4	74.8	80.4
40	2.10	2.34	2.75	3.17	3.69	4.49	5.63	7.24	9.23	11.6	14.2	17.0	20.0	23.0	25.9	28.8	31.6	33.8	35.0
50	2.10	2.29	2.62	2.95	3.29	3.75	4.38	5.20	6.24	7.53	8.94	10.6	12.3	14.1	15.8	17.3	18.4	19.2	19.7
60	2.10	2.24	2.48	2.72	2.95	3.18	3.46	3.82	4.24	4.72	5.28	5.99	6.77	7.55	8.28	8.92	9.45	9.83	10.0
70	2.10	2.20	2.32	2.50	2.65	2.78	2.90	3.01	3.13	3.26	3.43	3.62	3.81	4.01	4.19	4.34	4.47	4.56	4.60
80	2.10	2.16	2.21	2.27	2.35	2.44	2.51	2.57	2.62	2.65	2.68	2.71	2.74	2.77	2.79	2.81	2.82	2.83	2.84
90	2.10	2.11	2.12	2.13	2.14	2.15	2.16	2.17	2.18	2.20	2.19	2.17	2.16	2.15	2.14	2.13	2.12	2.11	2.10
100	2.10	2.07	2.03	1.98	1.94	1.90	1.86	1.81	1.77	1.74	1.70	1.66	1.63	1.61	1.59	1.57	1.55	1.54	1.53
110	2.10	2.02	1.93	1.85	1.75	1.67	1.60	1.55	1.51	1.49	1.47	1.47	1.46	1.46	1.46	1.47	1.47	1.47	1.48
120	2.10	1.97	1.85	1.71	1.60	1.51	1.48	1.46	1.45	1.45	1.44	1.46	1.49	1.53	1.58	1.61	1.64	1.66	1.66
130	2.10	1.94	1.76	1.61	1.50	1.47	1.46	1.46	1.48	1.55	1.65	1.83	2.05	2.29	2.53	2.74	2.91	3.01	3.03
140	2.10	1.90	1.70	1.54	1.47	1.46	1.48	1.54	1.70	1.98	2.41	2.93	3.47	3.93	4.29	4.53	4.68	4.76	4.79
150	2.10	1.88	1.65	1.49	1.46	1.48	1.55	1.75	2.15	2.76	3.48	4.14	4.62	4.91	5.08	5.18	5.23	5.28	5.31
160	2.10	1.86	1.61	1.47	1.47	1.51	1.67	2.03	2.69	3.50	4.25	4.75	5.00	5.12	5.29	5.37	5.45	5.58	5.72
170	2.10	1.85	1.59	1.47	1.47	1.54	1.77	2.29	3.08	3.93	4.59	4.89	4.94	4.94	4.96	5.04	5.09	5.09	5.38
180	2.10	1.85	1.59	1.46	1.48	1.56	1.83	2.39	3.22	4.06	4.66	4.82	4.74	4.55	4.40	4.31	4.08	3.97	4.00

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:

Test Date:2024-09-28

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline-609mm-TW-2200K-15D-Rev1	TYPE:2200K	WEIGHT:
SPEC.:15 DEG	DIM.:609MM	SERIAL No.:IES002954
MFR.:	SUR.:1	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	3.66	3.60	3.39	3.07	2.75	2.35	1.86	1.34	0.90	0.63	0.62	0.74	0.93	1.10	1.15	1.12	0.98	0.76
-170	4.37	4.23	3.80	3.33	2.83	2.31	1.77	1.25	0.84	0.60	0.61	0.74	0.94	1.11	1.15	1.12	0.98	0.76
-160	3.89	3.68	3.36	2.92	2.40	1.88	1.39	0.97	0.68	0.58	0.62	0.78	0.98	1.13	1.15	1.10	0.97	0.76
-150	2.63	2.47	2.23	1.91	1.56	1.21	0.90	0.66	0.56	0.57	0.69	0.88	1.05	1.15	1.15	1.09	0.95	0.76
-140	1.33	1.25	1.11	0.95	0.79	0.64	0.55	0.53	0.56	0.68	0.84	1.01	1.12	1.15	1.15	1.08	0.92	0.76
-130	0.52	0.51	0.50	0.50	0.50	0.50	0.55	0.64	0.77	0.90	1.03	1.12	1.15	1.15	1.12	1.03	0.90	0.76
-120	0.60	0.62	0.65	0.70	0.76	0.83	0.90	0.98	1.04	1.11	1.14	1.15	1.15	1.13	1.08	1.00	0.88	0.76
-110	1.12	1.12	1.12	1.13	1.14	1.14	1.15	1.15	1.15	1.15	1.15	1.14	1.11	1.06	1.01	0.92	0.85	0.76
-100	1.15	1.15	1.15	1.15	1.15	1.15	1.14	1.13	1.11	1.09	1.07	1.03	0.99	0.95	0.90	0.86	0.81	0.76
-90	0.87	0.87	0.86	0.86	0.85	0.85	0.84	0.84	0.83	0.83	0.82	0.81	0.80	0.79	0.79	0.78	0.77	0.76
-80	0.61	0.61	0.60	0.60	0.60	0.60	0.61	0.61	0.64	0.66	0.69	0.72	0.74	0.76	0.77	0.76	0.75	0.76
-70	1.75	1.68	1.59	1.46	1.33	1.19	1.05	0.91	0.80	0.74	0.69	0.71	0.72	0.74	0.75	0.76	0.75	0.76
-60	5.29	5.01	4.65	4.20	3.72	3.21	2.70	2.20	1.82	1.48	1.20	0.99	0.83	0.78	0.77	0.76	0.76	0.76
-50	11.7	11.1	10.3	9.37	8.26	7.05	5.81	4.68	3.75	2.91	2.17	1.60	1.19	0.92	0.81	0.78	0.76	0.76
-40	20.9	19.4	17.6	15.6	13.6	11.7	9.92	8.27	6.59	4.95	3.62	2.50	1.70	1.17	0.88	0.80	0.76	0.76
-30	50.7	43.1	34.6	27.0	20.9	17.2	14.4	11.9	9.58	7.37	5.27	3.60	2.30	1.47	1.00	0.83	0.77	0.76
-20	187	140	93.6	59.9	40.5	27.9	20.3	15.6	12.2	9.44	6.89	4.61	2.92	1.77	1.12	0.86	0.77	0.76
-10	1327	589	277	149	81.7	46.1	28.2	19.3	14.3	10.9	8.03	5.38	3.39	1.99	1.21	0.88	0.77	0.76
0	4523	1990	563	240	119	60.7	33.9	21.6	15.4	11.5	8.51	5.76	3.61	2.08	1.26	0.90	0.78	0.76
10	1005	578	341	198	111	62.5	36.9	24.1	17.0	12.5	9.00	5.99	3.78	2.23	1.37	0.97	0.81	0.76
20	224	199	160	116	75.5	48.4	32.2	22.6	16.5	12.1	8.59	5.72	3.63	2.22	1.42	1.03	0.84	0.76
30	80.8	75.6	66.0	54.7	43.9	33.2	24.9	18.8	14.2	10.4	7.36	5.02	3.25	2.10	1.42	1.08	0.86	0.76
40	35.0	33.7	31.5	28.5	25.2	21.7	17.9	14.0	10.7	7.98	5.79	4.02	2.78	1.93	1.40	1.11	0.88	0.76
50	19.5	18.8	17.8	16.4	14.8	13.0	11.2	9.21	7.26	5.58	4.22	3.14	2.34	1.77	1.39	1.12	0.89	0.76
60	9.90	9.60	9.12	8.52	7.83	7.09	6.30	5.57	4.66	3.81	3.08	2.50	2.02	1.67	1.37	1.12	0.90	0.76
70	4.58	4.52	4.41	4.26	4.09	3.90	3.70	3.51	3.23	2.83	2.47	2.15	1.86	1.59	1.34	1.10	0.90	0.76
80	2.84	2.84	2.83	2.82	2.80	2.78	2.76	2.72	2.67	2.43	2.18	1.94	1.71	1.48	1.26	1.07	0.90	0.76
90	2.10	2.10	2.10	2.10	2.10	2.10	2.10	2.10	2.10	1.95	1.80	1.65	1.51	1.36	1.21	1.06	0.91	0.76
100	1.54	1.56	1.58	1.59	1.60	1.62	1.64	1.67	1.69	1.64	1.58	1.51	1.43	1.33	1.22	1.09	0.94	0.76
110	1.48	1.49	1.50	1.50	1.51	1.51	1.52	1.54	1.53	1.50	1.47	1.43	1.38	1.32	1.23	1.11	0.96	0.76
120	1.66	1.65	1.63	1.60	1.57	1.55	1.52	1.52	1.48	1.45	1.41	1.38	1.35	1.31	1.24	1.14	0.97	0.76
130	2.99	2.87	2.70	2.48	2.25	2.03	1.84	1.64	1.47	1.37	1.35	1.34	1.32	1.29	1.24	1.14	0.98	0.76
140	4.74	4.64	4.47	4.20	3.82	3.34	2.70	2.04	1.59	1.35	1.26	1.25	1.28	1.26	1.24	1.16	0.98	0.76
150	5.28	5.22	5.13	5.01	4.82	4.20	3.36	2.50	1.80	1.35	1.16	1.14	1.20	1.24	1.22	1.15	0.99	0.76
160	5.64	5.54	5.44	5.21	4.60	3.98	3.29	2.54	1.81	1.29	1.04	1.01	1.10	1.20	1.20	1.14	0.99	0.76
170	5.31	5.42	4.92	4.37	3.86	3.32	2.74	2.10	1.50	1.04	0.86	0.88	1.00	1.14	1.17	1.13	0.99	0.76
180	3.66	3.60	3.39	3.07	2.75	2.35	1.86	1.34	0.90	0.63	0.62	0.74	0.93	1.10	1.15	1.12	0.98	0.76

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-28

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: