

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		10315.3 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	26.7V x 27.7H
	At 50% of Imax	13.6V x 14.0H
	At 90% of Imax	4.5V x 5.2H
Beam Flux	Total	1000.5 lumens per klm.
	To 10% of Imax	656.4 lumens per klm.
	To 50% of Imax	331.5 lumens per klm.
	To 90% of Imax	59.1 lumens per klm.
	Upward LOR	2.2 %
	Downward LOR	97.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-28

V(θ) Range:-180 - 180DEG
V(θ) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Blazeline-609mm-TW-4000K-15D-Rev1	TYPE:4000K	WEIGHT:
SPEC.:15 DEG	DIM.:609MM	SERIAL No.:IES002955
MFR.:	SUR.:1	Shielding Angle:

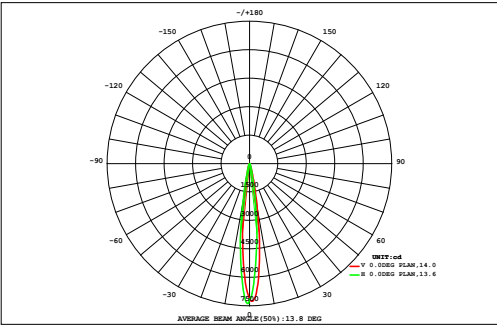

DATA OF LAMP		Eff:67.41lm/W	
MODEL		Imax(cd)	7370
NOMINAL POWER(W)	10.6	AVAILABILITY(%)	65.6
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	468.5
NOMINAL FLUX(lm)	714.5	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	714.5
TEST VOLTAGE(V)	220	q @50%(H,V)	14,14DEG


18 16 14 12 10 8 6 4 2 0 -2 -4 -6 -8 -10 -12 -14 -16 -18	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	0.25	0.29	0.33	0.36	0.40	0.43	0.45	0.46	0.46	0.45	0.43	0.39	0.35	0.31	0.26	0.22	0.19	0.16	6.20	0.00
	0.28	0.34	0.39	0.44	0.49	0.54	0.58	0.61	0.62	0.60	0.56	0.51	0.44	0.38	0.32	0.26	0.22	0.19	7.77	0.00
	0.31	0.38	0.46	0.53	0.61	0.69	0.78	0.85	0.88	0.87	0.80	0.70	0.58	0.48	0.38	0.32	0.27	0.23	10.1	1.65
	0.35	0.43	0.53	0.64	0.77	0.93	1.12	1.30	1.40	1.40	1.28	1.07	0.83	0.62	0.48	0.40	0.33	0.27	14.1	8.09
	0.38	0.47	0.60	0.76	1.00	1.32	1.68	2.08	2.38	2.40	2.13	1.71	1.28	0.89	0.67	0.52	0.40	0.32	21.0	16.2
	0.40	0.51	0.67	0.91	1.30	1.81	2.50	3.22	3.71	3.76	3.36	2.67	1.91	1.40	0.97	0.68	0.50	0.38	30.7	26.9
	0.42	0.55	0.75	1.09	1.63	2.45	3.46	4.48	5.18	5.25	4.69	3.79	2.93	2.06	1.37	0.90	0.60	0.44	42.0	38.9
	0.43	0.58	0.81	1.25	1.97	3.07	4.40	5.69	6.67	6.78	6.02	5.18	4.02	2.79	1.80	1.12	0.71	0.49	53.8	51.0
	0.43	0.58	0.85	1.33	2.19	3.45	5.03	6.65	7.91	8.20	7.63	6.47	4.95	3.41	2.16	1.31	0.81	0.54	63.9	61.6
	0.42	0.58	0.86	1.39	2.33	3.68	5.36	7.17	8.63	8.86	8.27	6.91	5.23	3.60	2.26	1.37	0.84	0.56	68.3	66.0
	0.41	0.56	0.84	1.38	2.34	3.69	5.30	6.93	7.88	8.10	7.63	6.35	4.80	3.31	2.08	1.29	0.80	0.55	64.2	62.0
	0.38	0.52	0.76	1.24	2.08	3.31	4.68	5.73	6.35	6.53	6.21	5.30	4.04	2.77	1.77	1.13	0.73	0.52	54.0	51.1
	0.34	0.46	0.65	1.00	1.64	2.59	3.57	4.35	4.81	4.92	4.65	3.98	3.06	2.13	1.41	0.94	0.65	0.48	41.6	38.6
	0.30	0.39	0.53	0.77	1.17	1.74	2.37	2.94	3.27	3.34	3.14	2.66	2.09	1.53	1.08	0.77	0.57	0.43	29.1	25.6
	0.26	0.33	0.43	0.57	0.79	1.10	1.45	1.76	1.94	1.99	1.90	1.66	1.35	1.06	0.83	0.63	0.49	0.38	18.9	14.7
	0.21	0.27	0.34	0.44	0.56	0.71	0.88	1.04	1.14	1.17	1.14	1.03	0.89	0.76	0.63	0.53	0.42	0.33	12.5	6.06
	0.18	0.22	0.27	0.34	0.42	0.50	0.59	0.66	0.70	0.73	0.73	0.69	0.63	0.56	0.49	0.43	0.36	0.28	8.77	0.00
	0.14	0.18	0.22	0.27	0.32	0.37	0.43	0.47	0.50	0.51	0.52	0.50	0.47	0.43	0.39	0.34	0.29	0.24	6.57	0.00
	-18	-16	-14	-12	-10	-8	-6	-4	HORIZONTAL (DEG)				4	6	8	10	12	14	16	18
F t	5.89	7.62	10.3	14.7	22.0	32.4	44.6	56.4	64.5	65.9	61.1	51.6	39.9	28.5	19.4	13.1	9.19	6.80	554	---
F a	0.00	0.00	1.64	9.19	17.7	28.7	41.4	53.6	61.8	63.2	58.3	48.4	36.4	24.6	14.9	7.45	1.36	0.00	---	468

one-half-peak spread: U:6.6,D:7.2 , L:7.0,R:7.1 NEMA Beam Type: Type 2

H(B) Range:-90 - 90DEG	V(B) Range:-180 - 180DEG
H(B) Interval: 0.5DEG	V(B) Interval: 0.5DEG
Test Speed: LOW	Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Temperature:25.3DEG	Humidity:65.0%
Operators:	Test Distance:8.630m [K=1.0000]
Test Date:2024-09-28	Remarks:

ISOCANDELA DIAGRAM


NAME:Blazeline-609mm-TW-4000K-15D-Rev1	TYPE:4000K	WEIGHT:
SPEC.:15 DEG	DIM.:609MM	SERIAL No.:IES002955
MFR.:	SUR.:1	Shielding Angle:

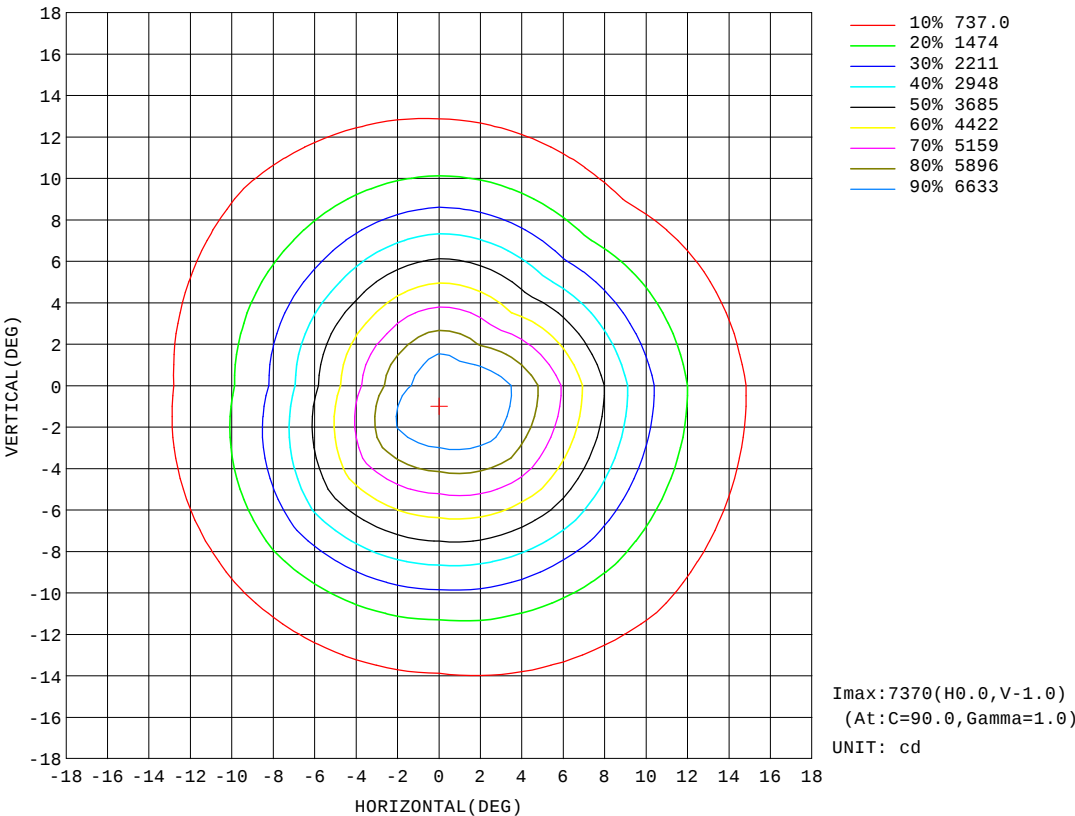

H(θ) Range:-90 - 90DEG	V(B) Range:-180 - 180DEG
H(θ) Interval: 0.5DEG	V(B) Interval: 0.5DEG
Test Speed: LOW	Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Temperature:25.3DEG	Humidity:65.0%
Operators:	Test Distance:8.630m [K=1.0000]
Test Date:2024-09-28	Remarks:

ISOLUX DIAGRAM


NAME:Blazeline-609mm-TW-4000K-15D-Rev1	TYPE:4000K	WEIGHT:
SPEC.:15 DEG	DIM.:609MM	SERIAL No.:IES002955
MFR.:	SUR.:1	Shielding Angle:

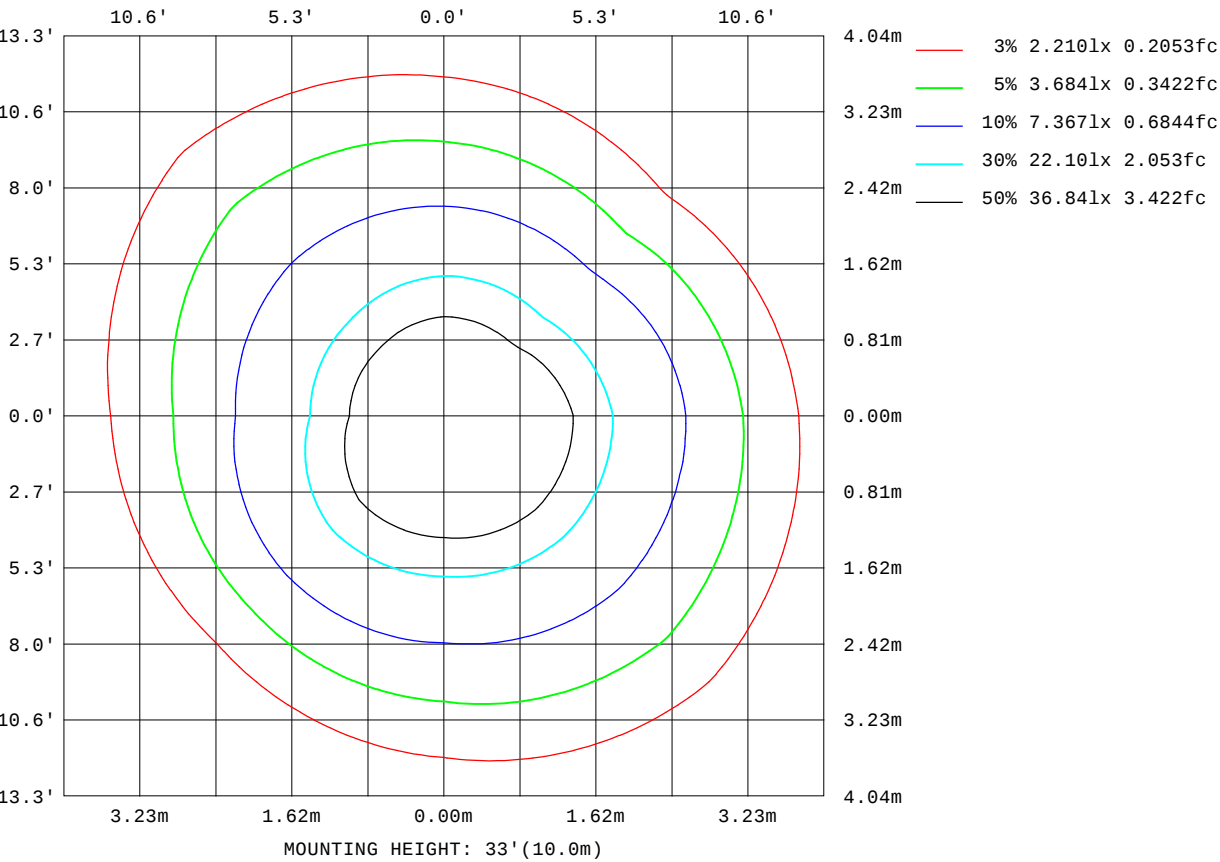

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-28

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

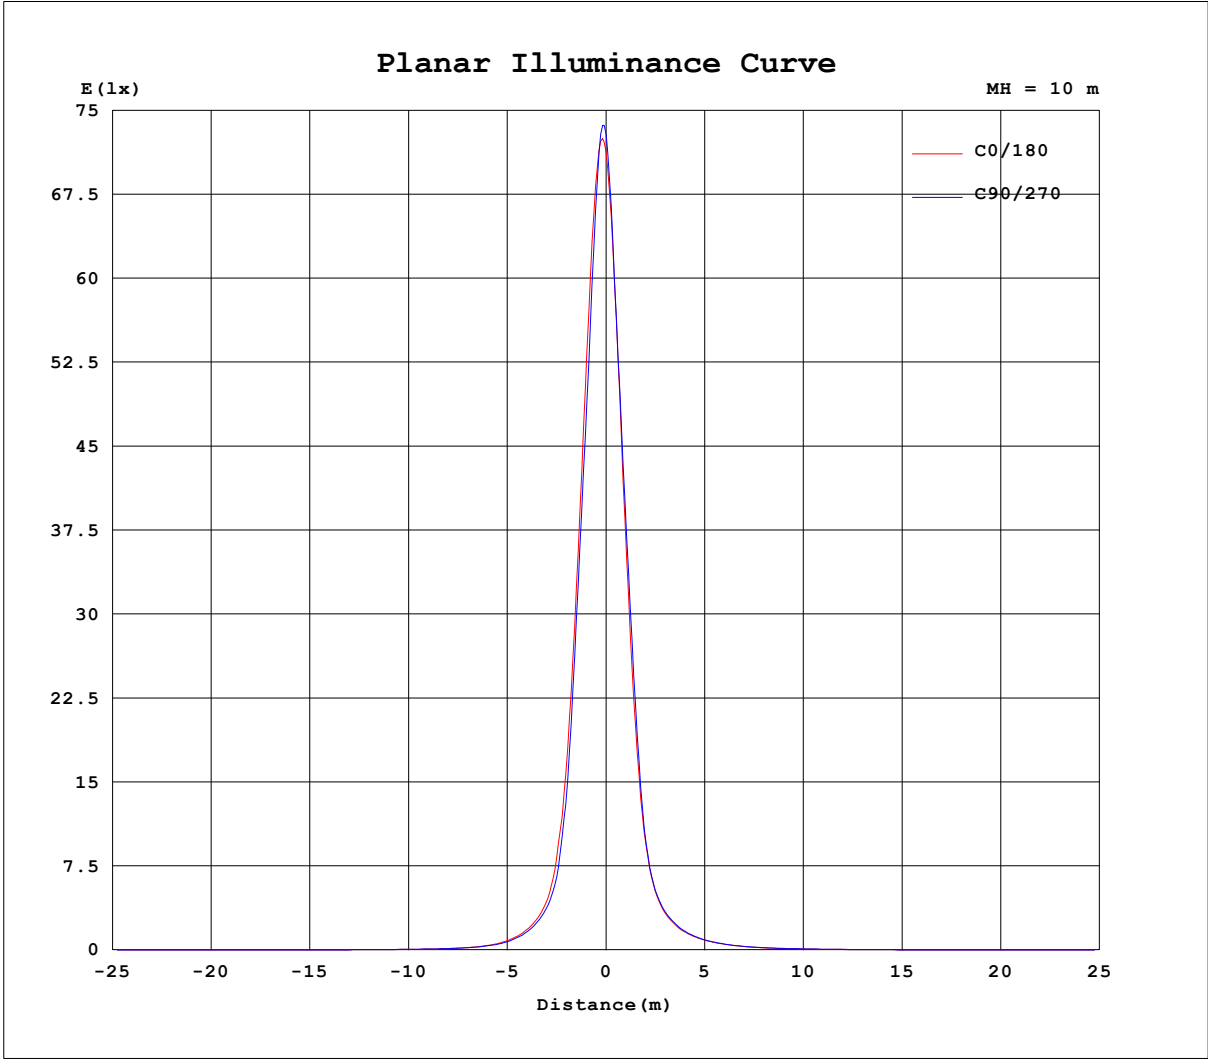


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-28

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Blazeline-609mm-TW-4000K-15D-Rev1	TYPE:4000K	WEIGHT:
SPEC.:15 DEG	DIM.:609MM	SERIAL No.:IES002955
MFR.:	SUR.:1	Shielding Angle:

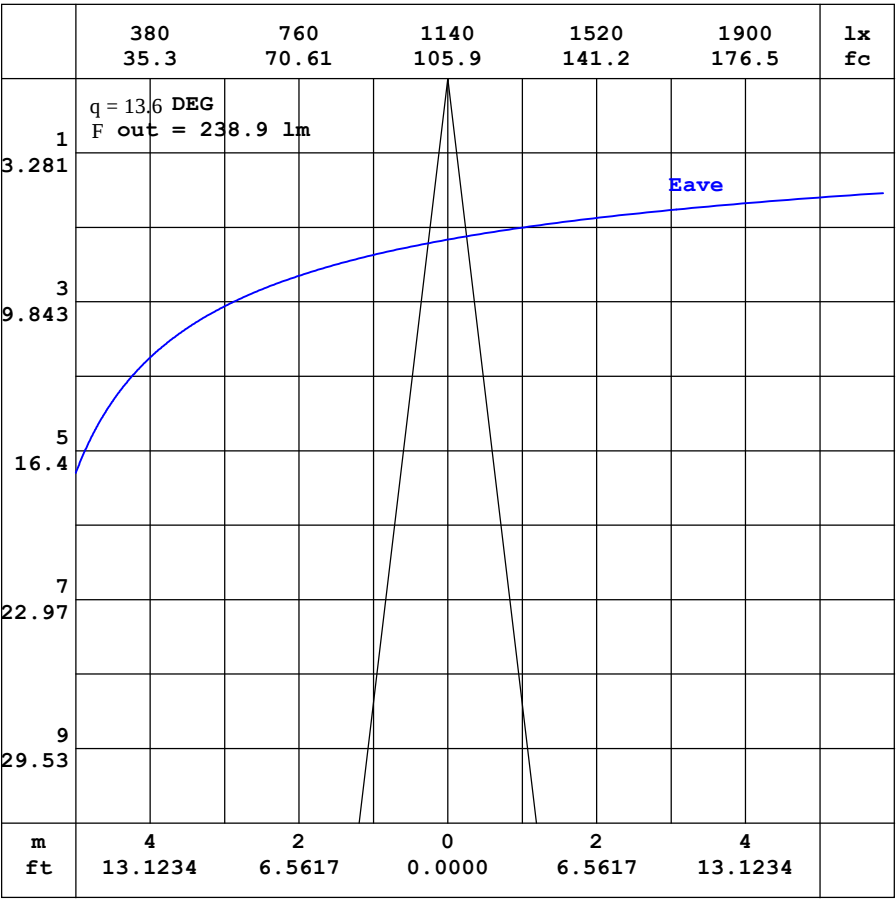

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H _(b) Range:-90 - 90DEG	V(B) Range:-180 - 180DEG
H _(b) Interval: 0.5DEG	V(B) Interval: 0.5DEG
Test Speed: LOW	Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Temperature:25.3DEG	Humidity:65.0%
Operators:	Test Distance:8.630m [K=1.0000]
Test Date:2024-09-28	Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline-609mm-TW-4000K-15D-Rev1	TYPE:4000K	WEIGHT:
SPEC.:15 DEG	DIM.:609MM	SERIAL No.:IES002955
MFR.:	SUR.:1	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	2.56	2.23	1.92	1.77	1.79	1.90	2.21	2.89	3.88	4.92	5.64	5.85	5.74	5.52	5.34	5.24	4.98	4.82	4.81
-170	2.56	2.22	1.91	1.75	1.75	1.79	1.99	2.45	3.17	3.94	4.51	4.76	4.80	4.80	4.91	5.09	5.17	5.27	5.54
-160	2.56	2.22	1.91	1.73	1.71	1.70	1.75	1.94	2.35	2.80	3.20	3.44	3.53	3.61	3.73	4.16	4.54	4.77	4.85
-150	2.56	2.22	1.93	1.73	1.68	1.63	1.58	1.56	1.64	1.78	1.89	1.95	1.92	2.01	2.42	2.78	3.06	3.21	3.27
-140	2.56	2.23	1.96	1.75	1.66	1.60	1.52	1.40	1.27	1.13	1.02	0.84	0.82	1.01	1.21	1.40	1.55	1.64	1.67
-130	2.56	2.25	2.00	1.80	1.66	1.60	1.53	1.42	1.27	1.07	0.82	0.63	0.60	0.60	0.60	0.62	0.64	0.65	0.65
-120	2.56	2.28	2.05	1.87	1.72	1.61	1.54	1.48	1.40	1.29	1.15	1.06	0.98	0.90	0.83	0.78	0.75	0.73	0.72
-110	2.56	2.31	2.11	1.94	1.80	1.69	1.58	1.51	1.45	1.40	1.38	1.37	1.37	1.36	1.35	1.35	1.35	1.35	1.36
-100	2.56	2.35	2.17	2.00	1.86	1.74	1.63	1.53	1.45	1.38	1.38	1.38	1.38	1.38	1.38	1.38	1.38	1.38	1.38
-90	2.56	2.39	2.23	2.06	1.90	1.73	1.57	1.40	1.23	1.07	1.07	1.07	1.07	1.06	1.06	1.06	1.06	1.06	1.06
-80	2.56	2.43	2.30	2.16	1.99	1.81	1.60	1.36	1.10	0.83	0.78	0.77	0.76	0.75	0.74	0.74	0.74	0.74	0.74
-70	2.56	2.49	2.40	2.32	2.19	2.03	1.81	1.56	1.33	1.09	1.10	1.26	1.43	1.60	1.76	1.91	2.03	2.11	2.16
-60	2.56	2.55	2.57	2.56	2.51	2.42	2.39	2.40	2.44	2.50	2.65	3.25	3.87	4.50	5.12	5.66	6.09	6.40	6.55
-50	2.56	2.61	2.74	2.86	2.94	3.14	3.47	3.95	4.57	5.27	5.98	7.01	8.55	10.1	11.4	12.7	13.6	14.3	14.7
-40	2.56	2.69	2.95	3.18	3.52	4.13	5.03	6.30	7.83	9.54	11.2	12.7	14.5	16.8	19.2	21.5	23.7	25.6	26.8
-30	2.56	2.78	3.16	3.54	4.21	5.30	6.97	9.21	11.9	14.7	17.4	20.0	22.3	25.5	32.5	41.6	52.0	61.5	67.2
-20	2.56	2.86	3.35	3.90	4.90	6.53	9.02	12.3	16.1	20.1	24.6	30.5	38.9	51.8	71.0	111	168	228	265
-10	2.56	2.92	3.52	4.24	5.51	7.62	10.8	15.0	19.7	25.3	32.8	45.3	66.8	104	170	307	658	1524	2120
0	2.56	2.97	3.65	4.49	5.94	8.34	12.0	16.8	22.2	29.1	39.5	57.9	90.5	145	246	487	1421	4238	7127
10	2.56	2.96	3.62	4.42	5.79	8.07	11.5	16.1	21.6	28.5	38.5	55.6	86.0	138	227	382	654	1127	1523
20	2.56	2.94	3.55	4.25	5.44	7.36	10.3	14.3	19.3	25.2	33.0	44.6	63.0	92.7	139	188	233	260	259
30	2.56	2.90	3.45	4.04	4.96	6.40	8.61	11.6	15.6	20.2	25.7	32.5	41.4	52.6	64.8	78.0	88.9	95.0	94.2
40	2.56	2.83	3.30	3.80	4.43	5.40	6.80	8.81	11.3	14.4	18.1	22.2	26.4	30.5	34.4	37.8	40.3	41.6	41.5
50	2.56	2.77	3.15	3.54	3.95	4.51	5.29	6.33	7.69	9.35	11.2	13.3	15.6	17.8	19.7	21.3	22.6	23.3	23.5
60	2.56	2.72	2.99	3.27	3.55	3.84	4.18	4.63	5.18	5.82	6.56	7.47	8.40	9.30	10.2	10.9	11.4	11.8	12.0
70	2.56	2.67	2.81	3.01	3.19	3.36	3.50	3.65	3.81	3.97	4.18	4.42	4.66	4.88	5.09	5.27	5.41	5.50	5.53
80	2.56	2.62	2.68	2.76	2.85	2.96	3.04	3.11	3.17	3.21	3.26	3.30	3.34	3.37	3.39	3.42	3.43	3.44	3.45
90	2.56	2.57	2.58	2.59	2.61	2.62	2.63	2.64	2.65	2.66	2.65	2.64	2.63	2.62	2.61	2.60	2.59	2.58	2.57
100	2.56	2.51	2.46	2.41	2.35	2.30	2.25	2.20	2.14	2.10	2.05	2.01	1.97	1.94	1.92	1.90	1.88	1.87	1.86
110	2.56	2.46	2.34	2.23	2.12	2.02	1.94	1.88	1.83	1.81	1.79	1.78	1.78	1.77	1.77	1.77	1.77	1.78	1.78
120	2.56	2.40	2.24	2.07	1.93	1.84	1.79	1.78	1.77	1.77	1.78	1.81	1.85	1.89	1.93	1.96	1.99	2.00	1.99
130	2.56	2.35	2.14	1.95	1.81	1.78	1.78	1.79	1.83	1.94	2.08	2.29	2.54	2.81	3.08	3.32	3.51	3.62	3.64
140	2.56	2.31	2.06	1.86	1.78	1.78	1.80	1.91	2.11	2.46	2.96	3.58	4.21	4.75	5.16	5.44	5.63	5.73	5.77
150	2.56	2.28	2.00	1.80	1.77	1.80	1.90	2.16	2.64	3.37	4.21	4.99	5.53	5.87	6.07	6.21	6.28	6.35	6.38
160	2.56	2.25	1.96	1.78	1.78	1.84	2.03	2.48	3.26	4.23	5.13	5.71	6.00	6.16	6.33	6.43	6.54	6.71	6.88
170	2.56	2.24	1.93	1.77	1.79	1.88	2.16	2.77	3.72	4.76	5.55	5.90	5.97	5.96	5.97	6.05	6.10	6.11	6.46
180	2.56	2.23	1.92	1.77	1.79	1.90	2.21	2.89	3.88	4.92	5.64	5.85	5.74	5.52	5.34	5.24	4.98	4.82	4.80

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-28

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline-609mm-TW-4000K-15D-Rev1	TYPE:4000K	WEIGHT:
SPEC.:15 DEG	DIM.:609MM	SERIAL No.:IES002955
MFR.:	SUR.:1	Shielding Angle:

Table--2																		UNIT: cd	
H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	4.35	4.26	4.04	3.69	3.31	2.84	2.26	1.62	1.07	0.74	0.72	0.87	1.11	1.33	1.38	1.34	1.18	0.93	
-170	5.25	5.04	4.53	3.98	3.41	2.80	2.15	1.51	1.01	0.73	0.73	0.89	1.12	1.33	1.38	1.34	1.17	0.93	
-160	4.70	4.41	4.02	3.51	2.90	2.29	1.70	1.20	0.84	0.71	0.75	0.94	1.18	1.36	1.38	1.33	1.17	0.93	
-150	3.19	3.00	2.71	2.34	1.93	1.51	1.13	0.85	0.72	0.72	0.85	1.06	1.26	1.37	1.37	1.31	1.15	0.93	
-140	1.63	1.54	1.38	1.20	1.02	0.85	0.74	0.69	0.72	0.85	1.03	1.21	1.34	1.38	1.36	1.28	1.13	0.93	
-130	0.66	0.66	0.65	0.65	0.65	0.67	0.71	0.82	0.96	1.10	1.24	1.34	1.37	1.37	1.34	1.25	1.10	0.93	
-120	0.74	0.77	0.81	0.87	0.94	1.02	1.10	1.18	1.26	1.33	1.36	1.38	1.37	1.35	1.29	1.19	1.07	0.93	
-110	1.35	1.35	1.36	1.36	1.37	1.37	1.37	1.37	1.37	1.37	1.37	1.36	1.33	1.28	1.20	1.12	1.03	0.93	
-100	1.38	1.38	1.37	1.37	1.37	1.37	1.36	1.34	1.33	1.30	1.27	1.23	1.19	1.14	1.09	1.04	0.98	0.93	
-90	1.05	1.05	1.04	1.03	1.03	1.02	1.02	1.01	1.01	1.00	0.99	0.98	0.97	0.96	0.95	0.95	0.94	0.93	
-80	0.74	0.74	0.74	0.74	0.75	0.75	0.76	0.77	0.79	0.82	0.85	0.89	0.91	0.92	0.93	0.92	0.91	0.93	
-70	2.14	2.07	1.97	1.84	1.69	1.53	1.35	1.18	1.04	0.95	0.88	0.88	0.89	0.90	0.92	0.92	0.91	0.93	
-60	6.46	6.21	5.84	5.35	4.76	4.13	3.52	2.91	2.38	1.92	1.54	1.24	1.04	0.96	0.93	0.93	0.92	0.93	
-50	14.6	14.1	13.4	12.3	10.9	9.27	7.64	6.15	4.88	3.75	2.78	2.03	1.48	1.13	0.99	0.95	0.92	0.93	
-40	27.1	26.4	24.7	22.3	19.5	16.7	13.9	11.1	8.56	6.36	4.59	3.15	2.12	1.45	1.08	0.97	0.93	0.93	
-30	69.0	64.5	55.9	45.8	36.4	27.8	21.1	16.3	12.7	9.46	6.67	4.51	2.87	1.82	1.22	1.01	0.93	0.93	
-20	269	230	173	116	71.2	45.0	30.3	21.6	16.1	12.1	8.66	5.77	3.61	2.17	1.37	1.04	0.93	0.93	
-10	1730	916	449	238	124	66.4	38.9	25.7	18.4	13.7	10.0	6.69	4.17	2.43	1.48	1.07	0.94	0.93	
0	5761	2417	707	297	146	73.9	41.2	26.4	19.0	14.1	10.5	7.08	4.41	2.54	1.53	1.09	0.94	0.93	
10	1112	518	309	186	110	64.9	39.9	27.1	19.9	14.8	10.9	7.28	4.56	2.69	1.66	1.17	0.98	0.93	
20	226	178	131	95.4	68.2	46.8	33.2	24.8	18.9	14.2	10.2	6.85	4.34	2.67	1.71	1.25	1.01	0.93	
30	88.1	77.4	64.6	52.0	41.4	33.0	26.3	20.9	16.3	12.2	8.69	5.94	3.87	2.52	1.71	1.30	1.04	0.93	
40	40.0	37.4	34.2	30.6	27.1	23.6	19.8	15.9	12.4	9.29	6.78	4.74	3.31	2.32	1.69	1.33	1.07	0.93	
50	22.9	21.9	20.5	18.9	16.9	14.9	12.8	10.5	8.38	6.50	4.94	3.71	2.79	2.12	1.68	1.36	1.09	0.93	
60	11.8	11.3	10.7	9.97	9.11	8.22	7.30	6.44	5.42	4.47	3.64	2.97	2.42	2.00	1.66	1.36	1.09	0.93	
70	5.48	5.39	5.24	5.06	4.84	4.61	4.38	4.15	3.83	3.37	2.95	2.58	2.25	1.92	1.62	1.34	1.09	0.93	
80	3.45	3.44	3.42	3.41	3.39	3.36	3.32	3.29	3.22	2.93	2.64	2.35	2.07	1.79	1.53	1.29	1.08	0.93	
90	2.57	2.57	2.56	2.56	2.56	2.56	2.55	2.55	2.55	2.37	2.19	2.01	1.83	1.65	1.47	1.29	1.11	0.93	
100	1.87	1.88	1.89	1.91	1.93	1.95	1.98	2.01	2.03	1.97	1.90	1.82	1.72	1.61	1.48	1.32	1.14	0.93	
110	1.78	1.78	1.79	1.79	1.80	1.81	1.82	1.83	1.83	1.79	1.75	1.71	1.66	1.59	1.48	1.34	1.16	0.93	
120	1.99	1.96	1.93	1.89	1.85	1.81	1.80	1.80	1.75	1.72	1.69	1.65	1.62	1.57	1.49	1.36	1.18	0.93	
130	3.59	3.45	3.23	2.96	2.67	2.38	2.14	1.90	1.71	1.62	1.60	1.60	1.57	1.54	1.49	1.38	1.19	0.93	
140	5.73	5.61	5.42	5.10	4.63	4.03	3.23	2.40	1.85	1.57	1.47	1.48	1.53	1.51	1.48	1.38	1.20	0.93	
150	6.36	6.31	6.22	6.09	5.88	5.13	4.09	3.02	2.13	1.58	1.35	1.34	1.43	1.48	1.46	1.38	1.20	0.93	
160	6.81	6.70	6.60	6.33	5.59	4.84	4.02	3.09	2.18	1.52	1.21	1.18	1.31	1.44	1.44	1.37	1.20	0.93	
170	6.41	6.57	5.97	5.30	4.68	4.03	3.33	2.55	1.80	1.23	1.00	1.03	1.19	1.37	1.41	1.36	1.19	0.93	
180	4.35	4.26	4.04	3.69	3.31	2.84	2.26	1.62	1.07	0.74	0.72	0.87	1.11	1.33	1.38	1.34	1.18	0.93	

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-28

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: