

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	2528.6 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	60.3V x 60.8H
	At 50% of Imax	30.9V x 31.4H
	At 90% of Imax	12.6V x 12.2H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	790.5 lumens per klm.
	To 50% of Imax	417.9 lumens per klm.
	To 90% of Imax	89.3 lumens per klm.

Upward LOR	2.3 %
Downward LOR	97.7 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-28

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Blazeline-609mm-TW-2200K-30D-Rev1	TYPE:2200K	WEIGHT:
SPEC.:30 DEG	DIM.:609MM	SERIAL No.:IES002957
MFR.:	SUR.:1	Shielding Angle:

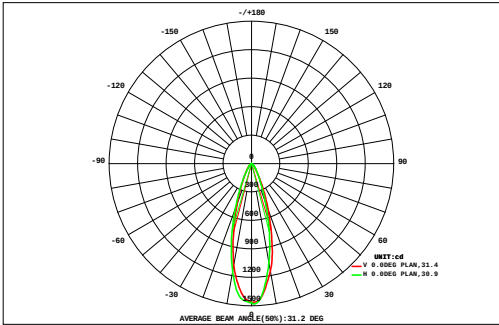

DATA OF LAMP		Eff:54.19lm/W	
MODEL		Imax(cd)	1480
NOMINAL POWER(W)	10.8	AVAILABILITY(%)	78.9
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	461.5
NOMINAL FLUX(lm)	585.2	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	585.2
TEST VOLTAGE(V)	220	q @50%(H,V)	31,31DEG


VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	0.07	0.10	0.13	0.18	0.22	0.27	0.32	0.36	0.38	0.39	0.38	0.35	0.31	0.26	0.21	0.17	0.12	0.08	4.32	0.00
45	0.07	0.10	0.13	0.18	0.22	0.27	0.32	0.36	0.38	0.39	0.38	0.35	0.31	0.26	0.21	0.17	0.12	0.08	4.32	0.00
40	0.10	0.13	0.18	0.24	0.31	0.39	0.46	0.53	0.57	0.58	0.56	0.51	0.45	0.38	0.30	0.23	0.16	0.10	6.19	0.00
35	0.12	0.18	0.24	0.32	0.43	0.56	0.68	0.80	0.87	0.89	0.85	0.76	0.65	0.52	0.41	0.29	0.20	0.13	8.89	0.00
30	0.15	0.22	0.32	0.43	0.59	0.80	1.04	1.25	1.39	1.41	1.32	1.14	0.93	0.72	0.53	0.37	0.25	0.16	13.0	6.08
25	0.18	0.28	0.40	0.58	0.83	1.19	1.64	2.09	2.39	2.41	2.16	1.75	1.34	0.98	0.68	0.46	0.30	0.19	19.9	15.1
20	0.22	0.33	0.50	0.76	1.17	1.79	2.65	3.54	4.15	4.19	3.64	2.77	1.95	1.32	0.86	0.54	0.34	0.21	31.0	27.1
15	0.24	0.38	0.61	0.97	1.60	2.63	4.00	5.43	6.52	6.67	5.79	4.25	2.84	1.78	1.06	0.63	0.38	0.23	46.0	42.7
10	0.27	0.43	0.70	1.16	2.03	3.47	5.38	7.47	9.05	8.93	7.78	5.97	3.85	2.28	1.27	0.70	0.41	0.24	61.4	58.4
5	0.28	0.46	0.76	1.30	2.33	4.03	6.47	9.05	10.8	10.6	9.13	7.15	4.61	2.67	1.41	0.74	0.42	0.24	72.4	69.5
0	0.29	0.47	0.78	1.33	2.40	4.20	6.81	9.18	10.7	10.9	9.56	7.27	4.71	2.73	1.42	0.73	0.41	0.24	74.1	71.2
-5	0.28	0.45	0.74	1.25	2.21	3.87	6.31	8.37	9.58	9.76	8.52	6.26	4.14	2.43	1.27	0.67	0.38	0.22	66.7	63.8
-10	0.26	0.42	0.67	1.09	1.84	3.08	4.93	6.64	7.43	7.36	6.32	4.79	3.25	1.91	1.03	0.57	0.33	0.20	52.1	49.0
-15	0.23	0.37	0.58	0.90	1.41	2.21	3.24	4.30	4.93	4.90	4.28	3.32	2.25	1.34	0.78	0.46	0.28	0.17	35.9	32.4
-20	0.20	0.31	0.47	0.71	1.04	1.48	2.01	2.53	2.85	2.87	2.55	2.00	1.38	0.89	0.56	0.35	0.23	0.14	22.6	18.2
-25	0.16	0.25	0.37	0.54	0.75	0.98	1.23	1.46	1.59	1.58	1.42	1.14	0.84	0.58	0.39	0.26	0.18	0.12	13.8	7.96
-30	0.13	0.19	0.28	0.40	0.52	0.64	0.77	0.87	0.92	0.90	0.81	0.67	0.52	0.38	0.27	0.19	0.13	0.09	8.68	0.18
-35	0.10	0.14	0.21	0.28	0.35	0.43	0.49	0.53	0.55	0.53	0.48	0.41	0.33	0.26	0.19	0.14	0.10	0.07	5.58	0.00
-40	0.07	0.10	0.14	0.19	0.23	0.28	0.31	0.34	0.34	0.33	0.30	0.26	0.22	0.18	0.13	0.10	0.07	0.05	3.64	0.00
-45	0.07	0.10	0.14	0.19	0.23	0.28	0.31	0.34	0.34	0.33	0.30	0.26	0.22	0.18	0.13	0.10	0.07	0.05	3.64	0.00
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45			
F t	3.35	5.21	8.09	12.6	20.3	32.3	48.7	64.7	75.0	75.2	65.8	50.8	34.6	21.6	12.8	7.61	4.67	2.88	546	---
F a	0.00	0.00	0.00	6.36	15.3	28.0	44.8	61.0	71.4	71.6	62.2	47.0	30.4	16.8	6.75	0.00	0.00	0.00	---	461

one-half-peak spread: U:17.3,D:13.8 , L:16.1,R:15.6 NEMA Beam Type: Type 4

H_b Range:-90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-28
V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:Blazeline-609mm-TW-2200K-30D-Rev1	TYPE:2200K	WEIGHT:
SPEC.:30 DEG	DIM.:609MM	SERIAL No.:IES002957
MFR.:	SUR.:1	Shielding Angle:

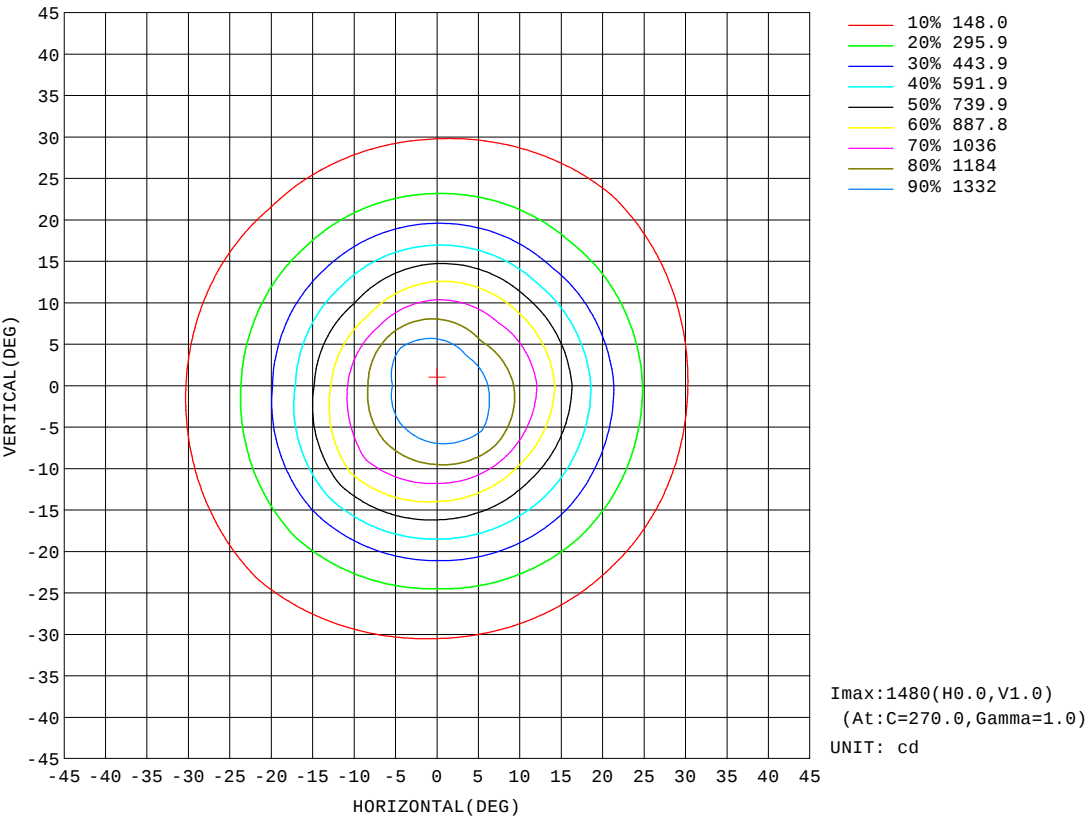


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-28

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Blazeline-609mm-TW-2200K-30D-Rev1	TYPE:2200K	WEIGHT:
SPEC.:30 DEG	DIM.:609MM	SERIAL No.:IES002957
MFR.:	SUR.:1	Shielding Angle:

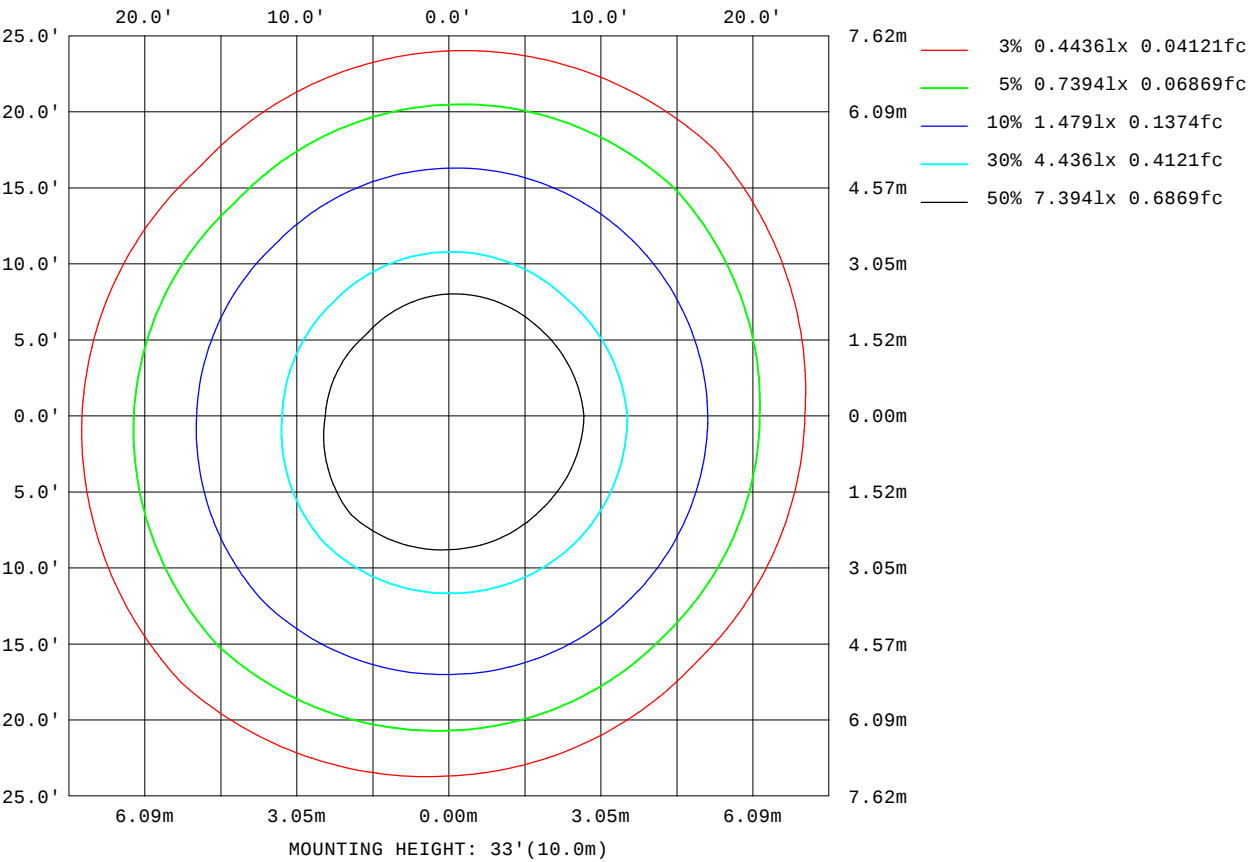

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-28

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:


Planar Illuminance Curve

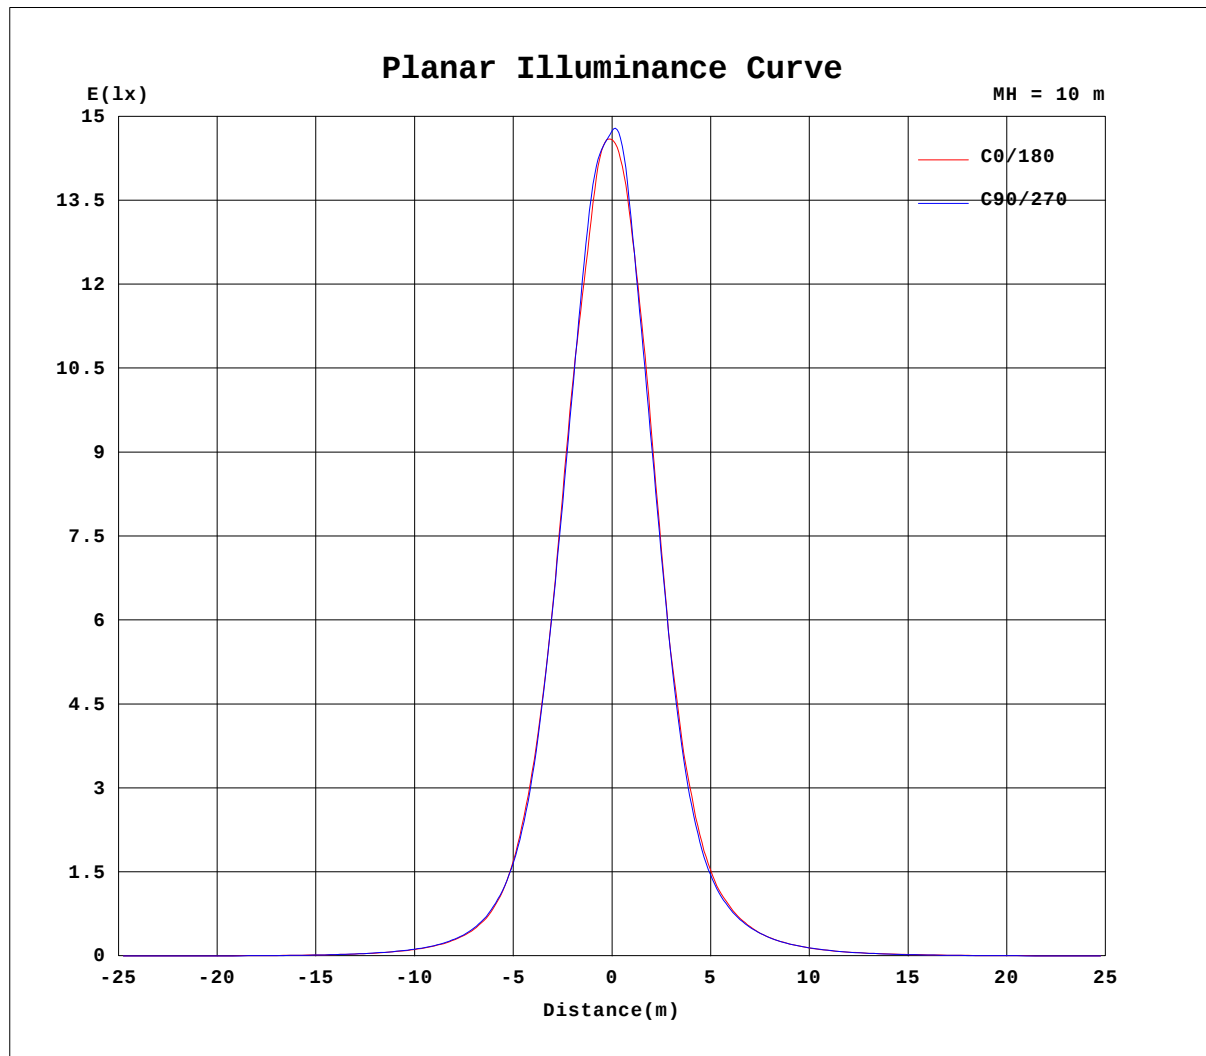

$H(b)$ Range: -90 - 90DEG
 $H(b)$ Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators:
Test Date: 2024-09-28

$V(B)$ Range: -180 - 180DEG
 $V(B)$ Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

NAME:Blazeline-609mm-TW-2200K-30D-Rev1	TYPE:2200K	WEIGHT:
SPEC.:30 DEG	DIM.:609MM	SERIAL No.:IES002957
MFR.:	SUR.:1	Shielding Angle:

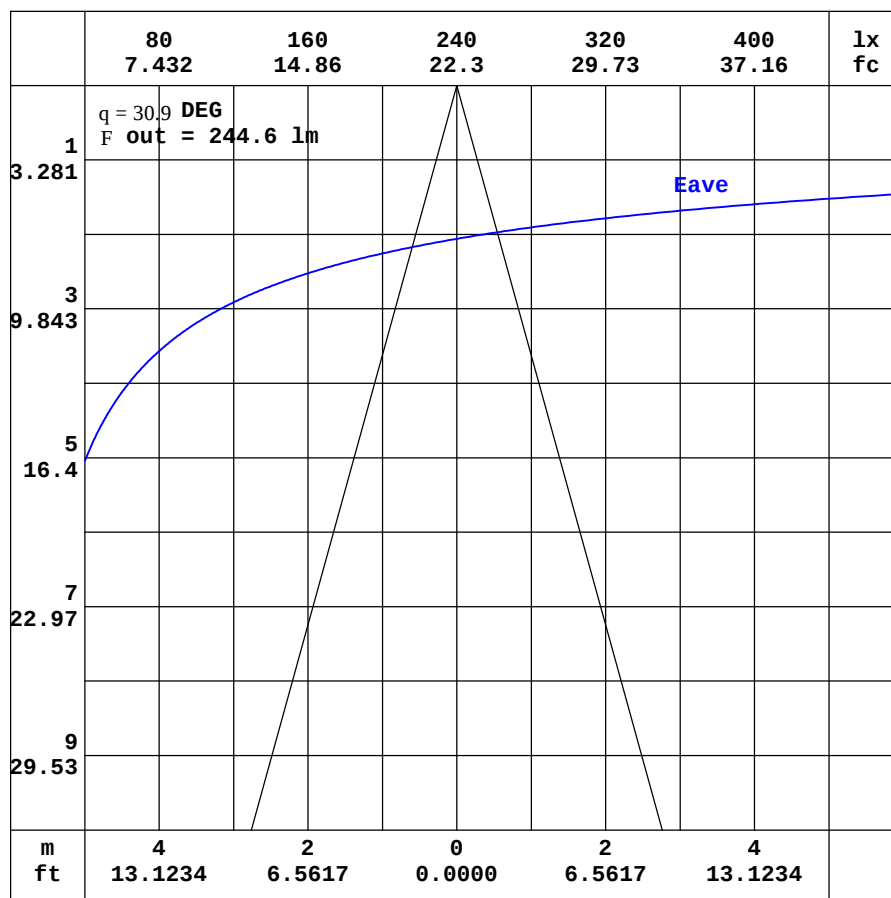

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline-609mm-TW-2200K-30D-Rev1	TYPE:2200K	WEIGHT:
SPEC.:30 DEG	DIM.:609MM	SERIAL No.:IES002957
MFR.:	SUR.:1	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	2.13	1.92	1.78	1.77	1.81	1.97	2.28	2.72	3.25	3.77	4.20	4.51	4.68	4.70	4.67	4.59	4.46	4.36	4.39
-170	2.13	1.91	1.75	1.72	1.73	1.83	2.06	2.38	2.76	3.14	3.45	3.68	3.82	3.87	3.88	3.82	3.68	3.81	3.90
-160	2.13	1.90	1.73	1.67	1.64	1.69	1.81	1.99	2.21	2.43	2.61	2.73	2.82	2.85	2.83	3.04	3.26	3.39	3.44
-150	2.13	1.89	1.72	1.62	1.57	1.55	1.58	1.64	1.71	1.77	1.80	1.79	1.74	1.77	2.01	2.22	2.38	2.47	2.49
-140	2.13	1.89	1.71	1.58	1.52	1.45	1.41	1.37	1.34	1.28	1.19	1.06	1.04	1.16	1.27	1.38	1.45	1.49	1.49
-130	2.13	1.90	1.71	1.57	1.47	1.39	1.30	1.22	1.12	1.02	0.89	0.81	0.81	0.83	0.83	0.86	0.87	0.87	0.86
-120	2.13	1.90	1.72	1.58	1.45	1.35	1.27	1.16	1.06	0.95	0.84	0.82	0.81	0.81	0.80	0.79	0.78	0.77	0.77
-110	2.13	1.92	1.75	1.59	1.46	1.35	1.24	1.14	1.04	0.95	0.91	0.91	0.90	0.90	0.90	0.90	0.91	0.91	0.92
-100	2.13	1.94	1.78	1.62	1.48	1.35	1.23	1.11	1.01	0.90	0.91	0.91	0.91	0.91	0.91	0.91	0.92	0.92	0.92
-90	2.13	1.98	1.82	1.67	1.51	1.36	1.20	1.05	0.89	0.73	0.73	0.73	0.72	0.72	0.72	0.71	0.71	0.71	0.70
-80	2.13	2.01	1.89	1.75	1.61	1.48	1.32	1.14	0.94	0.72	0.70	0.69	0.69	0.69	0.69	0.70	0.70	0.70	0.70
-70	2.13	2.06	1.97	1.94	1.85	1.74	1.59	1.39	1.18	0.94	0.89	0.98	1.09	1.19	1.29	1.39	1.46	1.50	1.52
-60	2.13	2.10	2.15	2.17	2.19	2.13	2.07	2.00	1.97	2.00	2.23	2.95	3.75	4.61	5.42	6.11	6.60	6.86	6.87
-50	2.13	2.16	2.31	2.47	2.57	2.69	2.89	3.30	4.11	5.44	7.34	9.77	12.6	15.4	18.0	20.0	21.5	22.1	21.9
-40	2.13	2.24	2.50	2.78	3.05	3.46	4.27	5.83	8.56	12.4	17.2	23.1	30.3	37.4	44.2	50.0	54.2	56.1	55.3
-30	2.13	2.32	2.70	3.10	3.59	4.47	6.24	9.66	14.8	21.5	30.8	43.2	59.2	78.3	97.9	119	139	153	157
-20	2.13	2.39	2.88	3.41	4.16	5.60	8.57	14.0	20.9	31.2	46.1	67.3	97.9	142	207	295	390	473	506
-10	2.13	2.45	3.04	3.69	4.67	6.57	10.5	17.1	25.5	38.8	58.3	88.5	138	221	372	615	935	1088	1155
0	2.13	2.49	3.16	3.91	5.04	7.18	11.6	18.6	27.5	41.5	62.2	95.7	152	253	436	727	1088	1349	1458
10	2.13	2.48	3.13	3.85	4.90	6.87	10.8	17.1	25.2	37.5	55.1	82.1	126	199	331	526	735	956	1059
20	2.13	2.46	3.05	3.71	4.62	6.21	9.19	14.3	20.7	29.6	42.0	59.0	82.9	117	166	236	322	393	422
30	2.13	2.42	2.94	3.52	4.24	5.35	7.27	10.5	15.2	20.8	28.3	37.6	48.6	62.6	81.0	101	121	137	145
40	2.13	2.36	2.79	3.29	3.83	4.55	5.64	7.36	9.89	13.3	17.0	21.6	27.3	34.1	41.1	48.2	54.4	59.3	61.9
50	2.13	2.30	2.64	3.04	3.42	3.87	4.44	5.21	6.24	7.66	9.33	11.4	14.0	16.8	19.7	22.4	24.8	26.6	27.6
60	2.13	2.25	2.49	2.75	3.04	3.31	3.61	3.93	4.31	4.74	5.27	5.96	6.77	7.62	8.47	9.28	9.98	10.5	10.7
70	2.13	2.21	2.32	2.51	2.66	2.84	2.99	3.13	3.26	3.40	3.57	3.74	3.93	4.09	4.26	4.41	4.52	4.60	4.64
80	2.13	2.18	2.22	2.26	2.34	2.43	2.51	2.57	2.62	2.67	2.72	2.76	2.80	2.83	2.86	2.88	2.90	2.91	2.91
90	2.13	2.14	2.14	2.14	2.15	2.15	2.16	2.16	2.17	2.17	2.17	2.16	2.15	2.15	2.14	2.14	2.13	2.12	2.12
100	2.13	2.09	2.06	2.03	2.01	1.98	1.95	1.93	1.91	1.90	1.88	1.86	1.84	1.82	1.81	1.80	1.79	1.78	1.78
110	2.13	2.06	2.00	1.93	1.89	1.85	1.81	1.79	1.78	1.76	1.75	1.75	1.75	1.75	1.75	1.76	1.77	1.77	1.77
120	2.13	2.02	1.93	1.86	1.80	1.78	1.76	1.76	1.76	1.76	1.80	1.86	1.93	2.00	2.07	2.13	2.18	2.20	2.21
130	2.13	2.00	1.89	1.81	1.77	1.76	1.77	1.80	1.89	2.02	2.18	2.37	2.56	2.74	2.91	3.04	3.15	3.21	3.23
140	2.13	1.98	1.85	1.77	1.76	1.78	1.84	1.98	2.20	2.48	2.79	3.11	3.43	3.69	3.92	4.10	4.23	4.31	4.34
150	2.13	1.95	1.82	1.77	1.77	1.82	1.98	2.24	2.58	2.99	3.42	3.82	4.17	4.45	4.65	4.80	4.89	4.97	5.03
160	2.13	1.94	1.80	1.77	1.78	1.89	2.13	2.48	2.93	3.43	3.89	4.29	4.59	4.78	4.89	4.97	5.03	5.09	5.17
170	2.13	1.93	1.79	1.77	1.80	1.95	2.24	2.66	3.17	3.69	4.15	4.49	4.71	4.80	4.83	4.78	4.67	4.63	4.72
180	2.13	1.92	1.78	1.77	1.81	1.97	2.28	2.72	3.25	3.77	4.20	4.51	4.68	4.70	4.67	4.59	4.46	4.36	4.40

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:

Test Date:2024-09-28

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline-609mm-TW-2200K-30D-Rev1	TYPE:2200K	WEIGHT:
SPEC.:30 DEG	DIM.:609MM	SERIAL No.:IES002957
MFR.:	SUR.:1	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	3.97	3.73	3.48	3.16	2.76	2.33	1.89	1.49	1.16	0.93	0.83	0.84	0.87	0.91	0.90	0.86	0.78	0.67
-170	3.81	3.64	3.39	3.09	2.69	2.24	1.81	1.42	1.11	0.90	0.82	0.83	0.87	0.90	0.90	0.86	0.78	0.67
-160	3.36	3.20	2.97	2.66	2.28	1.90	1.53	1.22	0.98	0.84	0.82	0.83	0.88	0.90	0.90	0.86	0.77	0.67
-150	2.45	2.33	2.15	1.92	1.66	1.40	1.17	0.98	0.85	0.81	0.81	0.84	0.89	0.90	0.89	0.85	0.77	0.67
-140	1.47	1.41	1.32	1.21	1.08	0.97	0.87	0.82	0.80	0.80	0.82	0.87	0.90	0.91	0.89	0.85	0.75	0.67
-130	0.86	0.85	0.83	0.81	0.79	0.79	0.78	0.78	0.80	0.82	0.87	0.89	0.91	0.90	0.87	0.81	0.73	0.67
-120	0.77	0.78	0.78	0.79	0.79	0.80	0.81	0.83	0.86	0.89	0.90	0.91	0.90	0.88	0.85	0.79	0.72	0.67
-110	0.91	0.91	0.91	0.90	0.90	0.91	0.91	0.91	0.91	0.91	0.91	0.90	0.87	0.84	0.80	0.75	0.70	0.67
-100	0.92	0.92	0.92	0.91	0.91	0.90	0.90	0.89	0.88	0.86	0.84	0.82	0.79	0.76	0.73	0.71	0.68	0.67
-90	0.70	0.70	0.70	0.70	0.70	0.70	0.70	0.70	0.70	0.70	0.70	0.69	0.69	0.68	0.68	0.67	0.67	0.67
-80	0.69	0.69	0.69	0.68	0.68	0.67	0.67	0.68	0.68	0.69	0.71	0.71	0.71	0.71	0.70	0.68	0.67	0.67
-70	1.50	1.44	1.37	1.27	1.16	1.06	0.96	0.86	0.80	0.77	0.76	0.77	0.78	0.77	0.74	0.71	0.67	0.67
-60	6.61	6.15	5.52	4.79	4.03	3.28	2.60	2.02	1.62	1.31	1.10	0.96	0.87	0.85	0.80	0.74	0.69	0.67
-50	20.9	19.2	17.0	14.5	11.9	9.47	7.22	5.43	4.03	2.84	1.97	1.42	1.11	0.95	0.88	0.79	0.71	0.67
-40	52.4	47.2	40.5	33.4	26.6	20.5	15.7	11.9	8.75	6.00	3.79	2.30	1.51	1.12	0.94	0.84	0.72	0.67
-30	148	129	103	77.5	55.8	40.3	29.6	21.5	15.1	10.3	6.63	3.73	2.09	1.33	1.02	0.88	0.72	0.67
-20	478	400	298	193	122	77.6	50.7	33.9	22.7	14.8	9.66	5.42	2.75	1.57	1.10	0.92	0.74	0.67
-10	1090	865	626	404	228	126	74.4	46.5	29.8	18.9	11.9	6.92	3.35	1.77	1.17	0.95	0.75	0.67
0	1384	1149	833	514	289	153	86.8	53.2	33.5	20.9	12.9	7.68	3.65	1.86	1.21	0.96	0.75	0.67
10	996	815	568	365	221	132	81.6	52.1	33.5	21.0	13.0	7.58	3.75	2.03	1.34	1.04	0.78	0.67
20	398	333	255	190	135	93.2	63.8	43.3	28.6	18.3	11.6	6.57	3.49	2.07	1.42	1.09	0.80	0.67
30	143	132	115	96.5	78.3	59.7	43.9	31.1	21.1	14.1	8.90	5.17	3.09	2.02	1.46	1.13	0.82	0.67
40	61.7	59.0	54.4	48.2	41.2	34.0	26.4	19.2	13.6	9.26	6.01	3.90	2.68	1.94	1.47	1.14	0.84	0.67
50	27.5	26.4	24.6	22.2	19.3	16.3	13.3	10.3	7.63	5.59	4.13	3.09	2.36	1.84	1.46	1.13	0.85	0.67
60	10.7	10.3	9.69	8.92	8.06	7.18	6.31	5.55	4.65	3.84	3.15	2.58	2.11	1.73	1.40	1.10	0.84	0.67
70	4.63	4.57	4.47	4.34	4.19	4.03	3.85	3.68	3.40	2.96	2.57	2.22	1.91	1.60	1.32	1.07	0.83	0.67
80	2.92	2.91	2.90	2.88	2.86	2.83	2.79	2.75	2.68	2.43	2.18	1.93	1.69	1.46	1.22	1.02	0.83	0.67
90	2.12	2.13	2.14	2.14	2.15	2.16	2.16	2.17	2.18	2.01	1.84	1.67	1.51	1.34	1.17	1.00	0.83	0.67
100	1.79	1.80	1.80	1.82	1.83	1.85	1.87	1.90	1.91	1.80	1.69	1.57	1.44	1.31	1.16	1.00	0.83	0.67
110	1.77	1.77	1.77	1.77	1.77	1.77	1.77	1.78	1.75	1.67	1.57	1.49	1.39	1.28	1.15	1.01	0.84	0.67
120	2.20	2.18	2.13	2.07	2.01	1.94	1.88	1.83	1.70	1.61	1.51	1.43	1.34	1.24	1.15	1.01	0.84	0.67
130	3.20	3.13	3.02	2.88	2.72	2.53	2.35	2.09	1.82	1.61	1.47	1.37	1.29	1.21	1.11	1.00	0.84	0.67
140	4.30	4.21	4.07	3.88	3.65	3.36	2.94	2.42	2.00	1.68	1.46	1.32	1.23	1.16	1.08	1.00	0.83	0.67
150	4.98	4.90	4.79	4.62	4.40	3.86	3.21	2.61	2.08	1.69	1.42	1.25	1.17	1.11	1.04	0.96	0.83	0.67
160	5.13	5.09	5.06	4.87	4.31	3.72	3.11	2.52	1.99	1.57	1.31	1.15	1.09	1.04	1.00	0.93	0.82	0.67
170	4.73	4.81	4.51	4.15	3.70	3.18	2.65	2.12	1.67	1.31	1.10	1.01	0.98	0.98	0.95	0.90	0.80	0.67
180	3.97	3.73	3.48	3.16	2.76	2.33	1.89	1.49	1.16	0.93	0.83	0.84	0.87	0.91	0.90	0.86	0.78	0.67

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-28

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: