

Test report

Light measurement results

Laboratory and Equipment

Test lab
Spectrometer Manufacturer and Model
Measurement date

n/a - serial: n/a sensor serial: n/a
n/a, n/a – n/a
5/4/2025

Measurement Conditions

Tested c-planes
Tested gamma angles
Input Power

9 – distance {C_PLANES_DIST}°
361 – {H_PLANES_DIST}°
11.8 W


Tested Light Source
Luminaire
Basic Luminous Shape
Item No.
Manufacturer

Blazeline Max-598mm-TW-6000K-65D-Rev1
NONE
luminoscape

Main Light Measurement Results
Output – Total Lumen (Up% / Down%)
Efficiency
Peak Intensity
Correlated Color Temperature, CCT
Color Rendering Index

765 lm – 2.36% / 97.64%
65 lm/W
636 cd
6000 K
CRI 80.0


Polar light distribution diagram

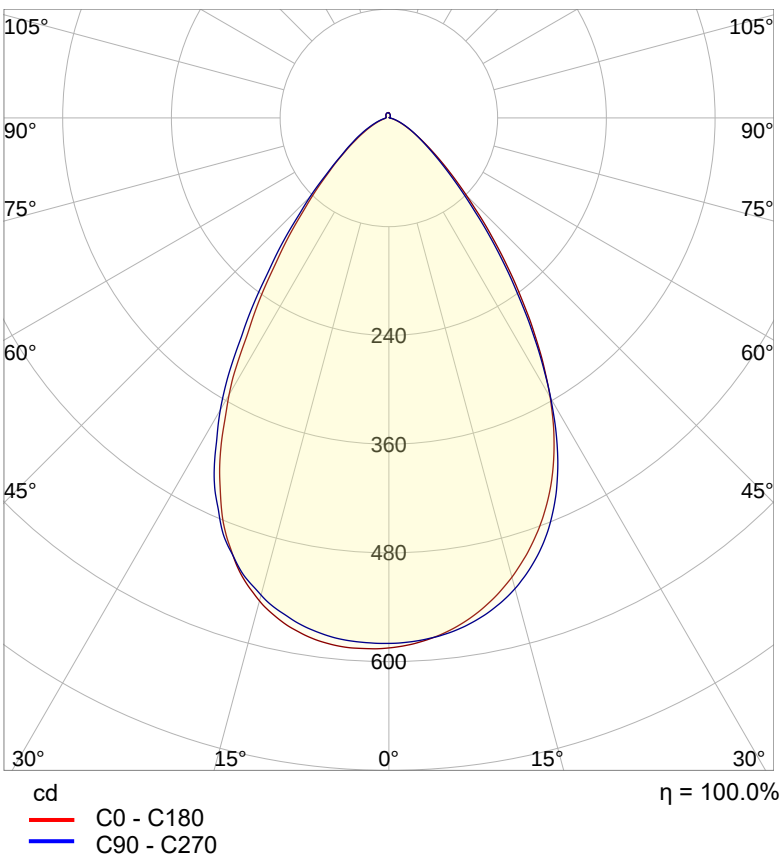

Test report


Light measurement results

Beam details

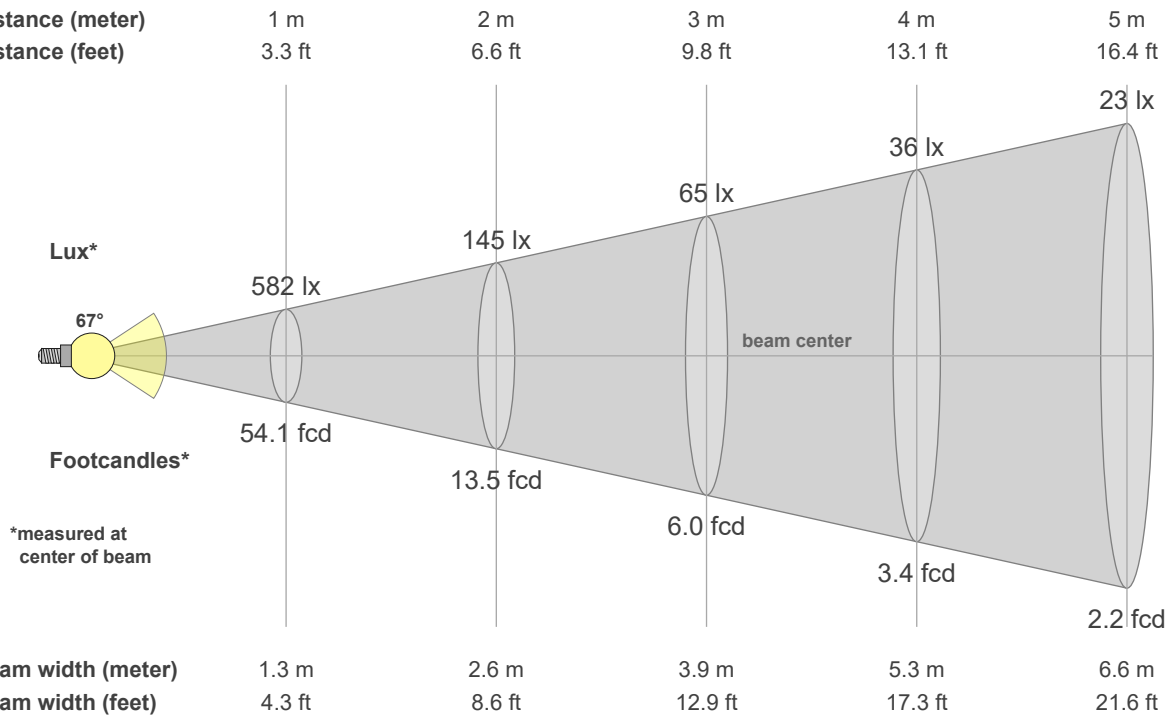

Luminaire budgetary diagram


LAMPS (number of lamps)

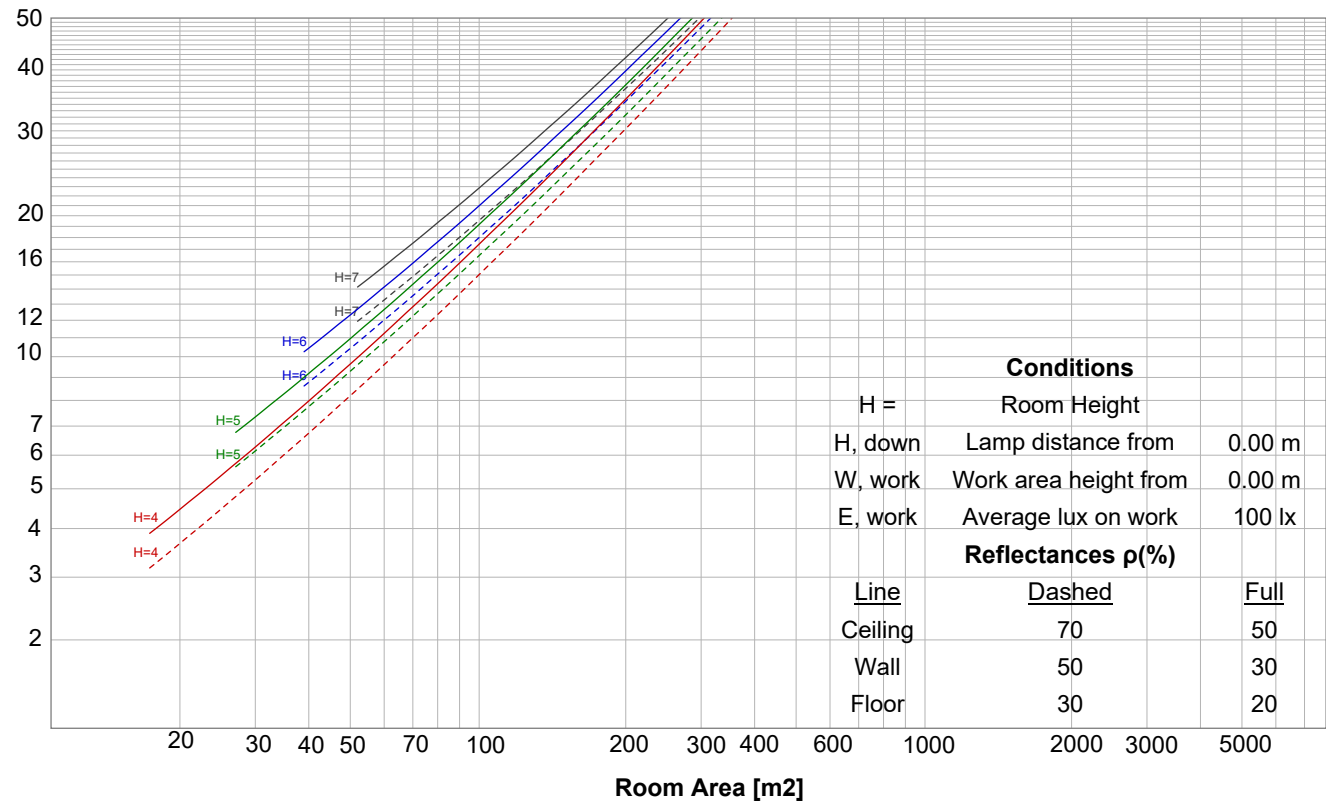


Test report

Light measurement results

Iso-intensity Diagram (Iso-candela)

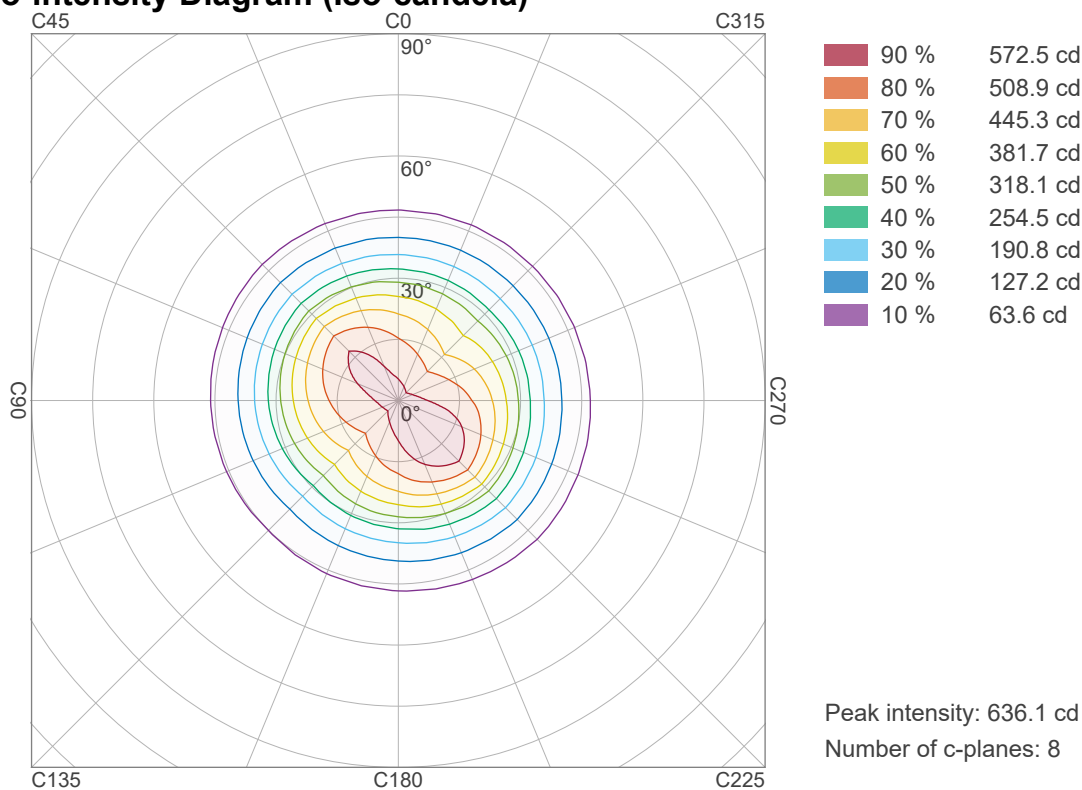


Iso-illuminance Diagram (Iso-lux)

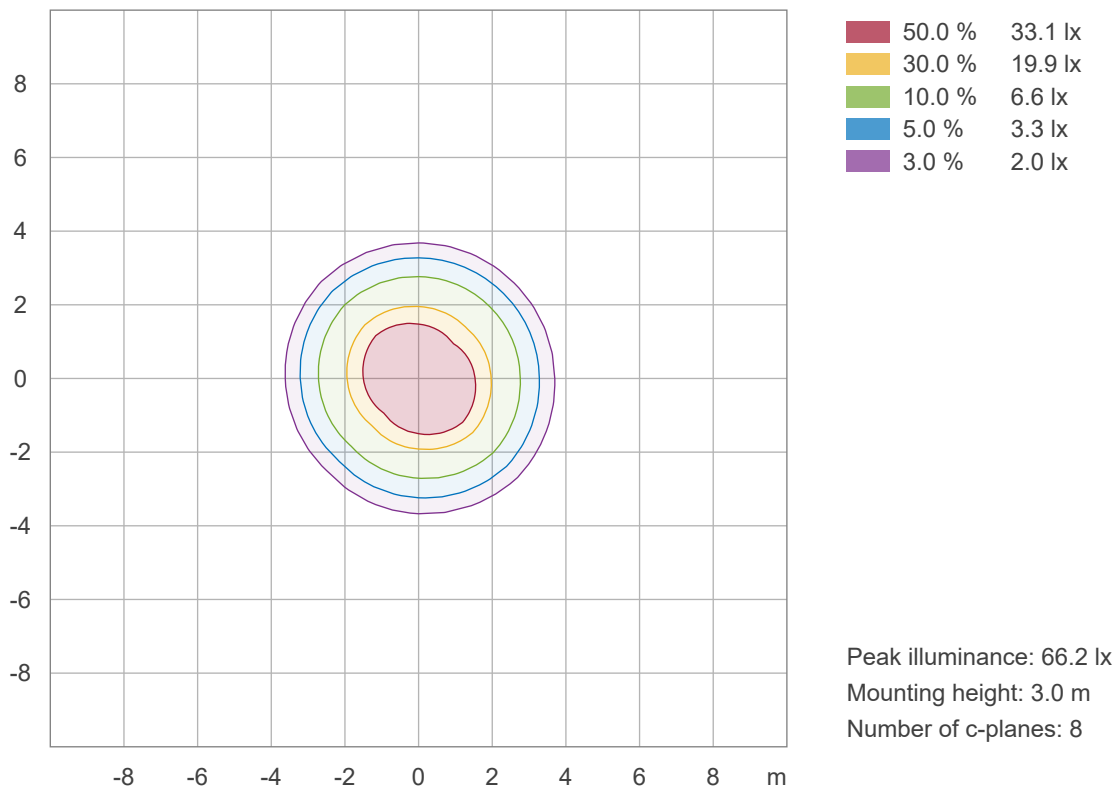

Test report


Light measurement results

Linear intensity distribution

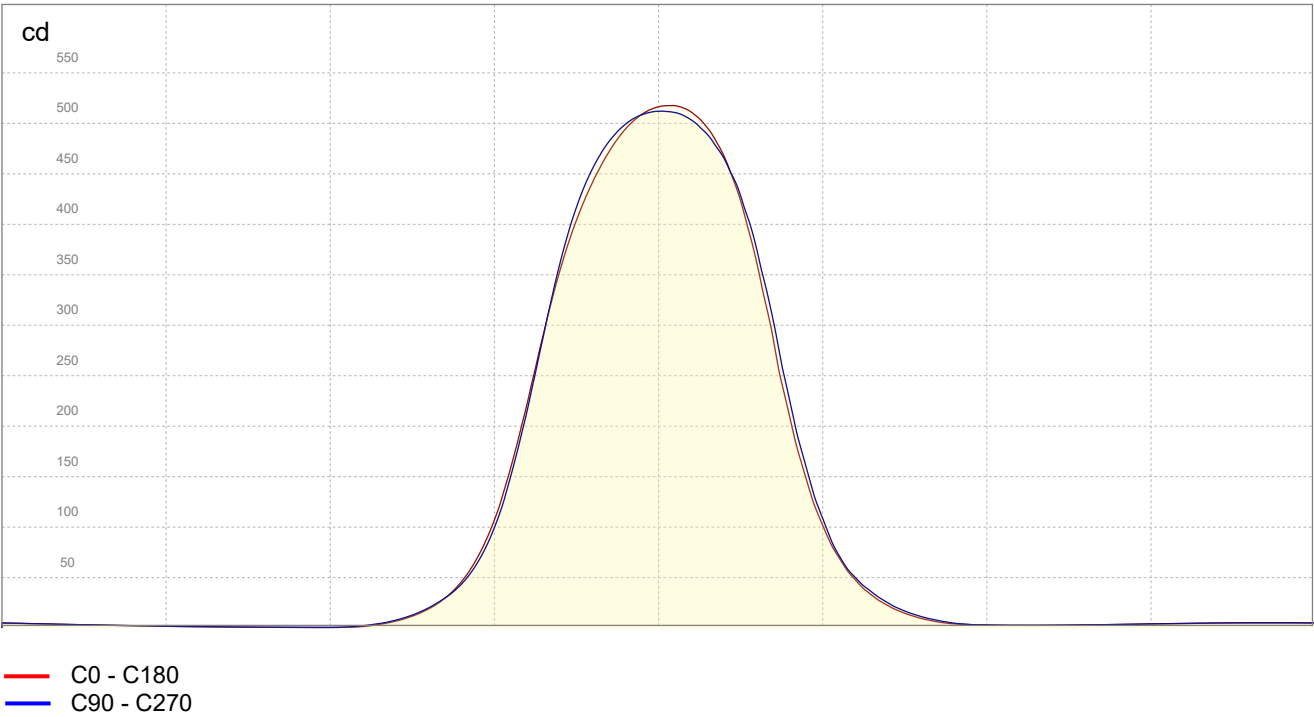

IESNA TM-15-07 Luminaire Classification System For Outdoor Luminaires

BUG rating B1 U2 G0

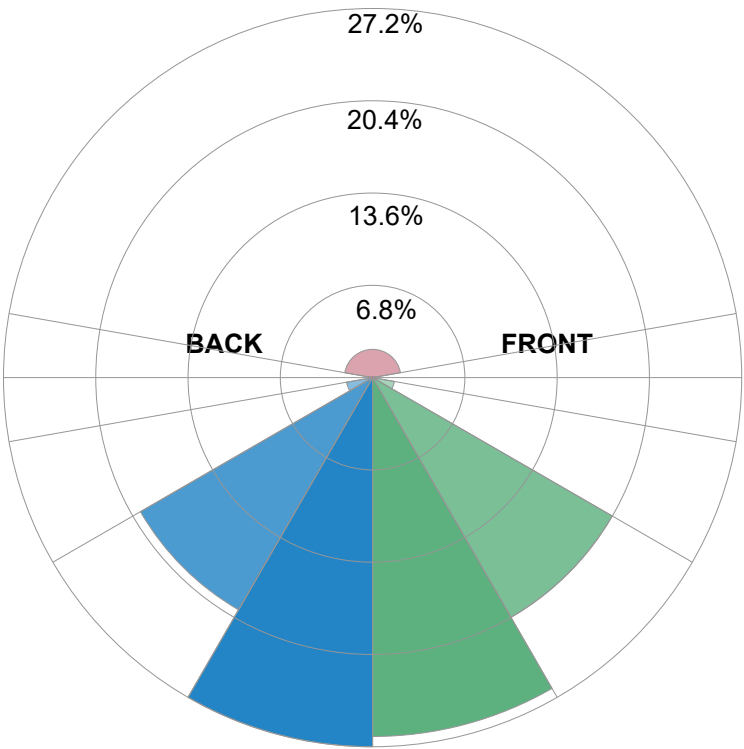

Forward Light

Low (0-30°)	202	lm	26.4%
Medium (30-60°)	155.8	lm	20.4%
High (60-80°)	12.5	lm	1.6%
Very High	0.8	lm	0.1%

Back Light

Low (0-30°)	207.8	lm	27.2%
Medium (30-60°)	150.9	lm	19.7%
High (60-80°)	14.9	lm	1.9%
Very High	2	lm	0.3%

Uplight

Low (90-100°)	2.2	lm	0.3%
High (100-180°)	15.9	lm	2.1%

Total

Sum	765	lm	100%
-----	-----	----	------