

Test report

Light measurement results

Laboratory and Equipment

Test lab
Spectrometer Manufacturer and Model
Measurement date

n/a - serial: n/a sensor serial: n/a
n/a, n/a – n/a
5/4/2025

Measurement Conditions

Tested c-planes
Tested gamma angles
Input Power

9 – distance {C_PLANES_DIST}°
361 – {H_PLANES_DIST}°
11.7 W


Tested Light Source
Luminaire
Basic Luminous Shape
Item No.
Manufacturer

Blazeline Max-598mm-TW-4000K-1545D-Rev1
NONE
Luminoscape

Main Light Measurement Results
Output – Total Lumen (Up% / Down%)
Efficiency
Peak Intensity
Correlated Color Temperature, CCT
Color Rendering Index

702 lm – 2.2% / 97.8%
60 lm/W
2081 cd
4000 K
CRI 80.0


Polar light distribution diagram

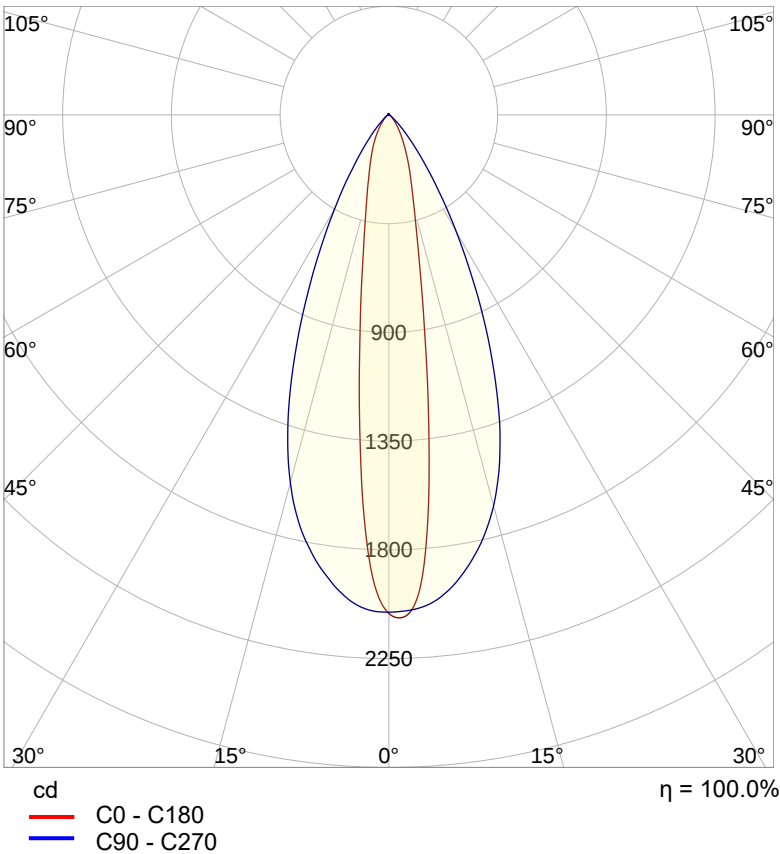

Test report


Light measurement results

Beam details

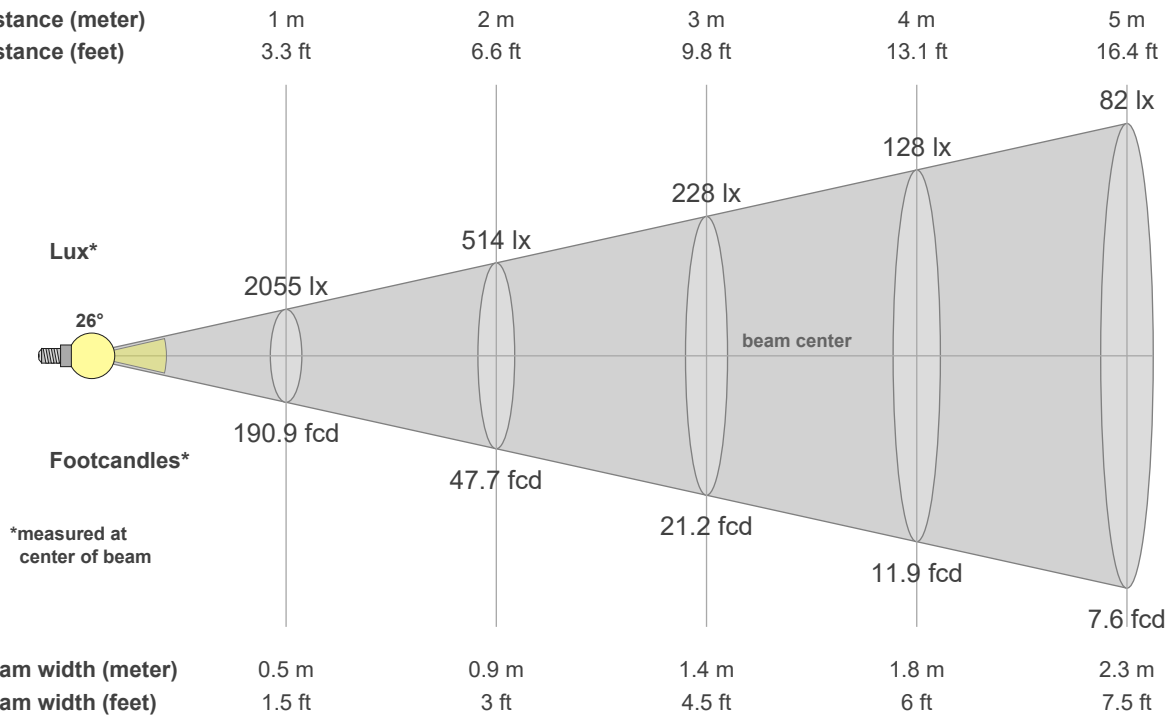

Luminaire budgetary diagram


LAMPS (number of lamps)

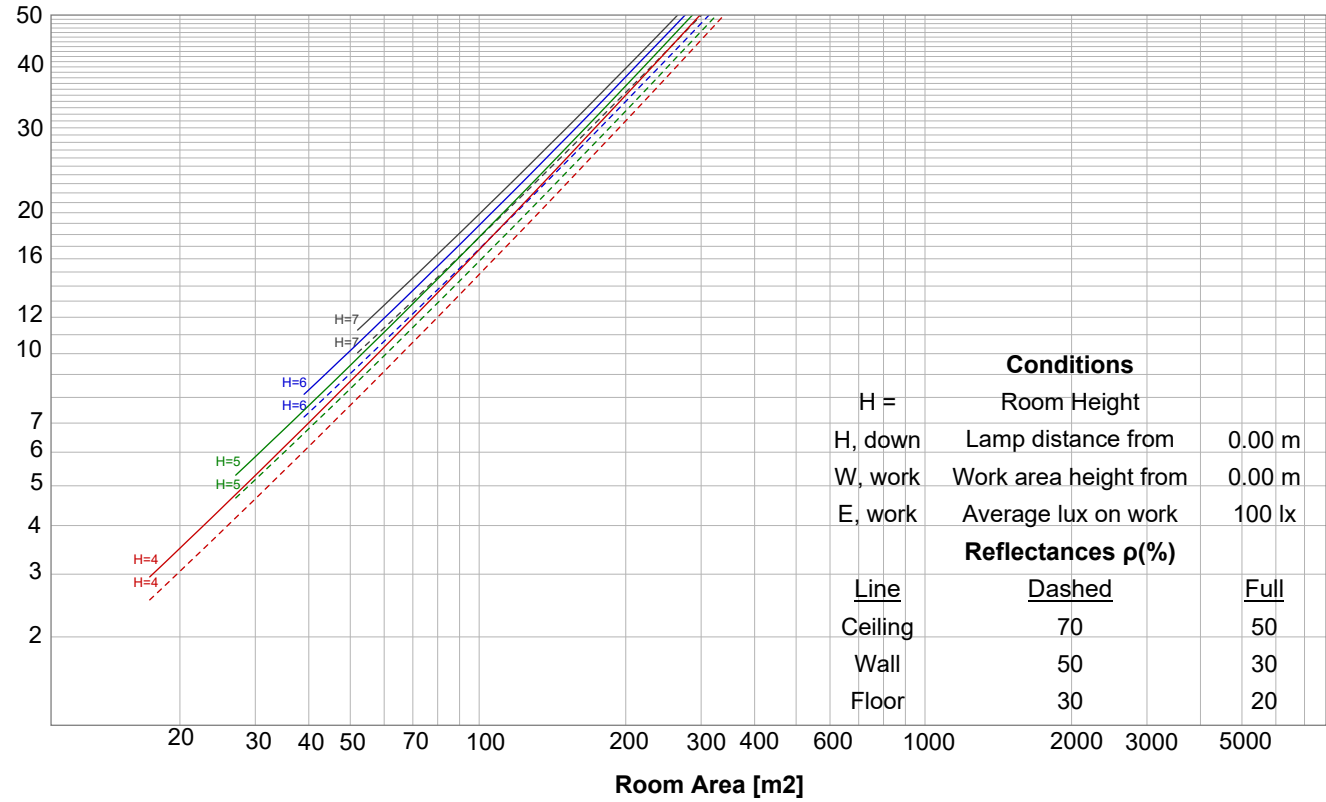


Test report

Light measurement results

Iso-intensity Diagram (Iso-candela)

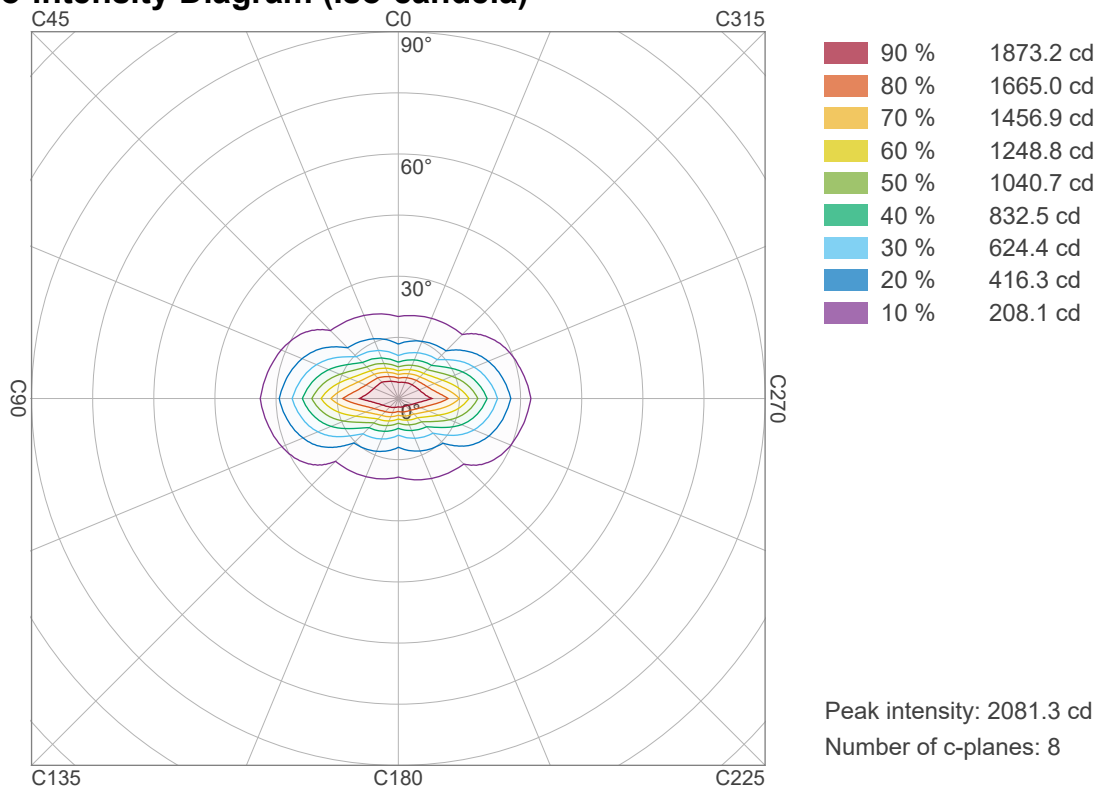


Iso-illuminance Diagram (Iso-lux)

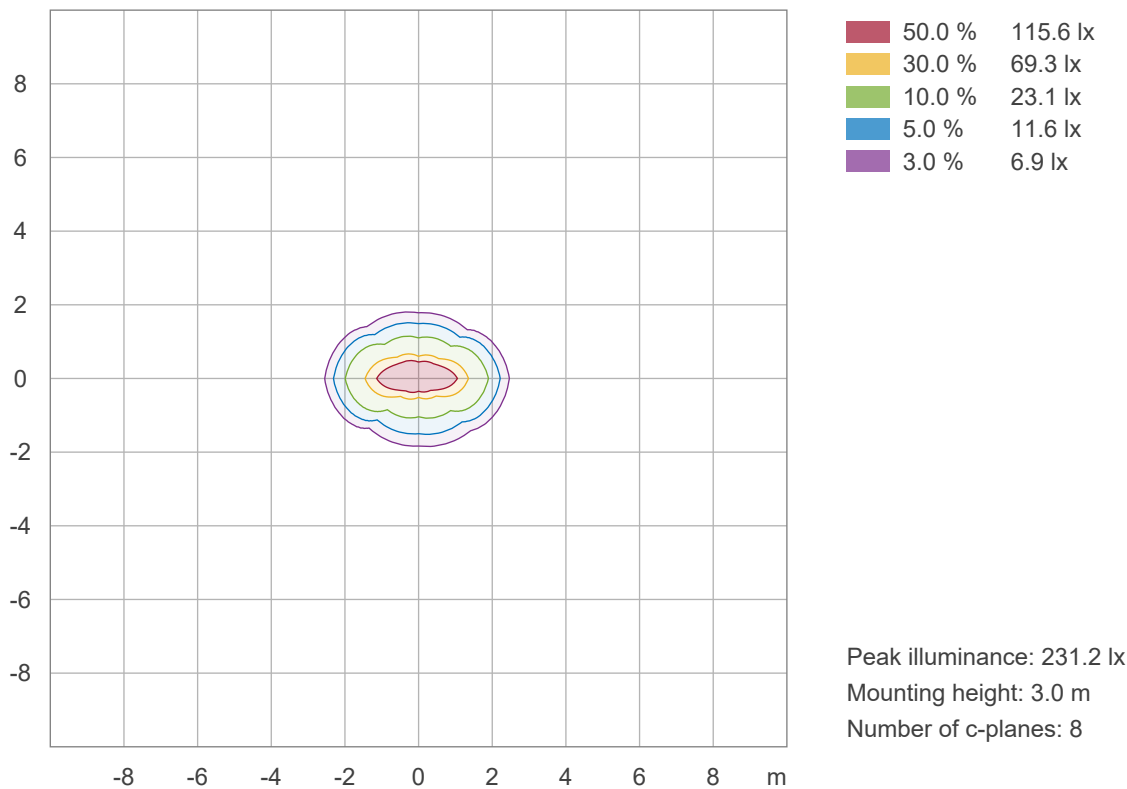

Test report


Light measurement results

Linear intensity distribution

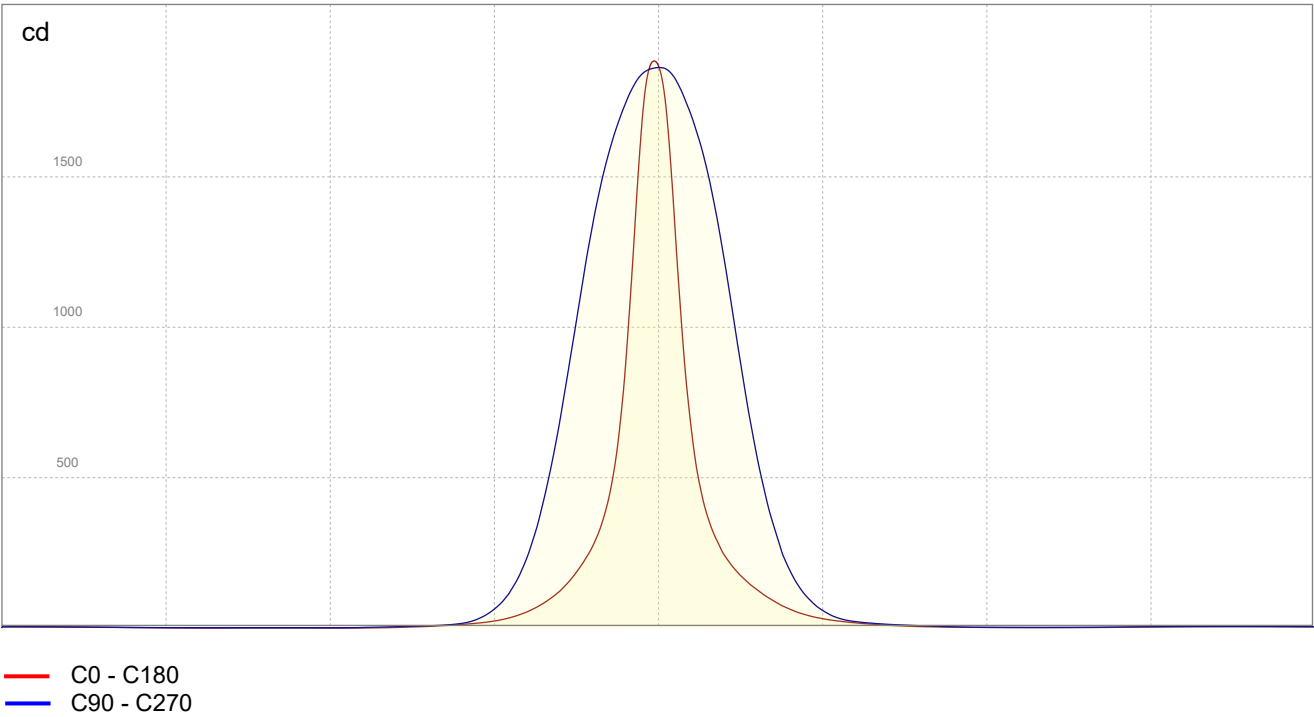

IESNA TM-15-07 Luminaire Classification System For Outdoor Luminaires

BUG rating B1 U2 G0

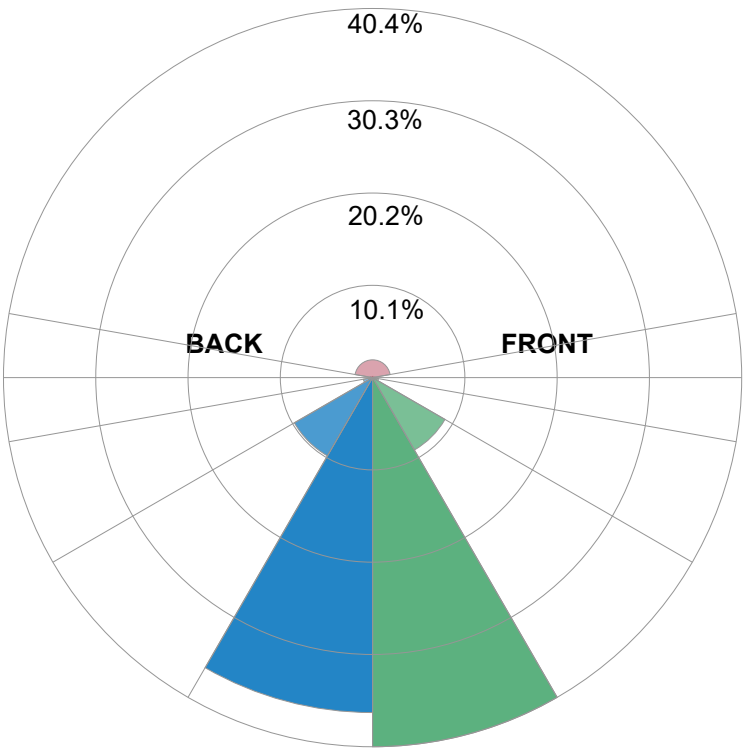

Forward Light

Low (0-30°)	283.6	lm	40.4%
Medium (30-60°)	64.2	lm	9.1%
High (60-80°)	4.6	lm	0.6%
Very High	0.6	lm	0.1%

Back Light

Low (0-30°)	257.4	lm	36.7%
Medium (30-60°)	69.4	lm	9.9%
High (60-80°)	7.2	lm	1%
Very High	1.5	lm	0.2%

Uplight

Low (90-100°)	1.8	lm	0.3%
High (100-180°)	13.7	lm	1.9%

Total

Sum	702	lm	100%
-----	-----	----	------