


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:219.96V I:0.0880A P:18.200W PF:0.9000 Freq:49.99Hz Lamp Flux:793.681x1 lm		
NAME:LuminoFlex Ground-500mm-RGBW ALL-25D-REV2	TYPE:RGBW W=3000K	WEIGHT:00
SPEC.:25 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 43.61 lm/W			
MODEL	1313	I _{max} (cd)	2899	S/MH(C0/180)	0.40
NOMINAL POWER(W)	10.8	LOR(%)	100.0	S/MH(C90/270)	0.37
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	793.68	η UP,DN(C0-180)	0.4,52.9
NOMINAL FLUX(lm)	793.681	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.4,46.2
LAMPS INSIDE	1	η up(%)	0.8	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	24	η down(%)	99.2	CIBSE SHR MAX	1.00

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

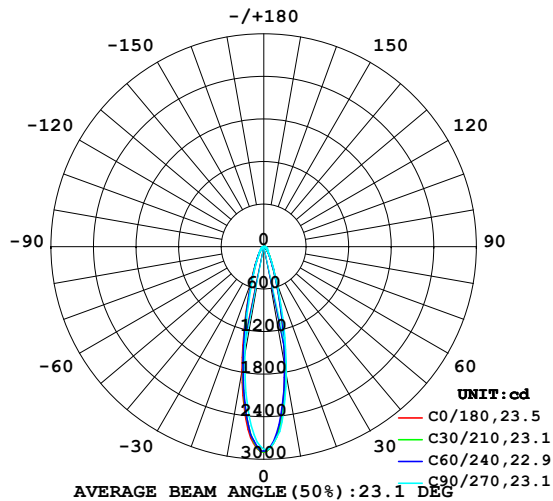

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

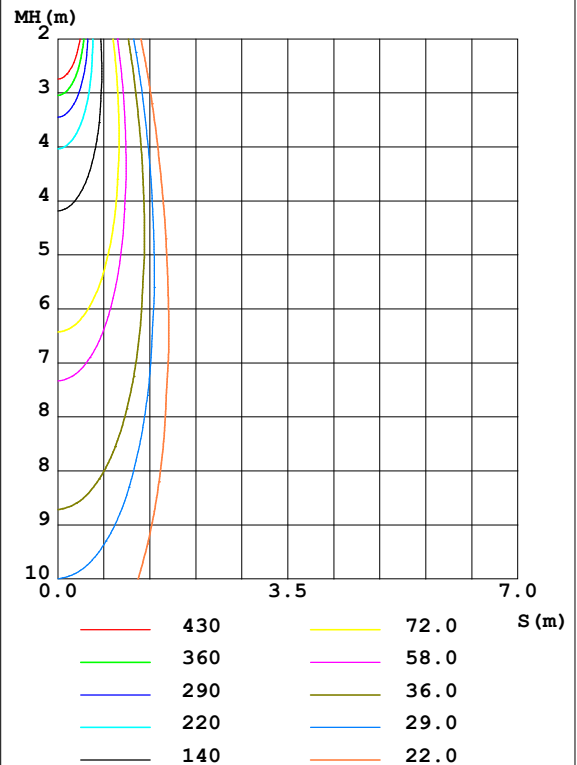

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1726	1715	1828	2009	1767	1697	1556	1458	0- 10	214.0	214.0	27,27
20	515.1	499.0	538.8	632.2	514.3	491.3	450.4	422.0	10- 20	270.0	484.0	61,61
30	177.5	178.5	186.7	205.4	174.4	171.3	159.9	154.4	20- 30	136.6	620.6	78.2,78.2
40	77.44	86.42	94.54	91.60	69.59	79.22	87.46	75.01	30- 40	75.55	696.1	87.7,87.7
50	31.03	44.06	57.99	45.44	25.92	39.14	54.91	39.38	40- 50	45.94	742.1	93.5,93.5
60	8.369	19.71	40.65	22.28	5.394	15.93	37.78	18.98	50- 60	27.28	769.3	96.9,96.9
70	1.218	4.506	24.17	5.833	0.8781	3.202	19.75	4.430	60- 70	12.58	781.9	98.5,98.5
80	0.4248	0.9601	8.459	1.391	0.3144	0.7765	5.909	0.9644	70- 80	3.989	785.9	99,99
90	0.0922	0.3767	1.983	0.5629	0.0875	0.3169	1.116	0.3806	80- 90	1.208	787.1	99.2,99.2
100	0.0569	0.3478	2.172	0.5227	0.0875	0.2976	1.453	0.3761	90-100	0.6032	787.7	99.2,99.2
110	0.0569	0.3565	1.566	0.5271	0.1050	0.3478	1.181	0.3435	100-110	0.5607	788.3	99.3,99.3
120	0.1398	0.4068	1.172	0.4856	0.1664	0.3783	1.067	0.4440	110-120	0.4953	788.8	99.4,99.4
130	0.3147	0.5163	0.8752	0.5752	0.3152	0.5273	0.8880	0.5776	120-130	0.4636	789.2	99.4,99.4
140	0.7909	0.9623	1.330	0.8858	0.6612	0.8101	1.259	1.006	130-140	0.5580	789.8	99.5,99.5
150	2.137	2.133	2.368	1.968	1.647	1.914	2.680	2.297	140-150	0.9018	790.7	99.6,99.6
160	4.141	4.022	3.934	3.696	3.484	3.552	3.932	3.902	150-160	1.363	792.1	99.8,99.8
170	4.694	4.573	4.444	4.449	4.243	4.307	4.287	4.368	160-170	1.201	793.3	99.9,99.9
180	4.156	4.160	4.116	4.142	4.138	4.162	4.116	4.132	170-180	0.4134	793.7	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 γ Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:219.96V I:0.0880A P:18.200W PF:0.9000 Freq:49.99Hz Lamp Flux:793.681x1 lm		
NAME:LuminoFlex Ground-500mm-RGBW ALL-25D-REV2	TYPE:RGBW W=3000K	WEIGHT:00
SPEC.:25 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:




C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:219.96V I:0.0880A P:18.200W PF:0.9000 Freq:49.99Hz Lamp Flux:793.681x1 lm		
NAME:LuminoFlex Ground-500mm-RGBW ALL-25D-REV2	TYPE:RGBW W=3000K	WEIGHT:00
SPEC.:25 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.03	1.02	1.01	.99	.98	.97	.96	.95	.94
2.0	1.04	1.00	.97	1.02	.99	.96	.99	.96	.94	.96	.94	.92	.93	.91	.90	.88
3.0	.98	.94	.90	.97	.93	.89	.94	.91	.88	.92	.89	.86	.89	.87	.85	.83
4.0	.93	.88	.84	.92	.87	.84	.89	.86	.82	.87	.84	.81	.86	.83	.80	.79
5.0	.88	.83	.79	.87	.82	.79	.85	.81	.78	.84	.80	.77	.82	.79	.77	.75
6.0	.84	.79	.75	.83	.78	.75	.82	.77	.74	.80	.77	.74	.79	.76	.73	.72
7.0	.80	.75	.71	.80	.75	.71	.78	.74	.71	.77	.73	.70	.76	.73	.70	.69
8.0	.77	.72	.68	.76	.72	.68	.75	.71	.68	.74	.70	.68	.73	.70	.67	.66
9.0	.74	.69	.66	.74	.69	.65	.73	.68	.65	.72	.68	.65	.71	.67	.65	.64
10.0	.71	.66	.63	.71	.66	.63	.70	.66	.63	.69	.65	.63	.69	.65	.62	.61

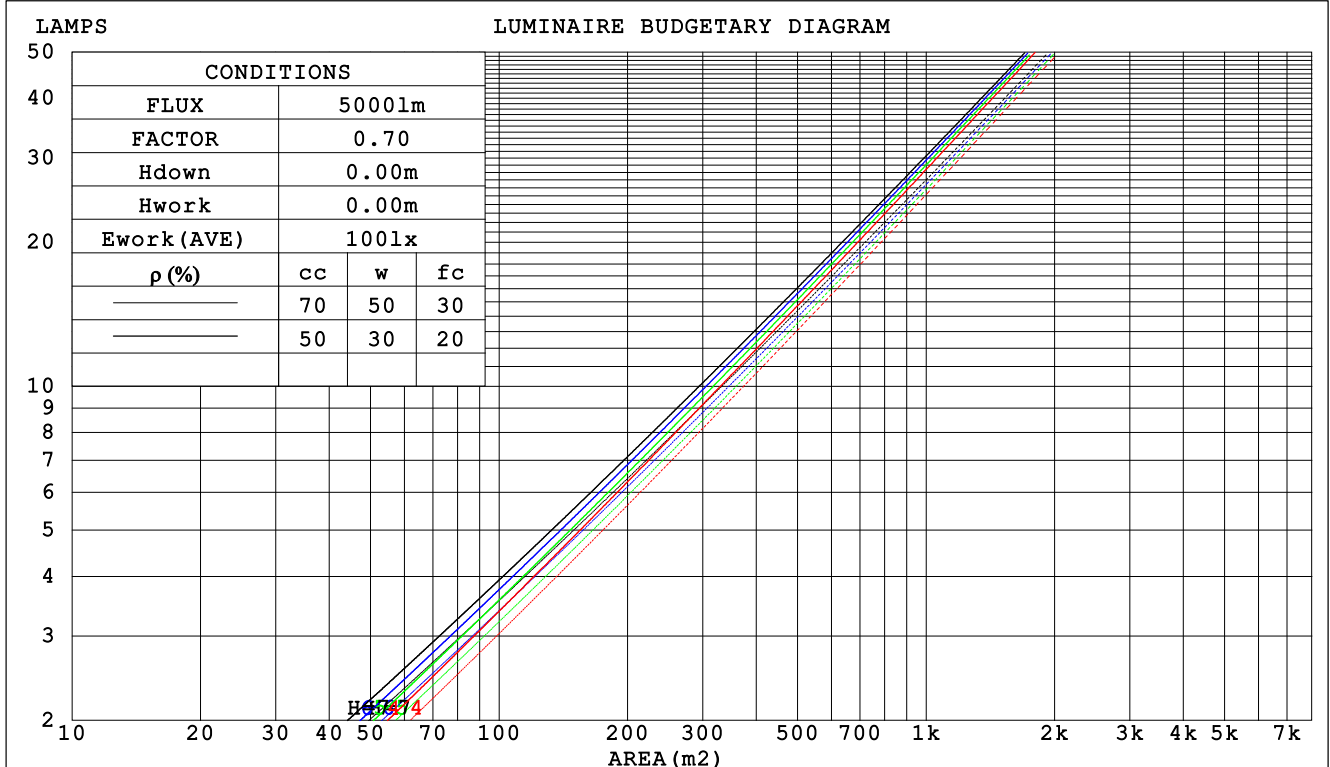

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:219.96V I:0.0880A P:18.200W PF:0.9000 Freq:49.99Hz Lamp Flux:793.681x1 lm					
NAME:LuminoFlex Ground-500mm-RGBW ALL-25D-REV2			TYPE:RGBW W=3000K		WEIGHT:00
SPEC.:25 DEG			DIM.:500mm		SERIAL No.:01
MFR.: 001			SUR.:0.8		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.167	.095	.030	.160	.091	.029	.147	.084	.027	.135	.078	.025	.124	.072	.023		
2.0	.158	.087	.027	.152	.084	.026	.141	.078	.024	.131	.074	.023	.122	.069	.022		
3.0	.148	.079	.024	.143	.077	.023	.134	.073	.022	.126	.069	.021	.118	.065	.020		
4.0	.140	.073	.021	.135	.071	.021	.127	.068	.020	.120	.064	.019	.113	.061	.019		
5.0	.132	.067	.019	.128	.066	.019	.121	.063	.019	.115	.060	.018	.109	.058	.017		
6.0	.124	.062	.018	.121	.061	.018	.115	.059	.017	.109	.057	.017	.104	.055	.016		
7.0	.118	.058	.016	.115	.057	.016	.110	.055	.016	.105	.054	.016	.100	.052	.015		
8.0	.112	.055	.015	.109	.054	.015	.105	.052	.015	.100	.051	.015	.096	.049	.014		
9.0	.106	.051	.014	.104	.051	.014	.100	.049	.014	.096	.048	.014	.092	.047	.014		
10.0	.102	.049	.014	.100	.048	.013	.096	.047	.013	.092	.046	.013	.089	.045	.013		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.197	.197	.197	.168	.168	.168	.115	.115	.115	.066	.066	.066	.021	.021	.021	
1.0	.177	.164	.152	.151	.141	.131	.103	.097	.090	.060	.056	.053	.019	.018	.017	
2.0	.161	.139	.121	.138	.120	.104	.094	.083	.073	.054	.048	.043	.017	.016	.014	
3.0	.147	.120	.098	.126	.103	.085	.087	.072	.060	.050	.042	.035	.016	.014	.011	
4.0	.136	.105	.081	.117	.091	.070	.080	.063	.050	.047	.037	.029	.015	.012	.010	
5.0	.127	.093	.068	.109	.081	.059	.075	.056	.042	.043	.033	.025	.014	.011	.008	
6.0	.118	.084	.059	.102	.072	.051	.070	.051	.036	.041	.030	.021	.013	.010	.007	
7.0	.111	.076	.051	.096	.066	.044	.066	.046	.031	.038	.027	.019	.012	.009	.006	
8.0	.105	.069	.045	.090	.060	.039	.063	.042	.028	.036	.025	.016	.012	.008	.005	
9.0	.099	.064	.040	.086	.055	.035	.059	.039	.025	.035	.023	.015	.011	.008	.005	
10.0	.094	.059	.036	.081	.051	.031	.057	.036	.022	.033	.021	.013	.011	.007	.004	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:20DEG
 Operators:01
 Test Date:2025-08-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.700m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:219.96V I:0.0880A P:18.200W PF:0.9000 Freq:49.99Hz Lamp Flux:793.681x1 lm										
NAME:LuminoFlex Ground-500mm-RGBW ALL-25D-REV2					TYPE:RGBW W=3000K			WEIGHT:00		
SPEC.:25 DEG					DIM.:500mm			SERIAL No.:01		
MFR.: 001					SUR.:0.8			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	-1.3	-0.5	-1.1	-0.3	-0.2	1.8	2.6	2.0	2.8	2.9
3H	-1.5	-0.7	-1.2	-0.5	-0.3	2.8	3.6	3.1	3.8	4.0
4H	-1.6	-0.8	-1.3	-0.6	-0.4	3.2	3.9	3.5	4.1	4.4
6H	-1.6	-1.0	-1.3	-0.7	-0.4	3.5	4.1	3.8	4.4	4.6
8H	-1.7	-1.0	-1.4	-0.8	-0.5	3.5	4.2	3.9	4.5	4.7
12H	-1.7	-1.1	-1.4	-0.8	-0.5	3.6	4.2	3.9	4.5	4.8
4H 2H	-1.1	-0.4	-0.8	-0.1	0.1	1.7	2.4	2.0	2.7	2.9
3H	-1.2	-0.6	-0.9	-0.3	-0.0	2.8	3.4	3.1	3.7	4.0
4H	-1.3	-0.8	-1.0	-0.4	-0.1	3.1	3.7	3.5	4.0	4.3
6H	-1.4	-0.9	-1.0	-0.6	-0.2	3.5	4.0	3.9	4.3	4.7
8H	-1.5	-1.0	-1.1	-0.6	-0.3	3.6	4.1	4.0	4.5	4.8
12H	-1.5	-1.1	-1.1	-0.7	-0.3	3.7	4.1	4.1	4.5	4.9
8H 4H	-1.4	-0.9	-1.0	-0.6	-0.2	3.0	3.5	3.4	3.8	4.2
6H	-1.5	-1.1	-1.1	-0.7	-0.3	3.3	3.7	3.8	4.1	4.6
8H	-1.6	-1.2	-1.1	-0.8	-0.3	3.5	3.8	4.0	4.3	4.7
12H	-1.6	-1.3	-1.1	-0.9	-0.4	3.6	3.9	4.1	4.4	4.9
12H 4H	-1.5	-1.0	-1.0	-0.6	-0.2	2.9	3.4	3.4	3.8	4.2
6H	-1.5	-1.2	-1.1	-0.8	-0.3	3.3	3.6	3.7	4.1	4.5
8H	-1.6	-1.3	-1.1	-0.8	-0.4	3.4	3.7	3.9	4.2	4.7
Variations with the observer position at spacings:										
S = 1.0H	+ 1.8 / - 3.9					+ 0.5 / - 0.5				
1.5H	+ 1.9 / - 2.1					+ 0.9 / - 0.8				
2.0H	+ 3.2 / - 6.0					+ 1.4 / - 1.8				

CIE Pub.117, 793.7 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.8)
Area: 0.8 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:219.96V I:0.0880A P:18.200W PF:0.9000 Freq:49.99Hz Lamp Flux:793.681x1 lm		
NAME:LuminoFlex Ground-500mm-RGBW ALL-25D-REV2	TYPE:RGBW W=3000K	WEIGHT:00
SPEC.:25 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	84	77	73	83	77	73	82	76	72	69
0.80	92	85	81	91	85	81	90	84	80	76
1.00	97	90	86	96	90	86	94	90	86	81
1.25	101	95	91	100	95	91	98	93	90	86
1.50	104	99	95	103	98	94	100	96	93	88
2.00	107	102	99	106	101	98	103	99	97	91
2.50	109	105	101	107	103	101	104	101	99	92
3.00	111	107	104	109	105	103	105	103	101	94
4.00	113	110	107	111	108	106	107	105	103	96
5.00	114	112	110	112	110	108	108	106	105	97
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.96V I:0.0880A P:18.200W PF:0.9000 Freq:49.99Hz Lamp Flux:793.681x1 lm		
NAME:LuminoFlex Ground-500mm-RGBW ALL-25D-REV2	TYPE:RGBW W=3000K	WEIGHT:00
SPEC.:25 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

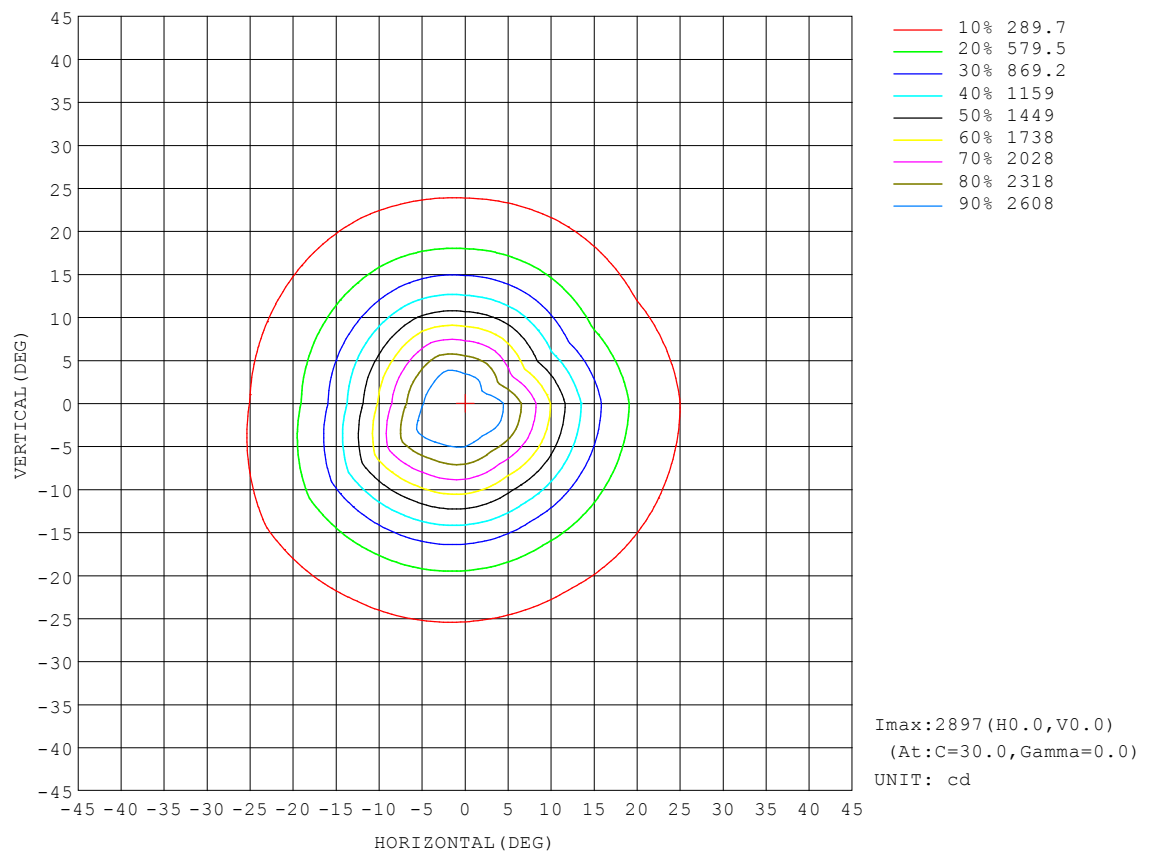


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.96V I:0.0880A P:18.200W PF:0.9000 Freq:49.99Hz Lamp Flux:793.681x1 lm		
NAME:LuminoFlex Ground-500mm-RGBW ALL-25D-REV2	TYPE:RGBW W=3000K	WEIGHT:00
SPEC.:25 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

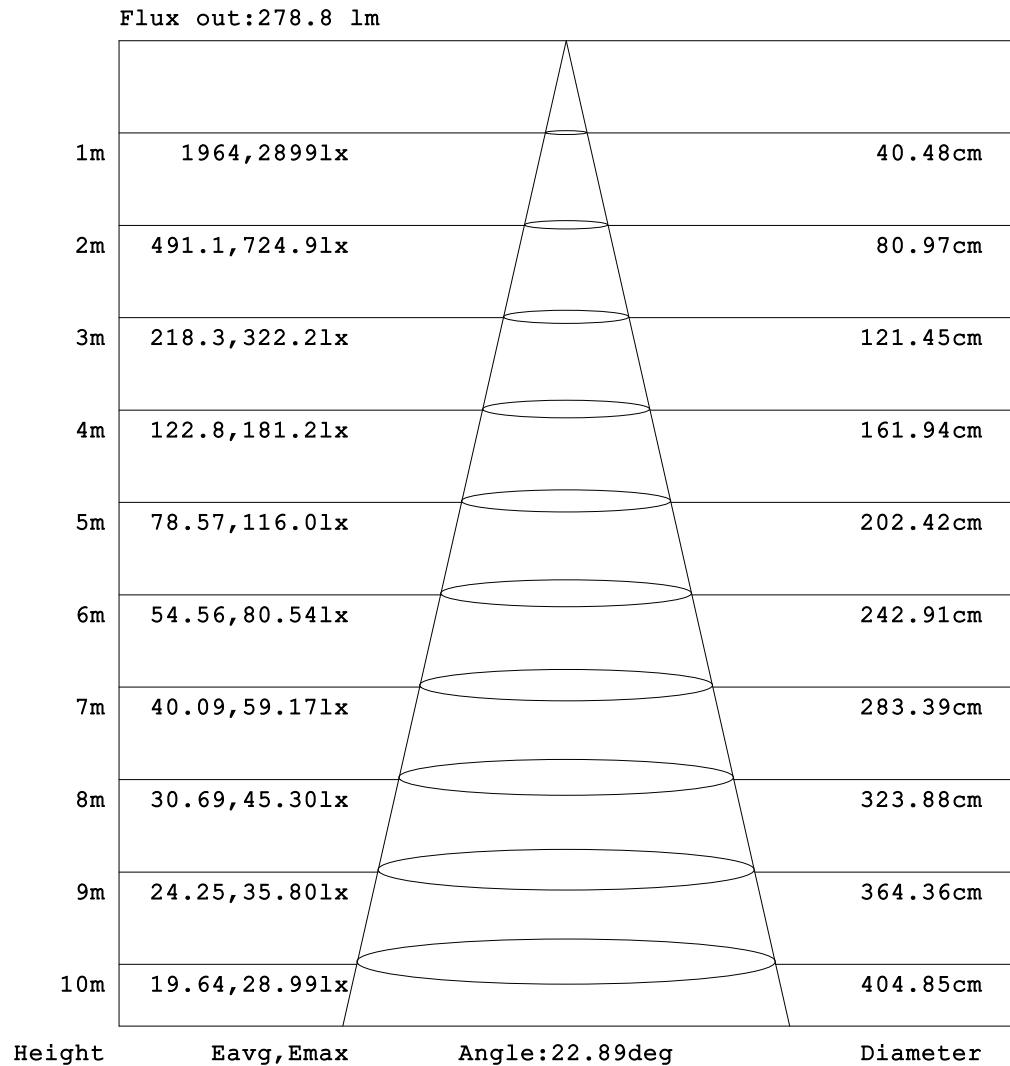


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:20DEG
 Operators:01
 Test Date:2025-08-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.700m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:219.96V I:0.0880A P:18.200W PF:0.9000 Freq:49.99Hz Lamp Flux:793.681x1 lm		
NAME:LuminoFlex Ground-500mm-RGBW ALL-25D-REV2	TYPE:RGBW W=3000K	WEIGHT:00
SPEC.:25 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

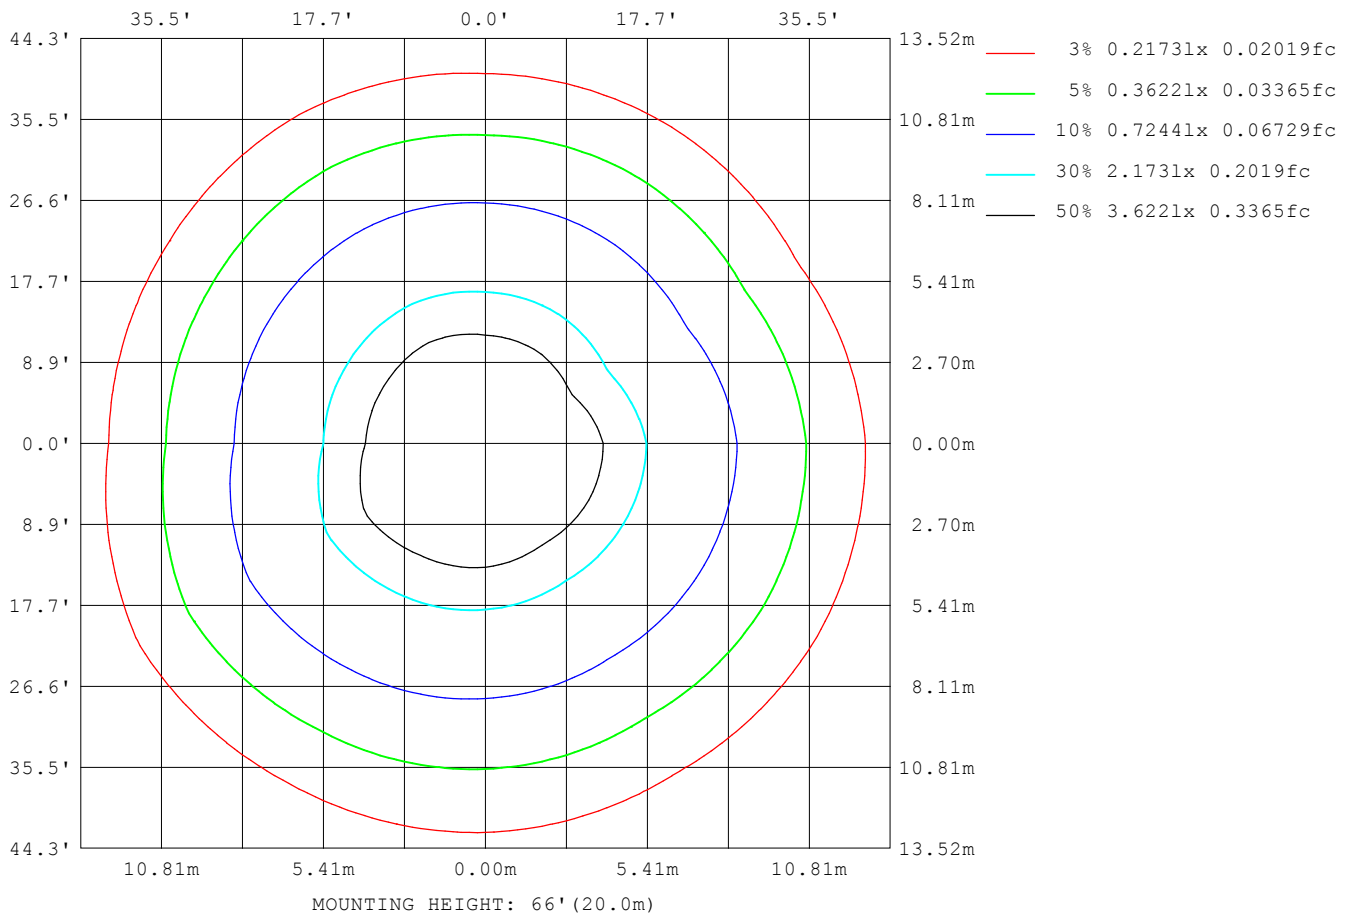

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:20DEG
 Operators:01
 Test Date:2025-08-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.700m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:219.96V I:0.0880A P:18.200W PF:0.9000 Freq:49.99Hz Lamp Flux:793.681x1 lm		
NAME:LuminoFlex Ground-500mm-RGBW ALL-25D-REV2	TYPE:RGBW W=3000K	WEIGHT:00
SPEC.:25 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	5
L_0~180 (75) av	3
L_0~180 (85) av	3
L_90~270 (65) av	92
L_90~270 (75) av	66
L_90~270 (85) av	42
L_45 (65) av	28
L_45 (75) av	4
L_45 (85) av	10

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

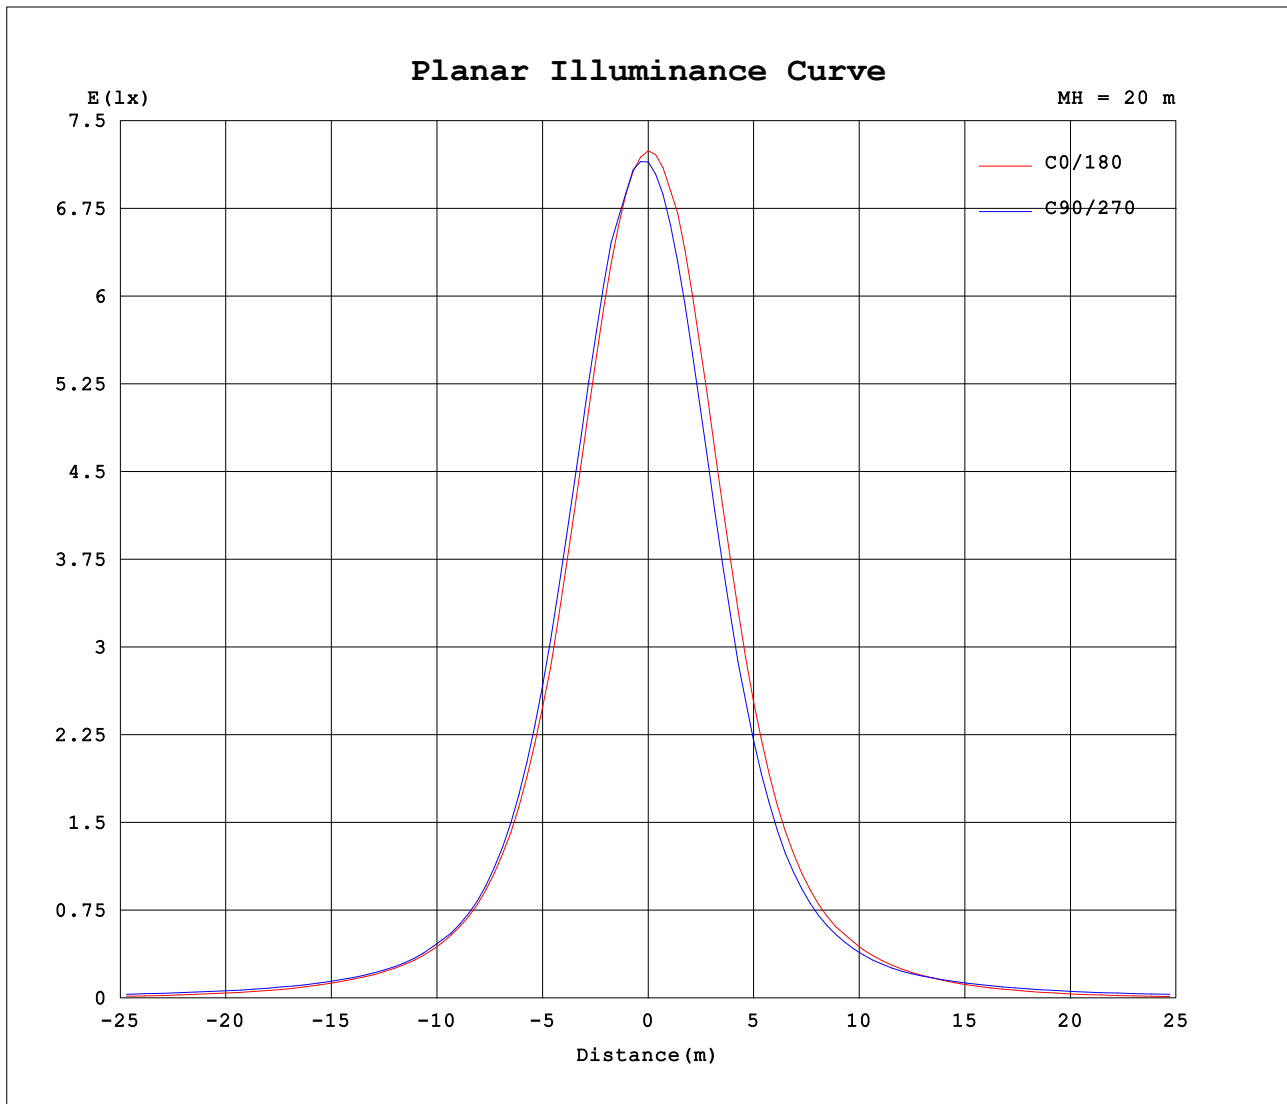

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-08-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.96V I:0.0880A P:18.200W PF:0.9000 Freq:49.99Hz Lamp Flux:793.681x1 lm		
NAME:LuminoFlex Ground-500mm-RGBW ALL-25D-REV2	TYPE:RGBW W=3000K	WEIGHT:00
SPEC.:25 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	2897	2899	2885	2859	2837	2809	2897	2899	2885	2859	2837	2809						
5	2540	2562	2515	2614	2661	2739	2586	2527	2529	2398	2355	2236						
10	1726	1733	1697	1828	1922	2096	1767	1703	1690	1556	1516	1400						
15	969	954	947	1036	1134	1263	984	945	927	853	823	760						
20	515	504	494	539	596	669	514	498	484	450	434	410						
25	290	287	279	300	325	360	291	279	278	256	254	238						
30	178	182	175	187	196	215	174	170	172	160	158	151						
35	118	122	122	128	131	136	111	113	116	115	108	103						
40	77.4	84.7	88.1	94.5	92.9	90.3	69.6	74.3	84.2	87.5	79.6	70.5						
45	50.3	56.1	66.4	72.2	69.1	58.7	43.1	48.0	63.6	67.3	61.7	46.0						
50	31.0	36.5	51.6	58.0	53.5	37.4	25.9	29.5	48.8	54.9	49.0	29.7						
55	18.5	22.1	39.6	48.0	42.1	22.6	14.5	17.4	35.8	45.8	38.7	18.0						
60	8.37	11.8	27.6	40.6	31.6	12.9	5.39	8.22	23.6	37.8	28.7	9.22						
65	2.08	3.88	16.3	33.1	20.9	5.17	1.59	2.01	12.7	28.8	17.7	2.73						
70	1.22	1.51	7.50	24.2	10.1	1.54	0.88	1.11	5.29	19.7	7.54	1.32						
75	0.67	0.82	1.98	15.1	3.74	0.89	0.55	0.71	1.53	12.2	2.30	0.77						
80	0.42	0.52	1.40	8.46	2.20	0.58	0.31	0.46	1.10	5.91	1.40	0.53						
85	0.23	0.31	1.25	3.70	1.62	0.39	0.15	0.28	0.97	2.13	0.99	0.34						
90	0.09	0.15	0.60	1.98	0.83	0.29	0.09	0.16	0.48	1.12	0.57	0.19						
95	0.06	0.14	0.56	2.29	0.75	0.30	0.09	0.14	0.42	1.74	0.61	0.17						
100	0.06	0.14	0.55	2.17	0.75	0.30	0.09	0.14	0.45	1.45	0.59	0.17						
105	0.06	0.16	0.54	1.83	0.75	0.30	0.10	0.14	0.55	1.24	0.50	0.17						
110	0.06	0.18	0.53	1.57	0.75	0.31	0.10	0.14	0.55	1.18	0.52	0.17						
115	0.09	0.21	0.53	1.36	0.67	0.32	0.13	0.17	0.55	1.16	0.61	0.19						
120	0.14	0.25	0.56	1.17	0.63	0.34	0.17	0.21	0.55	1.07	0.65	0.24						
125	0.21	0.32	0.60	0.94	0.67	0.39	0.23	0.24	0.64	0.92	0.67	0.31						
130	0.31	0.42	0.62	0.88	0.70	0.45	0.32	0.31	0.74	0.89	0.76	0.40						
135	0.49	0.57	0.80	1.05	0.84	0.56	0.44	0.45	0.84	1.01	0.93	0.57						
140	0.79	0.85	1.08	1.33	0.99	0.78	0.66	0.65	0.97	1.26	1.17	0.84						
145	1.32	1.33	1.50	1.72	1.42	1.17	1.03	1.04	1.52	1.84	1.74	1.34						
150	2.14	2.10	2.17	2.37	2.12	1.81	1.65	1.68	2.15	2.68	2.49	2.10						
155	3.18	3.12	3.09	3.26	2.96	2.71	2.53	2.58	2.86	3.65	3.30	3.06						
160	4.14	4.09	3.95	3.93	3.73	3.66	3.48	3.50	3.60	3.93	3.88	3.93						
165	4.70	4.65	4.48	4.43	4.30	4.31	4.14	4.12	4.16	4.22	4.33	4.37						
170	4.69	4.59	4.56	4.44	4.43	4.47	4.24	4.30	4.31	4.29	4.39	4.34						
175	4.34	4.29	4.34	4.20	4.27	4.26	4.13	4.23	4.26	4.29	4.29	4.23						
180	4.16	4.15	4.17	4.12	4.13	4.16	4.14	4.15	4.17	4.12	4.10	4.16						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks: