

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		4407.6 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	43.7V x 43.5H
	At 50% of Imax	22.3V x 22.6H
	At 90% of Imax	8.2V x 8.8H
Beam Flux	Total	990.3 lumens per klm.
	To 10% of Imax	728.7 lumens per klm.
	To 50% of Imax	373.2 lumens per klm.
	To 90% of Imax	66.6 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.0 %
Luminaire Efficiency(Light Output Ratio)		99.0 %

$H(\beta)$ Range:-90 - 90DEG
 $H(\beta)$ Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Kevin
Test Date:28 July 2025

$V(\beta)$ Range:-90 - 90DEG
 $V(\beta)$ Interval: 0.5DEG
Test System:EVERFINE 60-2000A_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:9.060m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.9V I:0.1778A P:35.61W PF:0.9108 Freq:49.99Hz Lamp Flux:464.165x8 lm		
NAME:Auroring Mini-212mm-3000K-20D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:20 DEG	DIA.:212mm	SERIAL No.:
MFR.:Luminoscope	SUR.:	Shielding Angle:

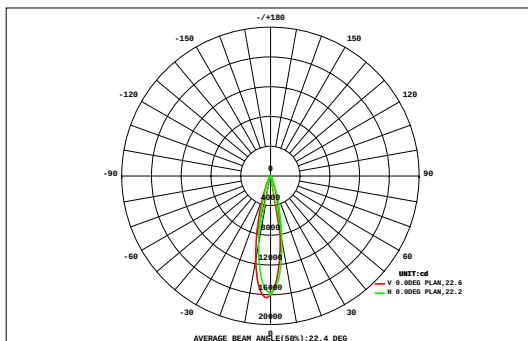

DATA OF LAMP		Eff:103.18lm/W	
MODEL		Imax(cd)	16367
NOMINAL POWER(W)	36	AVAILABILITY(%)	72.8
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	2703
NOMINAL FLUX(lm)	464.165	LOR(%)	99.0
LAMPS INSIDE	8	TOTAL FLUX(lm)	3675
TEST VOLTAGE(V)	220	θ @50%(H,V)	23,22DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.06	0.08	0.09	0.09	0.08	0.07	0.05	0.03	0.02	0.01	0.00	0.66	0.00
90	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.06	0.08	0.09	0.09	0.08	0.07	0.05	0.03	0.02	0.01	0.00	0.66	0.00
80	0.00	0.00	0.02	0.11	0.29	0.53	0.78	0.97	1.11	1.16	1.12	1.00	0.80	0.55	0.31	0.13	0.04	0.00	8.93	0.00
70	0.00	0.02	0.14	0.46	0.96	1.52	2.07	2.52	2.82	2.89	2.71	2.35	1.86	1.31	0.77	0.34	0.09	0.01	22.8	0.00
60	0.00	0.05	0.33	0.91	1.69	2.57	3.40	4.05	4.46	4.52	4.24	3.68	2.92	2.07	1.25	0.57	0.16	0.01	36.9	0.00
50	0.00	0.10	0.52	1.34	2.41	3.56	4.70	5.67	6.31	6.42	5.95	5.04	3.94	2.79	1.71	0.79	0.22	0.02	51.5	0.00
40	0.00	0.15	0.71	1.74	3.04	4.53	6.24	8.14	9.79	10.3	8.93	6.91	5.03	3.45	2.10	1.00	0.28	0.02	72.3	0.00
30	0.01	0.19	0.86	2.05	3.57	5.54	8.66	15.3	27.6	32.6	20.6	10.5	6.39	4.05	2.42	1.16	0.33	0.03	142	15.9
20	0.01	0.22	0.98	2.28	3.99	6.61	13.3	46.7	126	152	78.1	21.8	8.11	4.57	2.65	1.28	0.37	0.03	470	377
10	0.01	0.24	1.04	2.40	4.24	7.39	19.6	102	313	385	178	38.6	9.54	4.89	2.78	1.33	0.38	0.03	1070	994
0	0.01	0.24	1.03	2.39	4.20	7.30	19.3	95.6	301	378	173	37.1	9.35	4.88	2.77	1.33	0.38	0.03	1037	961
-10	0.01	0.22	0.96	2.24	3.89	6.43	12.7	42.7	117	144	73.1	20.7	7.93	4.54	2.65	1.27	0.36	0.03	441	346
-20	0.00	0.19	0.84	1.99	3.48	5.41	8.34	14.2	26.1	29.8	19.1	10.4	6.33	4.03	2.41	1.15	0.33	0.03	134	9.42
-30	0.00	0.14	0.68	1.66	2.94	4.41	6.08	7.95	9.57	9.91	8.69	6.83	5.00	3.43	2.08	0.98	0.28	0.02	70.7	0.00
-40	0.00	0.09	0.49	1.27	2.31	3.45	4.57	5.55	6.21	6.33	5.88	5.02	3.93	2.77	1.67	0.77	0.21	0.02	50.5	0.00
-50	0.00	0.04	0.30	0.84	1.61	2.45	3.27	3.96	4.37	4.45	4.20	3.65	2.89	2.03	1.21	0.54	0.15	0.01	36.0	0.00
-60	0.00	0.01	0.12	0.41	0.89	1.43	1.96	2.41	2.71	2.79	2.64	2.28	1.81	1.27	0.73	0.31	0.08	0.01	21.9	0.00
-70	0.00	0.00	0.02	0.09	0.25	0.47	0.71	0.91	1.04	1.10	1.08	0.96	0.77	0.53	0.28	0.11	0.03	0.00	8.36	0.00
-80	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.06	0.08	0.10	0.10	0.09	0.07	0.05	0.03	0.01	0.00	0.00	0.66	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.66	0.00
HORIZONTAL (DEG)																				
Φ t	0.05	1.90	9.04	22.2	39.8	63.6	116	359	960	1171	587	177	76.7	47.3	27.9	13.1	3.71	0.29	3675	---
Φ a	0.00	0.00	0.00	0.00	0.00	0.00	0.00	237	862	1076	484	43.4	0.00	0.00	0.00	0.00	0.00	0.00	---	2703

one-half-peak spread: U:11.0,D:11.5 , L:11.4,R:11.4


NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Kevin
Test Date:28 July 2025

V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE 60-2000A_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:9.060m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.9V I:0.1778A P:35.61W PF:0.9108 Freq:49.99Hz Lamp Flux:464.165x8 lm		
NAME: 香港Peter (36W投光灯)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: 威尔奈斯	SUR.:	Shielding Angle:

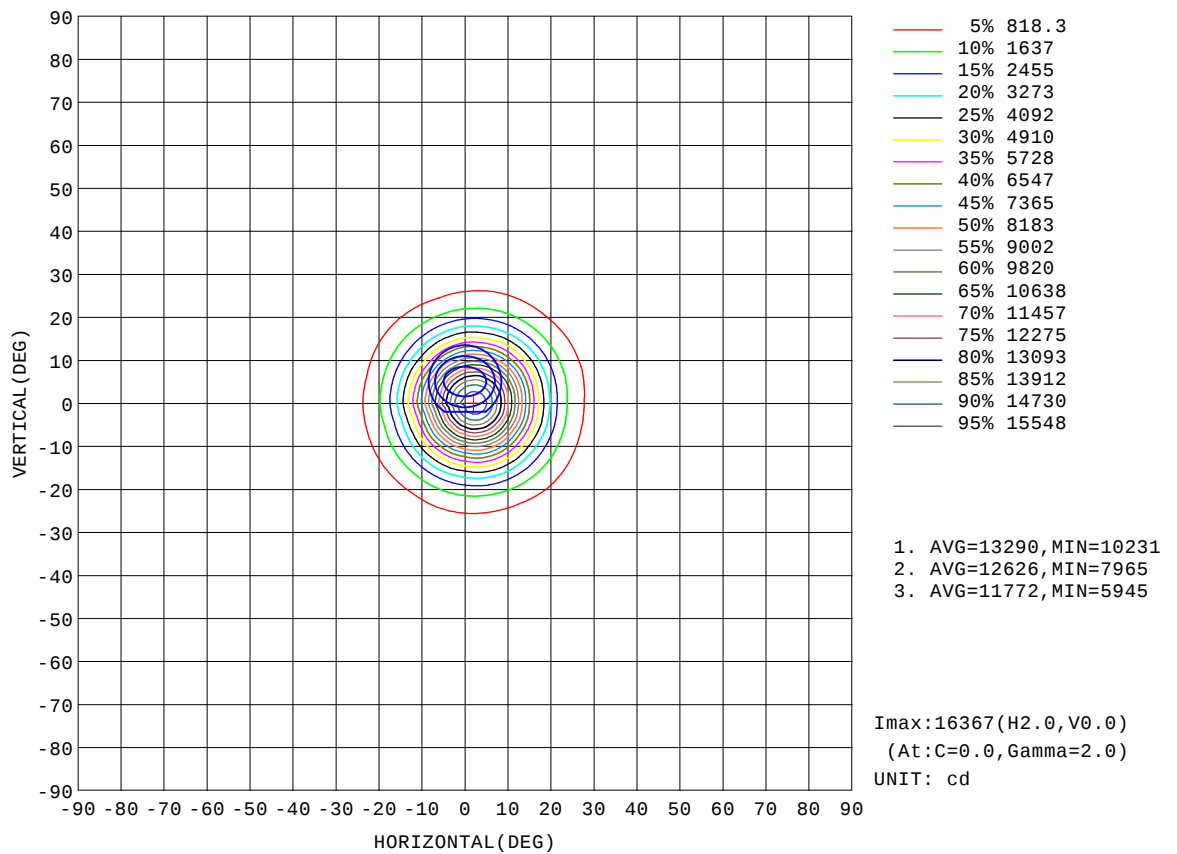


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Kevin
Test Date:28 July 2025

V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE 60-2000A_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:9.060m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.9V I:0.1778A P:35.61W PF:0.9108 Freq:49.99Hz Lamp Flux:464.165x8 lm		
NAME: 香港Peter (36W投光灯)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: 威尔奈斯	SUR.:	Shielding Angle:

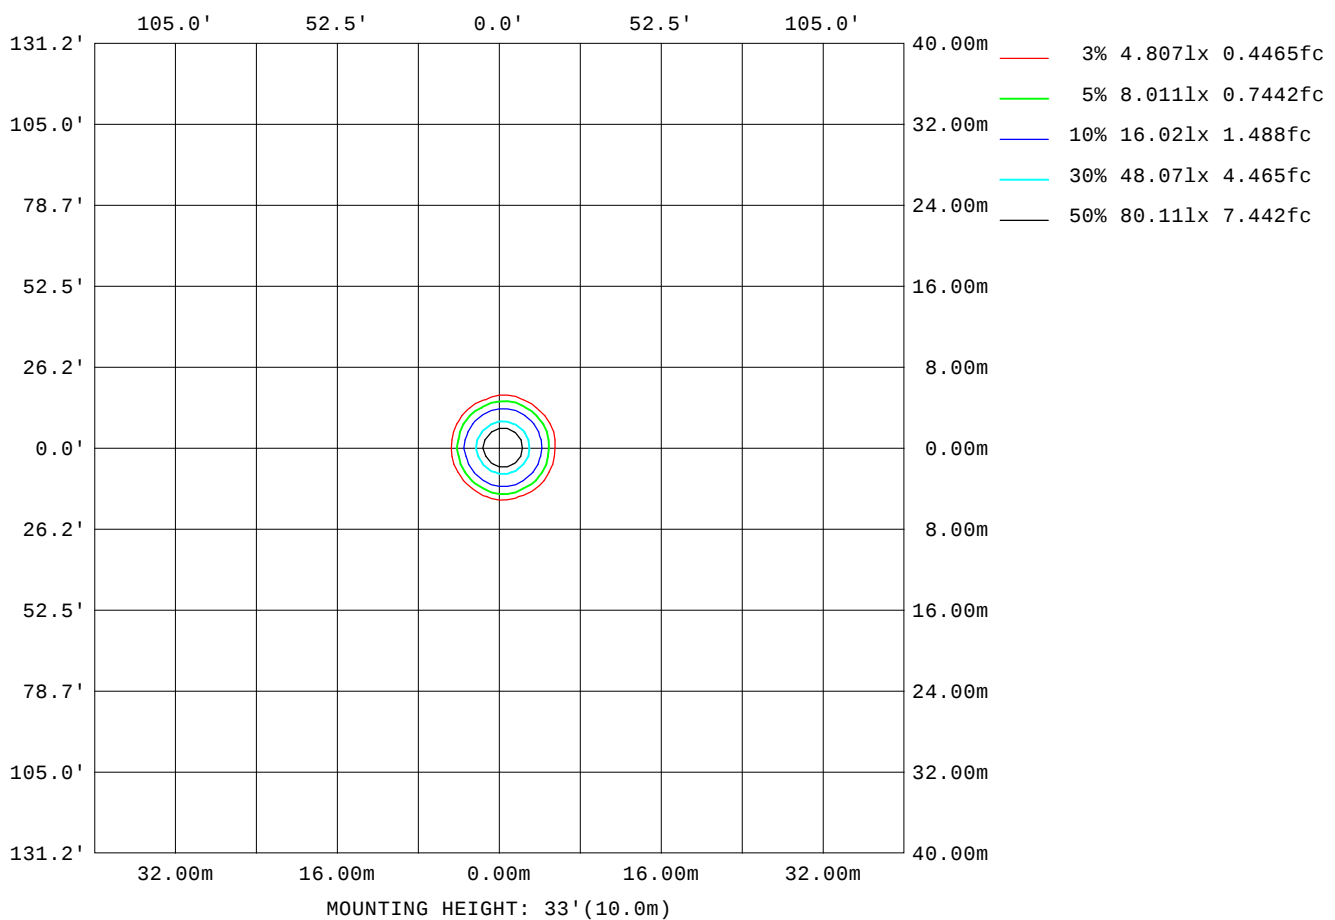

H(β) Range: -90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Kevin
Test Date: 28 July 2025

V(B) Range: -90 - 90DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE 60-2000A_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 9.060m [K=1.0000]
Remarks:

Planar Illuminance Curve

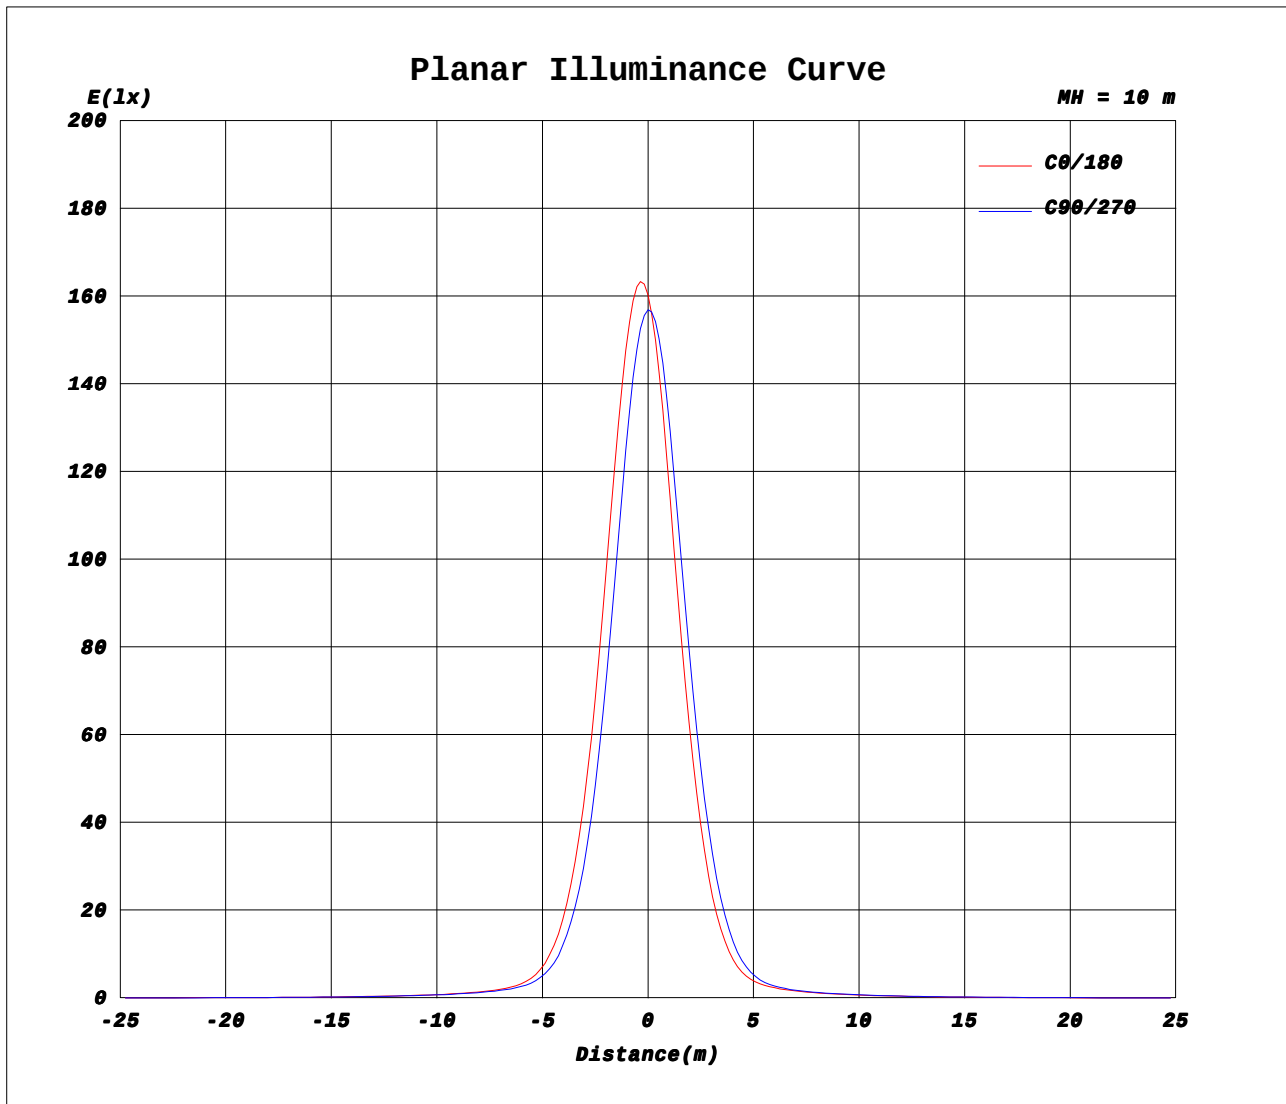


H(β) Range: -90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Kevin
Test Date: 28 July 2025

V(β) Range: -90 - 90DEG
V(β) Interval: 0.5DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 9.060m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.9V I:0.1778A P:35.61W PF:0.9108 Freq:49.99Hz Lamp Flux:464.165x8 lm		
NAME: 香港Peter (36W投光灯)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: 威尔奈斯	SUR.:	Shielding Angle:

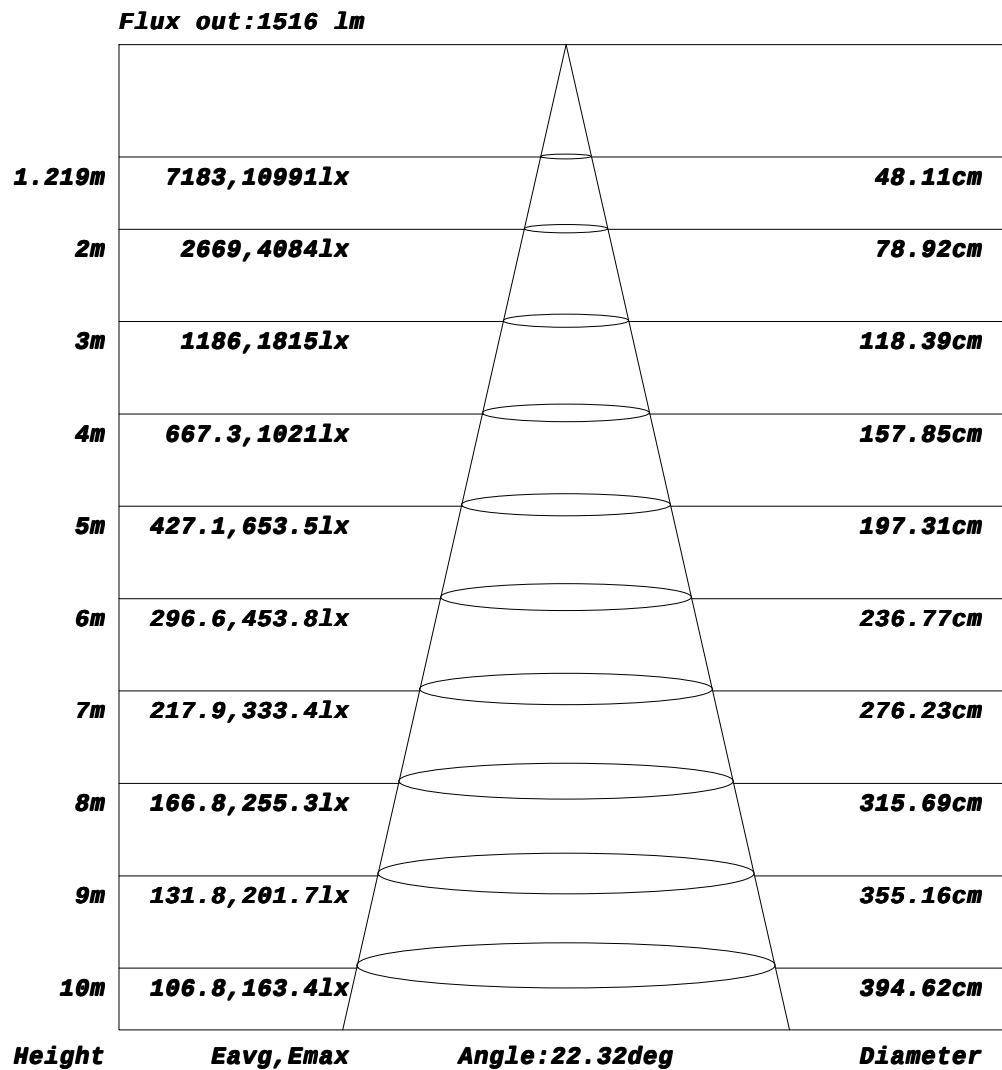

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range: -90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Kevin
Test Date: 28 July 2025

V(B) Range: -90 - 90DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE 60-2000A_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 9.060m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.9V I:0.1778A P:35.61W PF:0.9108 Freq:49.99Hz Lamp Flux:464.165x8 lm		
NAME: 香港Peter (36W投光灯)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: 威尔奈斯	SUR.:	Shielding Angle:

Table--1

UNIT: ×10cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.05	0.05
-80	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.06	0.12	0.20	0.32	0.44	0.57	0.73	0.91	1.07	1.16	1.23	1.26
-75	0.00	0.00	0.00	0.00	0.03	0.09	0.20	0.42	0.68	1.02	1.41	1.80	2.15	2.47	2.74	2.98	3.20	3.36	3.47
-70	0.00	0.00	0.00	0.03	0.12	0.36	0.69	1.16	1.79	2.49	3.15	3.73	4.27	4.76	5.21	5.59	5.87	6.07	6.18
-65	0.00	0.00	0.01	0.09	0.36	0.82	1.44	2.31	3.21	4.12	4.97	5.73	6.44	7.09	7.68	8.21	8.65	8.98	9.20
-60	0.00	0.00	0.03	0.22	0.71	1.45	2.45	3.49	4.67	5.78	6.81	7.76	8.64	9.46	10.3	10.9	11.4	11.8	12.0
-55	0.00	0.00	0.06	0.42	1.14	2.24	3.42	4.79	6.15	7.44	8.65	9.81	10.9	11.9	12.8	13.5	14.1	14.4	14.6
-50	0.00	0.00	0.11	0.67	1.66	2.97	4.44	6.04	7.60	9.07	10.5	11.9	13.1	14.2	15.2	16.0	16.7	17.2	17.5
-45	0.00	0.01	0.19	0.95	2.21	3.69	5.44	7.25	8.97	10.7	12.3	13.8	15.2	16.5	17.8	18.8	19.7	20.4	20.7
-40	0.00	0.01	0.29	1.25	2.71	4.40	6.40	8.39	10.3	12.2	14.0	15.7	17.4	19.1	20.7	22.2	23.5	24.6	25.2
-35	0.00	0.01	0.38	1.55	3.19	5.06	7.29	9.47	11.6	13.6	15.6	17.6	19.7	21.9	24.3	26.7	29.0	30.9	31.9
-30	0.00	0.02	0.48	1.85	3.64	5.75	8.08	10.5	12.7	14.9	17.2	19.5	22.2	25.4	29.1	33.1	38.0	42.8	45.8
-25	0.00	0.02	0.57	2.11	4.05	6.35	8.84	11.4	13.7	16.1	18.6	21.5	25.1	29.7	35.7	44.3	59.1	77.9	89.4
-20	0.00	0.03	0.67	2.34	4.41	6.87	9.53	12.1	14.5	17.1	19.9	23.5	28.3	35.2	46.8	71.7	116	173	210
-15	0.00	0.03	0.75	2.52	4.70	7.29	10.1	12.8	15.3	17.9	21.1	25.5	31.7	42.6	69.4	130	241	376	459
-10	0.00	0.03	0.81	2.65	4.92	7.62	10.5	13.3	15.9	18.7	22.2	27.2	35.0	52.5	102	219	429	692	880
-5	0.00	0.03	0.84	2.73	5.06	7.83	10.8	13.6	16.3	19.3	23.1	28.7	38.1	62.5	134	301	611	1037	1353
0	0.00	0.03	0.86	2.77	5.12	7.93	11.0	13.8	16.6	19.7	23.6	29.5	39.6	67.3	157	374	752	1256	1602
5	0.00	0.03	0.85	2.75	5.09	7.87	10.9	13.7	16.5	19.5	23.4	29.1	38.5	62.6	142	330	662	1079	1392
10	0.00	0.03	0.82	2.68	4.97	7.70	10.7	13.4	16.1	19.1	22.7	27.9	35.8	53.8	109	238	451	732	937
15	0.00	0.03	0.77	2.56	4.78	7.42	10.3	13.0	15.6	18.4	21.7	26.2	32.6	44.6	75.6	146	261	405	505
20	0.00	0.03	0.69	2.40	4.51	7.03	9.80	12.4	14.9	17.6	20.4	24.1	29.2	36.7	50.9	80.4	129	187	229
25	0.00	0.02	0.60	2.19	4.18	6.55	9.16	11.7	14.1	16.5	19.1	22.0	25.9	30.7	37.4	47.5	62.3	79.9	95.1
30	0.00	0.02	0.51	1.94	3.78	5.97	8.41	10.9	13.2	15.4	17.6	20.0	22.8	26.1	30.0	34.2	39.0	43.8	47.5
35	0.00	0.01	0.41	1.66	3.34	5.30	7.60	9.89	12.1	14.1	16.1	18.1	20.2	22.4	24.9	27.4	29.7	31.5	32.7
40	0.00	0.01	0.32	1.36	2.87	4.64	6.71	8.78	10.8	12.7	14.5	16.2	17.9	19.5	21.1	22.6	24.0	25.0	25.6
45	0.00	0.01	0.22	1.05	2.37	3.93	5.75	7.63	9.44	11.2	12.8	14.3	15.7	17.0	18.2	19.2	20.1	20.7	21.0
50	0.00	0.00	0.14	0.75	1.85	3.19	4.75	6.42	8.00	9.53	11.0	12.4	13.6	14.7	15.6	16.4	17.0	17.5	17.7
55	0.00	0.00	0.07	0.49	1.31	2.45	3.71	5.15	6.54	7.84	9.07	10.3	11.4	12.4	13.2	13.8	14.3	14.7	14.9
60	0.00	0.00	0.03	0.28	0.84	1.69	2.71	3.82	5.02	6.15	7.19	8.17	9.10	9.95	10.7	11.3	11.7	12.1	12.3
65	0.00	0.00	0.02	0.12	0.46	0.98	1.73	2.60	3.51	4.44	5.30	6.10	6.83	7.49	8.08	8.59	9.02	9.36	9.58
70	0.00	0.00	0.01	0.04	0.18	0.47	0.85	1.40	2.08	2.79	3.46	4.08	4.65	5.14	5.56	5.92	6.23	6.48	6.64
75	0.00	0.00	0.00	0.01	0.04	0.13	0.30	0.54	0.82	1.20	1.62	2.02	2.38	2.71	2.95	3.14	3.38	3.57	3.70
80	0.00	0.00	0.00	0.00	0.01	0.02	0.05	0.09	0.18	0.28	0.40	0.53	0.69	0.85	1.00	1.11	1.20	1.27	1.31
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.03	0.03
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Kevin
Test Date:28 July 2025

V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE 60-2000A_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:9.060m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.9V I:0.1778A P:35.61W PF:0.9108 Freq:49.99Hz Lamp Flux:464.165x8 lm																		
NAME: 香港Peter (36W投光灯)										TYPE:					WEIGHT:			
SPEC.:										DIM.:					SERIAL No.:			
MFR.: 威尔奈斯										SUR.:					Shielding Angle:			

Table--2

UNIT: ×10cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01
-85	0.06	0.07	0.08	0.09	0.10	0.09	0.10	0.12	0.12	0.10	0.09	0.09	0.07	0.06	0.04	0.03	0.02	0.01
-80	1.34	1.40	1.43	1.42	1.38	1.29	1.18	1.05	0.89	0.74	0.59	0.44	0.33	0.23	0.14	0.07	0.03	0.01
-75	3.58	3.62	3.61	3.56	3.45	3.29	3.04	2.77	2.44	1.99	1.55	1.15	0.83	0.56	0.33	0.15	0.05	0.01
-70	6.29	6.32	6.25	6.08	5.83	5.52	5.13	4.69	4.16	3.49	2.80	2.16	1.54	1.01	0.60	0.27	0.07	0.01
-65	9.25	9.19	9.01	8.68	8.26	7.78	7.24	6.62	5.89	5.05	4.15	3.22	2.39	1.60	0.92	0.41	0.10	0.01
-60	12.0	12.0	11.7	11.3	10.8	10.2	9.41	8.58	7.65	6.63	5.53	4.37	3.23	2.24	1.30	0.57	0.15	0.01
-55	14.7	14.6	14.3	13.9	13.2	12.5	11.6	10.6	9.42	8.18	6.90	5.52	4.12	2.86	1.73	0.77	0.19	0.01
-50	17.5	17.3	17.0	16.4	15.6	14.7	13.7	12.6	11.2	9.73	8.22	6.65	5.01	3.48	2.15	0.98	0.24	0.01
-45	20.7	20.5	19.9	19.2	18.2	17.0	15.8	14.4	12.9	11.2	9.51	7.72	5.89	4.09	2.55	1.19	0.29	0.01
-40	25.2	24.6	23.7	22.5	21.0	19.4	17.8	16.1	14.4	12.6	10.8	8.75	6.73	4.68	2.92	1.40	0.34	0.01
-35	31.9	30.8	29.1	27.0	24.5	22.2	20.0	17.9	15.9	13.9	11.9	9.73	7.49	5.25	3.28	1.60	0.39	0.01
-30	45.2	42.0	37.6	33.4	29.3	25.6	22.3	19.7	17.3	15.1	12.9	10.6	8.17	5.77	3.60	1.78	0.44	0.01
-25	87.9	74.4	58.0	45.5	36.2	29.7	25.1	21.5	18.6	16.1	13.7	11.4	8.79	6.21	3.89	1.94	0.48	0.01
-20	210	170	115	73.8	47.6	34.9	28.0	23.3	19.8	17.0	14.5	12.0	9.32	6.58	4.13	2.08	0.51	0.01
-15	468	367	233	127	67.6	41.4	31.0	25.0	20.9	17.8	15.1	12.5	9.74	6.88	4.33	2.19	0.54	0.01
-10	879	672	400	205	93.4	48.6	33.7	26.5	21.7	18.4	15.5	12.8	10.0	7.09	4.47	2.26	0.56	0.01
-5	1346	995	584	282	120	55.5	35.8	27.5	22.3	18.7	15.8	13.0	10.2	7.22	4.55	2.31	0.57	0.01
0	1558	1153	658	313	133	58.5	36.6	28.0	22.6	18.9	15.9	13.1	10.3	7.25	4.58	2.33	0.58	0.01
5	1367	1030	599	290	127	58.3	36.3	27.7	22.4	18.8	15.8	13.0	10.3	7.24	4.56	2.32	0.58	0.01
10	919	705	430	218	101	52.1	34.5	26.8	21.8	18.4	15.5	12.8	10.1	7.13	4.49	2.28	0.57	0.01
15	491	392	251	134	71.2	42.9	31.6	25.3	21.0	17.9	15.1	12.5	9.80	6.93	4.37	2.21	0.55	0.01
20	227	185	124	74.5	48.6	35.7	28.4	23.5	19.9	17.1	14.5	12.0	9.41	6.65	4.18	2.11	0.52	0.01
25	97.0	83.2	63.0	46.3	36.6	30.1	25.3	21.6	18.7	16.1	13.8	11.4	8.91	6.29	3.95	1.99	0.49	0.01
30	48.3	44.8	39.4	34.2	29.7	25.8	22.5	19.8	17.4	15.1	13.0	10.7	8.31	5.86	3.67	1.84	0.45	0.01
35	32.8	31.8	29.8	27.4	24.8	22.3	20.0	18.0	16.0	14.0	12.0	9.89	7.63	5.37	3.36	1.66	0.40	0.01
40	25.7	25.1	24.1	22.7	21.1	19.5	17.9	16.2	14.5	12.8	10.9	8.94	6.88	4.81	3.02	1.47	0.36	0.01
45	21.0	20.7	20.1	19.3	18.2	17.1	15.8	14.4	13.0	11.4	9.73	7.92	6.06	4.23	2.65	1.26	0.31	0.01
50	17.7	17.5	17.1	16.5	15.7	14.8	13.7	12.6	11.4	9.96	8.44	6.86	5.19	3.63	2.26	1.05	0.26	0.01
55	14.9	14.8	14.5	14.0	13.4	12.6	11.8	10.7	9.60	8.39	7.15	5.75	4.32	3.02	1.86	0.83	0.21	0.01
60	12.3	12.2	11.9	11.5	11.0	10.4	9.60	8.73	7.82	6.84	5.79	4.61	3.43	2.40	1.43	0.63	0.16	0.01
65	9.59	9.49	9.28	8.95	8.52	8.02	7.44	6.79	6.07	5.27	4.40	3.45	2.58	1.77	1.03	0.46	0.11	0.01
70	6.68	6.64	6.53	6.35	6.11	5.79	5.36	4.87	4.33	3.70	3.02	2.39	1.74	1.14	0.69	0.31	0.08	0.01
75	3.77	3.76	3.71	3.69	3.60	3.42	3.19	2.91	2.55	2.11	1.73	1.33	0.93	0.64	0.41	0.19	0.05	0.01
80	1.36	1.38	1.36	1.38	1.36	1.30	1.19	1.06	0.92	0.77	0.62	0.49	0.40	0.30	0.20	0.09	0.03	0.01
85	0.03	0.03	0.03	0.05	0.06	0.06	0.09	0.11	0.11	0.11	0.12	0.12	0.10	0.08	0.07	0.04	0.02	0.01
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.02	0.01	0.01

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Kevin
Test Date:28 July 2025

V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:9.060m [K=1.0000]
Remarks: