

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	13555.4 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	14.8V x 14.7H
	At 50% of Imax	8.8V x 8.8H
	At 90% of Imax	4.3V x 4.7H

Beam Flux	Total	545.9 lumens per klm.
	To 10% of Imax	308.7 lumens per klm.
	To 50% of Imax	199.3 lumens per klm.
	To 90% of Imax	72.4 lumens per klm.

Upward LOR	0.0 %
Downward LOR	54.6 %


Luminaire Efficiency(Light Output Ratio)	54.4 %
--	--------

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Kevin
Test Date:28 July 2025

V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:9.060m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.9V I:0.1787A P:35.86W PF:0.9124 Freq:49.99Hz Lamp Flux:853.588x8 lm		
NAME:Auroring Mini-212mm-3000K-8D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:8 DEG	DIA.:212mm	SERIAL No.:
MFR.:Luminoscope	SUR.:	Shielding Angle:

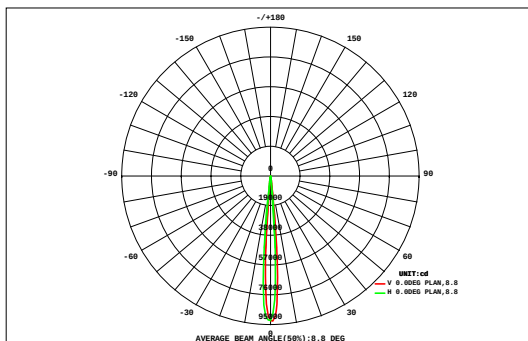

DATA OF LAMP		Eff:103.54lm/W	
MODEL		Imax(cd)	92566
NOMINAL POWER(W)	36	AVAILABILITY(%)	30.6
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	2089
NOMINAL FLUX(lm)	853.588	LOR(%)	54.4
LAMPS INSIDE	8	TOTAL FLUX(lm)	3713
TEST VOLTAGE(V)	220	θ @50%(H,V)	9,9DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.01	0.02	0.04	0.05	0.06	0.07	0.06	0.06	0.05	0.03	0.02	0.01	0.00	0.00	0.00	0.49	0.00
90	0.00	0.01	0.06	0.17	0.35	0.56	0.75	0.88	0.95	0.94	0.85	0.69	0.50	0.31	0.14	0.04	0.01	0.00	7.20	0.00
80	0.00	0.04	0.19	0.54	1.00	1.48	1.92	2.25	2.44	2.43	2.22	1.86	1.42	0.95	0.50	0.17	0.03	0.00	19.4	0.00
70	0.00	0.08	0.40	0.97	1.67	2.48	3.27	3.83	4.12	4.10	3.79	3.19	2.40	1.61	0.92	0.36	0.06	0.00	33.2	0.00
60	0.01	0.13	0.60	1.38	2.42	3.53	4.56	5.47	5.98	5.96	5.40	4.48	3.45	2.33	1.31	0.56	0.11	0.00	47.7	0.00
50	0.01	0.19	0.78	1.78	3.06	4.54	6.33	8.23	9.63	9.54	8.11	6.25	4.46	2.99	1.70	0.74	0.16	0.01	68.5	0.00
40	0.01	0.23	0.94	2.12	3.58	5.72	9.10	15.0	20.4	20.1	14.6	8.90	5.62	3.51	2.04	0.88	0.20	0.01	113	0.00
30	0.01	0.27	1.05	2.32	4.05	6.99	14.1	29.4	53.0	51.7	28.1	13.4	6.79	3.96	2.25	0.98	0.23	0.01	219	0.00
20	0.01	0.29	1.11	2.43	4.34	8.01	18.8	53.0	728	644	47.6	17.5	7.66	4.23	2.35	1.03	0.24	0.01	1540	1223
10	0.01	0.28	1.10	2.42	4.28	7.83	18.1	48.9	547	480	45.9	17.2	7.61	4.22	2.35	1.03	0.24	0.01	1189	867
0	0.01	0.26	1.03	2.29	3.92	6.68	13.1	27.2	47.0	46.4	26.5	12.8	6.70	3.93	2.25	0.97	0.23	0.01	201	0.00
-10	0.01	0.23	0.90	2.05	3.46	5.49	8.61	13.9	18.9	18.8	13.7	8.55	5.54	3.48	2.02	0.86	0.19	0.01	107	0.00
-20	0.01	0.18	0.75	1.70	2.95	4.35	6.04	7.79	9.11	9.11	7.80	6.10	4.39	2.96	1.67	0.71	0.15	0.01	65.8	0.00
-30	0.01	0.12	0.57	1.31	2.30	3.38	4.34	5.21	5.73	5.74	5.24	4.39	3.40	2.27	1.27	0.53	0.10	0.00	45.9	0.00
-40	0.00	0.07	0.36	0.91	1.58	2.34	3.07	3.64	3.93	3.93	3.64	3.06	2.31	1.55	0.87	0.33	0.05	0.00	31.7	0.00
-50	0.00	0.03	0.17	0.49	0.91	1.35	1.76	2.08	2.24	2.24	2.07	1.75	1.34	0.89	0.45	0.14	0.02	0.00	17.9	0.00
-60	0.00	0.01	0.04	0.14	0.29	0.47	0.64	0.78	0.84	0.84	0.77	0.63	0.45	0.27	0.11	0.03	0.00	0.00	6.30	0.00
-70	0.00	0.00	0.00	0.01	0.02	0.03	0.04	0.05	0.06	0.06	0.05	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.40	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
HORIZONTAL (DEG)																				
Φ t	0.11	2.41	10.1	23.0	40.2	65.3	115	228	1460	1306	216	111	64.1	39.5	22.2	9.36	2.04	0.07	3713	---
Φ a	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1125	964	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	---	2089

one-half-peak spread: U:3.8,D:5.0 , L:4.0,R:4.9


NEMA Beam Type: Type 1

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Kevin
Test Date:28 July 2025

V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:9.060m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.9V I:0.1787A P:35.86W PF:0.9124 Freq:49.99Hz Lamp Flux:853.588x8 lm		
NAME:Auroring Mini-212mm-3000K-8D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:8 DEG	DIA.:212mm	SERIAL No.:
MFR.:Luminoscape	SUR.:	Shielding Angle:

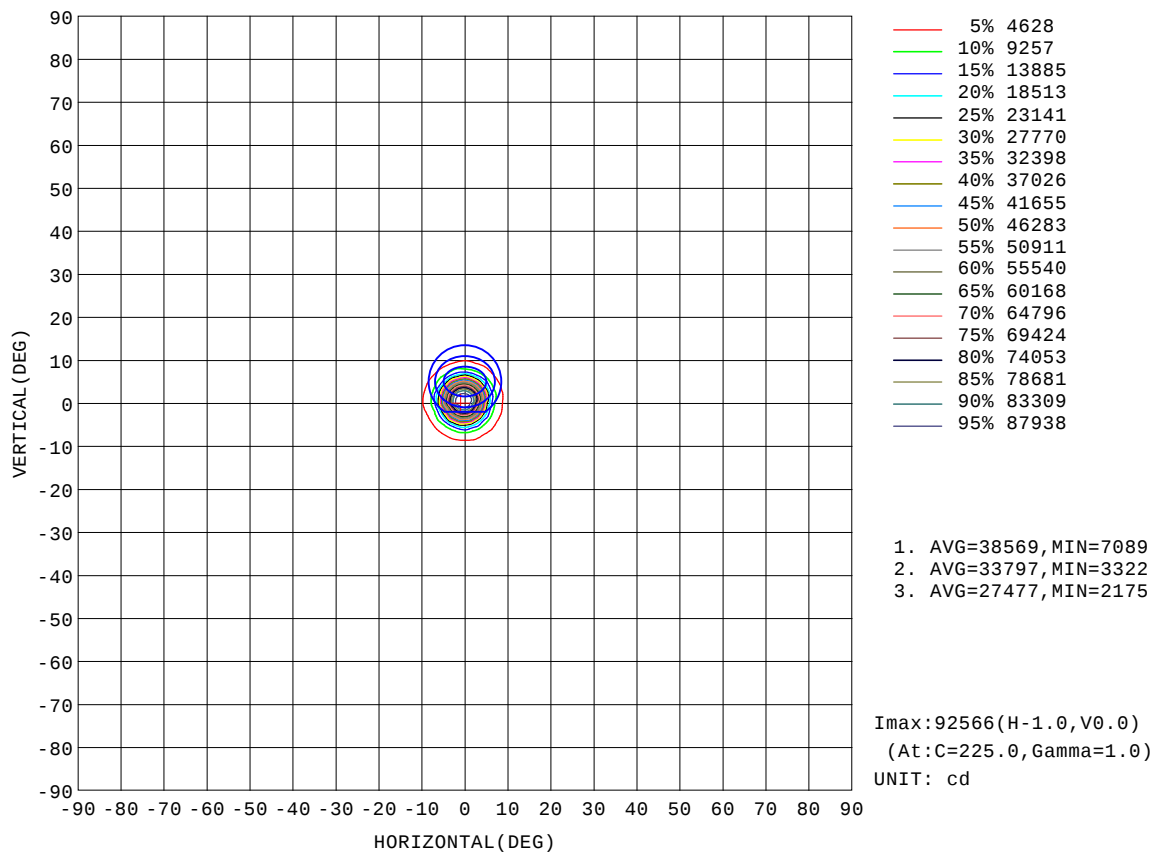


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Kevin
Test Date:28 July 2025

V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:9.060m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.9V I:0.1787A P:35.86W PF:0.9124 Freq:49.99Hz Lamp Flux:853.588x8 lm		
NAME:Auroring Mini-212mm-3000K-8D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:8 DEG	DIA.:212mm	SERIAL No.:
MFR.:Luminoscape	SUR.:	Shielding Angle:

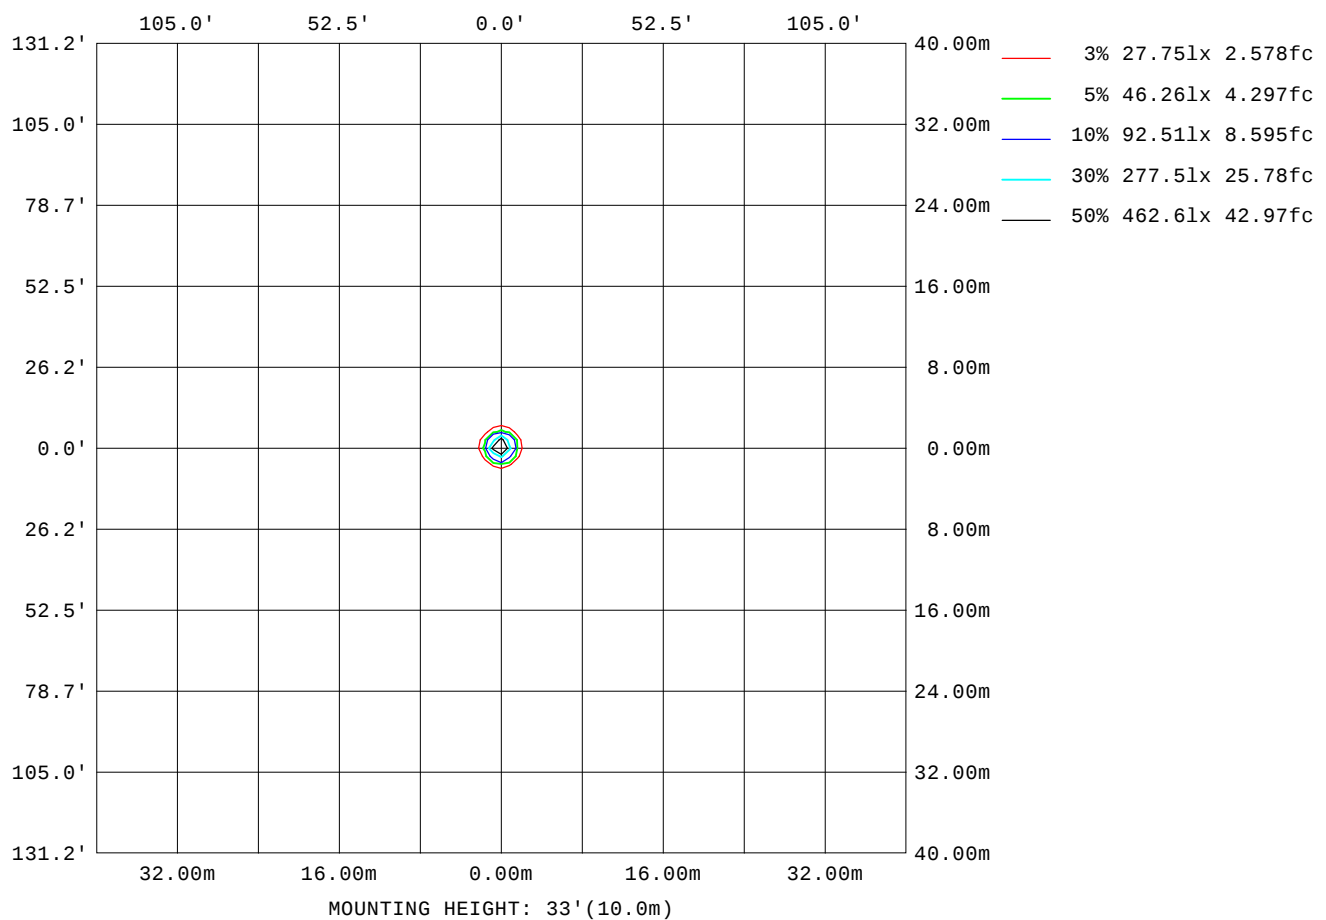

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Kevin
Test Date:28 July 2025

V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:9.060m [K=1.0000]
Remarks:

Planar Illuminance Curve

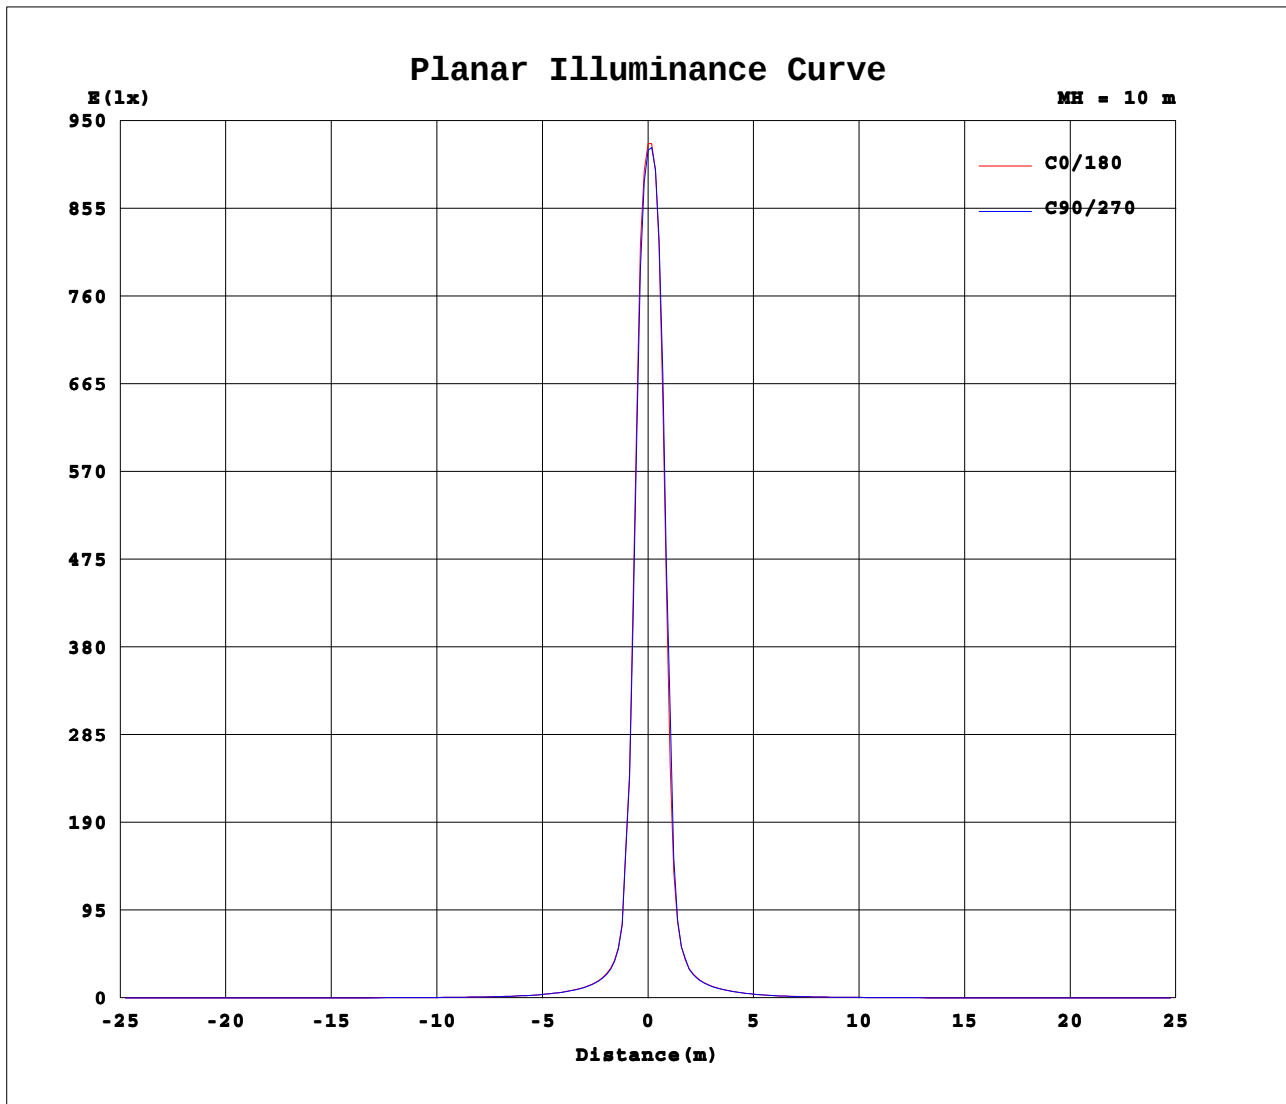


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Kevin
Test Date:28 July 2025

V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:9.060m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.9V I:0.1787A P:35.86W PF:0.9124 Freq:49.99Hz Lamp Flux:853.588x8 lm		
NAME:Auroring Mini-212mm-3000K-8D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:8 DEG	DIA.:212mm	SERIAL No.:
MFR.:Luminoscape	SUR.:	Shielding Angle:

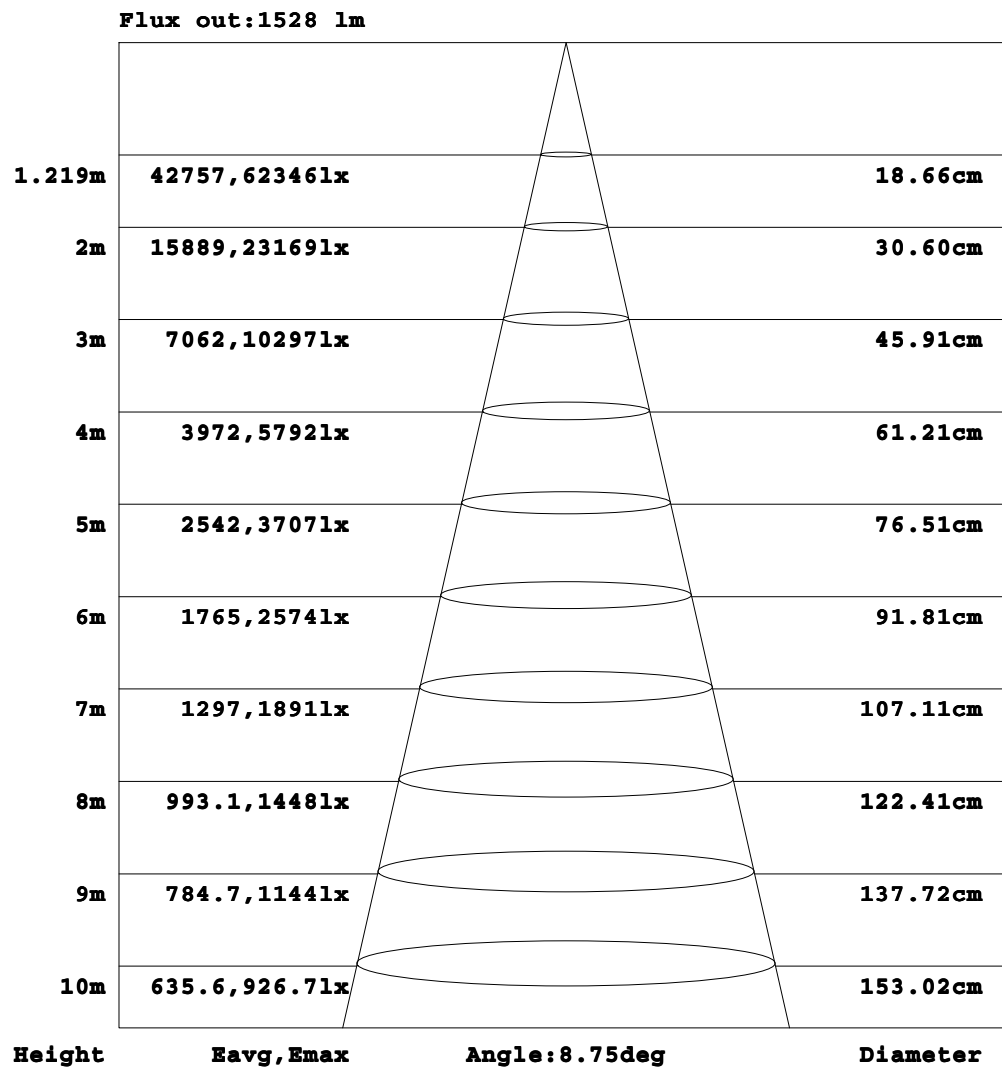

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Kevin
Test Date:28 July 2025

V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:9.060m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.9V I:0.1787A P:35.86W PF:0.9124 Freq:49.99Hz Lamp Flux:853.588x8 lm								
NAME:Auroring Mini-212mm-3000K-8D-Rev1					TYPE:3000K			WEIGHT:
SPEC.:8 DEG					DIA.:212mm			SERIAL No.:
MFR.:Luminoscope					SUR.:			Shielding Angle:

Table--1

UNIT: ×10cd

H(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.03	0.03	0.03	0.04	0.04	0.04	0.04	0.04	0.04	0.03
-80	0.00	0.00	0.00	0.01	0.03	0.08	0.12	0.19	0.27	0.35	0.45	0.54	0.63	0.71	0.80	0.87	0.90	0.92	0.92
-75	0.00	0.00	0.01	0.06	0.14	0.28	0.45	0.69	0.98	1.30	1.57	1.82	2.02	2.24	2.44	2.59	2.68	2.72	2.71
-70	0.00	0.00	0.05	0.15	0.36	0.66	1.09	1.61	2.15	2.70	3.15	3.53	3.86	4.21	4.50	4.70	4.83	4.89	4.89
-65	0.00	0.01	0.10	0.31	0.67	1.24	1.96	2.76	3.53	4.23	4.86	5.42	5.92	6.36	6.74	7.06	7.25	7.31	7.26
-60	0.00	0.02	0.17	0.51	1.09	1.95	2.97	4.00	4.92	5.78	6.58	7.29	7.97	8.61	9.21	9.72	10.1	10.3	10.4
-55	0.00	0.02	0.26	0.75	1.59	2.73	4.00	5.19	6.27	7.29	8.33	9.32	10.3	11.2	12.0	12.6	12.9	13.1	13.1
-50	0.00	0.04	0.37	1.04	2.14	3.55	4.99	6.32	7.58	8.90	10.2	11.6	12.7	13.5	14.1	14.7	15.1	15.4	15.4
-45	0.00	0.07	0.48	1.35	2.70	4.35	5.91	7.40	8.95	10.6	12.3	13.7	14.6	15.6	16.6	17.6	18.3	18.8	18.9
-40	0.00	0.09	0.59	1.68	3.27	5.08	6.78	8.51	10.4	12.4	13.9	15.3	16.9	18.5	20.0	21.4	22.5	23.2	23.5
-35	0.00	0.11	0.71	2.01	3.83	5.73	7.59	9.64	11.9	13.8	15.3	17.3	19.6	21.8	24.0	26.1	28.0	29.4	30.0
-30	0.00	0.14	0.83	2.32	4.33	6.34	8.39	10.8	13.1	14.8	16.9	19.6	22.4	25.6	29.1	33.3	37.7	40.8	41.7
-25	0.00	0.16	0.93	2.60	4.75	6.90	9.17	11.8	13.9	15.8	18.6	21.9	25.6	30.3	37.5	45.9	55.1	61.4	63.3
-20	0.00	0.17	1.03	2.84	5.10	7.38	9.88	12.6	14.5	17.0	20.2	24.1	29.2	37.4	49.9	65.6	80.5	93.0	97.0
-15	0.00	0.19	1.12	3.05	5.38	7.79	10.5	13.2	15.2	18.0	21.7	26.3	33.4	46.0	65.7	90.8	119	147	159
-10	0.00	0.20	1.18	3.21	5.60	8.13	11.0	13.6	15.7	19.0	23.0	28.3	38.2	55.8	82.0	120	182	272	328
-5	0.00	0.21	1.22	3.31	5.73	8.37	11.3	13.9	16.2	19.7	24.1	30.4	42.5	64.0	96.9	153	285	920	2406
0	0.00	0.21	1.23	3.36	5.80	8.50	11.5	14.0	16.4	20.1	24.8	31.6	45.2	69.3	108	182	432	4527	9251
5	0.00	0.21	1.22	3.33	5.77	8.43	11.4	13.9	16.3	20.0	24.6	31.1	43.8	66.7	102	167	346	1481	4754
10	0.00	0.20	1.19	3.25	5.66	8.24	11.1	13.7	16.0	19.5	23.8	29.6	40.2	59.7	88.3	130	204	325	452
15	0.00	0.19	1.14	3.11	5.46	7.95	10.7	13.4	15.5	18.7	22.6	27.5	35.5	49.6	70.3	97.1	129	162	177
20	0.00	0.18	1.06	2.92	5.20	7.57	10.2	12.8	14.9	17.6	21.1	25.2	30.6	39.9	53.7	70.2	87.5	100	105
25	0.00	0.16	0.96	2.69	4.86	7.11	9.58	12.2	14.2	16.4	19.4	22.8	26.7	32.0	40.1	50.1	59.8	66.1	67.9
30	0.00	0.14	0.86	2.42	4.47	6.58	8.79	11.2	13.5	15.3	17.6	20.4	23.4	26.7	30.8	35.9	40.6	43.7	44.6
35	0.00	0.12	0.75	2.11	4.01	6.00	7.95	10.1	12.4	14.2	15.9	18.1	20.5	22.8	25.2	27.5	29.5	30.9	31.2
40	0.00	0.10	0.64	1.78	3.48	5.30	7.11	8.94	11.0	13.0	14.4	15.9	17.7	19.4	21.0	22.5	23.6	24.2	24.4
45	0.00	0.07	0.52	1.44	2.91	4.57	6.23	7.80	9.44	11.3	13.0	14.2	15.2	16.4	17.5	18.5	19.3	19.6	19.7
50	0.00	0.05	0.42	1.13	2.33	3.81	5.27	6.68	8.01	9.37	10.9	12.3	13.4	14.1	14.8	15.3	15.8	16.0	16.1
55	0.00	0.03	0.31	0.84	1.75	2.98	4.28	5.52	6.66	7.73	8.78	9.87	11.0	12.0	12.7	13.2	13.5	13.7	13.7
60	0.00	0.02	0.21	0.60	1.23	2.16	3.26	4.32	5.29	6.20	7.02	7.79	8.55	9.24	9.83	10.4	10.8	11.1	11.2
65	0.00	0.01	0.13	0.39	0.79	1.41	2.20	3.07	3.90	4.65	5.33	5.93	6.46	6.93	7.31	7.62	7.84	7.96	7.97
70	0.00	0.01	0.07	0.22	0.46	0.81	1.29	1.85	2.48	3.10	3.61	4.07	4.47	4.79	5.03	5.22	5.36	5.41	5.38
75	0.00	0.00	0.02	0.10	0.21	0.38	0.61	0.88	1.20	1.56	1.89	2.19	2.45	2.67	2.85	2.98	3.08	3.14	3.14
80	0.00	0.00	0.01	0.03	0.07	0.12	0.19	0.28	0.37	0.46	0.58	0.69	0.80	0.87	0.93	0.98	1.02	1.04	1.03
85	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.03	0.04	0.05	0.05	0.05	0.05	0.06	0.05	0.04	0.04	0.04	0.03
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Kevin
Test Date:28 July 2025

V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:9.060m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.9V I:0.1787A P:35.86W PF:0.9124 Freq:49.99Hz Lamp Flux:853.588x8 lm																	
NAME:Auroring Mini-212mm-3000K-8D-Rev1									TYPE:3000K						WEIGHT:		
SPEC.:8 DEG									DIA.:212mm						SERIAL No.:		
MFR.:Luminoscape									SUR.:						Shielding Angle:		

Table--2

UNIT: ×10cd

H(°) V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.91	0.88	0.83	0.76	0.67	0.58	0.48	0.38	0.28	0.21	0.14	0.08	0.04	0.02	0.01	0.00	0.00	0.00	
-75	2.71	2.66	2.56	2.41	2.21	1.97	1.73	1.46	1.16	0.84	0.56	0.36	0.21	0.10	0.03	0.01	0.00	0.00	
-70	4.89	4.82	4.68	4.48	4.21	3.87	3.49	3.09	2.58	1.95	1.38	0.90	0.52	0.27	0.10	0.02	0.00	0.00	
-65	7.30	7.23	7.06	6.74	6.33	5.87	5.37	4.80	4.13	3.36	2.49	1.68	1.01	0.53	0.22	0.04	0.00	0.00	
-60	10.3	10.0	9.61	9.12	8.53	7.90	7.23	6.52	5.67	4.75	3.77	2.67	1.66	0.87	0.39	0.09	0.01	0.00	
-55	13.1	12.9	12.5	11.9	11.1	10.2	9.21	8.23	7.17	6.10	4.96	3.74	2.43	1.32	0.58	0.16	0.01	0.00	
-50	15.4	15.2	14.8	14.2	13.6	12.8	11.6	10.1	8.72	7.39	6.10	4.72	3.26	1.83	0.80	0.24	0.02	0.00	
-45	18.8	18.4	17.7	16.8	15.7	14.8	13.8	12.3	10.4	8.72	7.19	5.68	4.05	2.39	1.06	0.33	0.02	0.00	
-40	23.3	22.5	21.6	20.3	18.7	17.0	15.5	14.1	12.4	10.2	8.29	6.57	4.77	2.95	1.33	0.42	0.03	0.00	
-35	29.4	28.0	26.2	24.2	22.0	19.8	17.5	15.4	13.8	11.7	9.43	7.38	5.46	3.46	1.62	0.51	0.04	0.00	
-30	40.7	37.5	33.0	29.1	25.7	22.7	19.8	17.0	14.9	13.0	10.6	8.18	6.07	3.94	1.90	0.60	0.05	0.00	
-25	61.4	54.3	45.1	36.9	30.2	25.7	22.1	18.8	15.9	13.9	11.6	8.94	6.57	4.34	2.16	0.67	0.06	0.00	
-20	92.6	79.3	64.1	48.6	36.8	29.2	24.3	20.4	17.1	14.6	12.3	9.58	7.00	4.66	2.38	0.75	0.08	0.00	
-15	145	116	88.3	63.9	44.7	33.1	26.5	21.9	18.1	15.2	12.9	10.1	7.36	4.92	2.56	0.81	0.08	0.00	
-10	263	176	117	79.5	54.2	37.4	28.4	23.0	18.9	15.6	13.3	10.5	7.64	5.10	2.70	0.85	0.09	0.00	
-5	766	269	147	93.2	61.2	40.5	29.8	23.9	19.4	15.9	13.5	10.7	7.82	5.20	2.78	0.87	0.09	0.00	
0	2463	340	162	98.5	63.7	41.6	30.3	24.2	19.6	15.9	13.6	10.8	7.89	5.22	2.80	0.88	0.09	0.00	
5	1446	292	153	94.8	62.0	41.0	29.9	23.9	19.4	15.9	13.5	10.7	7.84	5.22	2.79	0.88	0.09	0.00	
10	310	192	123	82.9	56.0	38.1	28.6	23.2	19.0	15.6	13.3	10.5	7.68	5.15	2.73	0.86	0.09	0.00	
15	158	124	93.1	67.1	47.1	34.0	26.8	22.0	18.2	15.2	13.0	10.1	7.41	5.00	2.62	0.83	0.09	0.00	
20	98.6	85.1	67.9	51.8	38.6	29.9	24.7	20.6	17.2	14.6	12.4	9.61	7.07	4.77	2.45	0.78	0.08	0.00	
25	64.9	58.2	48.5	39.1	31.4	26.3	22.4	19.0	16.1	14.0	11.7	8.98	6.66	4.47	2.25	0.71	0.07	0.00	
30	43.1	39.6	35.1	30.3	26.4	23.2	20.1	17.3	15.0	13.2	10.7	8.27	6.19	4.08	2.00	0.63	0.06	0.00	
35	30.6	29.1	27.2	24.9	22.6	20.3	17.8	15.6	14.0	12.0	9.59	7.53	5.64	3.62	1.73	0.54	0.04	0.00	
40	24.1	23.3	22.2	20.7	19.1	17.4	15.6	14.2	12.6	10.5	8.50	6.74	5.01	3.12	1.45	0.45	0.03	0.00	
45	19.6	19.1	18.3	17.2	16.1	15.0	13.9	12.5	10.8	9.03	7.43	5.90	4.28	2.60	1.17	0.36	0.03	0.00	
50	16.0	15.7	15.2	14.6	13.9	13.1	11.9	10.4	9.01	7.67	6.36	4.99	3.50	2.03	0.90	0.27	0.02	0.00	
55	13.6	13.4	13.0	12.5	11.6	10.6	9.53	8.49	7.43	6.36	5.24	4.02	2.71	1.50	0.66	0.18	0.01	0.00	
60	11.0	10.7	10.2	9.64	8.98	8.29	7.54	6.76	5.92	5.02	4.08	3.01	1.90	1.02	0.45	0.11	0.01	0.00	
65	7.92	7.76	7.51	7.16	6.73	6.25	5.69	5.07	4.39	3.66	2.84	1.96	1.21	0.63	0.27	0.06	0.00	0.00	
70	5.36	5.26	5.09	4.88	4.57	4.17	3.77	3.34	2.84	2.20	1.63	1.11	0.65	0.34	0.13	0.03	0.00	0.00	
75	3.10	3.01	2.87	2.67	2.44	2.18	1.93	1.64	1.33	1.01	0.72	0.46	0.27	0.14	0.05	0.01	0.00	0.00	
80	1.02	0.99	0.93	0.87	0.79	0.70	0.59	0.48	0.37	0.28	0.20	0.13	0.08	0.04	0.01	0.00	0.00	0.00	
85	0.03	0.04	0.04	0.04	0.04	0.04	0.03	0.03	0.03	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Kevin
Test Date:28 July 2025

V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:9.060m [K=1.0000]
Remarks: