

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	2969.5 cd per klm.
(Luminaire orientation as tested.)	1.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	87.7V x 35.2H
	At 50% of Imax	55.7V x 14.7H
	At 90% of Imax	25.5V x 5.3H

Beam Flux	Total	1000.6 lumens per klm.
	To 10% of Imax	835.7 lumens per klm.
	To 50% of Imax	474.6 lumens per klm.
	To 90% of Imax	104.6 lumens per klm.

Upward LOR	0.6 %
Downward LOR	99.5 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-09-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.95V I:0.0840A P:18.200W PF:0.9000 Freq:49.99Hz Lamp Flux:105.93x18 lm		
NAME: Blazeline-609mm-3000K-15x55D-REV3	TYPE:3000K	WEIGHT:00
SPEC.:15x55 DEG	DIM.: 609mm	SERIAL No.:01
MFR.: Luminoscape	SUR.:0.8	Shielding Angle:

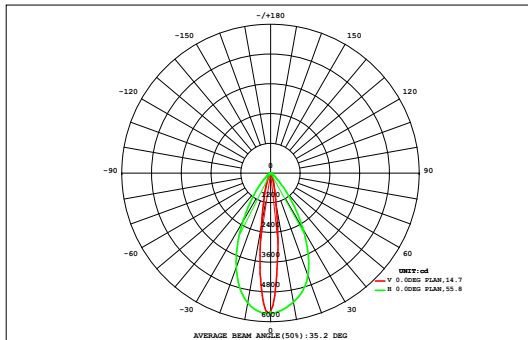

DATA OF LAMP		Eff:104.77lm/W	
MODEL		Imax(cd)	5662
NOMINAL POWER(W)	18	AVAILABILITY(%)	83.6
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	1594
NOMINAL FLUX(lm)	105.93	LOR(%)	100.0
LAMPS INSIDE	18	TOTAL FLUX(lm)	1907
TEST VOLTAGE(V)	220	θ @50% (H,V)	15,56DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.01	0.01	0.02	0.03	0.06	0.16	0.28	0.40	0.40	0.27	0.15	0.06	0.03	0.02	0.01	0.01	0.00	1.92	0.00
72	0.00	0.01	0.01	0.02	0.03	0.06	0.16	0.28	0.40	0.40	0.27	0.15	0.06	0.03	0.02	0.01	0.01	0.00	1.92	0.00
64	0.00	0.01	0.02	0.04	0.07	0.13	0.32	0.61	0.93	0.93	0.62	0.32	0.12	0.06	0.03	0.02	0.01	0.01	4.24	0.00
56	0.01	0.01	0.03	0.07	0.16	0.38	0.95	1.96	3.09	3.13	2.06	1.07	0.45	0.17	0.06	0.03	0.01	0.01	13.6	0.00
48	0.01	0.02	0.04	0.11	0.35	0.89	2.15	5.13	8.88	8.98	5.39	2.47	1.07	0.41	0.12	0.04	0.02	0.01	36.1	5.96
40	0.01	0.03	0.06	0.15	0.52	1.53	3.68	10.4	20.6	20.7	10.8	4.22	1.81	0.60	0.15	0.06	0.03	0.01	75.3	52.7
32	0.01	0.03	0.08	0.16	0.52	1.93	5.23	15.8	38.8	39.0	16.5	6.01	2.29	0.58	0.17	0.08	0.04	0.01	127	106
24	0.01	0.04	0.09	0.20	0.44	1.68	6.78	20.7	57.9	57.3	20.5	7.87	2.38	0.56	0.22	0.10	0.04	0.02	177	159
	0.01	0.04	0.10	0.22	0.52	1.71	6.46	25.0	72.9	71.7	25.4	8.41	2.93	0.78	0.26	0.11	0.05	0.02	217	199
	0.02	0.04	0.10	0.22	0.51	1.70	6.27	21.1	78.1	81.8	28.0	10.1	3.58	0.88	0.28	0.12	0.05	0.02	233	214
	0.02	0.05	0.10	0.22	0.52	1.79	6.63	24.3	83.4	91.5	35.1	11.5	4.07	1.06	0.31	0.13	0.06	0.02	261	243
	0.02	0.04	0.10	0.23	0.54	1.88	6.81	24.2	71.9	81.7	36.3	11.6	4.15	1.21	0.34	0.13	0.05	0.02	241	223
-24	0.01	0.04	0.10	0.21	0.47	1.68	6.21	18.6	60.5	66.6	29.9	11.7	3.88	1.00	0.30	0.12	0.05	0.02	201	183
-32	0.01	0.04	0.08	0.18	0.51	1.73	4.59	16.2	44.0	46.5	22.0	8.87	3.52	0.92	0.23	0.10	0.04	0.02	150	129
-40	0.01	0.03	0.07	0.16	0.49	1.35	3.28	11.3	24.4	25.4	13.9	5.93	2.65	0.93	0.23	0.08	0.03	0.01	90.3	68.5
-48	0.01	0.02	0.05	0.12	0.32	0.78	2.01	5.39	9.86	10.3	6.55	3.50	1.72	0.69	0.21	0.06	0.02	0.01	41.6	10.4
-56	0.01	0.02	0.03	0.08	0.17	0.36	0.92	2.03	3.32	3.52	2.57	1.63	0.88	0.37	0.12	0.04	0.02	0.01	16.1	0.00
-64	0.01	0.01	0.02	0.04	0.08	0.14	0.36	0.70	1.06	1.13	0.86	0.56	0.28	0.12	0.05	0.02	0.01	0.01	5.44	0.00
-72	0.00	0.01	0.01	0.02	0.03	0.06	0.15	0.26	0.38	0.39	0.28	0.17	0.08	0.04	0.02	0.01	0.01	0.00	1.93	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)	16	24	32	40	48	56	64	72			
Φ t	0.18	0.48	1.10	2.45	6.24	19.8	62.9	204	580	611	257	96.1	35.9	10.4	3.11	1.26	0.56	0.22	1893	---
Φ a	0.00	0.00	0.00	0.00	0.00	0.00	3.31	172	560	591	230	37.4	0.00	0.00	0.00	0.00	0.00	0.00	---	1594


one-half-peak spread: U:30.1,D:25.9 , L:7.2,R:7.6NEMA Beam Type: Type 3 x 5 (H x V)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.95V I:0.0840A P:18.200W PF:0.9000 Freq:49.99Hz Lamp Flux:105.93x18 lm		
NAME: Blazeline-609mm-3000K-15x55D-REV3	TYPE:3000K	WEIGHT:00
SPEC.:15x55 DEG	DIM.: 609mm	SERIAL No.:01
MFR.: Luminoscape	SUR.:0.8	Shielding Angle:

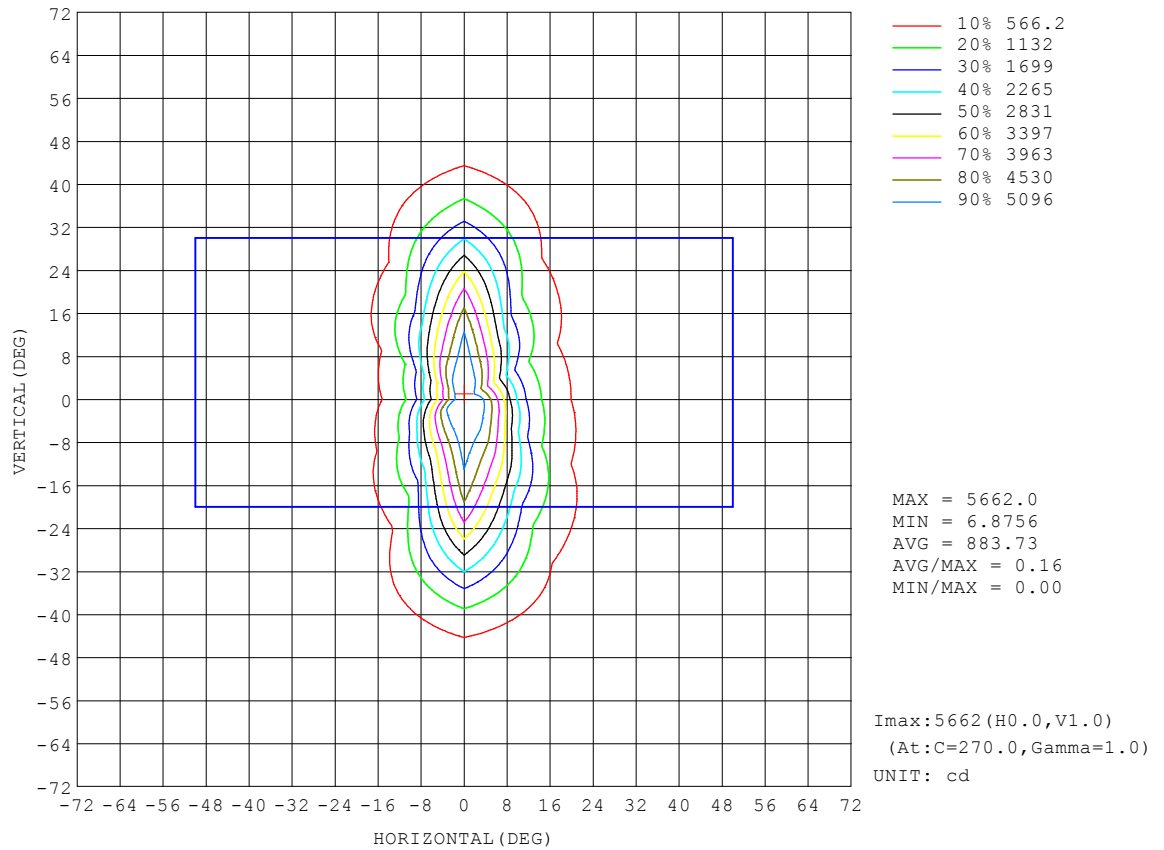


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.95V I:0.0840A P:18.200W PF:0.9000 Freq:49.99Hz Lamp Flux:105.93x18 lm		
NAME: Blazeline-609mm-3000K-15x55D-REV3	TYPE:3000K	WEIGHT:00
SPEC.:15x55 DEG	DIM.: 609mm	SERIAL No.:01
MFR.: Luminoscape	SUR.:0.8	Shielding Angle:

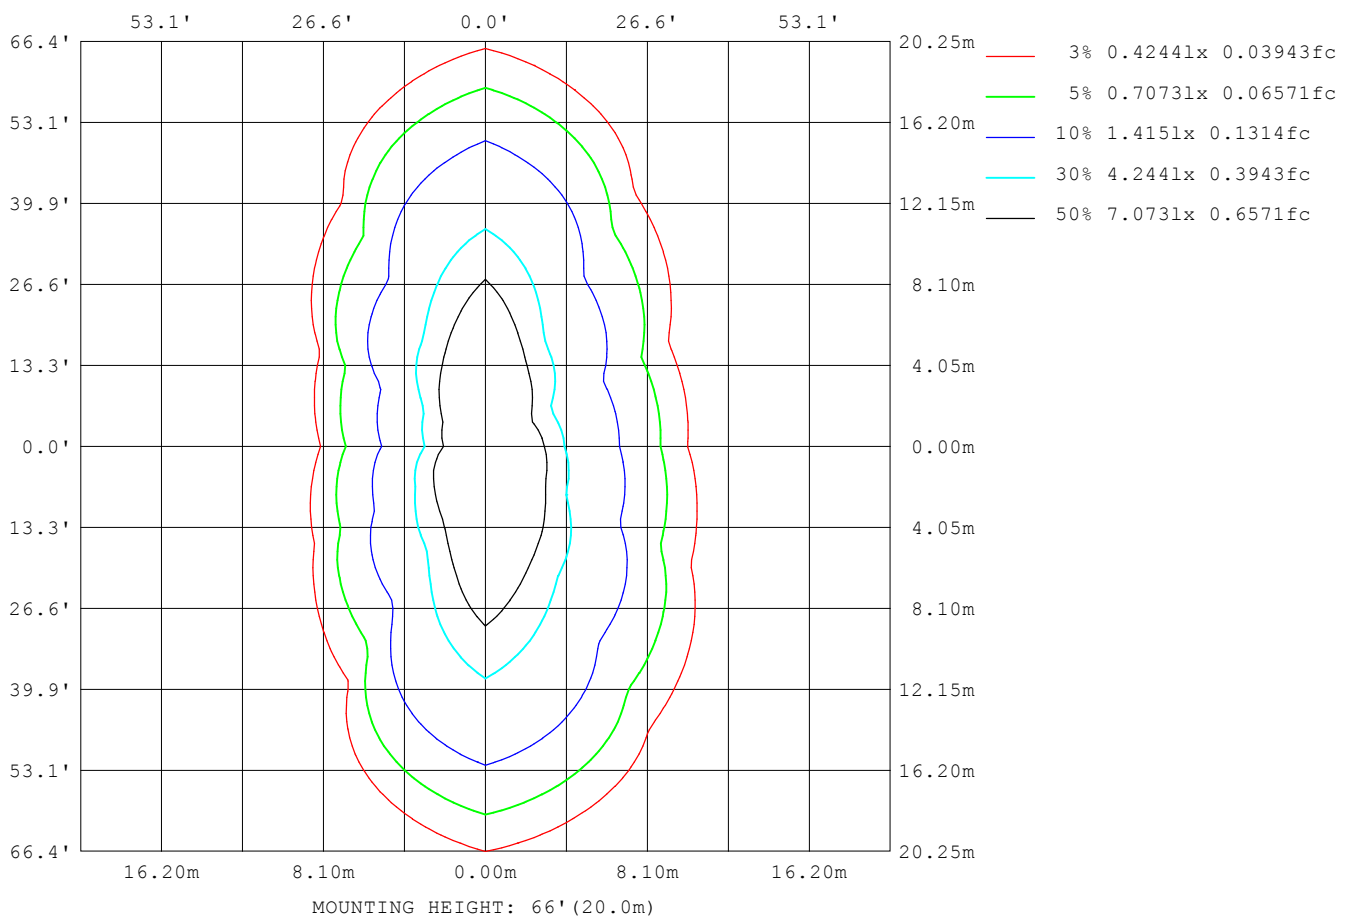

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

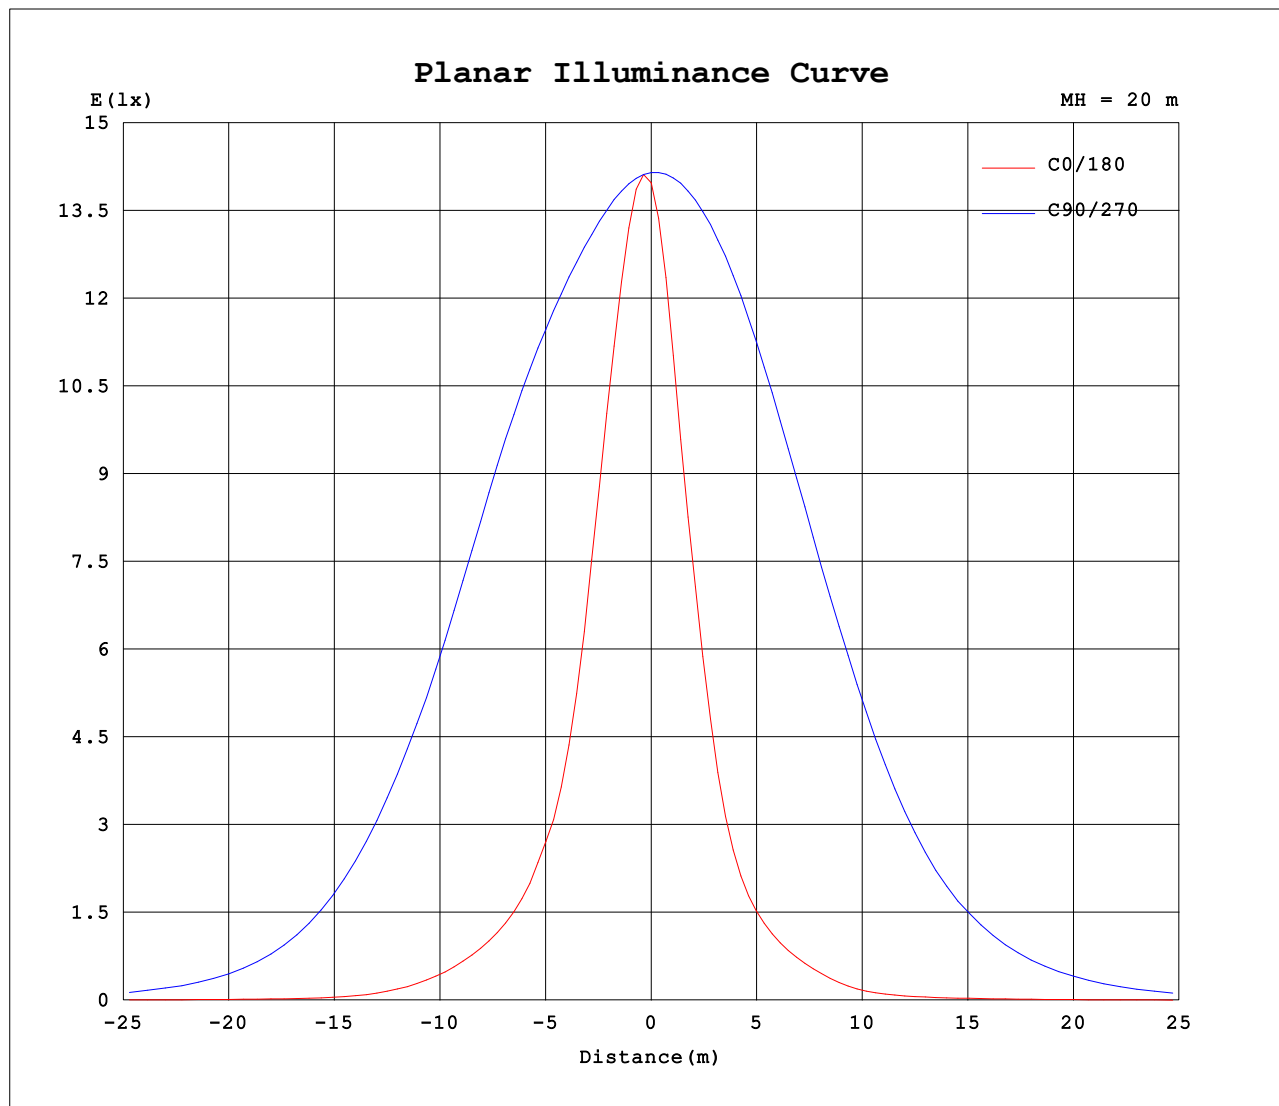


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-09-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.95V I:0.0840A P:18.200W PF:0.9000 Freq:49.99Hz Lamp Flux:105.93x18 lm		
NAME: Blazeline-609mm-3000K-15x55D-REV3	TYPE:3000K	WEIGHT:00
SPEC.:15x55 DEG	DIM.: 609mm	SERIAL No.:01
MFR.: Luminoscape	SUR.:0.8	Shielding Angle:

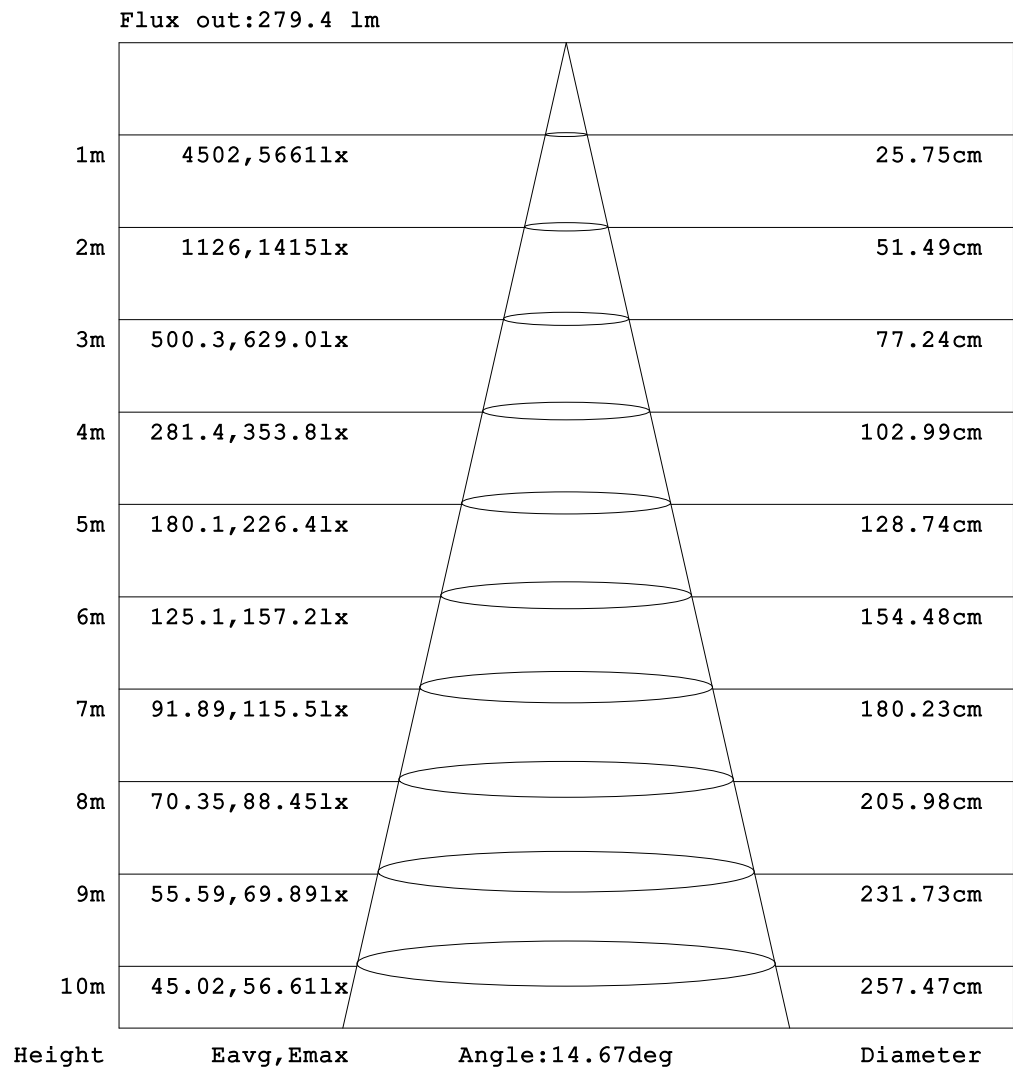

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.95V I:0.0840A P:18.200W PF:0.9000 Freq:49.99Hz Lamp Flux:105.93x18 lm		
NAME: Blazeline-609mm-3000K-15x55D-REV3	TYPE:3000K	WEIGHT:00
SPEC.:15x55 DEG	DIM.: 609mm	SERIAL No.:01
MFR.: Luminoscape	SUR.:0.8	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.07	0.09	0.10	0.10	0.11	0.11	0.14	0.16	0.23	0.38	0.67	1.23	2.36	4.68	7.82	10.2	10.6	9.71	9.20
-170	0.07	0.09	0.10	0.11	0.11	0.12	0.15	0.18	0.26	0.44	0.76	1.37	2.61	4.85	7.69	9.77	10.2	9.58	8.85
-160	0.07	0.09	0.10	0.11	0.12	0.12	0.15	0.19	0.27	0.41	0.67	1.12	1.95	3.75	5.94	7.84	8.79	8.40	7.73
-150	0.07	0.09	0.10	0.11	0.11	0.12	0.14	0.18	0.23	0.33	0.52	0.98	1.74	2.86	4.31	5.72	6.24	6.42	6.35
-140	0.07	0.09	0.10	0.10	0.11	0.12	0.13	0.16	0.20	0.27	0.44	0.72	1.13	1.70	2.43	3.12	3.70	4.14	4.45
-130	0.07	0.09	0.09	0.10	0.11	0.11	0.12	0.13	0.16	0.22	0.30	0.42	0.60	0.81	1.14	1.49	1.84	2.17	2.44
-120	0.07	0.08	0.09	0.09	0.10	0.11	0.11	0.12	0.13	0.15	0.19	0.23	0.29	0.38	0.51	0.65	0.79	0.93	1.05
-110	0.07	0.08	0.09	0.09	0.09	0.10	0.10	0.11	0.10	0.11	0.11	0.12	0.14	0.17	0.22	0.27	0.31	0.35	0.39
-100	0.07	0.08	0.08	0.09	0.09	0.09	0.09	0.09	0.10	0.10	0.10	0.10	0.10	0.11	0.12	0.14	0.15	0.16	0.18
-90	0.07	0.08	0.09	0.10	0.11	0.11	0.12	0.13	0.14	0.14	0.15	0.16	0.17	0.17	0.18	0.18	0.18	0.19	0.19
-80	0.07	0.09	0.13	0.18	0.23	0.28	0.34	0.41	0.48	0.56	0.63	0.71	0.80	1.63	2.71	3.90	5.16	6.41	7.59
-70	0.07	0.12	0.20	0.29	0.42	0.53	0.65	0.81	0.99	1.20	1.45	1.76	2.11	4.12	6.97	9.88	12.8	15.7	18.4
-60	0.07	0.15	0.27	0.45	0.64	0.83	1.03	1.35	1.91	2.67	3.68	4.96	6.61	10.1	18.4	28.5	39.4	50.3	60.0
-50	0.07	0.18	0.36	0.61	0.87	1.18	1.68	2.43	3.61	5.45	8.58	13.6	20.9	31.0	59.1	102	153	209	258
-40	0.07	0.20	0.45	0.75	1.12	1.65	2.54	3.85	5.49	8.65	15.6	28.2	49.4	80.9	129	291	510	760	994
-30	0.07	0.22	0.53	0.89	1.37	2.12	3.45	5.24	7.58	10.9	16.9	37.2	73.7	134	224	432	1082	1863	2648
-20	0.07	0.23	0.59	1.01	1.55	2.55	4.16	6.32	9.35	13.7	20.2	31.1	56.4	156	331	596	1229	2806	4409
-10	0.07	0.24	0.62	1.09	1.64	2.78	4.54	6.84	10.0	14.8	22.5	36.8	75.4	176	352	718	1755	3464	5283
0	0.07	0.24	0.63	1.12	1.63	2.77	4.49	6.64	9.41	13.7	20.3	30.9	54.1	132	303	584	1317	3343	5589
10	0.07	0.24	0.62	1.08	1.59	2.68	4.37	6.62	9.71	14.4	21.8	35.5	69.9	159	319	673	1748	3552	5327
20	0.07	0.23	0.58	1.00	1.46	2.36	3.86	5.92	8.77	13.0	19.2	29.3	54.0	161	360	688	1357	2717	4066
30	0.07	0.21	0.51	0.87	1.27	1.89	3.07	4.68	6.88	9.97	16.1	39.2	82.4	154	256	458	981	1607	2225
40	0.07	0.19	0.43	0.72	1.06	1.43	2.15	3.25	4.67	7.96	16.2	31.0	55.4	91.9	146	285	465	662	845
50	0.07	0.17	0.34	0.58	0.81	1.06	1.38	1.93	2.97	4.70	7.74	13.4	22.8	35.9	62.6	101	146	192	232
60	0.07	0.15	0.25	0.42	0.59	0.75	0.92	1.11	1.59	2.30	3.25	4.48	6.06	9.12	15.8	24.1	33.3	42.3	50.2
70	0.07	0.11	0.19	0.27	0.37	0.48	0.57	0.69	0.90	1.15	1.40	1.71	2.08	4.37	7.68	11.1	14.6	18.1	21.4
80	0.07	0.08	0.12	0.16	0.21	0.25	0.29	0.33	0.38	0.44	0.50	0.56	0.63	1.03	1.62	2.33	3.08	3.83	4.51
90	0.07	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.09	0.09	0.09	0.09	0.09	0.10
100	0.07	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.09	0.09	0.10	0.10	0.10	0.11	0.11	0.10	0.10	0.10
110	0.07	0.08	0.09	0.09	0.08	0.08	0.08	0.08	0.09	0.10	0.13	0.15	0.17	0.18	0.20	0.22	0.23	0.24	0.25
120	0.07	0.08	0.09	0.09	0.09	0.09	0.08	0.08	0.10	0.13	0.18	0.24	0.32	0.40	0.49	0.58	0.67	0.75	0.82
130	0.07	0.09	0.09	0.09	0.09	0.09	0.09	0.08	0.12	0.19	0.29	0.44	0.63	0.89	1.16	1.44	1.71	1.95	2.13
140	0.07	0.09	0.09	0.09	0.09	0.09	0.10	0.11	0.14	0.23	0.43	0.74	1.19	1.80	2.54	3.09	3.52	3.83	4.01
150	0.07	0.09	0.09	0.10	0.10	0.10	0.11	0.14	0.19	0.30	0.50	1.00	1.78	2.89	4.23	5.46	5.80	5.87	5.74
160	0.07	0.09	0.10	0.10	0.10	0.11	0.13	0.16	0.24	0.39	0.67	1.15	2.05	3.81	5.76	7.31	7.97	7.69	7.20
170	0.07	0.09	0.10	0.10	0.11	0.11	0.13	0.17	0.25	0.43	0.77	1.42	2.70	4.93	7.63	9.46	9.67	9.24	8.81
180	0.07	0.09	0.10	0.10	0.11	0.11	0.14	0.16	0.23	0.38	0.67	1.23	2.36	4.68	7.82	10.2	10.6	9.71	9.20

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.95V I:0.0840A P:18.200W PF:0.9000 Freq:49.99Hz Lamp Flux:105.93x18 lm																		
NAME: Blazeline-609mm-3000K-15x55D-REV3									TYPE:3000K					WEIGHT:00				
SPEC.:15x55 DEG									DIM.: 609mm					SERIAL No.:01				
MFR.: Luminoscape									SUR.:0.8					Shielding Angle:				

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	10.2	11.0	10.2	7.74	4.51	2.05	0.93	0.48	0.27	0.18	0.15	0.12	0.10	0.08	0.08	0.08	0.08	0.11	
-170	9.00	9.53	9.28	7.39	4.69	2.43	1.17	0.61	0.34	0.22	0.17	0.13	0.10	0.09	0.09	0.08	0.08	0.11	
-160	7.99	8.09	7.34	5.70	3.65	1.84	0.97	0.55	0.34	0.23	0.17	0.13	0.11	0.09	0.09	0.08	0.08	0.11	
-150	6.32	6.09	5.59	4.25	2.84	1.70	0.92	0.45	0.29	0.21	0.16	0.13	0.11	0.10	0.09	0.09	0.08	0.11	
-140	4.17	3.76	3.23	2.59	1.81	1.17	0.73	0.43	0.26	0.18	0.15	0.12	0.11	0.10	0.09	0.09	0.08	0.11	
-130	2.19	1.89	1.55	1.20	0.87	0.62	0.43	0.30	0.22	0.16	0.14	0.12	0.11	0.10	0.09	0.09	0.08	0.11	
-120	0.94	0.80	0.66	0.51	0.38	0.29	0.23	0.19	0.15	0.13	0.12	0.11	0.10	0.09	0.09	0.09	0.09	0.11	
-110	0.35	0.31	0.26	0.21	0.17	0.14	0.13	0.12	0.11	0.11	0.11	0.10	0.09	0.09	0.09	0.09	0.09	0.11	
-100	0.16	0.15	0.14	0.13	0.11	0.10	0.10	0.10	0.10	0.10	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.11	
-90	0.18	0.17	0.16	0.15	0.14	0.13	0.13	0.12	0.11	0.11	0.10	0.09	0.09	0.10	0.10	0.10	0.10	0.11	
-80	6.43	5.20	3.96	2.78	1.71	0.88	0.79	0.70	0.62	0.53	0.44	0.36	0.31	0.27	0.23	0.20	0.17	0.11	
-70	15.8	13.1	10.3	7.53	4.73	2.70	2.20	1.76	1.40	1.12	0.88	0.72	0.64	0.53	0.39	0.28	0.20	0.11	
-60	54.4	47.1	38.4	28.7	18.9	11.7	7.33	4.77	3.18	2.14	1.43	1.11	0.95	0.80	0.62	0.39	0.24	0.11	
-50	225	184	143	107	76.9	50.7	31.2	17.2	8.14	4.16	2.62	1.84	1.35	1.05	0.82	0.53	0.28	0.11	
-40	801	587	393	244	163	102	58.5	29.3	12.8	6.12	4.28	2.88	1.90	1.34	0.98	0.66	0.31	0.11	
-30	1985	1300	705	433	266	145	67.5	24.7	13.4	9.02	6.04	4.01	2.54	1.64	1.15	0.77	0.35	0.11	
-20	3198	1891	1084	627	336	151	69.2	32.2	18.3	11.4	7.58	4.96	3.11	1.90	1.28	0.85	0.38	0.11	
-10	4189	2459	1125	590	345	184	84.6	38.8	20.2	12.4	8.36	5.52	3.48	2.10	1.39	0.90	0.40	0.11	
0	4525	2197	1046	559	308	145	56.5	28.2	17.1	11.6	8.20	5.60	3.58	2.16	1.45	0.93	0.41	0.11	
10	3497	1783	802	450	263	132	56.0	27.6	16.6	11.1	7.74	5.23	3.33	2.03	1.38	0.90	0.40	0.11	
20	2676	1319	723	422	216	82.6	36.6	21.3	13.7	9.43	6.61	4.46	2.85	1.79	1.25	0.84	0.38	0.11	
30	1623	1012	501	295	178	96.5	44.5	16.2	9.89	7.11	5.03	3.42	2.22	1.53	1.11	0.75	0.34	0.11	
40	671	482	308	172	110	65.8	36.2	18.2	8.22	4.68	3.37	2.34	1.62	1.26	0.94	0.63	0.30	0.11	
50	195	152	109	71.6	44.0	27.2	14.7	7.73	4.49	2.86	1.93	1.46	1.20	0.98	0.77	0.50	0.27	0.11	
60	42.3	33.3	23.9	15.5	8.54	5.49	4.04	2.98	2.15	1.54	1.14	0.97	0.86	0.73	0.56	0.37	0.23	0.11	
70	18.0	14.5	11.0	7.50	4.16	1.89	1.58	1.32	1.09	0.88	0.72	0.61	0.54	0.45	0.35	0.26	0.19	0.11	
80	3.83	3.08	2.33	1.63	1.04	0.64	0.58	0.51	0.44	0.38	0.32	0.27	0.25	0.23	0.20	0.17	0.16	0.11	
90	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.08	0.08	0.08	0.09	0.09	0.09	0.10	0.10	0.11	
100	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.09	0.09	0.09	0.08	0.08	0.08	0.08	0.08	0.09	0.09	0.11	
110	0.24	0.22	0.19	0.17	0.15	0.13	0.12	0.11	0.10	0.09	0.09	0.08	0.08	0.08	0.08	0.08	0.09	0.11	
120	0.72	0.60	0.49	0.37	0.28	0.22	0.17	0.14	0.12	0.10	0.09	0.08	0.08	0.08	0.08	0.08	0.09	0.11	
130	1.85	1.53	1.19	0.86	0.58	0.41	0.29	0.19	0.13	0.09	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.11	
140	3.64	3.16	2.57	1.90	1.29	0.81	0.48	0.27	0.15	0.10	0.09	0.08	0.08	0.08	0.08	0.08	0.08	0.11	
150	5.69	5.42	4.84	3.53	2.23	1.26	0.64	0.29	0.17	0.13	0.10	0.09	0.08	0.08	0.08	0.08	0.08	0.11	
160	7.52	7.64	6.76	4.98	2.96	1.37	0.70	0.40	0.24	0.16	0.13	0.10	0.09	0.08	0.08	0.08	0.08	0.11	
170	8.82	9.12	8.73	6.78	4.13	2.04	0.97	0.50	0.29	0.18	0.14	0.11	0.09	0.08	0.08	0.08	0.08	0.11	
180	10.2	11.0	10.2	7.74	4.51	2.05	0.93	0.48	0.27	0.18	0.15	0.12	0.10	0.08	0.08	0.08	0.08	0.11	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks: