

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		4754.4 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		1.0 degrees horizontal
Beam Spread	At 10% of Imax	46.4V x 45.4H
	At 50% of Imax	21.4V x 20.0H
	At 90% of Imax	8.3V x 7.5H
Beam Flux	Total	1000.7 lumens per klm.
	To 10% of Imax	777.0 lumens per klm.
	To 50% of Imax	350.9 lumens per klm.
	To 90% of Imax	73.5 lumens per klm.
	Upward LOR	0.6 %
	Downward LOR	99.5 %
Luminaire Efficiency (Light Output Ratio)		100.0 %

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-09-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.90V I:0.0840A P:18.100W PF:0.0000 Freq:49.99Hz Lamp Flux:103.029x18 lm		
NAME:Blazeline-609mm-3000K-20D-REV3	TYPE:3000K	WEIGHT:00
SPEC.:20 DEG	DIM.:609mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

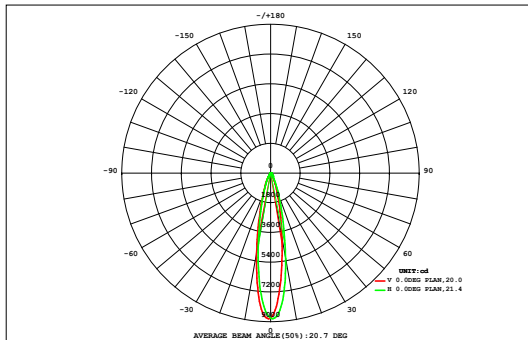

DATA OF LAMP		Eff:102.46lm/W	
MODEL		Imax(cd)	8817
NOMINAL POWER(W)	18	AVAILABILITY(%)	77.4
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	1436
NOMINAL FLUX(lm)	103.029	LOR(%)	100.0
LAMPS INSIDE	18	TOTAL FLUX(lm)	1855
TEST VOLTAGE(V)	220	θ @50% (H,V)	20,21DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.05	0.08	0.14	0.22	0.33	0.43	0.54	0.62	0.66	0.67	0.62	0.55	0.45	0.34	0.24	0.15	0.08	0.05	6.22	0.00
45	0.07	0.13	0.23	0.38	0.56	0.77	0.96	1.11	1.19	1.19	1.12	0.98	0.79	0.59	0.40	0.25	0.14	0.07	11.0	0.00
40	0.11	0.20	0.36	0.59	0.90	1.29	1.65	1.93	2.09	2.09	1.94	1.66	1.32	0.95	0.64	0.40	0.22	0.11	18.5	0.00
35	0.15	0.29	0.51	0.87	1.40	2.08	2.78	3.36	3.70	3.69	3.34	2.76	2.09	1.46	0.95	0.59	0.33	0.17	30.5	0.00
30	0.20	0.38	0.70	1.26	2.12	3.27	4.61	5.84	6.64	6.62	5.79	4.54	3.24	2.16	1.35	0.80	0.46	0.23	50.2	9.74
25	0.24	0.48	0.92	1.75	3.06	4.94	7.50	10.4	12.3	12.3	10.3	7.38	4.86	3.06	1.84	1.07	0.60	0.31	83.2	57.3
20	0.28	0.57	1.14	2.27	4.13	7.05	11.7	18.3	23.3	23.2	18.1	11.6	6.93	4.17	2.46	1.37	0.74	0.38	138	116
15	0.31	0.63	1.32	2.71	5.13	9.29	16.8	28.9	41.1	41.1	28.9	16.9	9.69	5.56	3.10	1.65	0.86	0.43	214	195
10	0.32	0.65	1.39	2.96	5.76	11.0	21.1	38.2	57.2	58.0	41.5	24.1	12.8	6.78	3.60	1.85	0.94	0.47	288	271
5	0.33	0.67	1.45	3.08	6.06	11.8	23.4	43.2	61.8	62.6	46.6	26.5	13.6	7.08	3.72	1.91	0.96	0.48	315	298
0	0.33	0.69	1.47	3.03	5.89	11.3	21.5	35.6	47.8	47.8	35.6	21.5	11.7	6.31	3.41	1.79	0.92	0.46	257	239
-5	0.31	0.65	1.35	2.70	5.04	8.84	14.7	22.1	28.6	28.5	21.9	14.4	8.70	5.06	2.87	1.57	0.83	0.41	168	149
-10	0.28	0.56	1.14	2.18	3.75	6.00	9.05	12.6	15.4	15.3	12.4	8.90	5.91	3.73	2.25	1.29	0.70	0.35	102	77.2
-15	0.23	0.45	0.87	1.56	2.55	3.87	5.42	7.01	8.11	8.08	6.94	5.35	3.83	2.57	1.64	0.98	0.55	0.28	60.3	23.9
-20	0.18	0.34	0.61	1.04	1.65	2.40	3.22	3.95	4.42	4.41	3.93	3.19	2.39	1.69	1.12	0.69	0.40	0.21	35.8	0.00
-25	0.13	0.24	0.41	0.66	1.01	1.44	1.87	2.23	2.45	2.45	2.23	1.87	1.46	1.06	0.72	0.46	0.27	0.15	21.1	0.00
-30	0.09	0.16	0.26	0.40	0.59	0.82	1.04	1.23	1.35	1.35	1.24	1.06	0.84	0.63	0.44	0.29	0.17	0.09	12.1	0.00
-35	0.06	0.10	0.16	0.24	0.33	0.44	0.55	0.63	0.69	0.69	0.64	0.56	0.46	0.35	0.25	0.17	0.10	0.06	6.46	0.00
-40	0.06	0.10	0.16	0.24	0.33	0.44	0.55	0.63	0.69	0.69	0.64	0.56	0.46	0.35	0.25	0.17	0.10	0.06	6.46	0.00
-45	0.06	0.10	0.16	0.24	0.33	0.44	0.55	0.63	0.69	0.69	0.64	0.56	0.46	0.35	0.25	0.17	0.10	0.06	6.46	0.00
HORIZONTAL(DEG)																				
Φ t	3.67	7.30	14.4	27.9	50.3	87.1	148	237	319	320	243	154	91.0	53.6	31.0	17.3	9.29	4.70	1819	---
Φ a	0.00	0.00	0.00	0.00	9.83	59.6	125	215	297	299	221	130	63.1	15.8	0.00	0.00	0.00	0.00	---	1436


one-half-peak spread: U:10.6,D:10.9 , L:10.2,R:10.2,Beam Type: Type 3 x 4 (H x V)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.90V I:0.0840A P:18.100W PF:0.0000 Freq:49.99Hz Lamp Flux:103.029x18 lm		
NAME:Blazeline-609mm-3000K-20D-REV3	TYPE:3000K	WEIGHT:00
SPEC.:20 DEG	DIM.:609mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

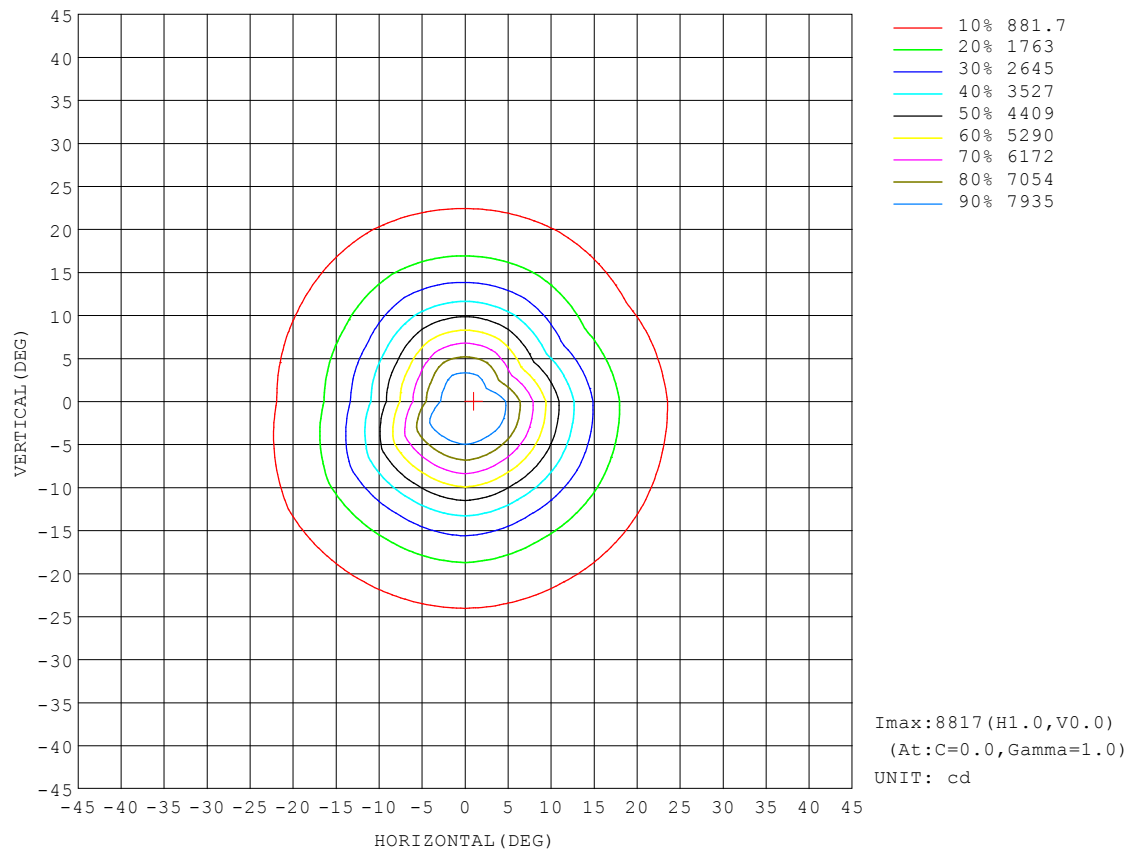


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.90V I:0.0840A P:18.100W PF:0.0000 Freq:49.99Hz Lamp Flux:103.029x18 lm		
NAME:Blazeline-609mm-3000K-20D-REV3	TYPE:3000K	WEIGHT:00
SPEC.:20 DEG	DIM.:609mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

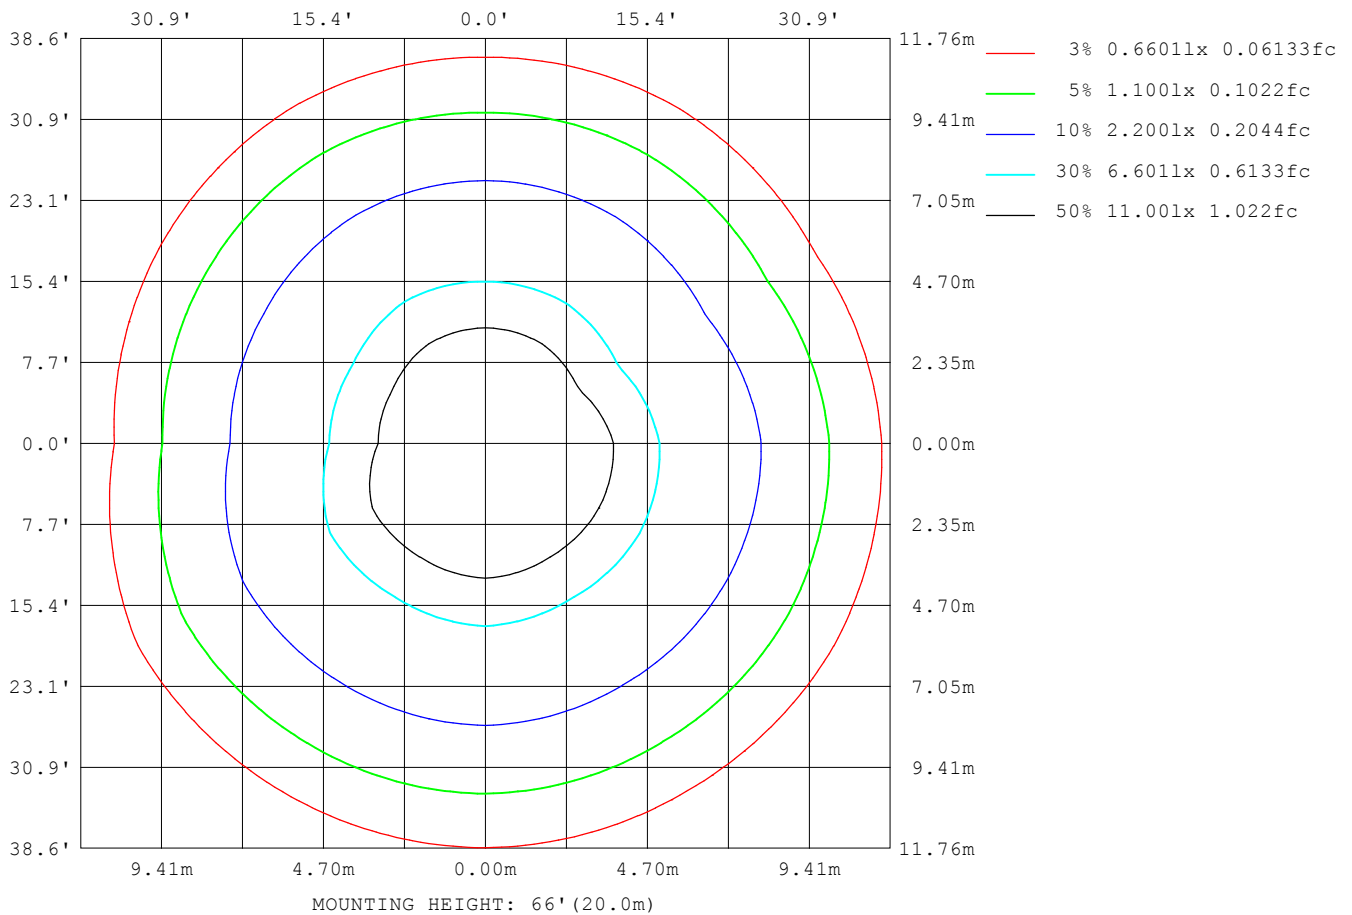

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

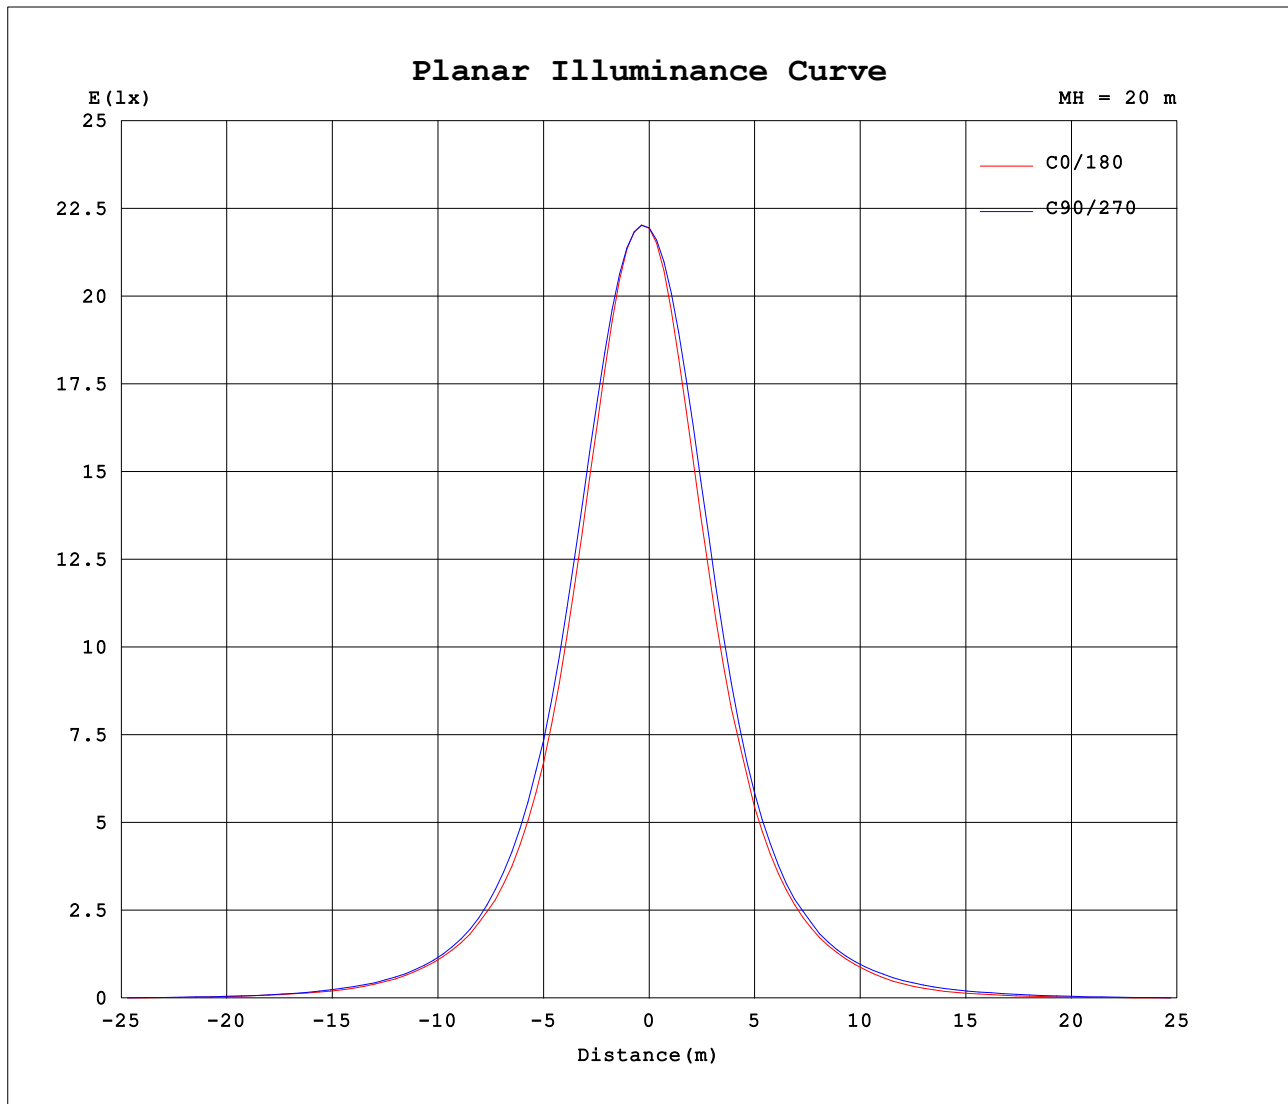


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-09-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.90V I:0.0840A P:18.100W PF:0.0000 Freq:49.99Hz Lamp Flux:103.029x18 lm		
NAME:Blazeline-609mm-3000K-20D-REV3	TYPE:3000K	WEIGHT:00
SPEC.:20 DEG	DIM.:609mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

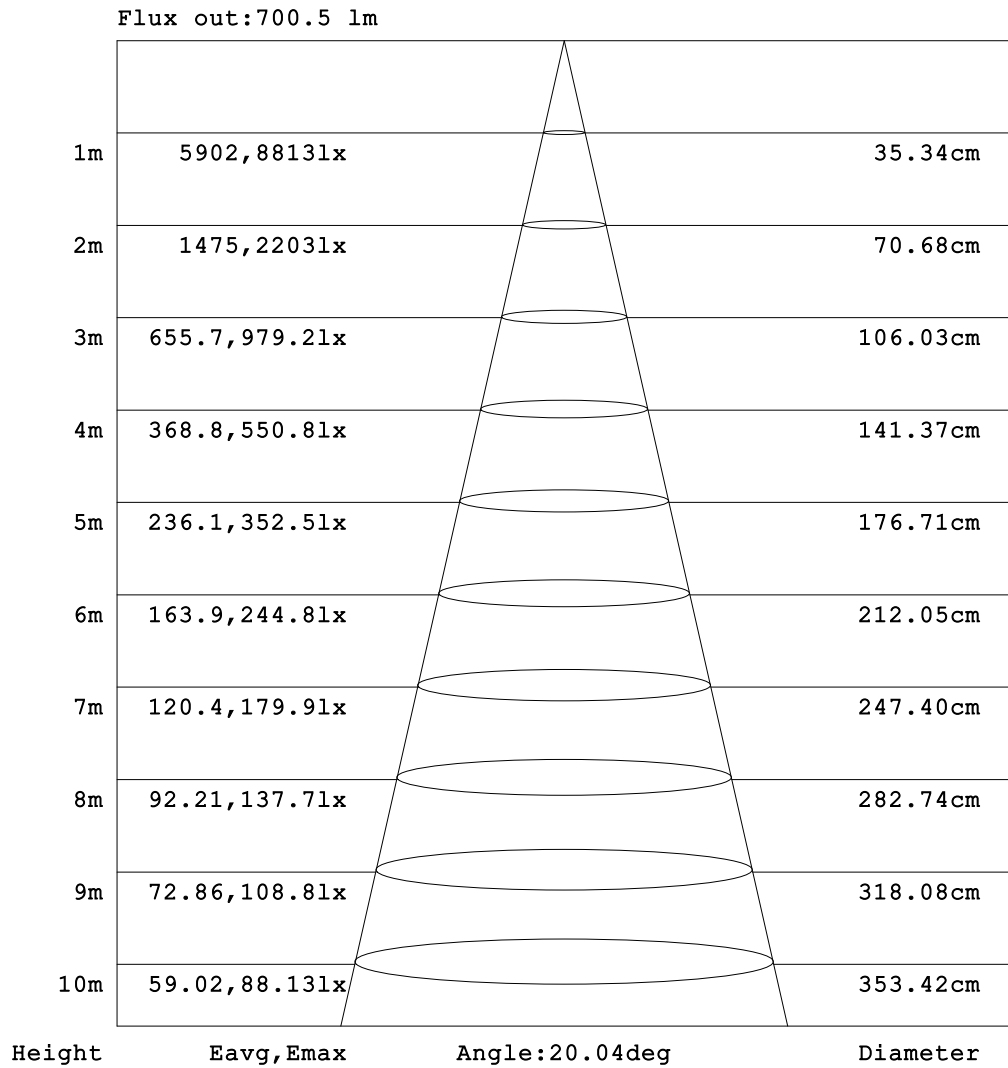

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:20DEG
 Operators:01
 Test Date:2025-09-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.700m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.90V I:0.0840A P:18.100W PF:0.0000 Freq:49.99Hz Lamp Flux:103.029x18 lm		
NAME:Blazeline-609mm-3000K-20D-REV3	TYPE:3000K	WEIGHT:00
SPEC.:20 DEG	DIM.:609mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.08	0.10	0.10	0.11	0.12	0.15	0.20	0.30	0.48	0.80	1.37	2.38	4.16	6.83	9.73	11.6	11.5	10.8	10.8
-170	0.08	0.10	0.10	0.11	0.12	0.16	0.21	0.31	0.49	0.78	1.32	2.24	3.86	6.25	8.99	11.1	11.8	11.5	11.3
-160	0.08	0.09	0.10	0.11	0.12	0.15	0.19	0.28	0.42	0.66	1.03	1.64	2.64	4.14	6.00	7.81	9.12	9.81	9.98
-150	0.08	0.09	0.09	0.10	0.12	0.14	0.18	0.24	0.34	0.49	0.70	1.02	1.48	2.10	2.93	3.85	4.62	5.16	5.38
-140	0.08	0.09	0.09	0.10	0.11	0.13	0.16	0.20	0.25	0.33	0.43	0.57	0.74	0.96	1.22	1.49	1.71	1.89	1.97
-130	0.08	0.09	0.09	0.10	0.11	0.12	0.13	0.16	0.18	0.21	0.26	0.31	0.37	0.43	0.52	0.59	0.66	0.71	0.74
-120	0.08	0.09	0.09	0.09	0.10	0.11	0.11	0.12	0.13	0.14	0.16	0.17	0.19	0.21	0.24	0.27	0.29	0.31	0.33
-110	0.08	0.09	0.09	0.09	0.09	0.10	0.10	0.11	0.10	0.10	0.10	0.10	0.10	0.12	0.13	0.14	0.16	0.17	0.18
-100	0.08	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.10	0.10	0.11	0.11	0.12	0.12
-90	0.08	0.08	0.08	0.09	0.09	0.09	0.09	0.09	0.10	0.10	0.11	0.11	0.12	0.12	0.11	0.11	0.11	0.11	0.10
-80	0.08	0.08	0.09	0.12	0.17	0.25	0.33	0.40	0.46	0.50	0.53	0.55	0.57	0.79	1.09	1.44	1.80	2.16	2.49
-70	0.08	0.09	0.14	0.28	0.49	0.64	0.72	0.82	0.99	1.22	1.49	1.82	2.22	3.38	4.95	6.57	8.20	9.78	11.3
-60	0.08	0.09	0.25	0.58	0.85	1.00	1.06	1.17	1.71	2.47	3.34	4.23	5.06	6.29	8.45	10.4	12.2	13.9	15.5
-50	0.08	0.11	0.43	0.88	1.15	1.30	1.54	2.20	3.41	4.90	6.66	9.03	12.3	16.5	21.1	25.4	28.7	30.7	31.4
-40	0.08	0.14	0.63	1.12	1.40	1.67	2.45	3.97	6.19	9.83	16.2	25.7	38.0	53.1	71.8	91.6	110	123	127
-30	0.08	0.17	0.80	1.32	1.63	2.14	3.63	6.06	10.6	20.0	36.8	60.4	97.0	150	218	291	361	412	432
-20	0.08	0.20	0.93	1.48	1.80	2.65	4.68	8.25	15.8	31.9	61.0	113	210	348	543	791	1087	1356	1492
-10	0.08	0.22	1.02	1.60	1.91	3.00	5.38	9.62	18.8	40.0	79.2	154	306	578	1044	1865	3084	4455	5266
0	0.08	0.22	1.07	1.68	1.95	3.07	5.46	9.34	17.6	38.7	76.4	145	302	601	1111	2110	3965	6787	8775
10	0.08	0.21	1.02	1.59	1.86	2.88	5.16	8.98	17.3	37.0	72.3	135	266	496	856	1442	2465	3705	4318
20	0.08	0.19	0.92	1.46	1.73	2.44	4.32	7.38	13.5	27.5	52.9	93.1	164	284	451	662	909	1115	1198
30	0.08	0.16	0.77	1.29	1.58	1.89	3.15	5.30	8.75	16.1	30.0	52.1	84.5	130	191	258	311	351	365
40	0.08	0.13	0.60	1.08	1.37	1.49	2.01	3.23	5.09	7.95	13.4	22.4	34.8	51.2	71.0	88.6	104	115	119
50	0.08	0.10	0.39	0.83	1.09	1.24	1.30	1.66	2.61	3.94	5.59	7.87	11.2	15.8	20.7	25.0	28.6	31.1	32.1
60	0.08	0.09	0.21	0.51	0.77	0.91	0.98	1.05	1.34	1.87	2.58	3.37	4.14	5.25	7.13	8.79	10.3	11.6	12.8
70	0.08	0.08	0.11	0.22	0.38	0.53	0.61	0.67	0.79	0.96	1.18	1.42	1.68	2.57	3.81	5.10	6.42	7.69	8.89
80	0.08	0.08	0.09	0.09	0.12	0.16	0.19	0.24	0.29	0.33	0.36	0.38	0.39	0.56	0.76	0.96	1.16	1.36	1.55
90	0.08	0.08	0.08	0.08	0.08	0.08	0.07	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08
100	0.08	0.08	0.08	0.08	0.08	0.08	0.07	0.08	0.08	0.08	0.09	0.09	0.10	0.09	0.09	0.09	0.09	0.09	0.08
110	0.08	0.09	0.08	0.09	0.08	0.08	0.08	0.08	0.08	0.09	0.10	0.11	0.12	0.12	0.12	0.12	0.11	0.11	0.10
120	0.08	0.09	0.09	0.08	0.08	0.08	0.08	0.08	0.08	0.11	0.13	0.14	0.17	0.19	0.19	0.20	0.20	0.20	0.19
130	0.08	0.09	0.09	0.09	0.09	0.09	0.08	0.09	0.11	0.15	0.18	0.24	0.30	0.36	0.41	0.46	0.49	0.52	0.52
140	0.08	0.09	0.09	0.09	0.09	0.09	0.11	0.13	0.16	0.23	0.32	0.44	0.60	0.78	0.99	1.20	1.40	1.53	1.60
150	0.08	0.09	0.09	0.09	0.10	0.12	0.14	0.17	0.25	0.37	0.55	0.83	1.23	1.76	2.44	3.18	3.88	4.38	4.60
160	0.08	0.09	0.09	0.10	0.11	0.12	0.16	0.23	0.35	0.56	0.89	1.44	2.31	3.63	5.28	6.88	8.10	8.84	9.07
170	0.08	0.10	0.10	0.11	0.12	0.14	0.19	0.28	0.45	0.73	1.23	2.10	3.60	5.85	8.41	10.4	11.1	11.0	10.9
180	0.08	0.10	0.10	0.11	0.12	0.15	0.20	0.30	0.48	0.80	1.37	2.38	4.16	6.83	9.73	11.6	11.5	10.8	10.8

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.90V I:0.0840A P:18.100W PF:0.0000 Freq:49.99Hz Lamp Flux:103.029x18 lm																		
NAME:Blazeline-609mm-3000K-20D-REV3									TYPE:3000K					WEIGHT:00				
SPEC.:20 DEG									DIM.:609mm					SERIAL No.:01				
MFR.: 001									SUR.:0.8					Shielding Angle:				

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	11.5	12.5	12.3	10.5	7.52	4.67	2.66	1.50	0.85	0.48	0.29	0.19	0.14	0.11	0.09	0.09	0.09	0.10	
-170	11.8	12.0	11.2	9.13	6.47	4.07	2.38	1.39	0.81	0.48	0.30	0.20	0.14	0.11	0.09	0.09	0.09	0.10	
-160	9.85	9.18	7.85	6.04	4.17	2.67	1.66	1.05	0.65	0.41	0.27	0.19	0.14	0.11	0.09	0.09	0.09	0.10	
-150	5.17	4.64	3.88	2.96	2.12	1.48	1.00	0.68	0.47	0.32	0.23	0.17	0.13	0.11	0.09	0.09	0.09	0.10	
-140	1.89	1.72	1.50	1.23	0.97	0.73	0.56	0.41	0.32	0.25	0.19	0.15	0.13	0.10	0.09	0.09	0.09	0.10	
-130	0.71	0.65	0.59	0.51	0.43	0.36	0.30	0.25	0.21	0.18	0.16	0.13	0.11	0.10	0.09	0.09	0.09	0.10	
-120	0.31	0.29	0.26	0.24	0.21	0.19	0.17	0.15	0.14	0.14	0.13	0.11	0.10	0.09	0.09	0.09	0.09	0.10	
-110	0.17	0.16	0.15	0.13	0.12	0.11	0.10	0.10	0.10	0.10	0.10	0.10	0.09	0.09	0.09	0.09	0.10	0.10	
-100	0.12	0.11	0.11	0.10	0.10	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.10	0.09	0.10	
-90	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.10	0.10	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.10	
-80	2.15	1.79	1.42	1.08	0.77	0.55	0.52	0.49	0.44	0.39	0.32	0.26	0.21	0.17	0.14	0.12	0.11	0.10	
-70	9.80	8.24	6.63	5.02	3.45	2.28	1.86	1.49	1.20	0.93	0.75	0.67	0.63	0.50	0.33	0.19	0.13	0.10	
-60	13.9	12.3	10.5	8.62	6.54	5.31	4.37	3.38	2.41	1.62	1.11	1.04	0.99	0.88	0.65	0.34	0.15	0.10	
-50	30.9	29.1	25.8	21.3	16.6	12.3	8.93	6.58	4.80	3.23	2.02	1.47	1.32	1.19	0.96	0.55	0.19	0.10	
-40	124	112	93.8	75.0	56.9	41.1	27.4	16.7	9.69	6.02	3.90	2.41	1.67	1.47	1.21	0.76	0.24	0.10	
-30	411	358	290	223	160	109	69.8	41.9	22.0	10.9	6.22	3.74	2.22	1.70	1.42	0.94	0.29	0.10	
-20	1344	1070	779	538	354	226	135	75.9	38.8	17.9	8.78	5.03	2.86	1.89	1.60	1.08	0.34	0.10	
-10	4435	3052	1833	1058	611	348	193	107	53.9	23.5	10.8	5.99	3.35	2.06	1.74	1.18	0.37	0.10	
0	7805	4928	2596	1353	737	401	210	116	57.6	24.4	10.9	6.31	3.54	2.17	1.84	1.24	0.38	0.10	
10	3694	2426	1420	871	531	311	174	98.5	50.0	21.5	10.0	5.77	3.23	2.03	1.73	1.17	0.36	0.10	
20	1109	895	653	448	292	181	113	65.6	33.1	15.0	7.88	4.66	2.66	1.84	1.58	1.06	0.33	0.10	
30	351	311	260	197	140	94.3	59.0	33.1	16.9	8.85	5.45	3.27	2.02	1.66	1.39	0.91	0.29	0.10	
40	115	105	91.0	73.1	54.2	37.3	23.4	13.4	7.71	4.93	3.16	2.03	1.54	1.43	1.18	0.72	0.24	0.10	
50	31.3	29.1	25.5	21.0	16.1	11.2	7.73	5.44	3.77	2.41	1.57	1.30	1.26	1.14	0.90	0.51	0.19	0.10	
60	11.6	10.3	8.77	7.10	5.22	4.05	3.24	2.44	1.76	1.27	1.01	0.95	0.92	0.80	0.57	0.31	0.15	0.10	
70	7.66	6.36	5.02	3.70	2.45	1.56	1.32	1.09	0.88	0.73	0.62	0.54	0.49	0.39	0.28	0.18	0.13	0.10	
80	1.36	1.16	0.96	0.75	0.55	0.38	0.35	0.31	0.27	0.23	0.19	0.15	0.16	0.15	0.13	0.12	0.11	0.10	
90	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.09	0.09	0.09	0.09	0.09	0.10	
100	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.08	0.08	0.08	0.09	0.09	0.09	0.09	0.10	
110	0.11	0.11	0.12	0.12	0.12	0.12	0.11	0.10	0.09	0.09	0.09	0.08	0.08	0.08	0.09	0.09	0.09	0.10	
120	0.20	0.20	0.20	0.19	0.18	0.16	0.14	0.12	0.10	0.09	0.08	0.08	0.08	0.08	0.09	0.09	0.09	0.10	
130	0.51	0.49	0.45	0.40	0.35	0.29	0.23	0.18	0.14	0.11	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.10	
140	1.54	1.41	1.22	1.00	0.78	0.59	0.42	0.31	0.22	0.15	0.12	0.10	0.09	0.09	0.09	0.09	0.09	0.10	
150	4.40	3.93	3.24	2.49	1.79	1.24	0.83	0.53	0.35	0.24	0.17	0.12	0.10	0.09	0.09	0.09	0.09	0.10	
160	8.91	8.21	6.97	5.36	3.71	2.36	1.47	0.91	0.55	0.34	0.22	0.16	0.12	0.10	0.09	0.09	0.09	0.10	
170	11.3	11.3	10.4	8.57	6.10	3.84	2.25	1.31	0.75	0.44	0.27	0.18	0.13	0.10	0.09	0.09	0.09	0.10	
180	11.5	12.5	12.3	10.5	7.52	4.67	2.66	1.50	0.85	0.48	0.29	0.19	0.14	0.11	0.09	0.09	0.09	0.10	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
γ Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks: