

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		4136.3 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		1.0 degrees horizontal
Beam Spread	At 10% of Imax	46.8V x 46.6H
	At 50% of Imax	24.9V x 24.8H
	At 90% of Imax	9.8V x 9.8H
Beam Flux	Total	1000.6 lumens per klm.
	To 10% of Imax	817.3 lumens per klm.
	To 50% of Imax	447.4 lumens per klm.
	To 90% of Imax	90.4 lumens per klm.
	Upward LOR	0.6 %
	Downward LOR	99.5 %
Luminaire Efficiency (Light Output Ratio)		100.0 %

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-09-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.87V I:0.0840A P:18.100W PF:0.9000 Freq:49.99Hz Lamp Flux:108.019x18 lm		
NAME:Blazeline-609mm-3000K-25D-REV3	TYPE:3000K	WEIGHT:00
SPEC.:25 DEG	DIM.:609mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

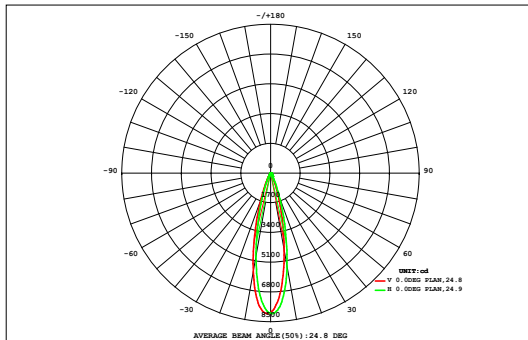

DATA OF LAMP		Eff:107.42lm/W	
MODEL		Imax (cd)	8042
NOMINAL POWER (W)	18	AVAILABILITY (%)	81.6
RATED VOLTAGE (V)	220	Avai. FLUX (lm)	1587
NOMINAL FLUX (lm)	108.019	LOR (%)	100.0
LAMPS INSIDE	18	TOTAL FLUX (lm)	1944
TEST VOLTAGE (V)	220	θ @50% (H,V)	25,25DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.08	0.12	0.18	0.25	0.33	0.40	0.47	0.52	0.55	0.56	0.54	0.49	0.43	0.35	0.27	0.19	0.13	0.08	5.93	0.00
45	0.11	0.17	0.26	0.37	0.49	0.62	0.74	0.84	0.89	0.90	0.87	0.79	0.67	0.54	0.41	0.29	0.19	0.12	9.26	0.00
40	0.15	0.24	0.37	0.53	0.72	0.96	1.19	1.38	1.49	1.51	1.44	1.27	1.05	0.80	0.59	0.42	0.27	0.16	14.5	0.00
35	0.19	0.32	0.49	0.72	1.04	1.50	2.05	2.56	2.89	2.93	2.67	2.20	1.66	1.17	0.83	0.57	0.37	0.22	24.4	0.00
30	0.24	0.40	0.62	0.96	1.52	2.47	3.86	5.34	6.36	6.47	5.61	4.18	2.75	1.74	1.12	0.74	0.48	0.29	45.1	13.2
25	0.29	0.48	0.77	1.25	2.24	4.19	7.44	11.3	13.9	14.2	11.9	8.10	4.74	2.62	1.50	0.93	0.59	0.36	86.8	66.0
20	0.32	0.55	0.91	1.64	3.26	6.86	13.1	21.4	27.2	27.7	22.6	14.4	7.81	3.96	2.06	1.16	0.70	0.42	156	139
15	0.35	0.61	1.04	2.01	4.43	9.90	19.7	32.9	43.5	44.4	35.1	22.2	12.1	5.87	2.73	1.38	0.79	0.47	239	224
10	0.37	0.63	1.12	2.25	5.23	12.1	24.6	41.1	54.8	56.6	46.2	30.8	16.6	7.63	3.30	1.56	0.86	0.51	306	292
5	0.37	0.65	1.16	2.38	5.63	13.2	26.8	44.5	57.3	58.5	49.3	32.9	17.7	8.03	3.43	1.60	0.87	0.51	325	311
0	0.37	0.65	1.16	2.35	5.44	12.5	24.5	38.1	47.2	47.9	39.7	26.9	14.7	6.85	3.04	1.49	0.83	0.49	274	260
-5	0.36	0.61	1.06	2.04	4.38	9.19	16.5	25.0	31.3	31.6	25.9	17.7	10.1	5.03	2.44	1.30	0.76	0.46	186	170
-10	0.33	0.55	0.91	1.61	2.96	5.48	9.27	13.6	17.0	17.1	14.1	9.86	5.97	3.29	1.84	1.07	0.66	0.40	106	86.6
-15	0.28	0.47	0.74	1.17	1.91	3.08	4.75	6.60	7.91	8.00	6.83	4.99	3.30	2.09	1.32	0.85	0.55	0.34	55.2	25.1
-20	0.24	0.39	0.59	0.85	1.24	1.80	2.48	3.14	3.58	3.62	3.22	2.57	1.90	1.35	0.94	0.66	0.45	0.28	29.3	0.00
-25	0.19	0.30	0.45	0.63	0.85	1.11	1.40	1.67	1.83	1.84	1.70	1.45	1.16	0.91	0.69	0.50	0.34	0.21	17.2	0.00
-30	0.14	0.22	0.33	0.45	0.59	0.74	0.88	0.99	1.05	1.06	1.00	0.90	0.77	0.63	0.49	0.36	0.25	0.16	11.0	0.00
-35	0.10	0.16	0.23	0.31	0.41	0.49	0.57	0.63	0.67	0.67	0.65	0.59	0.51	0.43	0.33	0.25	0.17	0.11	7.28	0.00
-40	0.08	0.12	0.18	0.25	0.33	0.40	0.47	0.52	0.55	0.56	0.54	0.49	0.43	0.35	0.27	0.19	0.13	0.08	5.93	0.00
-45	0.08	0.12	0.18	0.25	0.33	0.40	0.47	0.52	0.55	0.56	0.54	0.49	0.43	0.35	0.27	0.19	0.13	0.08	5.93	0.00
HORIZONTAL (DEG)																				
Φ t	4.47	7.53	12.4	21.8	42.7	86.7	160	252	319	325	269	182	104	53.3	27.3	15.3	9.27	5.59	1899	---
Φ a	0.00	0.00	0.00	0.00	9.79	64.9	142	234	303	309	252	164	82.2	25.8	0.00	0.00	0.00	0.00	---	1587

one-half-peak spread: U:12.2,D:12.9 , L:12.2,R:12.8


NEMA Beam Type: Type 4

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.87V I:0.0840A P:18.100W PF:0.9000 Freq:49.99Hz Lamp Flux:108.019x18 lm		
NAME:Blazeline-609mm-3000K-25D-REV3	TYPE:3000K	WEIGHT:00
SPEC.:25 DEG	DIM.:609mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

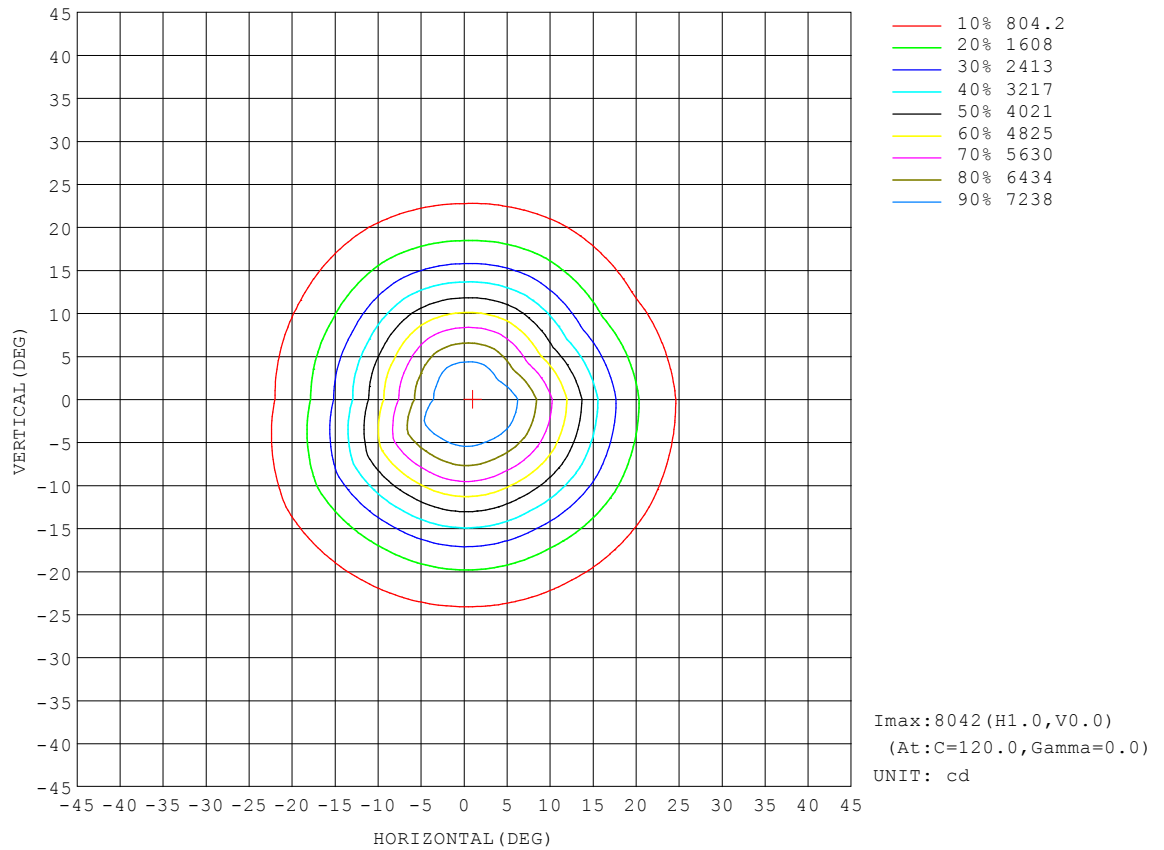


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.87V I:0.0840A P:18.100W PF:0.9000 Freq:49.99Hz Lamp Flux:108.019x18 lm		
NAME:Blazeline-609mm-3000K-25D-REV3	TYPE:3000K	WEIGHT:00
SPEC.:25 DEG	DIM.:609mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

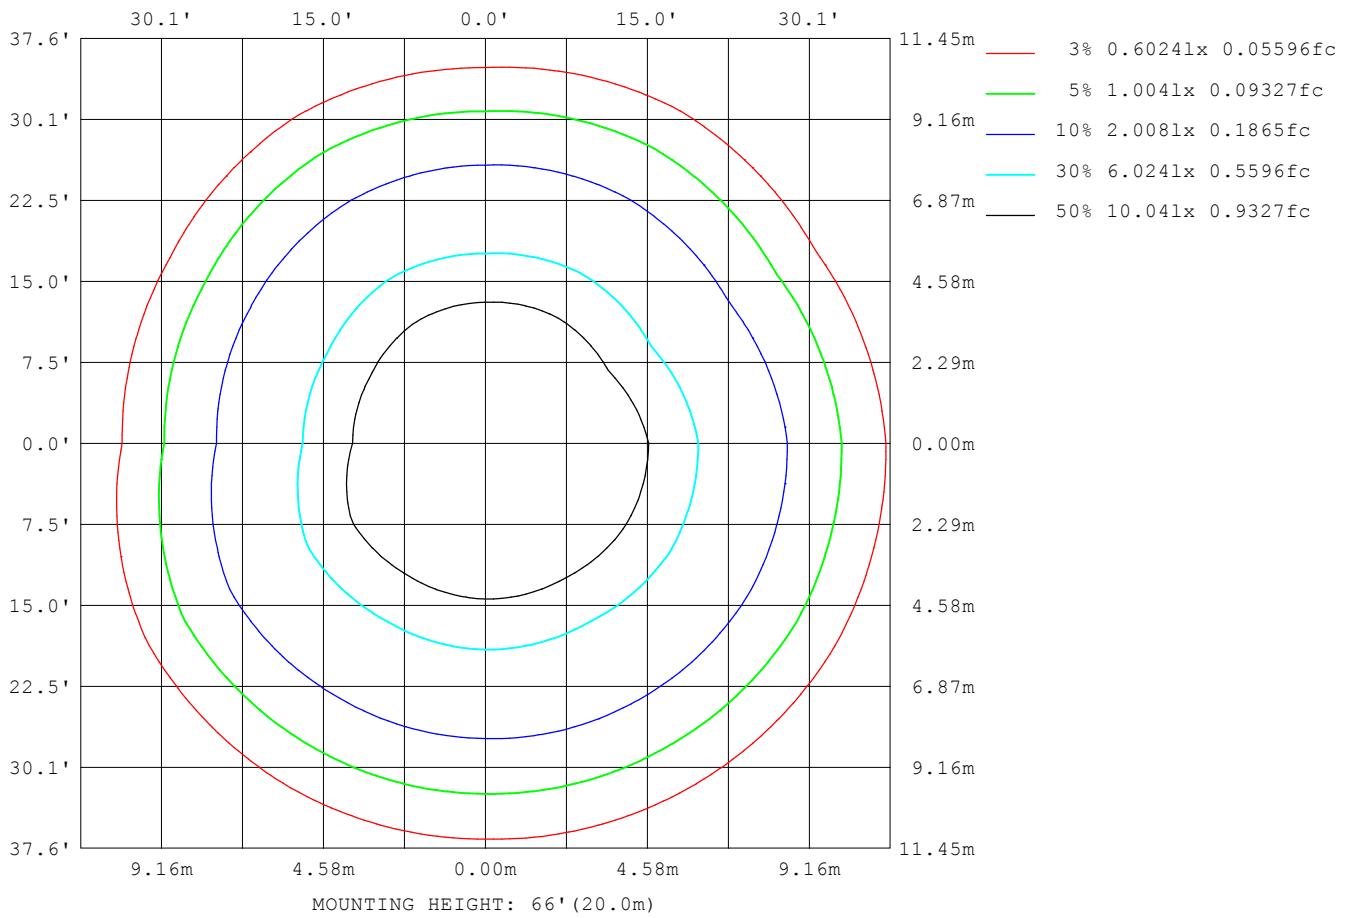

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

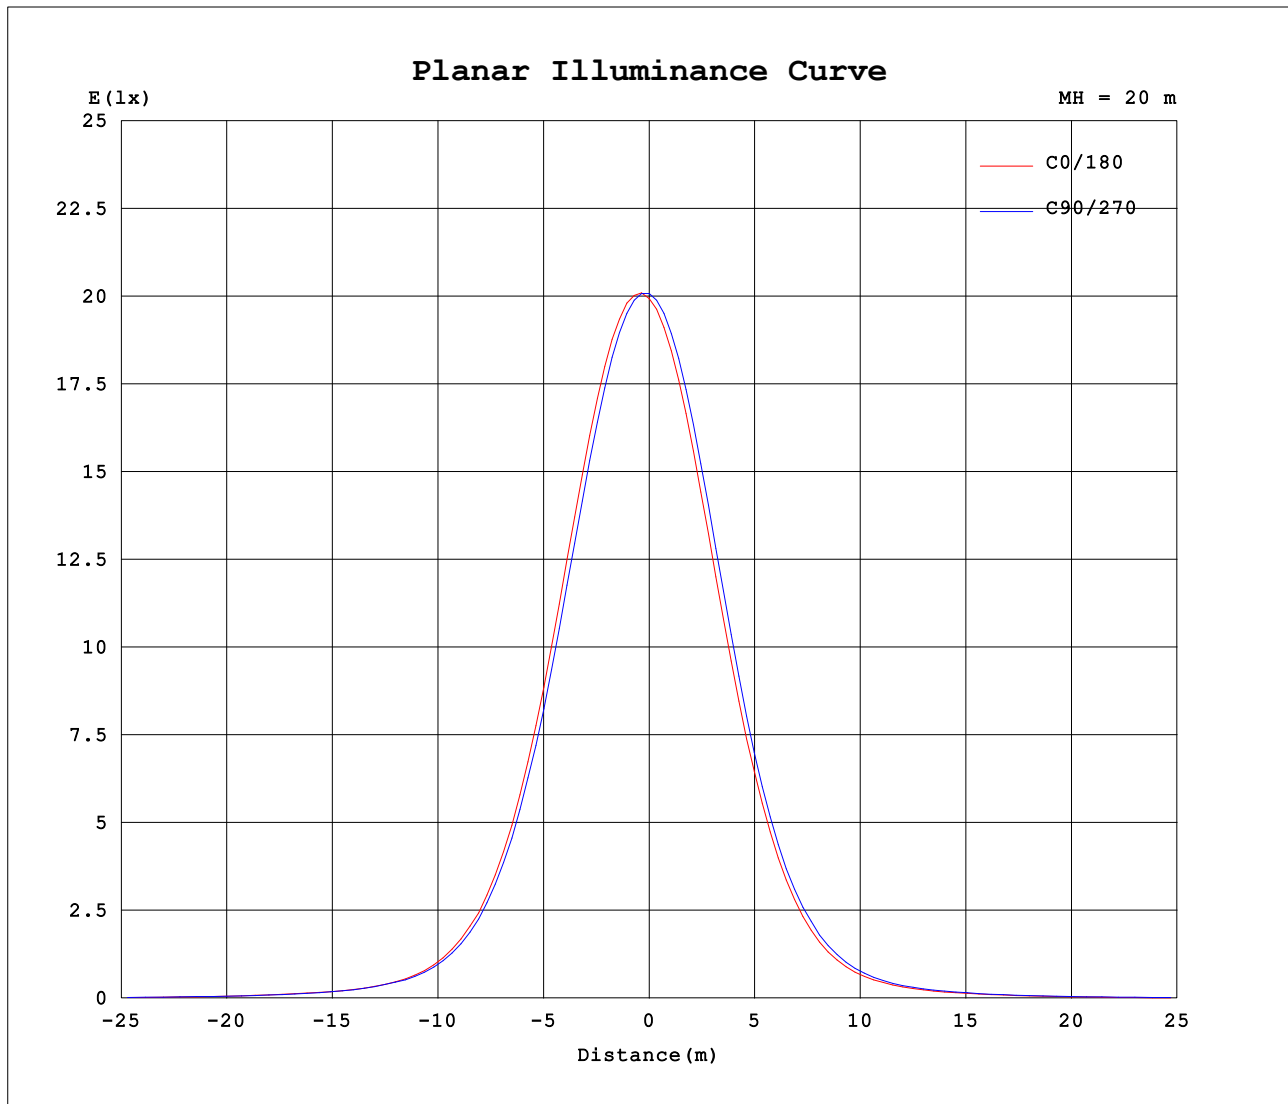


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-09-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.87V I:0.0840A P:18.100W PF:0.9000 Freq:49.99Hz Lamp Flux:108.019x18 lm		
NAME:Blazeline-609mm-3000K-25D-REV3	TYPE:3000K	WEIGHT:00
SPEC.:25 DEG	DIM.:609mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

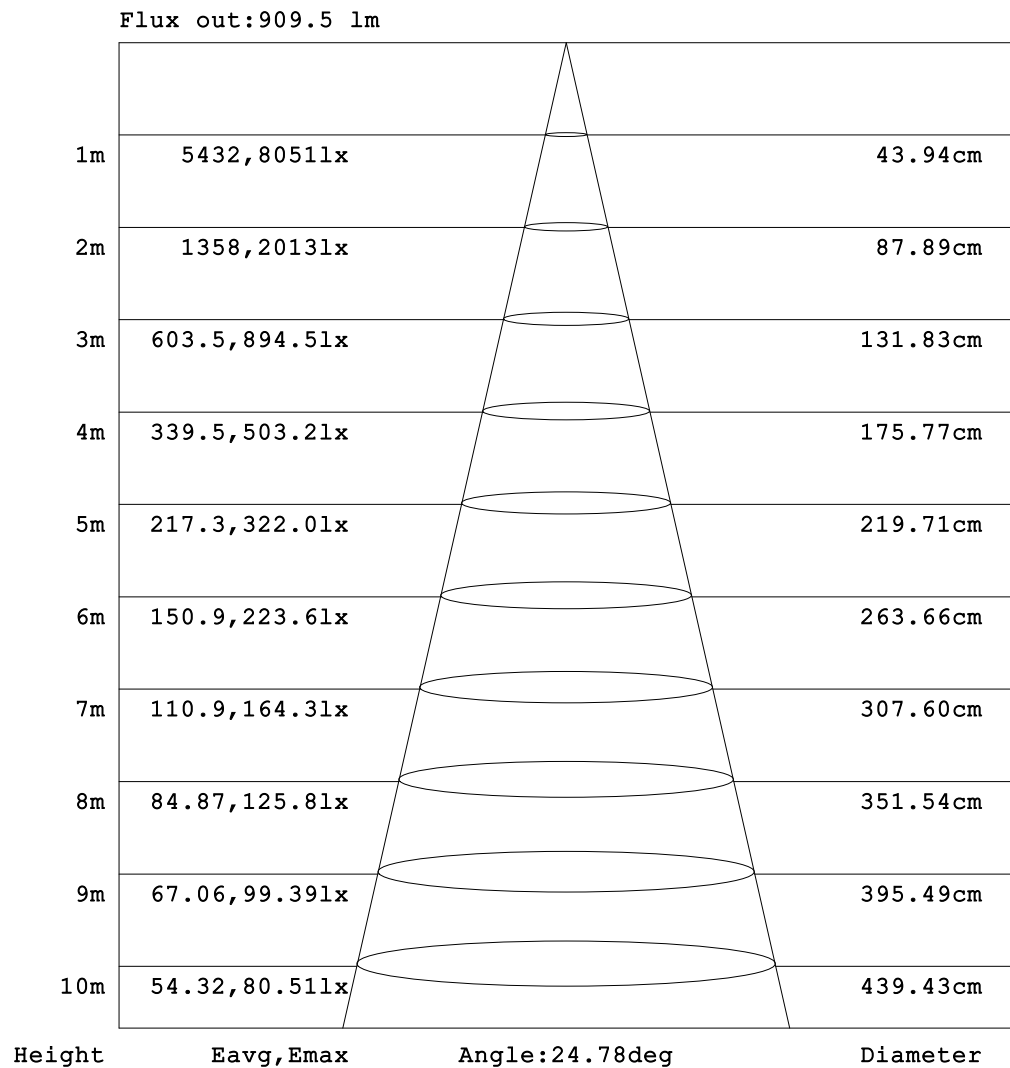

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:20DEG
 Operators:01
 Test Date:2025-09-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.700m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.87V I:0.0840A P:18.100W PF:0.9000 Freq:49.99Hz Lamp Flux:108.019x18 lm		
NAME:Blazeline-609mm-3000K-25D-REV3	TYPE:3000K	WEIGHT:00
SPEC.:25 DEG	DIM.:609mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.10	0.12	0.12	0.14	0.15	0.18	0.24	0.32	0.47	0.76	1.39	2.65	4.80	7.62	10.4	12.1	12.1	11.9	12.1
-170	0.10	0.12	0.12	0.14	0.15	0.19	0.24	0.33	0.47	0.74	1.33	2.47	4.41	7.02	9.78	11.8	12.6	12.4	12.2
-160	0.10	0.12	0.12	0.14	0.15	0.18	0.23	0.30	0.42	0.62	1.00	1.72	2.95	4.69	6.67	8.50	9.80	10.5	10.6
-150	0.10	0.12	0.12	0.13	0.15	0.17	0.21	0.27	0.35	0.48	0.66	0.97	1.49	2.24	3.21	4.22	5.04	5.58	5.77
-140	0.10	0.11	0.12	0.13	0.14	0.16	0.19	0.23	0.28	0.34	0.42	0.53	0.68	0.90	1.17	1.46	1.70	1.89	1.96
-130	0.10	0.11	0.12	0.13	0.14	0.15	0.16	0.19	0.21	0.24	0.27	0.31	0.35	0.40	0.46	0.52	0.58	0.62	0.64
-120	0.10	0.11	0.12	0.12	0.13	0.14	0.15	0.15	0.15	0.16	0.18	0.19	0.20	0.22	0.24	0.27	0.29	0.30	0.32
-110	0.10	0.11	0.12	0.12	0.12	0.13	0.13	0.13	0.13	0.13	0.13	0.12	0.12	0.13	0.14	0.16	0.17	0.18	0.19
-100	0.10	0.11	0.11	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.11	0.11	0.11	0.11	0.12	0.12	0.13	0.13	0.14
-90	0.10	0.11	0.11	0.12	0.12	0.12	0.13	0.13	0.13	0.14	0.14	0.14	0.14	0.14	0.13	0.12	0.12	0.11	0.10
-80	0.10	0.11	0.12	0.14	0.19	0.25	0.32	0.38	0.44	0.49	0.53	0.57	0.61	0.91	1.33	1.80	2.29	2.77	3.21
-70	0.10	0.11	0.16	0.28	0.43	0.60	0.71	0.85	1.07	1.33	1.68	2.18	2.75	3.76	4.97	6.10	7.15	8.12	9.00
-60	0.10	0.12	0.25	0.51	0.77	0.96	1.09	1.46	2.46	3.76	5.20	6.73	8.35	10.1	11.9	13.6	15.0	16.1	16.7
-50	0.10	0.13	0.38	0.77	1.07	1.32	2.10	3.75	6.13	8.98	12.3	16.7	21.9	27.5	32.6	37.2	40.8	43.2	44.1
-40	0.10	0.15	0.53	0.99	1.32	2.03	4.01	7.24	11.4	17.3	25.6	36.5	49.1	62.7	76.7	89.4	99.8	107	109
-30	0.10	0.18	0.67	1.17	1.62	3.09	6.31	10.9	17.9	29.7	47.3	67.9	92.9	125	165	218	272	313	326
-20	0.10	0.20	0.78	1.31	1.85	4.04	8.26	14.3	24.5	42.2	68.1	103	160	260	427	706	1071	1407	1567
-10	0.10	0.22	0.85	1.41	2.02	4.65	9.40	16.3	28.1	49.8	82.5	132	232	464	1038	2119	3511	4804	5431
0	0.10	0.22	0.88	1.46	2.01	4.68	9.43	15.9	27.0	49.3	82.6	132	233	483	1125	2468	4519	6740	7975
10	0.10	0.21	0.84	1.39	1.89	4.33	8.83	15.1	25.8	46.1	76.6	119	197	370	780	1585	2900	4267	4856
20	0.10	0.20	0.76	1.28	1.64	3.49	7.24	12.4	20.8	35.9	58.7	88.6	130	202	332	559	867	1145	1250
30	0.10	0.17	0.64	1.12	1.45	2.43	5.09	8.99	14.3	23.2	37.5	55.6	77.8	106	141	185	224	254	262
40	0.10	0.14	0.50	0.94	1.25	1.52	2.88	5.34	8.58	12.9	19.4	28.5	39.1	50.8	63.0	74.1	83.3	89.4	91.2
50	0.10	0.12	0.34	0.71	0.98	1.18	1.40	2.32	4.16	6.48	9.19	12.3	16.3	21.0	25.5	29.5	32.5	34.6	35.5
60	0.10	0.11	0.21	0.44	0.68	0.84	0.96	1.09	1.61	2.54	3.79	5.10	6.42	7.82	9.41	10.8	11.9	12.8	13.5
70	0.10	0.11	0.13	0.21	0.34	0.47	0.56	0.66	0.83	1.08	1.38	1.73	2.16	3.07	4.15	5.20	6.21	7.16	8.03
80	0.10	0.10	0.11	0.12	0.14	0.17	0.20	0.23	0.28	0.32	0.36	0.40	0.43	0.61	0.83	1.06	1.30	1.53	1.75
90	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09
100	0.10	0.11	0.11	0.11	0.11	0.10	0.10	0.10	0.10	0.10	0.10	0.11	0.11	0.11	0.11	0.10	0.10	0.10	0.09
110	0.10	0.11	0.11	0.11	0.11	0.10	0.10	0.10	0.11	0.11	0.12	0.13	0.14	0.14	0.15	0.14	0.14	0.13	0.13
120	0.10	0.11	0.11	0.11	0.11	0.11	0.10	0.10	0.11	0.13	0.15	0.17	0.20	0.22	0.23	0.22	0.22	0.22	0.22
130	0.10	0.11	0.11	0.11	0.12	0.11	0.11	0.12	0.14	0.18	0.22	0.26	0.31	0.36	0.40	0.44	0.46	0.48	0.48
140	0.10	0.11	0.12	0.12	0.12	0.12	0.14	0.16	0.19	0.25	0.32	0.42	0.56	0.73	0.94	1.15	1.34	1.49	1.55
150	0.10	0.11	0.12	0.12	0.13	0.14	0.17	0.21	0.27	0.36	0.52	0.79	1.22	1.81	2.56	3.36	4.08	4.59	4.79
160	0.10	0.12	0.12	0.13	0.14	0.16	0.19	0.26	0.36	0.53	0.86	1.48	2.53	4.03	5.76	7.35	8.54	9.29	9.52
170	0.10	0.12	0.12	0.13	0.14	0.18	0.22	0.30	0.43	0.69	1.23	2.29	4.09	6.49	9.03	10.9	11.7	11.8	11.8
180	0.10	0.12	0.12	0.14	0.15	0.18	0.24	0.32	0.47	0.76	1.39	2.65	4.80	7.62	10.4	12.1	12.1	11.9	12.1

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.87V I:0.0840A P:18.100W PF:0.9000 Freq:49.99Hz Lamp Flux:108.019x18 lm		
NAME:Blazeline-609mm-3000K-25D-REV3	TYPE:3000K	WEIGHT:00
SPEC.:25 DEG	DIM.:609mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	12.6	13.3	12.8	10.8	7.83	4.90	2.70	1.40	0.75	0.46	0.31	0.23	0.17	0.13	0.11	0.11	0.11	0.13	
-170	12.5	12.6	11.7	9.52	6.80	4.26	2.38	1.28	0.71	0.45	0.31	0.23	0.17	0.13	0.12	0.11	0.11	0.13	
-160	10.4	9.67	8.26	6.36	4.38	2.69	1.58	0.92	0.58	0.40	0.29	0.22	0.17	0.13	0.12	0.11	0.11	0.13	
-150	5.52	4.91	4.05	3.03	2.08	1.37	0.88	0.61	0.44	0.32	0.25	0.20	0.16	0.12	0.12	0.11	0.11	0.13	
-140	1.86	1.65	1.40	1.10	0.84	0.64	0.49	0.39	0.32	0.26	0.21	0.17	0.14	0.12	0.11	0.11	0.11	0.13	
-130	0.62	0.57	0.51	0.44	0.38	0.34	0.29	0.26	0.23	0.20	0.18	0.15	0.13	0.12	0.11	0.11	0.12	0.13	
-120	0.30	0.28	0.26	0.24	0.21	0.20	0.18	0.17	0.16	0.15	0.14	0.14	0.12	0.11	0.11	0.11	0.12	0.13	
-110	0.18	0.17	0.16	0.14	0.13	0.12	0.12	0.12	0.13	0.12	0.12	0.11	0.11	0.11	0.11	0.11	0.12	0.13	
-100	0.13	0.13	0.12	0.12	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.12	0.12	0.13	
-90	0.11	0.11	0.11	0.12	0.12	0.13	0.12	0.12	0.12	0.11	0.11	0.10	0.11	0.11	0.12	0.12	0.13	0.13	
-80	2.77	2.29	1.80	1.33	0.92	0.61	0.57	0.53	0.47	0.41	0.35	0.27	0.23	0.19	0.16	0.15	0.14	0.13	
-70	8.15	7.22	6.20	5.09	3.91	2.87	2.25	1.73	1.35	1.06	0.82	0.70	0.62	0.49	0.34	0.21	0.15	0.13	
-60	16.2	15.2	13.8	12.2	10.4	8.64	7.01	5.45	3.94	2.51	1.45	1.10	0.99	0.85	0.62	0.34	0.18	0.13	
-50	43.5	41.5	38.1	33.6	28.5	22.9	17.5	13.0	9.44	6.55	4.04	2.21	1.37	1.15	0.89	0.52	0.21	0.13	
-40	108	102	92.7	80.4	66.8	53.1	40.1	28.1	18.6	12.2	8.00	4.61	2.26	1.42	1.13	0.70	0.25	0.13	
-30	317	280	226	176	135	103	76.3	53.9	34.2	20.2	12.4	7.42	3.71	1.74	1.32	0.85	0.30	0.13	
-20	1437	1130	754	466	287	182	121	81.8	51.7	29.4	16.8	9.90	5.16	2.19	1.47	0.97	0.34	0.13	
-10	4925	3717	2319	1203	570	287	165	105	66.0	36.5	19.8	11.6	6.14	2.58	1.58	1.06	0.36	0.13	
0	7597	5743	3448	1697	750	341	183	114	70.7	37.7	20.2	12.0	6.42	2.69	1.65	1.10	0.37	0.13	
10	4446	3137	1796	951	481	256	153	99.5	61.8	33.6	18.4	10.9	5.78	2.43	1.56	1.05	0.36	0.13	
20	1186	928	618	379	236	153	107	72.1	44.4	24.8	14.6	8.80	4.54	1.98	1.44	0.96	0.33	0.13	
30	261	237	201	157	119	88.8	63.5	42.4	26.1	15.9	10.2	6.05	3.00	1.58	1.28	0.83	0.29	0.13	
40	91.4	87.0	78.9	67.9	55.2	42.7	31.0	20.9	13.7	9.10	5.88	3.35	1.73	1.34	1.08	0.66	0.25	0.13	
50	35.0	33.3	30.5	26.7	22.1	17.2	12.9	9.62	6.76	4.32	2.47	1.49	1.23	1.07	0.83	0.49	0.21	0.13	
60	12.9	12.1	11.0	9.70	8.14	6.67	5.29	3.91	2.59	1.61	1.08	0.96	0.89	0.76	0.55	0.32	0.18	0.13	
70	7.16	6.22	5.21	4.15	3.05	2.12	1.70	1.34	1.04	0.80	0.64	0.55	0.49	0.40	0.30	0.21	0.16	0.13	
80	1.53	1.30	1.06	0.82	0.60	0.41	0.38	0.35	0.31	0.26	0.23	0.20	0.19	0.18	0.17	0.15	0.14	0.13	
90	0.09	0.09	0.09	0.09	0.10	0.10	0.10	0.11	0.11	0.12	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	
100	0.10	0.10	0.10	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.12	0.12	0.13	0.13	
110	0.13	0.14	0.14	0.14	0.14	0.14	0.13	0.12	0.12	0.12	0.11	0.11	0.11	0.11	0.11	0.12	0.13	0.13	
120	0.22	0.22	0.22	0.22	0.21	0.19	0.17	0.14	0.13	0.12	0.11	0.11	0.11	0.11	0.11	0.11	0.12	0.13	
130	0.47	0.45	0.42	0.39	0.35	0.30	0.25	0.20	0.17	0.14	0.12	0.12	0.11	0.11	0.11	0.11	0.12	0.13	
140	1.47	1.31	1.12	0.90	0.69	0.53	0.40	0.30	0.23	0.18	0.15	0.13	0.12	0.11	0.11	0.11	0.11	0.13	
150	4.55	4.01	3.26	2.45	1.71	1.13	0.73	0.48	0.33	0.25	0.20	0.16	0.13	0.11	0.11	0.11	0.11	0.13	
160	9.29	8.49	7.20	5.54	3.79	2.34	1.37	0.80	0.50	0.33	0.24	0.19	0.14	0.12	0.11	0.11	0.11	0.13	
170	12.0	11.8	10.8	8.84	6.34	3.97	2.22	1.19	0.66	0.42	0.29	0.21	0.16	0.12	0.11	0.11	0.11	0.13	
180	12.6	13.3	12.8	10.8	7.83	4.90	2.70	1.40	0.75	0.46	0.31	0.23	0.17	0.13	0.11	0.11	0.11	0.13	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks: