

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		2226.8 cd per klm.
(Luminaire orientation as tested.)		1.0 degrees vertical
		1.5 degrees horizontal
Beam Spread	At 10% of Imax	65.7V x 64.9H
	At 50% of Imax	36.8V x 36.7H
	At 90% of Imax	14.6V x 14.1H
Beam Flux	Total	1000.3 lumens per klm.
	To 10% of Imax	891.9 lumens per klm.
	To 50% of Imax	512.3 lumens per klm.
	To 90% of Imax	99.1 lumens per klm.
	Upward LOR	0.6 %
	Downward LOR	99.5 %
Luminaire Efficiency (Light Output Ratio)		100.0 %

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-09-10

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.88V I:0.0840A P:18.200W PF:0.9000 Freq:49.99Hz Lamp Flux:99.2916x18 lm		
NAME:Blazeline-609mm-3000K-35D-REV3	TYPE:3000K	WEIGHT:00
SPEC.:35 DEG	DIM.:609mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

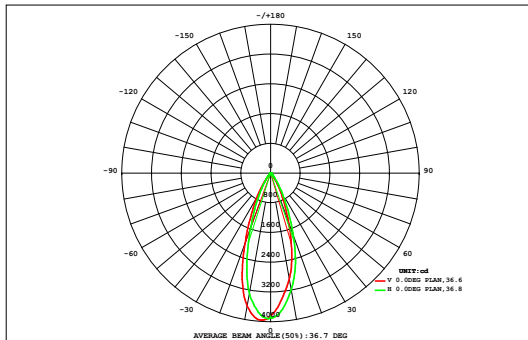

DATA OF LAMP		Eff:98.20lm/W	
MODEL		Imax(cd)	3980
NOMINAL POWER(W)	18	AVAILABILITY(%)	89.2
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	1595
NOMINAL FLUX(lm)	99.2916	LOR(%)	100.0
LAMPS INSIDE	18	TOTAL FLUX(lm)	1787
TEST VOLTAGE(V)	220	θ @50%(H,V)	37,37DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.04	0.06	0.10	0.15	0.24	0.35	0.46	0.55	0.60	0.60	0.56	0.48	0.36	0.25	0.16	0.10	0.07	0.04	5.16	0.00
45	0.04	0.06	0.10	0.15	0.24	0.35	0.46	0.55	0.60	0.60	0.56	0.48	0.36	0.25	0.16	0.10	0.07	0.04	5.16	0.00
40	0.06	0.09	0.16	0.30	0.53	0.81	1.06	1.26	1.36	1.38	1.30	1.12	0.86	0.58	0.34	0.19	0.10	0.06	11.5	0.00
35	0.08	0.14	0.29	0.58	1.03	1.57	2.07	2.49	2.72	2.76	2.59	2.21	1.72	1.17	0.69	0.35	0.17	0.09	22.7	3.95
30	0.11	0.22	0.49	1.02	1.79	2.76	3.81	4.70	5.24	5.32	4.92	4.09	3.05	2.07	1.24	0.64	0.28	0.13	41.9	31.1
25	0.14	0.32	0.78	1.64	2.90	4.56	6.50	8.22	9.28	9.45	8.67	7.06	5.11	3.35	2.00	1.04	0.46	0.19	71.7	63.5
20	0.19	0.46	1.15	2.41	4.27	6.85	10.1	13.1	15.0	15.4	14.0	11.1	7.82	5.01	2.96	1.54	0.67	0.26	112	106
15	0.23	0.59	1.53	3.21	5.71	9.32	14.0	18.6	21.5	22.1	20.3	15.9	10.9	6.96	4.13	2.14	0.90	0.34	158	153
10	0.26	0.70	1.85	3.89	7.01	11.6	17.2	22.4	26.0	27.2	25.2	20.2	14.3	9.08	5.31	2.71	1.10	0.40	196	191
5	0.27	0.73	2.02	4.28	7.76	13.0	18.9	23.9	27.9	29.8	28.0	23.7	17.2	10.8	6.20	3.14	1.23	0.43	219	215
0	0.29	0.79	2.11	4.44	8.08	13.5	19.4	24.2	28.0	29.3	28.1	24.1	17.8	11.1	6.37	3.23	1.27	0.44	222	218
-5	0.31	0.84	2.10	4.34	7.87	13.0	18.6	22.5	25.3	26.4	25.2	21.6	15.9	10.00	5.78	2.95	1.20	0.43	204	199
-10	0.30	0.80	1.91	3.84	6.85	11.0	15.4	19.0	21.4	22.1	20.7	17.3	12.7	8.15	4.80	2.47	1.03	0.38	170	165
-15	0.27	0.69	1.60	3.09	5.21	8.03	11.2	14.2	16.2	16.6	15.1	12.3	9.05	6.02	3.66	1.90	0.80	0.30	126	120
-20	0.21	0.52	1.20	2.22	3.61	5.40	7.41	9.32	10.6	10.8	9.77	8.01	6.00	4.11	2.53	1.33	0.56	0.23	83.8	76.2
-25	0.16	0.36	0.78	1.45	2.33	3.39	4.56	5.62	6.30	6.39	5.86	4.88	3.72	2.58	1.59	0.83	0.37	0.16	51.3	41.4
-30	0.11	0.23	0.47	0.87	1.40	2.00	2.64	3.19	3.55	3.59	3.31	2.80	2.17	1.52	0.94	0.50	0.23	0.11	29.6	12.6
-35	0.08	0.14	0.27	0.49	0.80	1.13	1.44	1.72	1.89	1.91	1.77	1.53	1.22	0.87	0.53	0.28	0.14	0.08	16.3	0.00
-40	0.05	0.09	0.14	0.25	0.41	0.58	0.74	0.87	0.94	0.95	0.90	0.78	0.63	0.44	0.26	0.15	0.09	0.06	8.33	0.00
-45	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL(DEG)	10	15	20	25	30	35	40	45			
Φ t	3.15	7.78	19.0	38.5	67.8	109	155	196	224	232	216	179	130	84.1	49.5	25.5	10.7	4.14	1752	---
Φ a	0.00	0.00	2.01	27.0	58.3	100	148	188	217	225	209	172	122	75.1	39.6	11.5	0.00	0.00	---	1595

one-half-peak spread: U:20.1,D:16.9 , L:20.5,R:16.4


NEMA Beam Type: Type 4

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-10

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.88V I:0.0840A P:18.200W PF:0.9000 Freq:49.99Hz Lamp Flux:99.2916x18 lm		
NAME:Blazeline-609mm-3000K-35D-REV3	TYPE:3000K	WEIGHT:00
SPEC.:35 DEG	DIM.:609mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

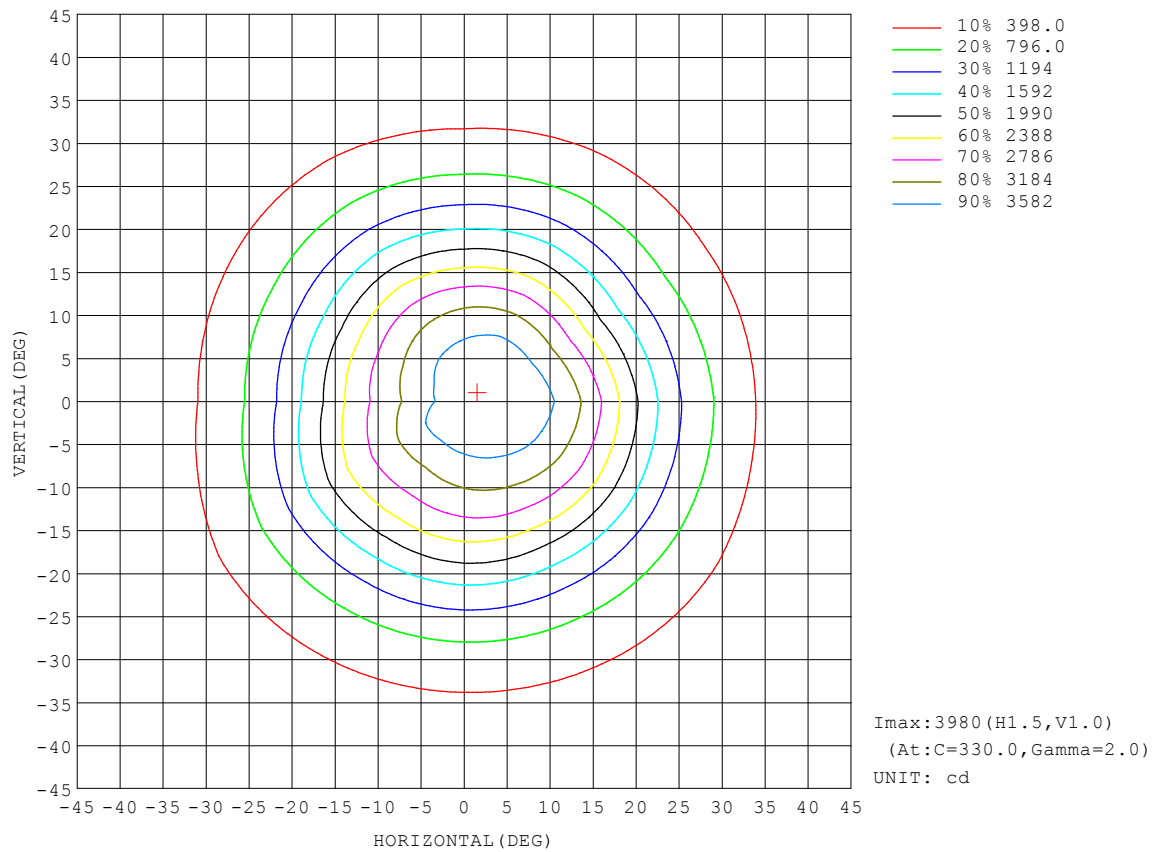


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-10

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.88V I:0.0840A P:18.200W PF:0.9000 Freq:49.99Hz Lamp Flux:99.2916x18 lm		
NAME:Blazeline-609mm-3000K-35D-REV3	TYPE:3000K	WEIGHT:00
SPEC.:35 DEG	DIM.:609mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

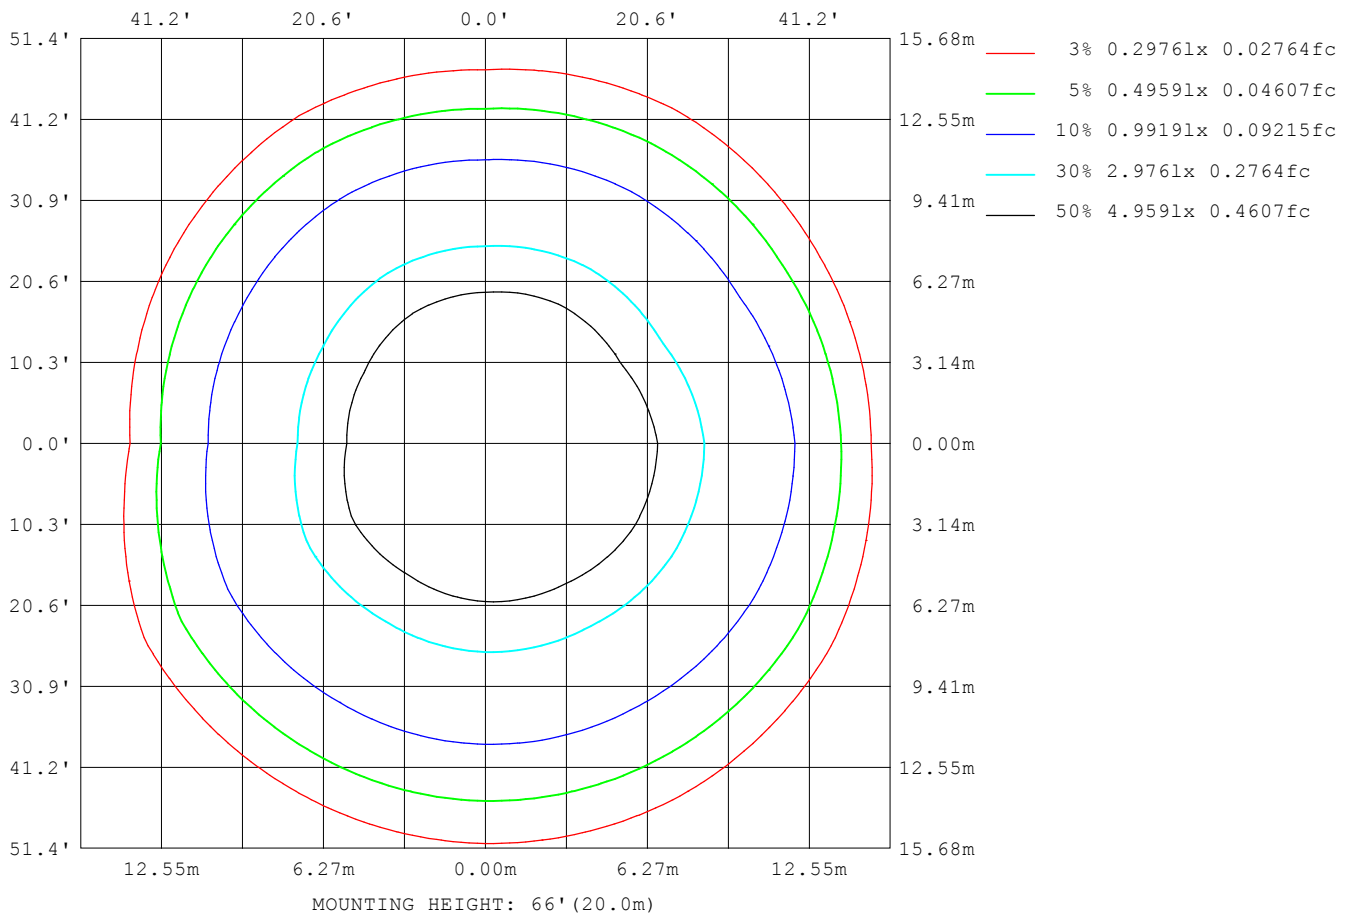

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:20DEG
 Operators:01
 Test Date:2025-09-10

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.700m [K=1.0000]
 Remarks:

Planar Illuminance Curve

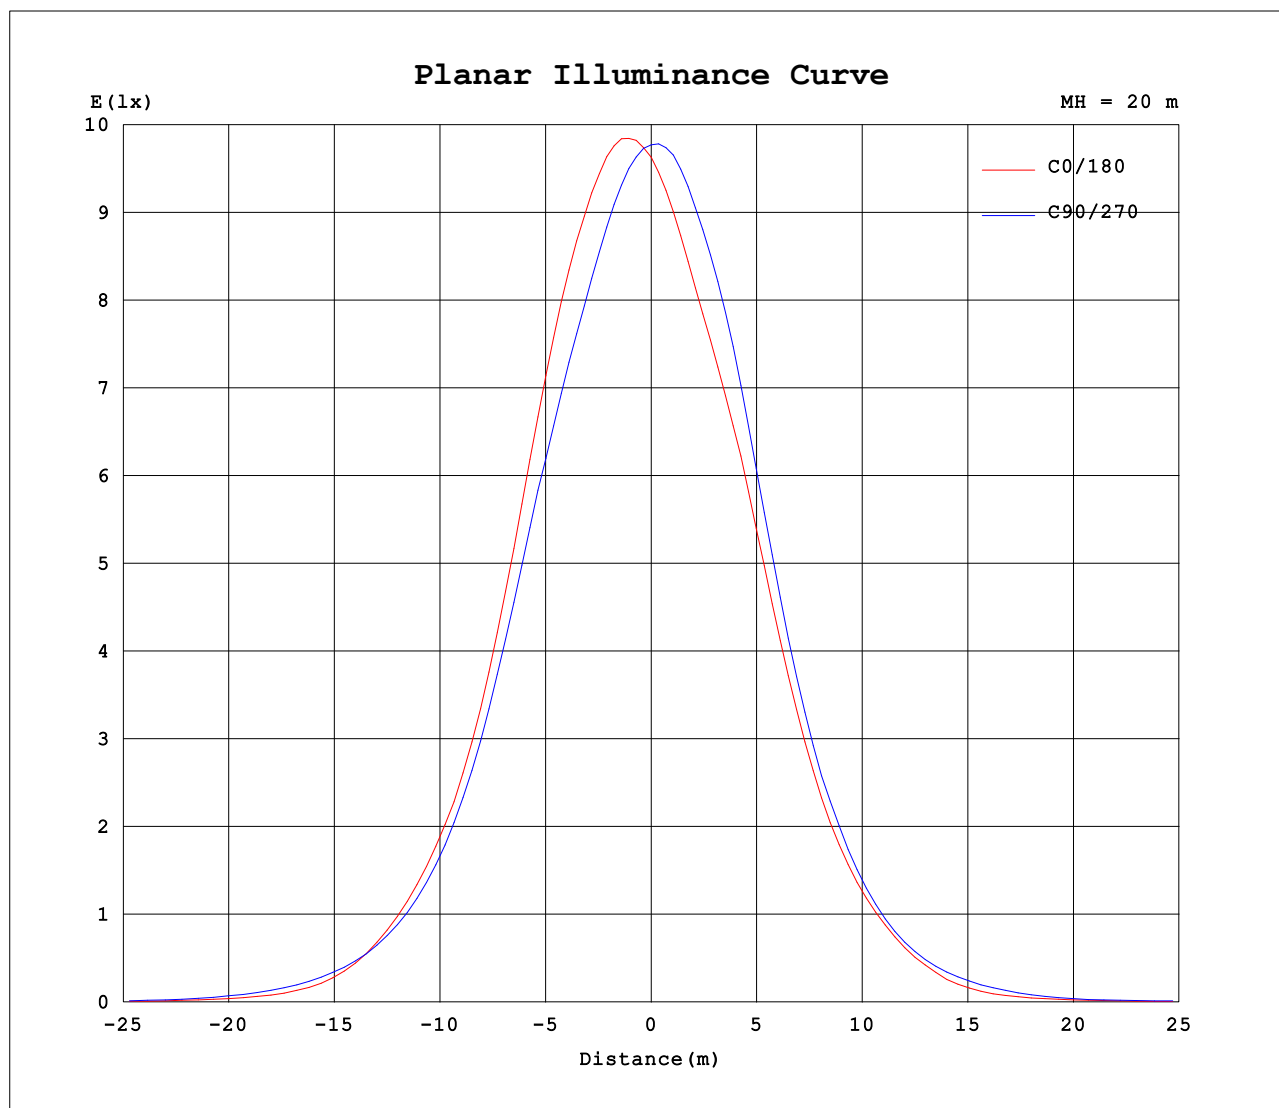


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-09-10

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.88V I:0.0840A P:18.200W PF:0.9000 Freq:49.99Hz Lamp Flux:99.2916x18 lm		
NAME:Blazeline-609mm-3000K-35D-REV3	TYPE:3000K	WEIGHT:00
SPEC.:35 DEG	DIM.:609mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

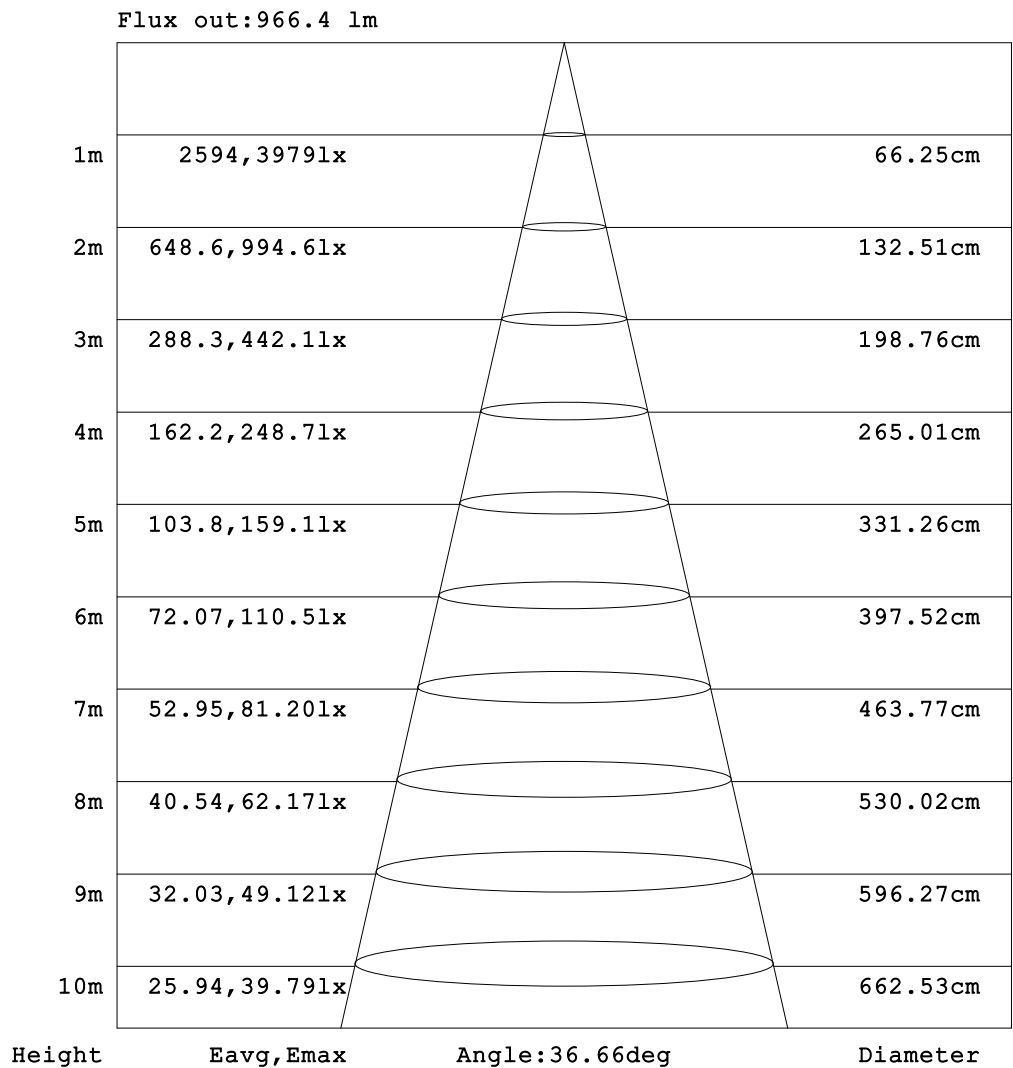

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 20DEG
 Operators: 01
 Test Date: 2025-09-10

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 7.700m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.88V I:0.0840A P:18.200W PF:0.9000 Freq:49.99Hz Lamp Flux:99.2916x18 lm		
NAME:Blazeline-609mm-3000K-35D-REV3	TYPE:3000K	WEIGHT:00
SPEC.:35 DEG	DIM.:609mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.08	0.09	0.10	0.11	0.12	0.14	0.19	0.32	0.61	1.17	2.04	3.34	4.98	6.67	8.09	9.05	9.80	10.6	11.1
-170	0.08	0.09	0.10	0.11	0.12	0.15	0.20	0.32	0.60	1.11	1.93	3.12	4.65	6.28	7.76	8.81	9.40	9.69	9.90
-160	0.08	0.09	0.10	0.11	0.12	0.15	0.19	0.29	0.50	0.87	1.48	2.34	3.48	4.74	5.97	6.95	7.64	8.07	8.21
-150	0.08	0.09	0.10	0.11	0.12	0.14	0.17	0.23	0.36	0.59	0.93	1.41	2.02	2.76	3.54	4.24	4.77	5.09	5.18
-140	0.08	0.09	0.10	0.11	0.11	0.13	0.15	0.18	0.25	0.35	0.49	0.69	0.95	1.26	1.58	1.88	2.13	2.28	2.32
-130	0.08	0.09	0.09	0.10	0.11	0.12	0.13	0.15	0.17	0.20	0.25	0.31	0.39	0.48	0.58	0.68	0.75	0.80	0.81
-120	0.08	0.09	0.09	0.10	0.10	0.11	0.11	0.12	0.13	0.13	0.15	0.15	0.17	0.19	0.22	0.25	0.28	0.29	0.31
-110	0.08	0.09	0.09	0.09	0.09	0.10	0.10	0.10	0.11	0.11	0.11	0.10	0.10	0.11	0.11	0.11	0.12	0.13	0.14
-100	0.08	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.10	0.10	0.10	0.10	0.11	0.11	0.12	0.13	0.14
-90	0.08	0.08	0.09	0.09	0.09	0.09	0.09	0.09	0.10	0.10	0.10	0.11	0.11	0.11	0.11	0.11	0.10	0.10	0.10
-80	0.08	0.09	0.09	0.13	0.19	0.27	0.35	0.41	0.46	0.51	0.53	0.55	0.55	0.70	0.90	1.11	1.32	1.52	1.71
-70	0.08	0.09	0.15	0.32	0.53	0.71	0.80	0.90	1.08	1.31	1.56	1.83	2.11	3.18	4.73	6.40	8.12	9.79	11.4
-60	0.08	0.10	0.29	0.65	0.96	1.15	1.27	1.35	1.72	2.37	3.30	4.35	5.37	6.86	9.93	12.9	15.8	18.6	21.2
-50	0.08	0.12	0.49	1.00	1.36	1.60	1.76	2.18	3.34	4.92	6.70	8.86	11.6	15.1	19.8	24.6	29.1	32.3	33.7
-40	0.08	0.16	0.71	1.32	1.75	2.05	2.61	3.99	6.11	9.27	14.1	22.7	39.1	65.7	98.9	127	150	169	176
-30	0.08	0.20	0.91	1.59	2.09	2.55	3.81	6.10	9.85	16.9	32.3	66.3	127	209	306	413	517	596	631
-20	0.08	0.24	1.08	1.82	2.40	3.04	4.90	8.04	14.0	27.7	62.9	149	301	495	756	1075	1391	1666	1802
-10	0.08	0.26	1.20	2.01	2.63	3.45	5.62	9.31	16.8	35.1	84.5	208	442	806	1350	2029	2593	2945	3192
0	0.08	0.27	1.26	2.12	2.79	3.61	5.75	9.33	16.1	30.9	69.2	191	460	844	1430	2209	2895	3417	3851
10	0.08	0.26	1.19	1.99	2.61	3.30	5.30	8.62	14.9	28.6	64.8	167	381	697	1156	1770	2481	3019	3292
20	0.08	0.23	1.06	1.80	2.37	2.81	4.36	6.95	11.5	20.6	41.3	96.2	213	391	630	931	1252	1497	1595
30	0.08	0.20	0.88	1.56	2.06	2.35	3.20	4.98	7.73	12.3	21.1	39.7	81.2	150	238	330	416	478	498
40	0.08	0.15	0.67	1.28	1.70	1.98	2.19	3.03	4.51	6.77	10.1	15.2	23.7	37.9	60.9	84.0	104	118	121
50	0.08	0.11	0.45	0.95	1.30	1.54	1.67	1.73	2.33	3.48	4.91	6.50	8.35	10.6	14.8	18.7	21.7	23.8	25.2
60	0.08	0.09	0.25	0.57	0.89	1.06	1.16	1.26	1.49	1.78	2.24	2.89	3.67	5.25	8.90	12.9	16.8	20.7	24.4
70	0.08	0.08	0.13	0.25	0.42	0.58	0.68	0.75	0.85	0.99	1.17	1.37	1.56	2.49	3.91	5.49	7.13	8.77	10.3
80	0.08	0.09	0.09	0.10	0.14	0.18	0.22	0.26	0.31	0.35	0.38	0.41	0.43	0.58	0.75	0.93	1.11	1.29	1.45
90	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.09	0.09	0.09	0.09	0.09
100	0.08	0.09	0.09	0.09	0.09	0.08	0.08	0.08	0.09	0.09	0.09	0.09	0.10	0.10	0.09	0.09	0.09	0.09	0.09
110	0.08	0.09	0.09	0.09	0.09	0.09	0.08	0.09	0.09	0.10	0.10	0.11	0.12	0.12	0.12	0.12	0.12	0.11	0.11
120	0.08	0.09	0.09	0.09	0.09	0.09	0.09	0.08	0.09	0.10	0.12	0.15	0.18	0.21	0.22	0.23	0.24	0.25	0.25
130	0.08	0.09	0.09	0.10	0.09	0.09	0.09	0.09	0.10	0.14	0.20	0.27	0.37	0.47	0.56	0.65	0.72	0.76	0.78
140	0.08	0.09	0.09	0.10	0.10	0.10	0.10	0.12	0.16	0.26	0.40	0.61	0.86	1.16	1.47	1.74	1.97	2.13	2.19
150	0.08	0.09	0.10	0.10	0.11	0.11	0.13	0.17	0.28	0.48	0.80	1.26	1.83	2.51	3.22	3.85	4.35	4.66	4.76
160	0.08	0.09	0.10	0.10	0.11	0.12	0.16	0.24	0.43	0.79	1.36	2.16	3.23	4.41	5.54	6.45	7.11	7.55	7.67
170	0.08	0.09	0.10	0.10	0.11	0.14	0.18	0.30	0.57	1.06	1.85	3.01	4.48	6.05	7.40	8.41	9.14	9.64	9.81
180	0.08	0.09	0.10	0.11	0.12	0.14	0.19	0.32	0.61	1.17	2.04	3.34	4.98	6.67	8.09	9.05	9.80	10.6	11.1

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-10

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.88V I:0.0840A P:18.200W PF:0.9000 Freq:49.99Hz Lamp Flux:99.2916x18 lm		
NAME:Blazeline-609mm-3000K-35D-REV3	TYPE:3000K	WEIGHT:00
SPEC.:35 DEG	DIM.:609mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	10.8	10.3	9.33	8.01	6.36	4.64	3.12	1.92	1.10	0.59	0.31	0.18	0.12	0.10	0.09	0.09	0.09	0.11	
-170	9.82	9.38	8.49	7.23	5.74	4.19	2.82	1.74	1.01	0.55	0.30	0.18	0.13	0.11	0.09	0.09	0.09	0.11	
-160	7.98	7.43	6.56	5.46	4.21	3.03	2.03	1.29	0.77	0.44	0.26	0.17	0.13	0.11	0.10	0.09	0.09	0.11	
-150	4.98	4.56	3.95	3.22	2.46	1.77	1.21	0.79	0.50	0.32	0.21	0.15	0.12	0.10	0.10	0.09	0.09	0.11	
-140	2.22	2.02	1.75	1.45	1.13	0.84	0.60	0.43	0.31	0.23	0.17	0.14	0.12	0.10	0.10	0.09	0.09	0.11	
-130	0.78	0.72	0.63	0.53	0.43	0.35	0.28	0.23	0.19	0.16	0.14	0.13	0.11	0.10	0.10	0.09	0.09	0.11	
-120	0.29	0.27	0.24	0.21	0.17	0.16	0.15	0.14	0.13	0.13	0.12	0.11	0.11	0.10	0.10	0.09	0.09	0.11	
-110	0.17	0.15	0.14	0.12	0.11	0.10	0.10	0.10	0.10	0.11	0.11	0.10	0.10	0.10	0.09	0.09	0.09	0.11	
-100	0.13	0.12	0.11	0.11	0.10	0.09	0.09	0.10	0.10	0.10	0.10	0.10	0.09	0.09	0.09	0.09	0.09	0.11	
-90	0.10	0.10	0.11	0.11	0.11	0.11	0.11	0.11	0.10	0.10	0.10	0.10	0.10	0.10	0.11	0.11	0.11	0.11	
-80	1.53	1.34	1.15	0.95	0.78	0.62	0.60	0.57	0.53	0.48	0.42	0.35	0.32	0.27	0.22	0.17	0.14	0.11	
-70	9.68	7.91	6.11	4.38	2.78	1.73	1.58	1.43	1.27	1.11	0.97	0.88	0.82	0.68	0.49	0.31	0.19	0.11	
-60	18.5	15.7	12.7	9.49	6.15	4.53	3.65	2.87	2.22	1.75	1.50	1.42	1.32	1.15	0.89	0.52	0.25	0.11	
-50	32.8	29.9	25.6	20.6	15.7	11.7	8.87	6.64	4.87	3.41	2.37	1.95	1.82	1.59	1.26	0.78	0.31	0.11	
-40	173	158	135	108	71.0	41.4	23.7	14.4	9.47	6.34	4.32	2.91	2.28	2.00	1.58	1.04	0.39	0.11	
-30	612	544	444	335	228	135	68.4	32.7	17.6	10.5	6.65	4.32	2.86	2.37	1.88	1.26	0.47	0.11	
-20	1728	1490	1184	858	574	344	167	69.4	30.9	15.6	9.07	5.63	3.58	2.67	2.13	1.42	0.53	0.11	
-10	3181	2908	2355	1622	1014	588	282	111	44.6	20.4	11.0	6.62	4.16	2.93	2.33	1.54	0.57	0.11	
0	3949	3634	2961	2031	1228	708	327	121	47.9	21.7	11.6	7.00	4.44	3.11	2.46	1.61	0.59	0.11	
10	3253	2796	2071	1406	899	523	251	102	41.1	18.9	10.3	6.29	3.98	2.88	2.31	1.53	0.57	0.11	
20	1557	1352	1037	722	463	271	136	57.8	26.3	13.6	8.03	5.07	3.28	2.59	2.10	1.41	0.52	0.11	
30	492	439	357	269	176	103	50.6	25.1	13.8	8.52	5.52	3.62	2.56	2.27	1.83	1.23	0.46	0.11	
40	120	108	88.1	65.3	41.4	26.0	16.5	10.7	7.15	4.72	3.22	2.34	2.07	1.89	1.53	1.01	0.38	0.11	
50	24.0	22.1	19.2	15.4	11.3	9.09	7.27	5.69	4.00	2.45	1.71	1.67	1.66	1.49	1.21	0.75	0.30	0.11	
60	21.0	17.5	13.9	10.3	7.03	5.24	3.87	2.77	1.97	1.52	1.24	1.22	1.20	1.08	0.82	0.49	0.24	0.11	
70	8.87	7.33	5.76	4.25	2.87	1.92	1.62	1.35	1.10	0.92	0.81	0.76	0.71	0.59	0.44	0.29	0.18	0.11	
80	1.28	1.10	0.92	0.74	0.56	0.42	0.42	0.40	0.38	0.34	0.29	0.24	0.24	0.22	0.19	0.17	0.14	0.11	
90	0.09	0.09	0.09	0.09	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.09	0.09	0.10	0.10	0.11	0.11
100	0.09	0.09	0.09	0.10	0.10	0.10	0.10	0.09	0.09	0.09	0.08	0.08	0.08	0.09	0.09	0.09	0.09	0.11	
110	0.11	0.12	0.12	0.13	0.12	0.12	0.11	0.10	0.09	0.09	0.09	0.08	0.08	0.09	0.09	0.09	0.09	0.11	
120	0.25	0.24	0.23	0.22	0.21	0.18	0.15	0.13	0.11	0.09	0.08	0.08	0.09	0.09	0.09	0.09	0.09	0.11	
130	0.76	0.70	0.63	0.55	0.47	0.36	0.27	0.20	0.15	0.11	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.11	
140	2.10	1.92	1.68	1.40	1.10	0.81	0.58	0.39	0.25	0.16	0.12	0.10	0.09	0.09	0.09	0.09	0.09	0.11	
150	4.58	4.20	3.66	3.00	2.32	1.68	1.15	0.73	0.45	0.27	0.17	0.12	0.10	0.09	0.09	0.09	0.09	0.11	
160	7.45	6.90	6.10	5.09	3.96	2.86	1.94	1.23	0.73	0.41	0.23	0.15	0.11	0.10	0.09	0.09	0.09	0.11	
170	9.72	9.05	8.03	6.86	5.50	4.05	2.75	1.71	0.99	0.54	0.29	0.17	0.12	0.10	0.09	0.09	0.09	0.11	
180	10.8	10.3	9.33	8.01	6.36	4.64	3.12	1.92	1.10	0.59	0.31	0.18	0.12	0.10	0.09	0.09	0.09	0.11	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-10

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks: