

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	1389.2 cd per klm.
(Luminaire orientation as tested.)	2.0 degrees vertical
	3.5 degrees horizontal

Beam Spread	At 10% of Imax	84.2V x 82.6H
	At 50% of Imax	46.1V x 46.6H
	At 90% of Imax	20.5V x 20.4H

Beam Flux	Total	1000.2 lumens per klm.
	To 10% of Imax	900.9 lumens per klm.
	To 50% of Imax	516.6 lumens per klm.
	To 90% of Imax	121.7 lumens per klm.

Upward LOR	0.6 %
Downward LOR	99.5 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-09-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.87V I:0.0840A P:18.100W PF:0.9000 Freq:49.99Hz Lamp Flux:88.4106x18 lm		
NAME:Blazeline-609mm-3000K-45D-REV3	TYPE:3000K	WEIGHT:00
SPEC.:45 DEG	DIM.:609mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

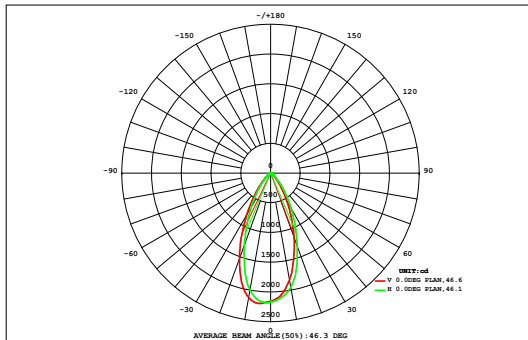

DATA OF LAMP		Eff:87.92lm/W	
MODEL		Imax(cd)	2211
NOMINAL POWER(W)	18	AVAILABILITY(%)	90.1
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	1434
NOMINAL FLUX(lm)	88.4106	LOR(%)	100.0
LAMPS INSIDE	18	TOTAL FLUX(lm)	1591
TEST VOLTAGE(V)	220	θ @50% (H,V)	47,46DEG

72 64 56 48 40 32 24 -24 -32 -40 -48 -56 -64 -72	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a	
	0.01	0.01	0.02	0.03	0.05	0.08	0.17	0.27	0.37	0.37	0.27	0.17	0.08	0.04	0.03	0.02	0.01	0.01	2.01	0.00	
	0.01	0.02	0.03	0.05	0.10	0.18	0.30	0.43	0.53	0.53	0.43	0.30	0.18	0.10	0.05	0.03	0.02	0.01	3.30	0.00	
	0.02	0.03	0.05	0.12	0.27	0.50	0.80	1.07	1.24	1.24	1.08	0.81	0.50	0.26	0.11	0.04	0.02	0.01	8.18	0.00	
	0.02	0.04	0.10	0.28	0.65	1.25	2.01	2.69	3.07	3.11	2.77	2.10	1.32	0.68	0.28	0.09	0.03	0.02	20.5	1.19	
	0.02	0.05	0.19	0.55	1.32	2.62	4.43	6.16	7.27	7.38	6.44	4.73	2.86	1.45	0.59	0.19	0.05	0.02	46.3	34.3	
	0.03	0.08	0.32	0.94	2.27	4.72	8.27	12.0	14.4	14.8	12.8	9.10	5.33	2.61	1.08	0.36	0.09	0.03	89.3	80.9	
	0.03	0.12	0.45	1.36	3.43	7.37	13.3	19.7	24.2	25.1	21.5	15.0	8.61	4.16	1.68	0.55	0.14	0.03	147	140	
	0.03	0.15	0.56	1.73	4.52	9.92	17.9	27.2	34.6	36.0	30.4	21.2	12.3	5.86	2.29	0.73	0.18	0.04	206	200	
	0.04	0.16	0.62	1.93	5.13	11.4	20.9	31.8	40.0	42.0	36.9	26.4	15.3	7.16	2.72	0.85	0.21	0.04	244	238	
	0.04	0.17	0.64	2.01	5.31	11.7	21.4	32.4	39.7	41.3	37.5	27.1	15.8	7.40	2.81	0.88	0.22	0.04	246	241	
	0.04	0.16	0.62	1.94	5.03	10.9	19.2	28.0	34.3	35.7	31.2	22.7	13.6	6.50	2.54	0.81	0.20	0.04	213	208	
	0.03	0.14	0.53	1.63	4.12	8.52	14.4	20.3	24.6	25.4	22.3	16.5	10.1	4.99	2.02	0.66	0.16	0.03	156	150	
	0.03	0.10	0.40	1.20	2.88	5.58	9.26	13.0	15.4	15.8	13.9	10.3	6.39	3.33	1.41	0.46	0.12	0.03	99.6	91.8	
	0.03	0.07	0.26	0.75	1.70	3.19	5.10	7.04	8.32	8.48	7.43	5.55	3.55	1.92	0.84	0.28	0.07	0.02	54.6	43.4	
	0.02	0.05	0.15	0.39	0.87	1.60	2.47	3.31	3.87	3.93	3.46	2.65	1.75	0.95	0.42	0.15	0.04	0.02	26.1	5.59	
	0.02	0.03	0.07	0.18	0.37	0.67	1.03	1.36	1.56	1.58	1.41	1.09	0.70	0.39	0.18	0.07	0.03	0.02	10.7	0.00	
	0.01	0.02	0.04	0.07	0.14	0.24	0.38	0.51	0.62	0.62	0.52	0.38	0.24	0.14	0.07	0.03	0.02	0.01	4.09	0.00	
	0.01	0.02	0.02	0.04	0.06	0.10	0.19	0.29	0.39	0.39	0.29	0.19	0.10	0.06	0.03	0.02	0.01	0.01	2.22	0.00	
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)				16	24	32	40	48	56	64	72	
Φ t	0.43	1.41	5.06	15.2	38.2	80.5	142	208	255	264	231	166	98.7	48.0	19.1	6.23	1.63	0.43	1579	---	
Φ a	0.00	0.00	0.00	0.00	24.9	70.2	132	198	245	254	221	157	89.2	37.0	3.87	0.00	0.00	0.00	---	1434	

one-half-peak spread: U:26.5,D:19.9 , L:27.1,R:19.8


NEMA Beam Type: Type 5

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.87V I:0.0840A P:18.100W PF:0.9000 Freq:49.99Hz Lamp Flux:88.4106x18 lm		
NAME:Blazeline-609mm-3000K-45D-REV3	TYPE:3000K	WEIGHT:00
SPEC.:45 DEG	DIM.:609mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

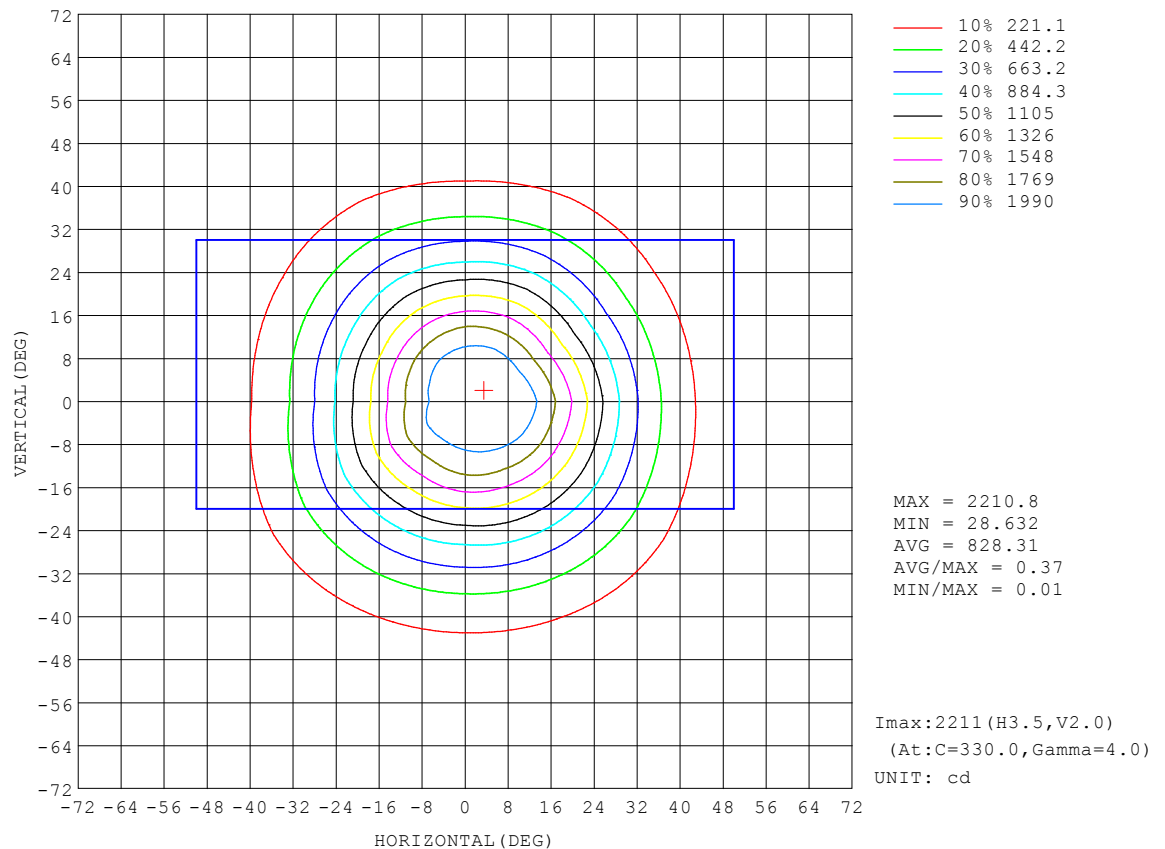


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.87V I:0.0840A P:18.100W PF:0.9000 Freq:49.99Hz Lamp Flux:88.4106x18 lm		
NAME:Blazeline-609mm-3000K-45D-REV3	TYPE:3000K	WEIGHT:00
SPEC.:45 DEG	DIM.:609mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

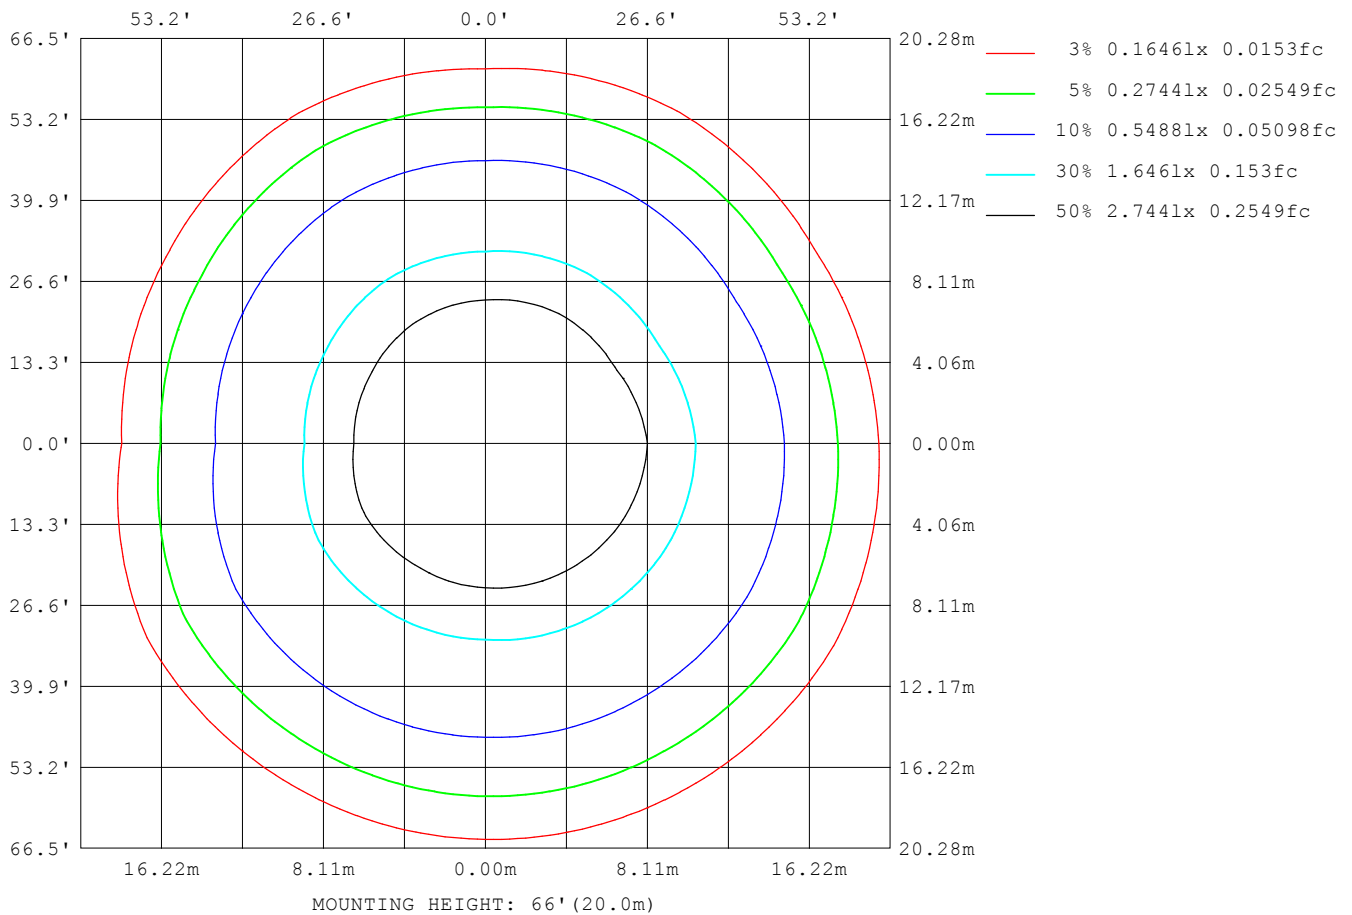

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

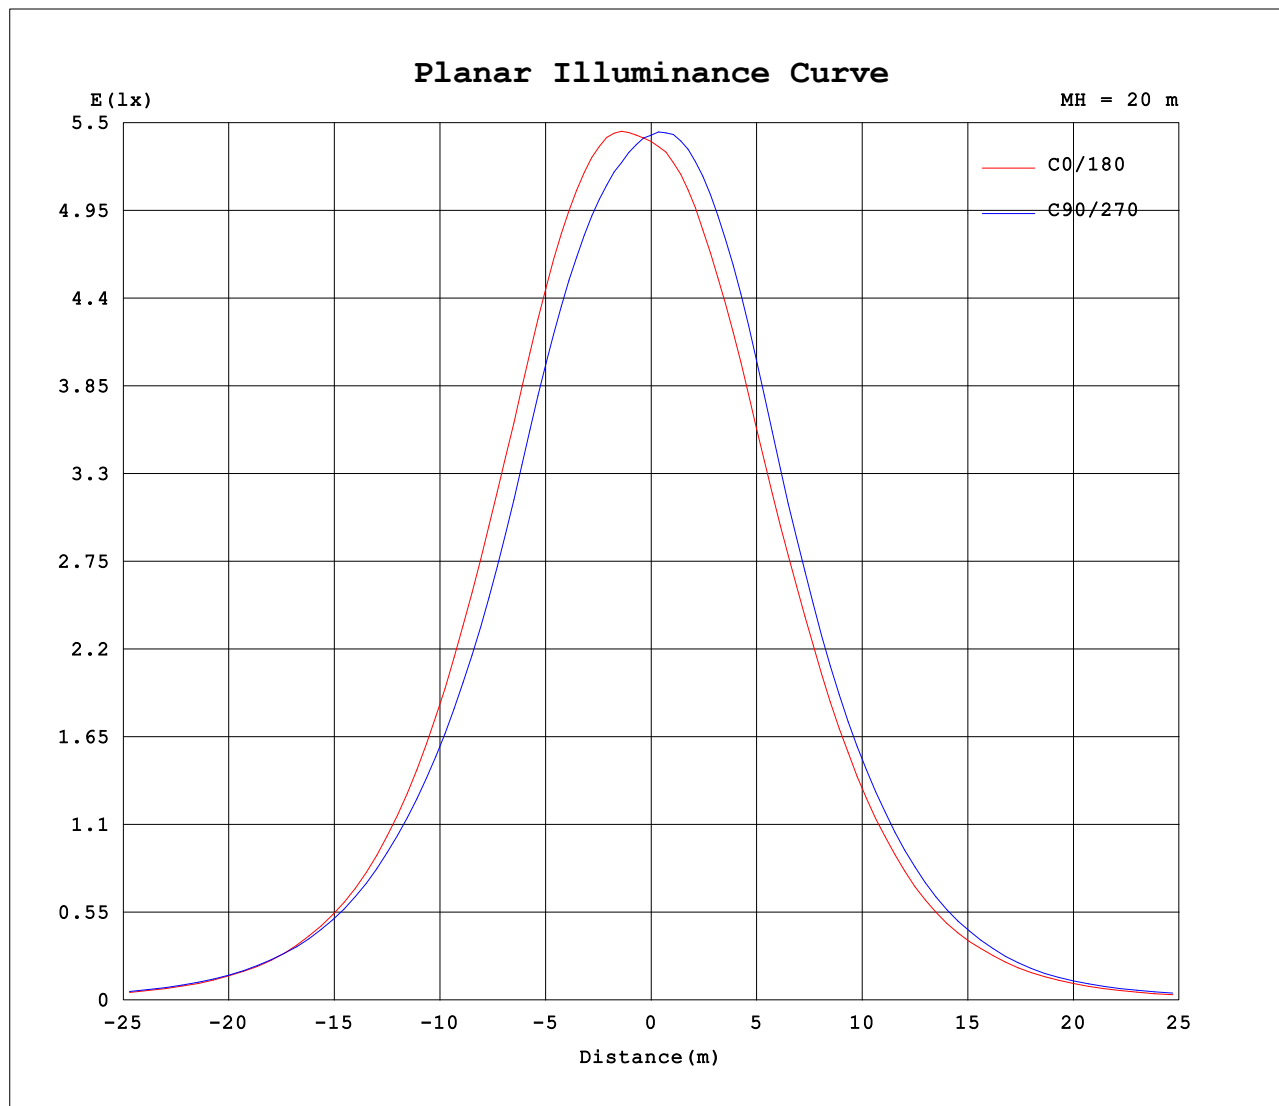


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-09-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.87V I:0.0840A P:18.100W PF:0.9000 Freq:49.99Hz Lamp Flux:88.4106x18 lm		
NAME:Blazeline-609mm-3000K-45D-REV3	TYPE:3000K	WEIGHT:00
SPEC.:45 DEG	DIM.:609mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

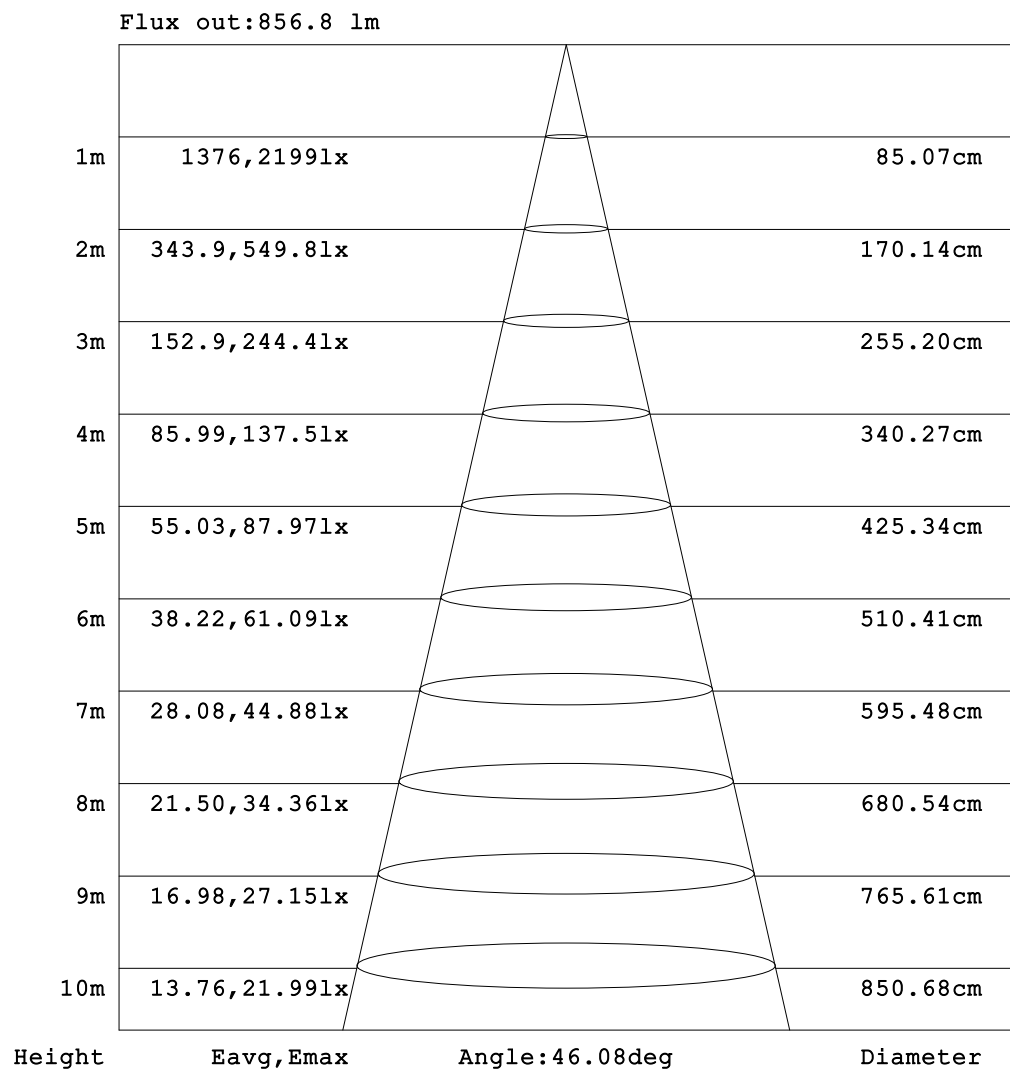

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:20DEG
 Operators:01
 Test Date:2025-09-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.700m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.87V I:0.0840A P:18.100W PF:0.9000 Freq:49.99Hz Lamp Flux:88.4106x18 lm		
NAME:Blazeline-609mm-3000K-45D-REV3	TYPE:3000K	WEIGHT:00
SPEC.:45 DEG	DIM.:609mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.09	0.10	0.10	0.12	0.16	0.25	0.39	0.64	1.03	1.58	2.31	3.18	4.12	5.05	5.89	6.56	7.07	7.58	7.78
-170	0.09	0.10	0.10	0.12	0.16	0.24	0.38	0.63	1.00	1.52	2.21	3.05	3.97	4.89	5.72	6.37	6.78	7.00	7.14
-160	0.09	0.10	0.10	0.12	0.15	0.22	0.35	0.54	0.85	1.28	1.83	2.53	3.29	4.06	4.74	5.30	5.68	5.92	5.99
-150	0.09	0.10	0.10	0.11	0.14	0.19	0.28	0.43	0.64	0.94	1.33	1.76	2.28	2.82	3.32	3.76	4.08	4.27	4.33
-140	0.09	0.10	0.10	0.11	0.13	0.16	0.22	0.31	0.43	0.60	0.81	1.07	1.35	1.64	1.92	2.17	2.37	2.49	2.53
-130	0.09	0.10	0.10	0.10	0.11	0.13	0.17	0.21	0.27	0.35	0.44	0.55	0.68	0.81	0.94	1.05	1.13	1.19	1.21
-120	0.09	0.10	0.11	0.10	0.10	0.12	0.13	0.15	0.17	0.19	0.23	0.26	0.30	0.35	0.40	0.44	0.48	0.50	0.51
-110	0.09	0.10	0.11	0.11	0.10	0.10	0.10	0.11	0.11	0.12	0.12	0.12	0.13	0.15	0.17	0.19	0.21	0.23	0.24
-100	0.09	0.10	0.11	0.12	0.13	0.13	0.14	0.12	0.11	0.10	0.10	0.10	0.10	0.11	0.11	0.12	0.13	0.13	0.14
-90	0.09	0.10	0.12	0.13	0.14	0.16	0.17	0.17	0.17	0.18	0.18	0.18	0.18	0.17	0.16	0.15	0.14	0.13	0.12
-80	0.09	0.10	0.14	0.20	0.32	0.47	0.64	0.79	0.92	1.04	1.13	1.19	1.24	1.82	2.69	3.71	4.80	5.88	6.87
-70	0.09	0.11	0.23	0.52	0.93	1.29	1.51	1.69	1.95	2.27	2.64	3.13	3.73	6.01	9.13	12.2	15.3	18.2	21.0
-60	0.09	0.13	0.44	1.09	1.69	2.05	2.23	2.45	3.32	4.66	6.71	9.10	11.9	15.2	19.4	23.3	26.8	29.6	31.6
-50	0.09	0.17	0.78	1.71	2.35	2.74	3.24	4.62	8.25	14.0	21.0	30.4	42.4	56.6	70.1	81.6	91.6	98.5	101
-40	0.09	0.22	1.15	2.23	2.94	3.55	5.33	10.6	20.3	34.2	55.4	83.0	116	153	193	233	267	289	298
-30	0.09	0.28	1.48	2.67	3.48	4.61	8.82	19.4	36.8	67.2	113	172	248	336	438	539	624	682	705
-20	0.09	0.33	1.75	3.06	3.88	5.73	13.1	28.1	54.9	100	174	281	428	600	787	971	1130	1251	1310
-10	0.09	0.36	1.95	3.32	4.17	6.36	15.9	33.6	65.2	121	215	353	553	807	1101	1403	1673	1852	1951
0	0.09	0.37	2.04	3.50	4.33	6.22	16.1	33.3	63.0	118	213	352	563	835	1160	1502	1828	2055	2153
10	0.09	0.35	1.93	3.30	4.07	5.89	14.7	30.9	59.4	110	194	323	510	753	1034	1330	1640	1884	1997
20	0.09	0.32	1.71	3.01	3.72	5.03	11.0	23.9	45.8	83.8	143	233	361	528	722	927	1108	1235	1297
30	0.09	0.26	1.41	2.60	3.35	4.02	6.81	15.3	28.6	51.3	86.7	136	203	289	387	488	571	628	650
40	0.09	0.19	1.05	2.13	2.84	3.17	4.08	7.28	14.4	24.9	40.8	63.7	91.6	126	164	196	223	242	246
50	0.09	0.14	0.67	1.57	2.19	2.59	2.73	3.28	5.42	9.37	15.1	22.1	32.1	43.3	54.5	64.7	72.7	77.7	79.7
60	0.09	0.11	0.34	0.89	1.50	1.83	2.01	2.12	2.61	3.47	4.81	6.81	8.94	11.8	16.0	19.7	22.9	25.6	27.8
70	0.09	0.09	0.16	0.35	0.65	0.95	1.20	1.37	1.58	1.85	2.19	2.54	2.95	5.02	7.97	11.0	14.1	17.1	19.9
80	0.09	0.09	0.10	0.13	0.17	0.23	0.30	0.41	0.52	0.64	0.75	0.84	0.92	1.40	1.88	2.35	2.80	3.24	3.68
90	0.09	0.09	0.10	0.10	0.11	0.12	0.12	0.12	0.11	0.10	0.09	0.09	0.08	0.08	0.08	0.09	0.09	0.09	0.09
100	0.09	0.09	0.10	0.10	0.10	0.10	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.10	0.09	0.09	0.09	0.09	0.09
110	0.09	0.09	0.10	0.09	0.09	0.09	0.08	0.09	0.09	0.10	0.11	0.13	0.15	0.16	0.16	0.17	0.17	0.16	0.16
120	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.12	0.15	0.19	0.24	0.29	0.33	0.36	0.38	0.40	0.41	0.41
130	0.09	0.09	0.09	0.09	0.10	0.10	0.11	0.14	0.20	0.29	0.38	0.49	0.61	0.73	0.83	0.92	0.98	1.02	1.02
140	0.09	0.09	0.09	0.10	0.10	0.12	0.17	0.25	0.36	0.51	0.71	0.94	1.20	1.46	1.69	1.89	2.04	2.14	2.16
150	0.09	0.09	0.09	0.10	0.12	0.16	0.24	0.37	0.56	0.83	1.18	1.58	2.03	2.49	2.93	3.30	3.57	3.73	3.76
160	0.09	0.09	0.09	0.11	0.14	0.20	0.31	0.50	0.78	1.19	1.69	2.30	2.98	3.66	4.29	4.80	5.17	5.41	5.46
170	0.09	0.10	0.10	0.11	0.15	0.23	0.37	0.60	0.96	1.47	2.12	2.91	3.77	4.62	5.39	6.02	6.50	6.81	6.91
180	0.09	0.10	0.10	0.12	0.16	0.25	0.39	0.64	1.03	1.58	2.31	3.18	4.12	5.05	5.89	6.56	7.07	7.58	7.77

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.87V I:0.0840A P:18.100W PF:0.9000 Freq:49.99Hz Lamp Flux:88.4106x18 lm																		
NAME:Blazeline-609mm-3000K-45D-REV3									TYPE:3000K					WEIGHT:00				
SPEC.:45 DEG									DIM.:609mm					SERIAL No.:01				
MFR.: 001									SUR.:0.8					Shielding Angle:				

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	7.50	7.05	6.49	5.71	4.81	3.85	2.92	2.10	1.44	0.93	0.58	0.35	0.22	0.14	0.12	0.12	0.12	0.13	
-170	7.00	6.62	6.06	5.35	4.52	3.63	2.76	1.99	1.37	0.90	0.57	0.35	0.22	0.15	0.12	0.12	0.12	0.13	
-160	5.83	5.50	5.02	4.40	3.69	2.94	2.24	1.63	1.14	0.76	0.50	0.31	0.20	0.14	0.12	0.12	0.12	0.13	
-150	4.19	3.93	3.55	3.09	2.58	2.06	1.58	1.17	0.84	0.58	0.39	0.26	0.18	0.13	0.12	0.12	0.12	0.13	
-140	2.45	2.29	2.07	1.81	1.52	1.23	0.97	0.74	0.55	0.41	0.29	0.21	0.15	0.13	0.12	0.12	0.12	0.13	
-130	1.17	1.10	1.00	0.89	0.76	0.63	0.51	0.42	0.33	0.26	0.21	0.16	0.14	0.13	0.12	0.12	0.12	0.13	
-120	0.49	0.47	0.43	0.38	0.34	0.29	0.25	0.22	0.19	0.17	0.16	0.14	0.13	0.12	0.12	0.12	0.12	0.13	
-110	0.23	0.21	0.19	0.18	0.15	0.14	0.13	0.13	0.14	0.13	0.13	0.13	0.12	0.12	0.12	0.12	0.12	0.13	
-100	0.14	0.13	0.13	0.13	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.13	
-90	0.12	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.13	0.13	0.13
-80	5.85	4.74	3.62	2.57	1.68	1.06	0.99	0.90	0.79	0.67	0.55	0.43	0.34	0.26	0.20	0.16	0.15	0.13	
-70	18.2	15.2	12.2	9.07	5.91	3.58	2.95	2.44	2.03	1.68	1.40	1.21	1.06	0.81	0.51	0.28	0.17	0.13	
-60	29.8	27.2	23.8	19.9	15.7	12.1	9.15	6.60	4.50	3.10	2.22	2.00	1.84	1.49	1.04	0.51	0.21	0.13	
-50	100	94.7	85.6	74.1	60.2	45.1	32.0	21.9	14.2	8.14	4.37	3.04	2.57	2.21	1.58	0.83	0.27	0.13	
-40	295	278	247	208	168	129	92.4	61.0	36.9	21.4	11.0	5.21	3.41	2.83	2.11	1.18	0.34	0.13	
-30	702	659	583	485	380	282	197	130	78.1	42.3	21.7	9.73	4.55	3.35	2.62	1.49	0.42	0.13	
-20	1305	1222	1083	900	701	509	339	213	125	68.0	34.1	15.4	5.94	3.81	3.02	1.73	0.49	0.13	
-10	1951	1847	1614	1317	1005	713	466	283	162	86.7	43.7	19.6	7.28	4.19	3.32	1.90	0.53	0.13	
0	2199	2126	1895	1537	1154	799	511	308	173	90.8	46.3	20.8	7.67	4.41	3.52	1.99	0.55	0.13	
10	1982	1813	1531	1238	938	657	426	260	149	79.4	40.3	17.9	6.71	4.09	3.29	1.88	0.53	0.13	
20	1288	1198	1025	818	609	422	282	177	104	56.2	28.8	12.6	5.13	3.65	2.96	1.69	0.48	0.13	
30	644	599	522	423	320	230	153	97.4	57.5	31.9	16.0	7.17	3.91	3.19	2.53	1.44	0.41	0.13	
40	245	230	205	173	134	98.1	68.0	42.9	25.0	13.2	6.80	3.83	3.01	2.70	2.01	1.12	0.34	0.13	
50	78.4	73.7	65.7	55.2	43.9	32.2	21.8	14.1	8.31	4.68	2.92	2.49	2.36	2.02	1.47	0.77	0.27	0.13	
60	25.6	22.9	19.6	15.8	11.7	8.79	6.54	4.57	3.24	2.36	1.81	1.71	1.58	1.32	0.91	0.47	0.21	0.13	
70	17.0	14.0	11.0	7.89	4.88	2.77	2.31	1.91	1.55	1.28	1.07	0.93	0.83	0.65	0.44	0.27	0.18	0.13	
80	3.21	2.74	2.26	1.76	1.24	0.73	0.65	0.58	0.50	0.42	0.35	0.29	0.28	0.25	0.21	0.18	0.16	0.13	
90	0.10	0.10	0.10	0.11	0.11	0.11	0.12	0.14	0.15	0.16	0.17	0.18	0.17	0.16	0.16	0.15	0.14	0.13	
100	0.10	0.10	0.11	0.12	0.12	0.13	0.14	0.14	0.15	0.16	0.16	0.17	0.17	0.16	0.15	0.14	0.13	0.13	
110	0.16	0.17	0.17	0.18	0.17	0.17	0.15	0.15	0.16	0.16	0.17	0.17	0.16	0.15	0.14	0.14	0.13	0.13	
120	0.41	0.40	0.38	0.36	0.33	0.29	0.24	0.20	0.17	0.14	0.14	0.16	0.16	0.15	0.14	0.13	0.13	0.13	
130	1.00	0.95	0.88	0.79	0.69	0.57	0.47	0.37	0.29	0.19	0.16	0.13	0.14	0.15	0.14	0.13	0.13	0.13	
140	2.10	1.97	1.79	1.58	1.34	1.09	0.85	0.65	0.48	0.35	0.25	0.16	0.13	0.14	0.14	0.13	0.13	0.13	
150	3.65	3.42	3.09	2.69	2.26	1.81	1.40	1.04	0.74	0.52	0.35	0.23	0.16	0.13	0.13	0.13	0.13	0.13	
160	5.33	5.00	4.53	3.95	3.30	2.63	2.03	1.50	1.06	0.71	0.46	0.29	0.18	0.13	0.13	0.12	0.12	0.13	
170	6.82	6.35	5.71	5.01	4.25	3.43	2.62	1.90	1.32	0.87	0.55	0.34	0.21	0.14	0.12	0.12	0.12	0.13	
180	7.50	7.05	6.49	5.71	4.81	3.85	2.92	2.10	1.44	0.93	0.58	0.35	0.22	0.14	0.12	0.12	0.12	0.13	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
γ Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks: