

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	17003.5 cd per klm.
(Luminaire orientation as tested.)	-1.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	21.9V x 21.4H
	At 50% of Imax	11.9V x 11.4H
	At 90% of Imax	5.5V x 5.9H

Beam Flux	Total	1002.6 lumens per klm.
	To 10% of Imax	739.9 lumens per klm.
	To 50% of Imax	440.2 lumens per klm.
	To 90% of Imax	146.2 lumens per klm.

Upward LOR	0.6 %
Downward LOR	99.7 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-09-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.94V I:0.1120A P:23.800W PF:0.9000 Freq:49.99Hz Lamp Flux:122.298x24 lm		
NAME:Blazeline Max-598mm-3000K-10D-REV2	TYPE:3000K	WEIGHT:
SPEC.:10 DEG	DIM.:598mm	SERIAL No.:01
MFR.: Luminoscape	SUR.:0.8	Shielding Angle:

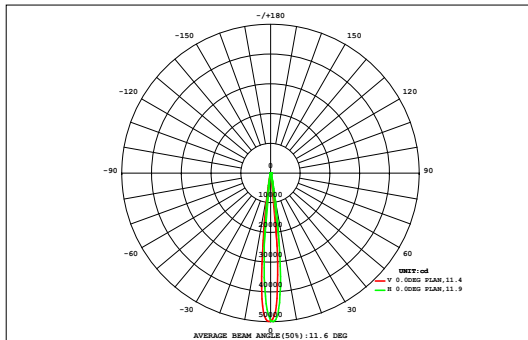

DATA OF LAMP		Eff:123.33lm/W	
MODEL		Imax(cd)	49908
NOMINAL POWER(W)	24	AVAILABILITY(%)	74.0
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	2171
NOMINAL FLUX(lm)	122.298	LOR(%)	100.0
LAMPS INSIDE	24	TOTAL FLUX(lm)	2935
TEST VOLTAGE(V)	220	θ @50% (H,V)	11,12DEG

	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.28	0.40	0.54	0.69	0.82	0.90	0.94	0.94	0.89	0.85	0.83	0.78	0.72	0.63	0.50	0.37	0.26	0.18	11.6	0.00
18	0.41	0.59	0.80	1.00	1.20	1.36	1.49	1.54	1.49	1.43	1.36	1.23	1.06	0.88	0.69	0.51	0.36	0.24	17.6	0.00
16	0.58	0.84	1.11	1.39	1.72	2.07	2.36	2.50	2.44	2.32	2.16	1.90	1.58	1.22	0.91	0.67	0.47	0.31	26.6	0.00
14	0.80	1.12	1.46	1.92	2.50	3.27	3.85	4.13	4.19	4.04	3.72	3.17	2.39	1.70	1.21	0.85	0.60	0.39	41.3	0.00
12	0.99	1.40	1.90	2.60	3.58	4.69	5.91	6.98	7.70	7.42	6.20	4.90	3.61	2.39	1.58	1.07	0.73	0.49	64.2	26.0
10	1.14	1.65	2.40	3.41	4.78	6.65	9.55	13.0	15.4	15.1	11.9	8.15	5.03	3.24	2.01	1.33	0.89	0.59	106	79.9
8	1.26	1.92	2.93	4.26	6.16	9.52	15.2	23.8	29.6	29.0	22.6	14.3	7.90	4.32	2.77	1.75	1.11	0.69	179	154
6	1.35	2.16	3.42	5.05	7.66	12.8	22.4	36.9	46.0	45.0	34.8	21.4	13.3	6.84	3.82	2.24	1.33	0.77	267	246
4	1.40	2.34	3.76	5.64	8.89	15.6	29.8	47.1	56.8	55.9	48.2	35.3	20.3	9.98	4.88	2.69	1.50	0.84	351	331
2	1.50	2.52	4.06	6.25	10.3	19.4	36.7	54.2	60.1	60.3	56.4	42.3	23.7	11.3	5.45	3.00	1.65	0.91	400	382
0	1.64	2.70	4.26	6.64	11.2	21.6	39.3	52.2	56.9	56.4	50.9	38.0	21.2	10.3	5.33	3.10	1.72	0.97	384	363
-2	1.67	2.71	4.17	6.40	10.4	17.4	28.6	39.5	45.4	44.9	38.0	26.9	15.5	8.42	4.84	2.95	1.66	0.97	300	278
-4	1.63	2.55	3.88	5.53	8.02	12.0	17.7	24.2	29.0	28.7	23.2	16.3	10.4	6.34	4.15	2.55	1.50	0.93	199	175
-6	1.52	2.24	3.25	4.35	5.85	8.00	10.9	13.7	15.7	15.5	13.0	9.92	6.79	4.72	3.25	2.05	1.31	0.84	123	94.0
-8	1.33	1.81	2.47	3.34	4.27	5.39	6.68	7.86	8.66	8.49	7.38	6.00	4.66	3.48	2.43	1.65	1.12	0.74	77.8	42.5
-10	1.06	1.44	1.89	2.45	3.09	3.74	4.40	4.93	5.25	5.15	4.66	4.01	3.27	2.52	1.85	1.34	0.94	0.63	52.6	0.00
-12	0.80	1.11	1.45	1.81	2.21	2.59	2.95	3.23	3.38	3.32	3.06	2.69	2.28	1.87	1.45	1.08	0.76	0.51	36.6	0.00
-14	0.57	0.81	1.08	1.36	1.59	1.78	1.94	2.06	2.09	2.05	1.95	1.78	1.59	1.41	1.12	0.82	0.58	0.39	25.0	0.00
-16	0.57	0.81	1.08	1.36	1.59	1.78	1.94	2.06	2.09	2.05	1.95	1.78	1.59	1.41	1.12	0.82	0.58	0.39	25.0	0.00
-18	0.57	0.81	1.08	1.36	1.59	1.78	1.94	2.06	2.09	2.05	1.95	1.78	1.59	1.41	1.12	0.82	0.58	0.39	25.0	0.00
	-18	-16	-14	-12	-10	-8	-6	-4	HORIZONTAL (DEG)	4	6	8	10	12	14	16	18			
Φ t	19.9	30.3	44.8	64.1	94.2	149	241	339	391	386	330	239	145	81.6	48.2	30.0	18.5	11.4	2663	---
Φ a	0.00	0.00	0.00	15.5	61.5	123	219	318	371	365	310	216	118	49.2	4.72	0.00	0.00	0.00	---	2171

one-half-peak spread: U:6.0,D:6.0 , L:6.2,R:5.2


NEMA Beam Type: Type 2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.94V I:0.1120A P:23.800W PF:0.9000 Freq:49.99Hz Lamp Flux:122.298x24 lm		
NAME:Blazeline Max-598mm-3000K-10D-REV2	TYPE:3000K	WEIGHT:
SPEC.:10 DEG	DIM.:598mm	SERIAL No.:01
MFR.: Luminoscape	SUR.:0.8	Shielding Angle:

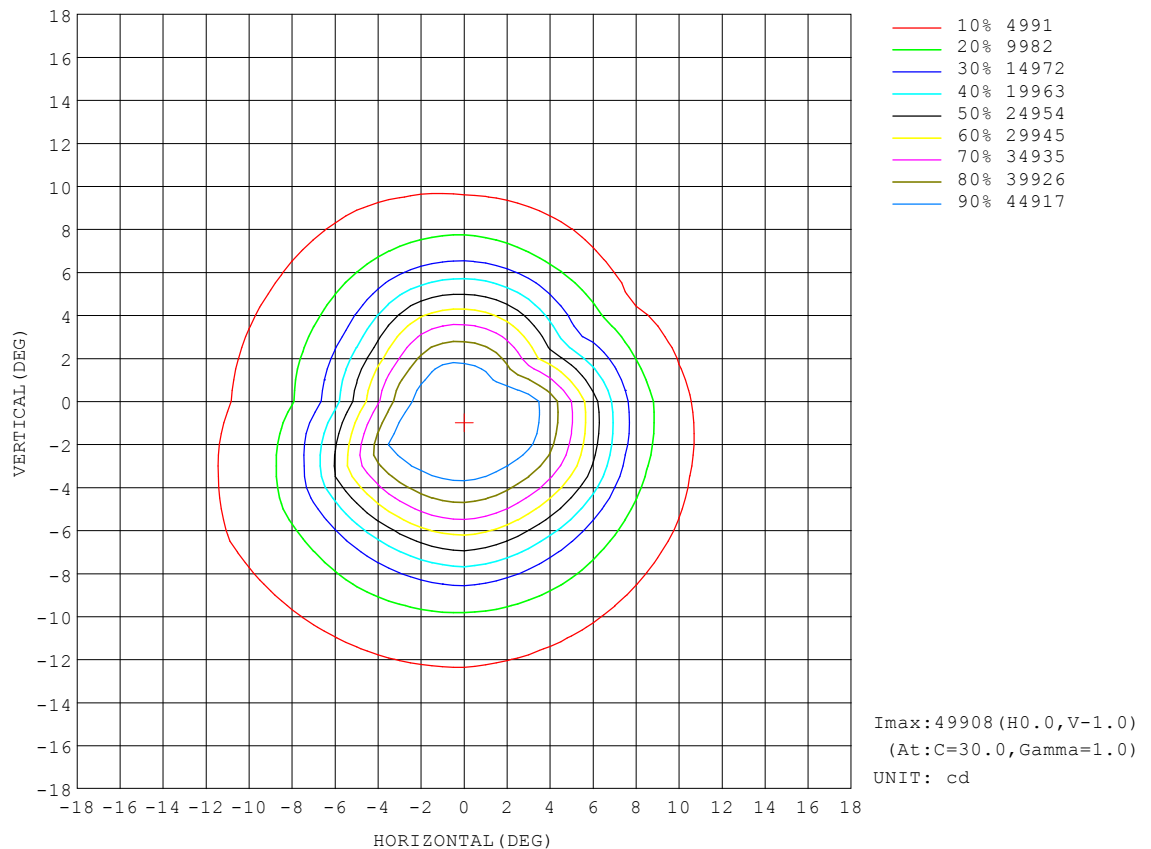


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.94V I:0.1120A P:23.800W PF:0.9000 Freq:49.99Hz Lamp Flux:122.298x24 lm		
NAME:Blazeline Max-598mm-3000K-10D-REV2	TYPE:3000K	WEIGHT:
SPEC.:10 DEG	DIM.:598mm	SERIAL No.:01
MFR.: Luminoscape	SUR.:0.8	Shielding Angle:

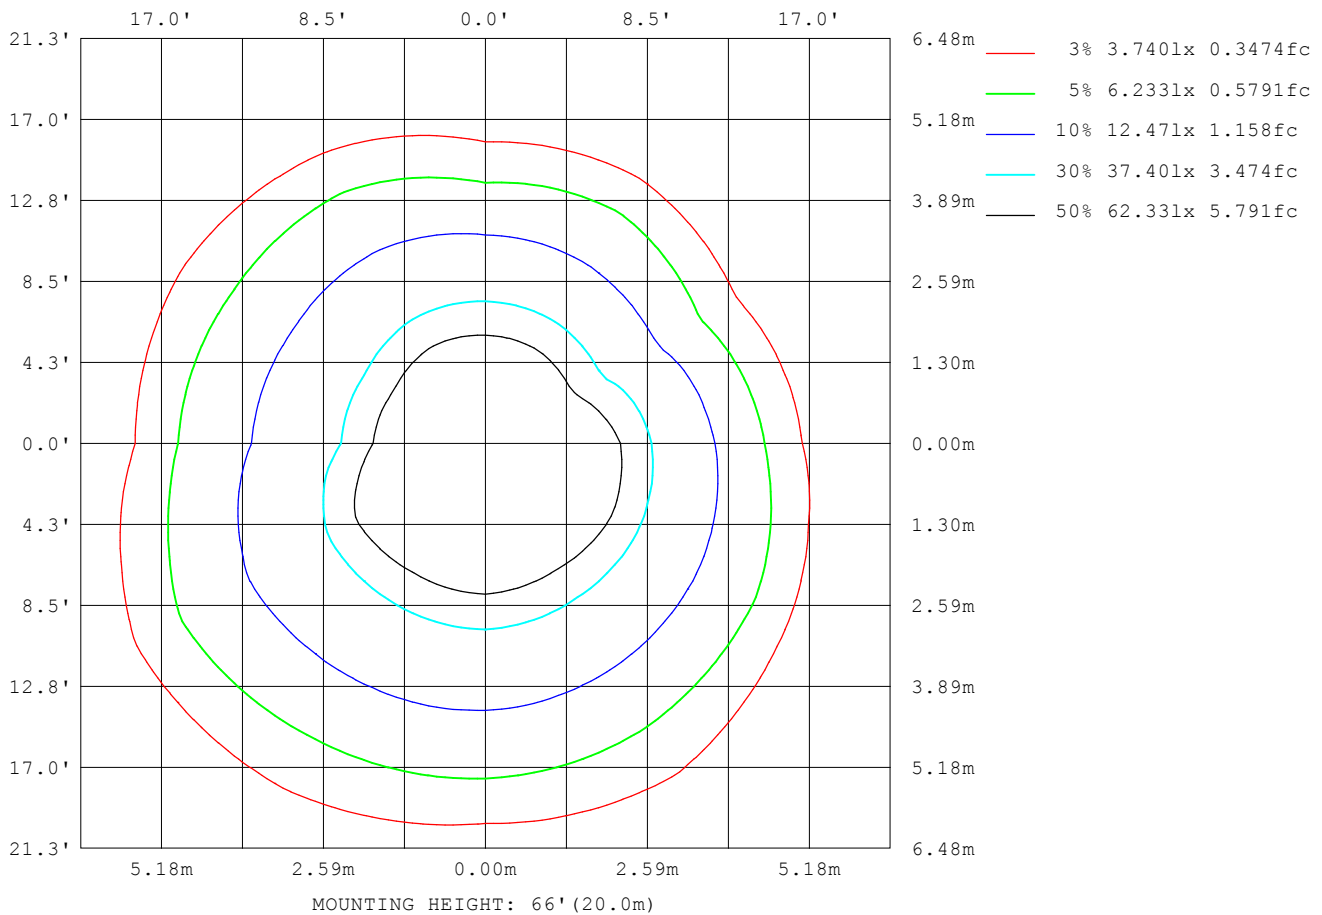

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:20DEG
 Operators:01
 Test Date:2025-09-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.700m [K=1.0000]
 Remarks:

Planar Illuminance Curve

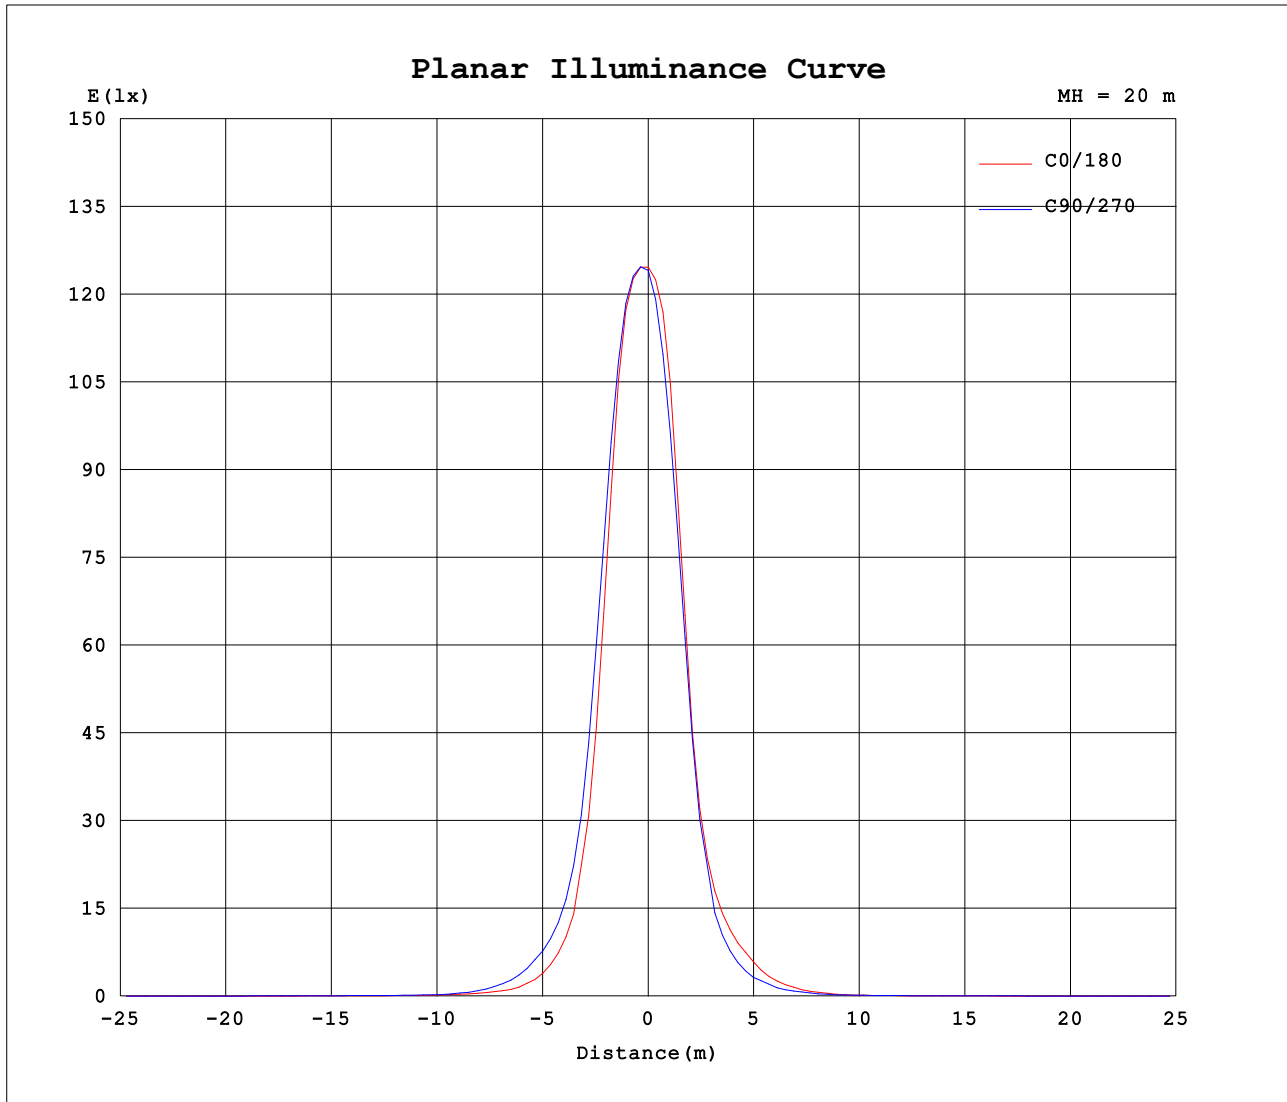


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-09-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.94V I:0.1120A P:23.800W PF:0.9000 Freq:49.99Hz Lamp Flux:122.298x24 lm		
NAME:Blazeline Max-598mm-3000K-10D-REV2	TYPE:3000K	WEIGHT:
SPEC.:10 DEG	DIM.:598mm	SERIAL No.:01
MFR.: Luminoscape	SUR.:0.8	Shielding Angle:

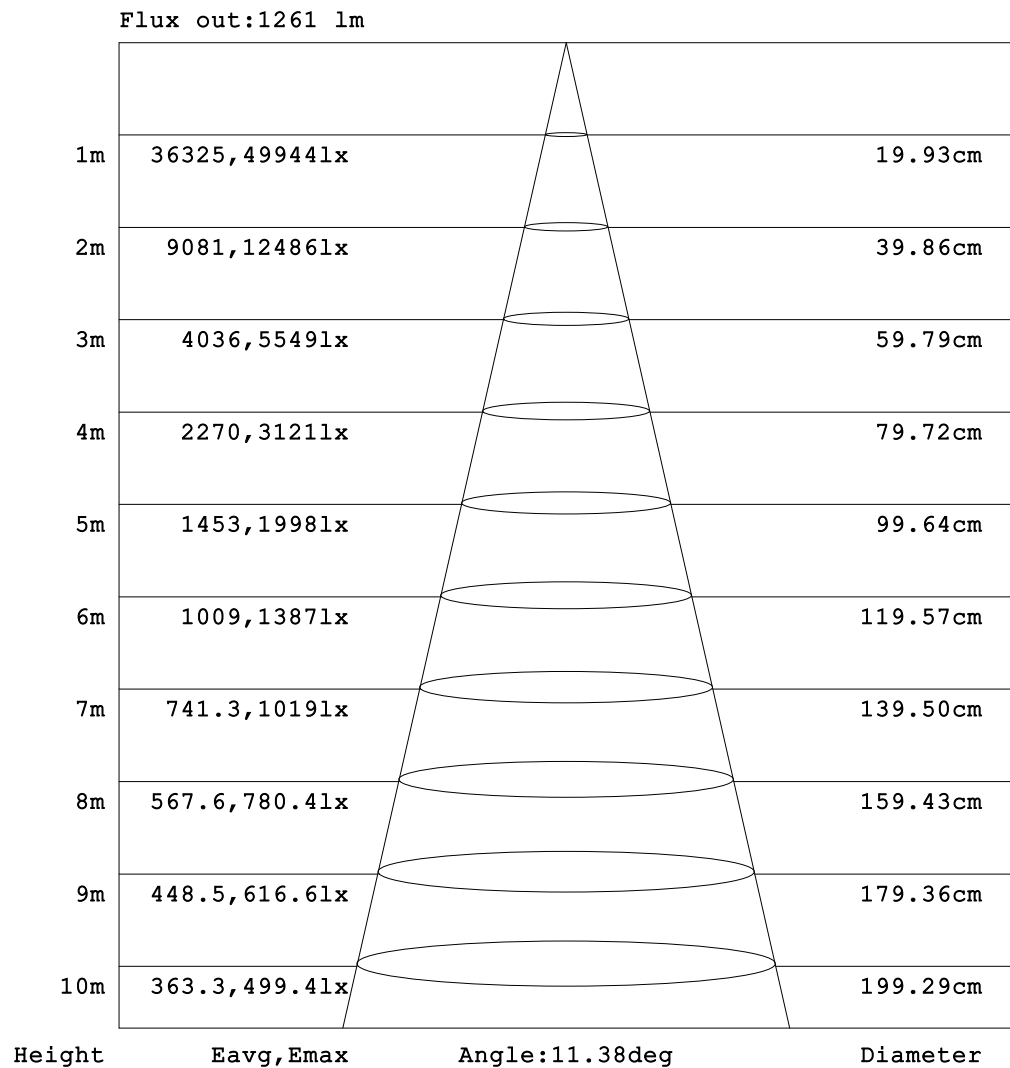

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:20DEG
 Operators:01
 Test Date:2025-09-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.700m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.94V I:0.1120A P:23.800W PF:0.9000 Freq:49.99Hz Lamp Flux:122.298x24 lm		
NAME:Blazeline Max-598mm-3000K-10D-REV2	TYPE:3000K	WEIGHT:
SPEC.:10 DEG	DIM.:598mm	SERIAL No.:01
MFR.: Luminoscape	SUR.:0.8	Shielding Angle:

Table--1

UNIT: ×10cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.04	0.05	0.09	0.28	0.98	2.03	2.59	2.27	1.53	1.21
-170	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.04	0.04	0.04	0.05	0.09	0.25	0.81	1.74	2.38	2.44	2.16
-160	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.04	0.04	0.04	0.05	0.06	0.12	0.31	0.76	1.32	1.74	1.95
-150	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.04	0.04	0.04	0.05	0.05	0.06	0.09	0.16	0.30	0.47	0.61
-140	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.04	0.04	0.04	0.04	0.05	0.05	0.05	0.07	0.08	0.09	0.10
-130	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.04	0.04	0.04	0.04	0.04	0.04	0.05	0.05	0.05
-120	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.04	0.04	0.04	0.04
-110	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03
-100	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.02
-90	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02
-80	0.03	0.03	0.03	0.03	0.04	0.05	0.07	0.10	0.12	0.15	0.19	0.23	0.28	0.35	0.42	0.49	0.56	0.62	0.67
-70	0.03	0.03	0.04	0.06	0.10	0.18	0.27	0.39	0.56	0.75	0.97	1.19	1.41	1.64	1.88	2.10	2.29	2.47	2.61
-60	0.03	0.03	0.05	0.11	0.24	0.43	0.67	0.93	1.28	1.64	2.00	2.34	2.65	2.91	3.12	3.24	3.32	3.37	3.40
-50	0.03	0.03	0.07	0.21	0.47	0.85	1.30	1.63	2.02	2.48	2.86	3.20	3.49	3.76	3.99	4.18	4.33	4.45	4.52
-40	0.03	0.03	0.11	0.33	0.78	1.46	1.93	2.26	2.65	3.07	3.50	3.93	4.30	4.64	5.00	5.47	5.99	6.45	6.81
-30	0.03	0.04	0.14	0.49	1.20	1.98	2.31	2.74	3.15	3.60	4.05	4.52	5.11	5.84	6.68	7.80	9.12	10.2	10.7
-20	0.03	0.04	0.17	0.63	1.62	2.27	2.56	3.07	3.47	3.91	4.44	5.15	6.22	8.09	14.1	37.9	69.6	86.0	79.3
-10	0.03	0.04	0.19	0.73	1.90	2.41	2.80	3.22	3.63	4.04	4.66	5.56	7.37	16.2	66.5	170	361	682	936
0	0.03	0.04	0.20	0.77	2.05	2.49	2.90	3.24	3.60	4.01	4.57	5.45	7.29	14.2	55.2	197	592	2634	4985
10	0.03	0.04	0.19	0.72	1.87	2.37	2.75	3.16	3.57	3.95	4.52	5.31	6.74	11.2	37.4	107	213	385	436
20	0.03	0.04	0.16	0.60	1.56	2.18	2.45	2.96	3.36	3.78	4.21	4.79	5.64	6.89	9.45	18.1	33.2	40.3	34.7
30	0.03	0.03	0.13	0.46	1.13	1.86	2.14	2.58	2.98	3.42	3.83	4.20	4.66	5.22	5.87	6.56	7.17	7.57	7.63
40	0.03	0.03	0.09	0.30	0.70	1.33	1.74	2.01	2.40	2.81	3.25	3.65	3.95	4.22	4.48	4.78	5.09	5.36	5.55
50	0.03	0.03	0.06	0.17	0.40	0.73	1.10	1.36	1.71	2.16	2.56	2.88	3.17	3.43	3.65	3.86	4.03	4.15	4.25
60	0.03	0.03	0.04	0.08	0.18	0.34	0.52	0.72	1.02	1.35	1.69	2.00	2.29	2.56	2.81	3.01	3.17	3.30	3.41
70	0.03	0.03	0.03	0.04	0.07	0.11	0.18	0.27	0.40	0.54	0.73	0.93	1.13	1.37	1.61	1.84	2.05	2.23	2.40
80	0.03	0.03	0.03	0.03	0.03	0.04	0.04	0.05	0.07	0.08	0.11	0.14	0.17	0.24	0.32	0.40	0.48	0.55	0.62
90	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01
100	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02
110	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.02	0.02
120	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
130	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.04	0.04	0.04	0.04	0.04	0.04
140	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.03	0.03	0.03	0.03	0.03	0.04	0.04	0.06	0.07	0.08	0.10	0.10
150	0.03	0.03	0.03	0.03	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.04	0.06	0.10	0.17	0.29	0.45	0.60	0.68
160	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.04	0.06	0.12	0.30	0.70	1.23	1.65	1.87	1.92
170	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.04	0.05	0.09	0.24	0.76	1.65	2.31	2.35	2.02	1.84
180	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.04	0.05	0.09	0.28	0.98	2.03	2.59	2.27	1.53	1.21

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.94V I:0.1120A P:23.800W PF:0.9000 Freq:49.99Hz Lamp Flux:122.298x24 lm																		
NAME:Blazeline Max-598mm-3000K-10D-REV2									TYPE:3000K					WEIGHT:				
SPEC.:10 DEG									DIM.:598mm					SERIAL No.:01				
MFR.: Luminoscape									SUR.:0.8					Shielding Angle:				

Table--2

UNIT: ×10cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	1.69	2.47	2.76	2.47	1.48	0.54	0.20	0.08	0.05	0.04	0.04	0.03	0.03	0.03	0.02	0.02	0.02	0.03	
-170	2.25	2.55	2.50	1.94	1.05	0.40	0.16	0.07	0.05	0.04	0.04	0.04	0.03	0.03	0.02	0.02	0.02	0.03	
-160	1.99	1.81	1.42	0.87	0.41	0.18	0.10	0.06	0.05	0.04	0.04	0.03	0.03	0.03	0.02	0.02	0.02	0.03	
-150	0.63	0.50	0.35	0.21	0.13	0.08	0.06	0.05	0.04	0.04	0.04	0.03	0.03	0.02	0.02	0.02	0.02	0.03	
-140	0.10	0.09	0.08	0.06	0.05	0.05	0.04	0.04	0.04	0.04	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.03	
-130	0.05	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.03	0.03	
-120	0.04	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.03	0.03	
-110	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.03	
-100	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.03	0.03	
-90	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	
-80	0.62	0.57	0.51	0.44	0.36	0.29	0.25	0.21	0.17	0.13	0.10	0.08	0.06	0.04	0.04	0.03	0.03	0.03	
-70	2.46	2.28	2.08	1.86	1.63	1.40	1.20	0.99	0.79	0.61	0.45	0.33	0.23	0.14	0.08	0.04	0.03	0.03	
-60	3.36	3.30	3.21	3.08	2.85	2.59	2.31	2.00	1.67	1.33	0.99	0.76	0.54	0.34	0.17	0.07	0.04	0.03	
-50	4.45	4.33	4.17	3.99	3.78	3.51	3.21	2.87	2.49	2.07	1.68	1.37	1.00	0.64	0.32	0.12	0.04	0.03	
-40	6.43	5.95	5.44	4.97	4.64	4.31	3.96	3.56	3.12	2.68	2.33	1.97	1.54	1.00	0.51	0.18	0.05	0.03	
-30	10.1	9.05	7.71	6.62	5.84	5.17	4.60	4.10	3.68	3.22	2.76	2.40	2.00	1.39	0.72	0.25	0.06	0.03	
-20	78.8	60.8	28.9	12.1	7.87	6.32	5.29	4.53	3.98	3.57	3.12	2.61	2.30	1.71	0.92	0.32	0.06	0.03	
-10	610	285	101	35.5	12.2	7.34	5.69	4.77	4.13	3.69	3.30	2.79	2.48	1.94	1.05	0.36	0.07	0.03	
0	3488	591	128	37.8	14.8	7.64	5.57	4.68	4.09	3.68	3.35	2.87	2.58	2.07	1.12	0.38	0.07	0.03	
10	330	137	55.9	20.0	9.57	6.60	5.33	4.58	4.02	3.61	3.21	2.72	2.43	1.90	1.03	0.35	0.07	0.03	
20	34.7	26.3	13.5	8.30	6.45	5.49	4.80	4.24	3.81	3.38	2.96	2.49	2.21	1.64	0.88	0.30	0.06	0.03	
30	7.41	6.92	6.32	5.74	5.18	4.67	4.21	3.83	3.38	2.95	2.55	2.23	1.87	1.30	0.67	0.23	0.06	0.03	
40	5.36	5.09	4.80	4.52	4.27	3.99	3.63	3.20	2.76	2.38	2.08	1.75	1.38	0.90	0.46	0.16	0.05	0.03	
50	4.16	4.04	3.88	3.67	3.43	3.16	2.85	2.53	2.18	1.75	1.38	1.14	0.86	0.55	0.28	0.10	0.04	0.03	
60	3.29	3.15	2.98	2.78	2.52	2.25	1.98	1.68	1.36	1.04	0.75	0.58	0.43	0.26	0.13	0.06	0.04	0.03	
70	2.23	2.04	1.83	1.60	1.37	1.14	0.95	0.76	0.58	0.43	0.30	0.20	0.14	0.09	0.06	0.04	0.03	0.03	
80	0.56	0.49	0.41	0.33	0.25	0.18	0.15	0.12	0.09	0.07	0.06	0.05	0.04	0.04	0.04	0.03	0.03	0.03	
90	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	
100	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.03	0.03	
110	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.03	
120	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.03	
130	0.04	0.04	0.04	0.04	0.04	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.03	
140	0.10	0.09	0.07	0.06	0.05	0.04	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.03	0.03	
150	0.62	0.50	0.34	0.20	0.12	0.07	0.04	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.03	
160	1.91	1.73	1.35	0.83	0.40	0.17	0.08	0.05	0.04	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.03	
170	2.10	2.44	2.41	1.86	1.01	0.39	0.15	0.07	0.04	0.04	0.04	0.03	0.03	0.02	0.02	0.02	0.02	0.03	
180	1.69	2.47	2.76	2.47	1.48	0.54	0.20	0.08	0.05	0.04	0.04	0.03	0.03	0.03	0.02	0.02	0.02	0.03	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
γ Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks: