

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		2140.2 cd per klm.
(Luminaire orientation as tested.)		0.5 degrees vertical
		1.0 degrees horizontal
Beam Spread	At 10% of Imax	63.8V x 63.2H
	At 50% of Imax	35.3V x 34.8H
	At 90% of Imax	14.7V x 14.6H
Beam Flux	Total	1000.3 lumens per klm.
	To 10% of Imax	799.9 lumens per klm.
	To 50% of Imax	453.5 lumens per klm.
	To 90% of Imax	107.0 lumens per klm.
	Upward LOR	0.6 %
	Downward LOR	99.5 %
Luminaire Efficiency (Light Output Ratio)		100.0 %

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-09-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.91V I:0.1120A P:23.800W PF:0.9000 Freq:49.99Hz Lamp Flux:111.371x24 lm		
NAME: Blazeline Max-598mm-3000K-35D-REV2	TYPE:3000K	WEIGHT:
SPEC.:35 DEG	DIM.: 598mm	SERIAL No.:01
MFR.: Luminoscape	SUR.:0.8	Shielding Angle:

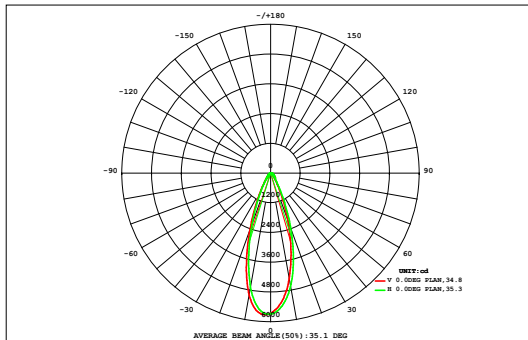

DATA OF LAMP		Eff:112.31lm/W	
MODEL		Imax(cd)	5721
NOMINAL POWER(W)	24	AVAILABILITY(%)	79.9
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	2137
NOMINAL FLUX(lm)	111.371	LOR(%)	100.0
LAMPS INSIDE	24	TOTAL FLUX(lm)	2673
TEST VOLTAGE(V)	220	θ @50% (H,V)	35,35DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.52	0.65	0.79	0.96	1.14	1.30	1.45	1.54	1.58	1.58	1.54	1.44	1.29	1.12	0.95	0.78	0.63	0.50	19.8	0.00
45	0.52	0.65	0.79	0.96	1.14	1.30	1.45	1.54	1.58	1.58	1.54	1.44	1.29	1.12	0.95	0.78	0.63	0.50	19.8	0.00
40	0.59	0.76	0.95	1.20	1.50	1.81	2.08	2.29	2.38	2.38	2.28	2.07	1.80	1.49	1.19	0.94	0.75	0.58	27.0	0.00
35	0.68	0.88	1.16	1.54	2.04	2.67	3.27	3.76	4.01	4.00	3.74	3.24	2.64	2.03	1.54	1.15	0.87	0.67	39.9	5.59
30	0.76	1.02	1.42	2.01	2.90	4.11	5.44	6.55	7.21	7.20	6.52	5.40	4.09	2.91	2.03	1.43	1.02	0.76	62.8	42.0
25	0.84	1.19	1.74	2.67	4.18	6.36	9.02	11.3	12.7	12.7	11.3	8.96	6.37	4.22	2.72	1.78	1.21	0.86	100	84.2
20	0.93	1.37	2.12	3.50	5.89	9.49	14.0	18.3	20.8	20.9	18.4	14.1	9.56	5.99	3.62	2.23	1.43	0.97	154	140
15	1.01	1.54	2.52	4.43	7.86	13.0	19.7	26.2	30.2	30.4	26.6	20.1	13.3	8.18	4.79	2.76	1.66	1.07	215	203
10	1.07	1.67	2.84	5.27	9.73	16.4	24.6	32.7	38.0	38.6	34.1	25.9	17.6	10.7	6.03	3.27	1.87	1.16	272	261
5	1.10	1.73	3.01	5.75	10.9	18.6	27.6	35.9	41.4	42.7	38.9	31.1	21.4	12.8	6.97	3.64	2.00	1.21	307	296
0	1.11	1.75	3.08	5.94	11.3	19.2	28.3	36.5	41.3	42.4	39.7	32.2	22.2	13.3	7.17	3.73	2.04	1.23	313	303
-5	1.10	1.74	3.03	5.76	10.9	18.3	26.6	33.5	37.4	38.2	35.4	28.6	19.9	12.0	6.58	3.51	1.96	1.20	286	275
-10	1.06	1.64	2.77	5.06	9.27	15.2	21.4	26.9	30.6	31.1	28.1	22.5	15.8	9.72	5.52	3.08	1.80	1.14	233	221
-15	0.99	1.49	2.38	4.06	6.86	10.8	15.3	19.4	22.1	22.3	19.8	15.7	11.1	7.10	4.30	2.57	1.60	1.05	169	156
-20	0.91	1.31	1.95	2.99	4.65	7.00	9.71	12.3	14.0	14.1	12.4	9.86	7.16	4.83	3.15	2.06	1.38	0.95	111	95.2
-25	0.82	1.12	1.55	2.17	3.08	4.31	5.72	7.00	7.78	7.80	7.05	5.79	4.41	3.19	2.26	1.62	1.16	0.84	67.7	46.6
-30	0.73	0.95	1.24	1.62	2.10	2.71	3.34	3.89	4.19	4.20	3.92	3.38	2.75	2.16	1.66	1.27	0.97	0.74	41.8	7.30
-35	0.64	0.80	1.00	1.24	1.52	1.82	2.12	2.35	2.47	2.48	2.37	2.14	1.84	1.54	1.26	1.02	0.82	0.64	28.1	0.00
-40	0.55	0.68	0.83	0.98	1.15	1.32	1.48	1.60	1.67	1.67	1.61	1.49	1.33	1.16	0.99	0.84	0.69	0.55	20.6	0.00
-45	0.52	0.65	0.79	0.96	1.14	1.30	1.45	1.54	1.58	1.58	1.54	1.44	1.29	1.12	0.95	0.78	0.63	0.50	19.8	0.00
HORIZONTAL(DEG)																				
Φ t	15.4	22.3	34.4	57.2	97.0	154	221	282	320	325	294	234	164	104	62.7	37.7	23.9	16.1	2466	---
Φ a	0.00	0.00	2.01	34.7	79.3	139	207	269	308	312	281	220	149	87.2	41.5	7.23	0.00	0.00	---	2137

one-half-peak spread: U:19.2,D:16.4 , L:18.5,R:16.5


NEMA Beam Type: Type 4

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.91V I:0.1120A P:23.800W PF:0.9000 Freq:49.99Hz Lamp Flux:111.371x24 lm		
NAME: Blazeline Max-598mm-3000K-35D-REV2	TYPE:3000K	WEIGHT:
SPEC.:35 DEG	DIM.: 598mm	SERIAL No.:01
MFR.: Luminoscape	SUR.:0.8	Shielding Angle:

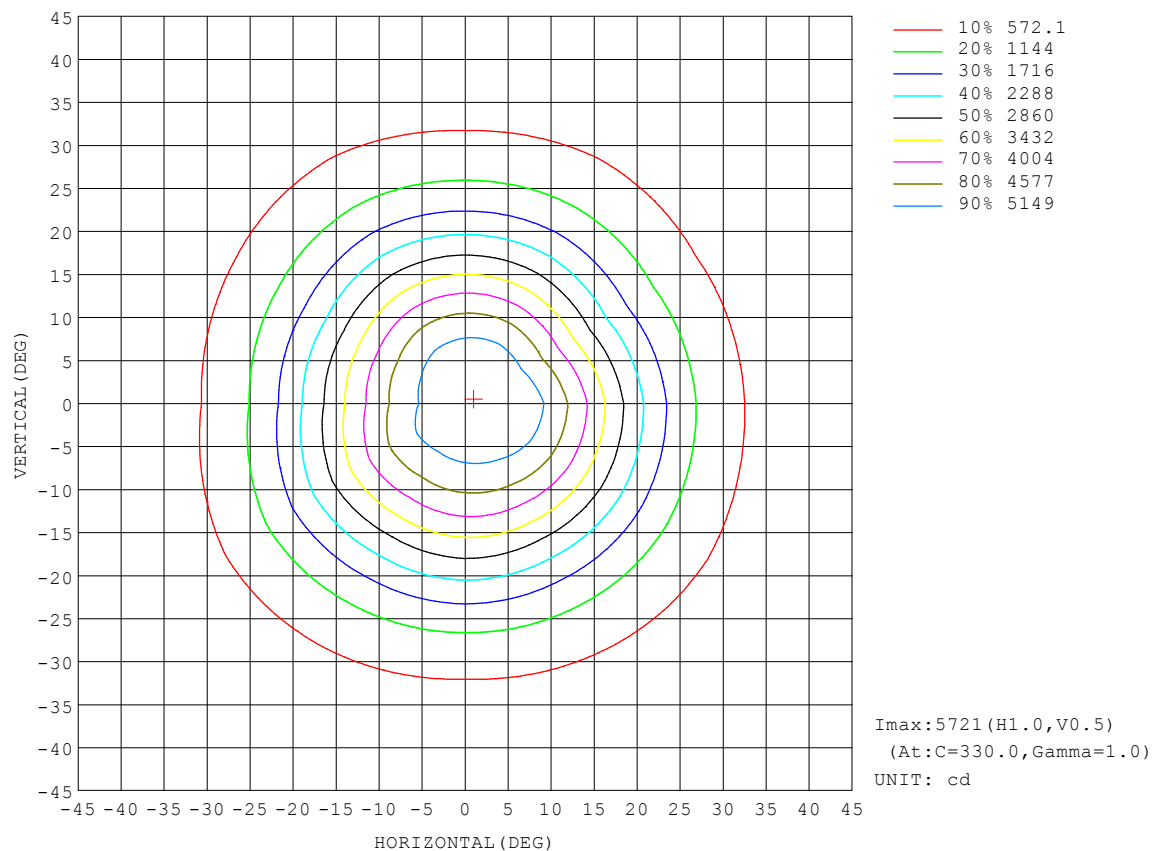


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.91V I:0.1120A P:23.800W PF:0.9000 Freq:49.99Hz Lamp Flux:111.371x24 lm		
NAME: Blazeline Max-598mm-3000K-35D-REV2	TYPE:3000K	WEIGHT:
SPEC.:35 DEG	DIM.: 598mm	SERIAL No.:01
MFR.: Luminoscape	SUR.:0.8	Shielding Angle:

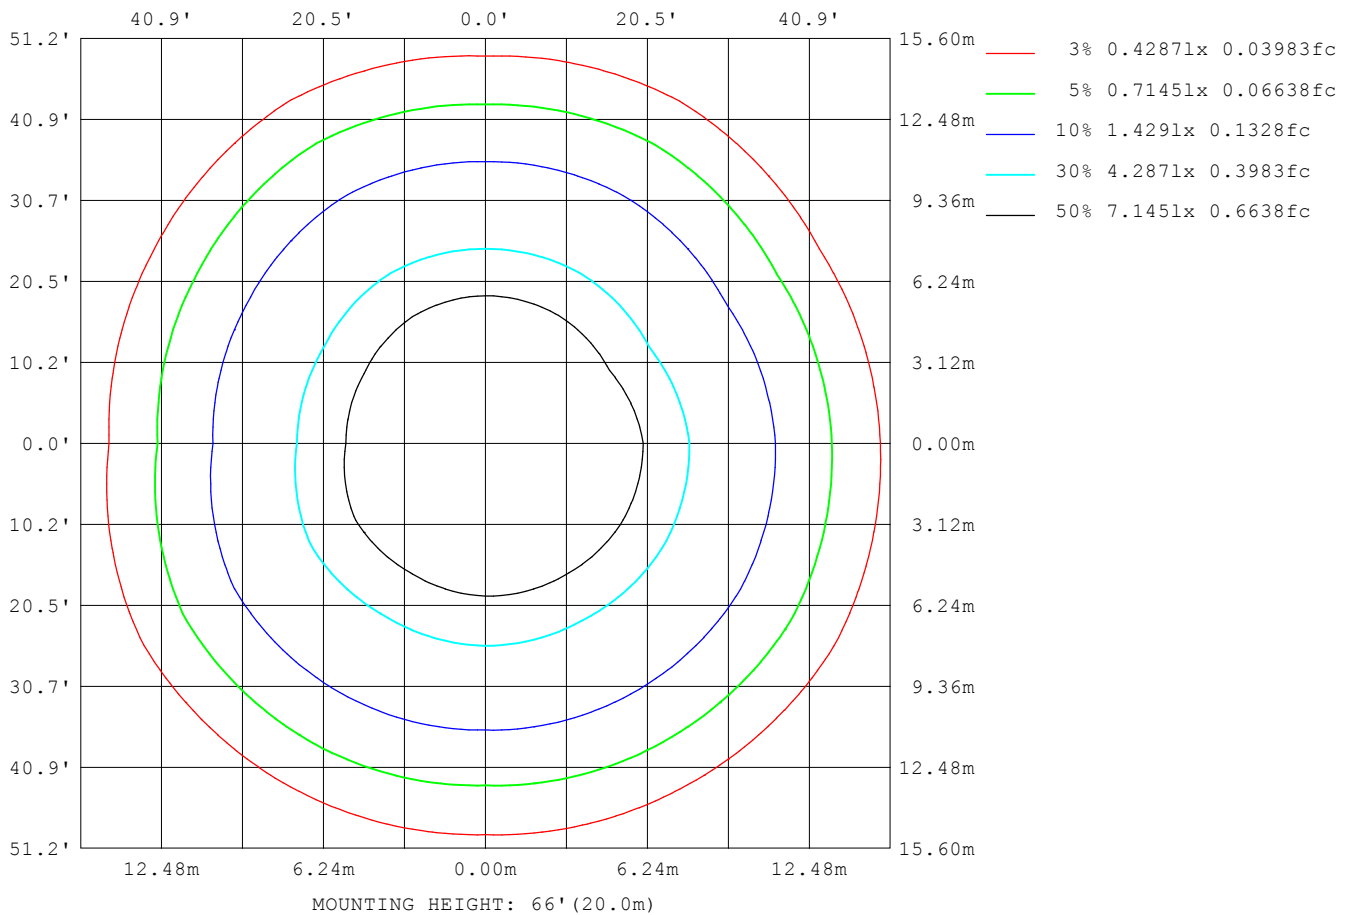

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

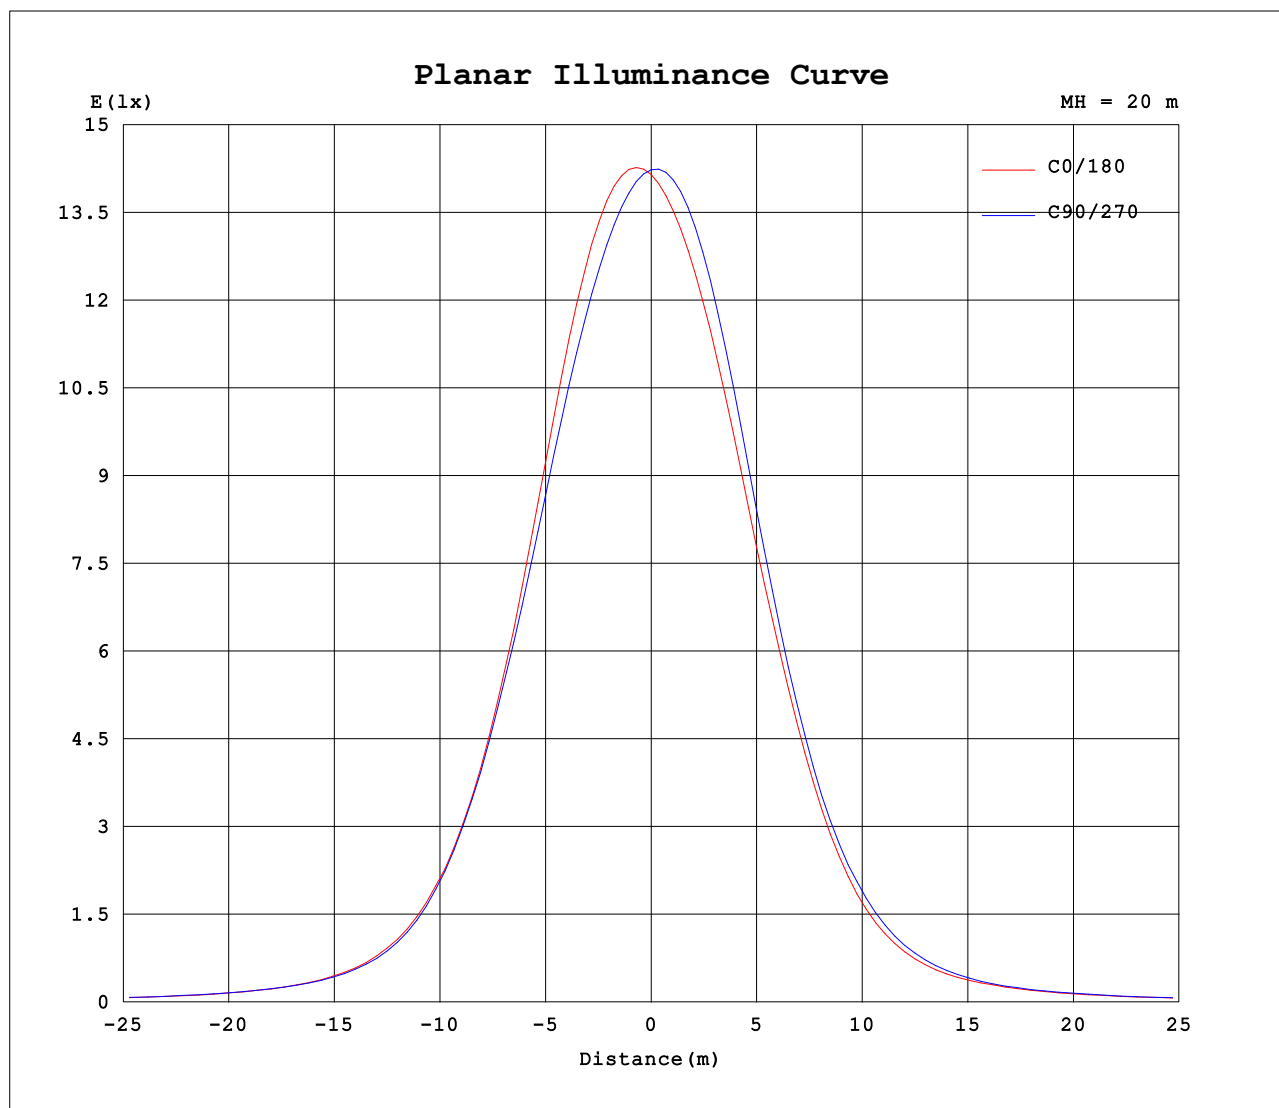


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-09-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.91V I:0.1120A P:23.800W PF:0.9000 Freq:49.99Hz Lamp Flux:111.371x24 lm		
NAME: Blazeline Max-598mm-3000K-35D-REV2	TYPE:3000K	WEIGHT:
SPEC.:35 DEG	DIM.: 598mm	SERIAL No.:01
MFR.: Luminoscape	SUR.:0.8	Shielding Angle:

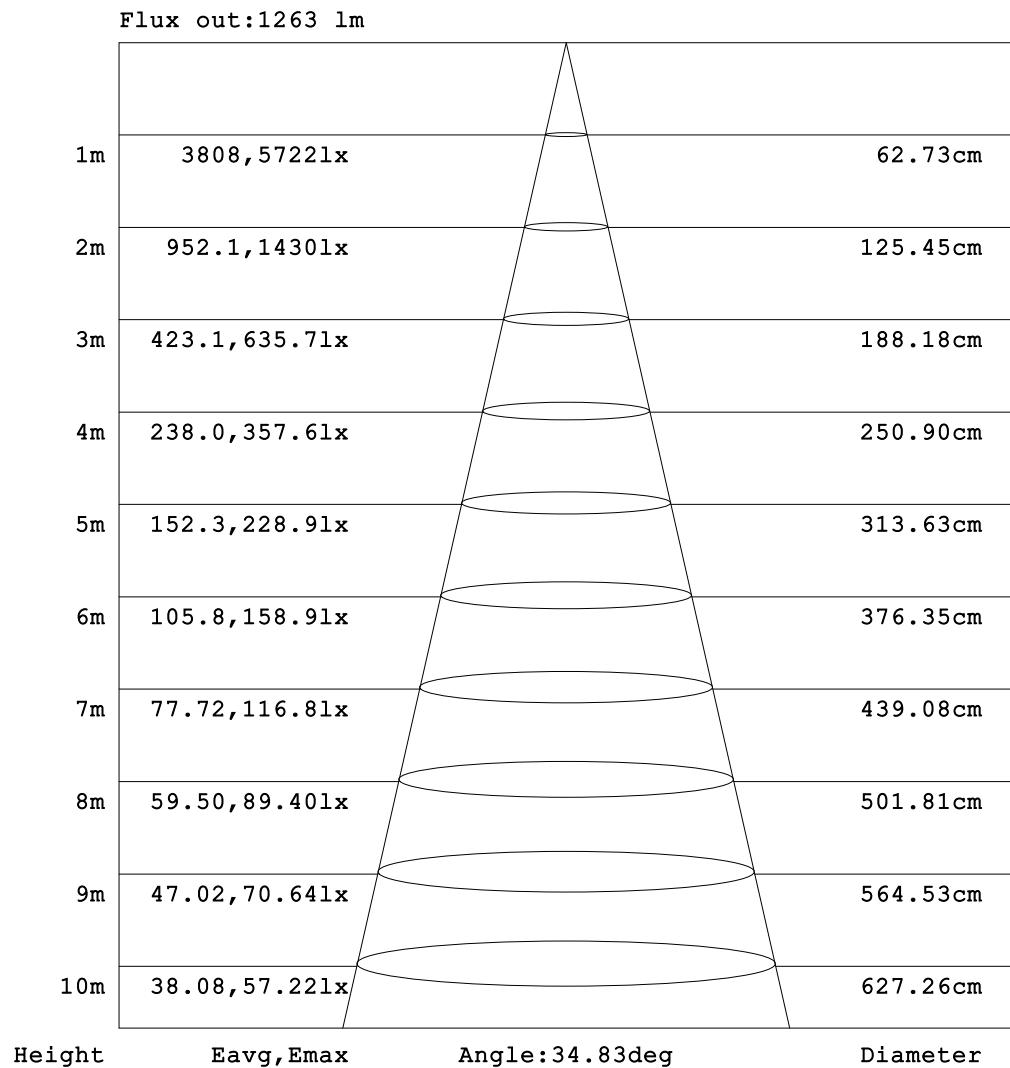

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:20DEG
 Operators:01
 Test Date:2025-09-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.700m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.91V I:0.1120A P:23.800W PF:0.9000 Freq:49.99Hz Lamp Flux:111.371x24 lm		
NAME: Blazeline Max-598mm-3000K-35D-REV2	TYPE:3000K	WEIGHT:
SPEC.:35 DEG	DIM.: 598mm	SERIAL No.:01
MFR.: Luminoscape	SUR.:0.8	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.18	0.21	0.25	0.31	0.39	0.49	0.61	0.81	1.13	1.69	2.72	4.30	6.44	8.88	11.0	12.4	13.4	14.4	15.0
-170	0.18	0.21	0.25	0.31	0.39	0.49	0.61	0.81	1.12	1.67	2.61	4.10	6.10	8.40	10.6	12.2	13.2	13.6	13.9
-160	0.18	0.20	0.25	0.31	0.38	0.47	0.59	0.75	1.01	1.42	2.10	3.17	4.63	6.33	8.07	9.56	10.6	11.3	11.5
-150	0.18	0.20	0.24	0.29	0.35	0.44	0.54	0.66	0.85	1.11	1.50	2.06	2.85	3.82	4.87	5.87	6.64	7.16	7.36
-140	0.18	0.20	0.23	0.28	0.33	0.39	0.48	0.57	0.68	0.83	1.01	1.26	1.57	1.96	2.41	2.83	3.20	3.46	3.57
-130	0.18	0.20	0.22	0.26	0.30	0.34	0.40	0.47	0.53	0.61	0.69	0.79	0.91	1.03	1.17	1.30	1.42	1.50	1.55
-120	0.18	0.19	0.21	0.24	0.27	0.30	0.34	0.37	0.40	0.45	0.49	0.52	0.57	0.61	0.66	0.71	0.74	0.77	0.79
-110	0.18	0.19	0.20	0.22	0.24	0.26	0.28	0.29	0.31	0.32	0.34	0.35	0.36	0.39	0.41	0.44	0.46	0.48	0.49
-100	0.18	0.19	0.20	0.21	0.22	0.23	0.23	0.23	0.24	0.24	0.24	0.24	0.23	0.24	0.26	0.27	0.29	0.30	0.31
-90	0.18	0.20	0.22	0.24	0.26	0.28	0.30	0.30	0.31	0.32	0.33	0.33	0.34	0.33	0.31	0.30	0.28	0.27	0.25
-80	0.18	0.21	0.34	0.56	0.93	1.44	2.10	3.09	4.36	5.82	7.47	9.15	10.9	12.2	13.4	14.4	15.2	15.8	16.1
-70	0.18	0.28	0.68	1.56	3.32	6.21	10.1	14.7	19.6	24.6	29.4	34.1	38.3	41.7	44.4	46.6	48.3	49.4	50.0
-60	0.18	0.37	1.27	3.69	8.35	15.0	23.1	32.0	40.5	48.4	55.7	62.5	68.8	74.1	78.6	82.1	84.7	86.3	87.0
-50	0.18	0.49	2.20	6.90	15.1	25.7	37.7	49.7	61.2	72.4	82.9	93.2	103	113	121	128	134	138	139
-40	0.18	0.64	3.28	10.6	22.0	36.0	50.4	65.7	81.4	97.4	114	132	151	173	197	222	244	258	262
-30	0.18	0.78	4.41	14.0	28.2	44.2	61.1	79.2	99.3	123	153	190	243	311	407	520	632	714	739
-20	0.18	0.90	5.33	16.6	32.5	49.9	68.8	89.6	114	147	196	275	413	640	988	1426	1873	2245	2414
-10	0.18	0.95	5.82	18.0	34.7	52.9	72.8	95.5	124	164	230	347	594	1078	1874	2830	3704	4342	4651
0	0.18	0.94	5.78	18.1	34.6	52.9	72.8	95.5	124	165	231	353	617	1158	2054	3181	4336	5203	5659
10	0.18	0.91	5.57	17.5	33.8	51.9	71.6	93.8	121	158	218	325	539	949	1604	2498	3514	4352	4684
20	0.18	0.83	4.87	15.5	30.8	47.9	66.3	86.5	110	139	181	248	362	560	869	1292	1747	2077	2201
30	0.18	0.70	3.81	12.6	25.8	41.1	57.5	74.9	93.8	115	140	175	226	295	393	509	607	678	697
40	0.18	0.55	2.65	8.95	19.3	31.9	45.8	60.2	75.1	90.6	107	125	145	170	197	220	238	248	248
50	0.18	0.41	1.69	5.30	12.2	21.4	31.9	43.2	54.7	66.2	77.3	88.0	98.5	109	117	124	129	132	132
60	0.18	0.31	0.93	2.49	5.85	11.1	17.6	25.3	33.7	42.2	50.1	57.5	64.2	69.7	73.8	77.2	79.5	80.8	81.1
70	0.18	0.24	0.46	0.98	1.91	3.56	6.05	9.76	14.3	19.1	24.1	28.9	33.4	36.8	39.3	41.2	42.6	43.4	43.6
80	0.18	0.19	0.25	0.33	0.47	0.67	0.93	1.43	2.14	3.05	4.29	5.65	7.16	8.31	9.38	10.3	10.9	11.4	11.7
90	0.18	0.19	0.20	0.21	0.21	0.22	0.23	0.23	0.23	0.24	0.24	0.24	0.24	0.23	0.23	0.22	0.22	0.21	0.21
100	0.18	0.19	0.19	0.19	0.20	0.20	0.20	0.21	0.22	0.23	0.24	0.26	0.27	0.27	0.26	0.26	0.26	0.25	0.25
110	0.18	0.19	0.19	0.20	0.21	0.21	0.21	0.23	0.26	0.28	0.31	0.34	0.37	0.38	0.39	0.39	0.40	0.40	0.40
120	0.18	0.19	0.20	0.21	0.23	0.25	0.27	0.30	0.34	0.39	0.43	0.49	0.53	0.57	0.59	0.62	0.63	0.63	0.63
130	0.18	0.19	0.21	0.23	0.26	0.29	0.33	0.38	0.45	0.52	0.60	0.70	0.79	0.91	1.01	1.09	1.16	1.21	1.22
140	0.18	0.20	0.22	0.25	0.29	0.35	0.41	0.49	0.58	0.70	0.87	1.10	1.36	1.68	2.03	2.38	2.67	2.88	2.95
150	0.18	0.20	0.23	0.27	0.33	0.40	0.49	0.59	0.74	0.97	1.31	1.81	2.51	3.35	4.24	5.10	5.80	6.26	6.43
160	0.18	0.20	0.24	0.30	0.36	0.45	0.55	0.70	0.93	1.30	1.92	2.90	4.24	5.80	7.34	8.65	9.61	10.3	10.5
170	0.18	0.20	0.25	0.31	0.38	0.48	0.59	0.78	1.08	1.60	2.50	3.93	5.83	7.98	9.94	11.4	12.4	13.0	13.3
180	0.18	0.21	0.25	0.31	0.39	0.49	0.61	0.81	1.13	1.69	2.72	4.30	6.44	8.88	11.0	12.4	13.4	14.4	15.0

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.91V I:0.1120A P:23.800W PF:0.9000 Freq:49.99Hz Lamp Flux:111.371x24 lm		
NAME: Blazeline Max-598mm-3000K-35D-REV2	TYPE:3000K	WEIGHT:
SPEC.:35 DEG	DIM.: 598mm	SERIAL No.:01
MFR.: Luminoscape	SUR.:0.8	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	14.8	14.3	13.3	11.6	9.31	6.85	4.67	2.99	1.87	1.24	0.87	0.66	0.51	0.41	0.31	0.26	0.24	0.25	
-170	13.8	13.2	12.2	10.5	8.41	6.21	4.26	2.77	1.78	1.20	0.86	0.66	0.51	0.40	0.31	0.26	0.24	0.25	
-160	11.3	10.6	9.50	7.99	6.27	4.59	3.20	2.16	1.48	1.06	0.80	0.62	0.49	0.38	0.31	0.26	0.24	0.25	
-150	7.16	6.65	5.89	4.89	3.83	2.86	2.07	1.51	1.13	0.87	0.70	0.56	0.45	0.36	0.30	0.26	0.24	0.25	
-140	3.47	3.22	2.86	2.45	2.00	1.60	1.28	1.03	0.85	0.70	0.59	0.49	0.41	0.34	0.28	0.25	0.24	0.25	
-130	1.51	1.43	1.32	1.19	1.05	0.93	0.81	0.71	0.63	0.56	0.48	0.42	0.36	0.31	0.27	0.25	0.24	0.25	
-120	0.78	0.75	0.72	0.67	0.63	0.59	0.54	0.50	0.46	0.43	0.39	0.35	0.31	0.28	0.26	0.24	0.24	0.25	
-110	0.48	0.46	0.44	0.42	0.40	0.38	0.37	0.35	0.33	0.32	0.31	0.30	0.28	0.26	0.25	0.24	0.24	0.25	
-100	0.30	0.29	0.28	0.26	0.25	0.24	0.25	0.25	0.25	0.25	0.25	0.26	0.25	0.25	0.24	0.24	0.24	0.25	
-90	0.26	0.27	0.27	0.28	0.28	0.29	0.28	0.28	0.27	0.27	0.26	0.25	0.25	0.25	0.25	0.25	0.25	0.25	
-80	15.4	14.5	13.4	12.1	10.5	8.93	7.24	5.63	4.12	2.93	2.00	1.38	0.99	0.68	0.46	0.34	0.29	0.25	
-70	49.1	47.7	45.7	43.1	40.0	36.2	31.7	26.8	21.8	16.7	11.9	7.79	4.64	2.44	1.29	0.63	0.34	0.25	
-60	86.2	84.3	81.5	77.7	73.0	67.4	60.8	53.6	45.7	37.4	28.6	20.3	12.9	7.08	3.04	1.19	0.42	0.25	
-50	138	134	129	122	113	103	92.7	82.0	70.7	59.1	47.0	35.3	23.8	13.8	6.20	1.98	0.55	0.25	
-40	259	246	225	200	176	153	133	114	97.3	80.7	64.6	49.2	34.7	21.0	10.0	3.06	0.70	0.25	
-30	718	638	528	417	322	251	197	157	125	101	80.1	61.3	43.8	27.7	13.7	4.30	0.87	0.25	
-20	2273	1908	1454	1016	671	439	291	206	153	119	92.5	70.4	50.7	32.7	16.7	5.39	1.01	0.25	
-10	4506	3924	2986	1985	1179	671	392	251	175	131	100	75.8	54.6	35.5	18.5	6.06	1.09	0.25	
0	5645	5001	3787	2468	1423	775	429	264	180	134	102	76.8	55.4	36.1	18.9	6.21	1.11	0.25	
10	4451	3624	2568	1682	1037	605	363	236	168	128	97.9	74.1	53.3	34.6	17.9	5.84	1.07	0.25	
20	2076	1738	1290	877	572	372	256	186	142	113	88.2	67.2	48.2	30.8	15.6	4.99	0.97	0.25	
30	676	603	504	391	296	226	175	139	115	93.3	74.4	56.7	40.3	25.2	12.3	3.81	0.82	0.25	
40	248	237	218	195	168	144	124	105	88.0	72.4	57.8	43.7	30.2	18.1	8.50	2.60	0.65	0.25	
50	131	128	123	116	107	96.4	85.6	74.5	62.9	51.0	39.5	29.0	19.2	11.0	4.81	1.65	0.51	0.25	
60	80.4	78.6	75.8	72.0	67.4	61.5	54.5	46.8	38.6	29.9	21.4	14.6	9.22	4.86	2.19	0.95	0.40	0.25	
70	42.9	41.6	39.7	37.3	34.4	30.6	26.0	21.0	16.1	11.4	7.23	4.18	2.53	1.52	0.89	0.51	0.32	0.25	
80	11.0	10.2	9.14	7.95	6.60	5.27	4.01	2.92	2.00	1.36	0.89	0.58	0.50	0.43	0.36	0.31	0.29	0.25	
90	0.21	0.22	0.23	0.24	0.25	0.26	0.26	0.25	0.25	0.25	0.25	0.24	0.25	0.25	0.25	0.25	0.25	0.25	
100	0.26	0.27	0.28	0.29	0.29	0.29	0.27	0.26	0.25	0.23	0.22	0.21	0.22	0.22	0.23	0.23	0.24	0.25	
110	0.40	0.40	0.40	0.40	0.39	0.38	0.35	0.33	0.30	0.27	0.25	0.22	0.22	0.22	0.23	0.23	0.24	0.25	
120	0.63	0.63	0.61	0.59	0.57	0.53	0.49	0.44	0.40	0.35	0.31	0.27	0.25	0.24	0.23	0.23	0.24	0.25	
130	1.20	1.15	1.08	0.99	0.90	0.79	0.69	0.60	0.52	0.45	0.39	0.34	0.30	0.26	0.24	0.23	0.23	0.25	
140	2.86	2.64	2.34	1.99	1.64	1.33	1.06	0.85	0.69	0.58	0.49	0.42	0.35	0.30	0.26	0.24	0.23	0.25	
150	6.23	5.74	5.00	4.14	3.25	2.43	1.75	1.27	0.95	0.75	0.61	0.50	0.41	0.33	0.27	0.25	0.23	0.25	
160	10.3	9.64	8.56	7.16	5.59	4.07	2.84	1.93	1.33	0.95	0.72	0.57	0.46	0.36	0.29	0.25	0.23	0.25	
170	13.4	12.6	11.4	9.86	7.92	5.87	4.03	2.63	1.68	1.14	0.82	0.63	0.49	0.39	0.31	0.26	0.24	0.25	
180	14.8	14.3	13.3	11.6	9.31	6.85	4.67	2.99	1.87	1.24	0.87	0.66	0.51	0.41	0.31	0.26	0.24	0.25	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
γ Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks: