

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		2225.4 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		1.0 degrees horizontal
Beam Spread	At 10% of Imax	86.0V x 54.5H
	At 50% of Imax	55.7V x 20.6H
	At 90% of Imax	24.5V x 6.7H
Beam Flux	Total	1000.4 lumens per klm.
	To 10% of Imax	857.3 lumens per klm.
	To 50% of Imax	438.0 lumens per klm.
	To 90% of Imax	89.5 lumens per klm.
	Upward LOR	0.9 %
	Downward LOR	99.2 %
Luminaire Efficiency (Light Output Ratio)		100.0 %

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 20DEG
 Operators: 01
 Test Date: 2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 7.700m [K=1.0000]
 Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.89V I:0.0820A P:17.900W PF:0.9000 Freq:49.99Hz Lamp Flux:121.67x12 lm		
NAME:Edgeless Ground-500mm-3000K-20x55D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:20x55 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

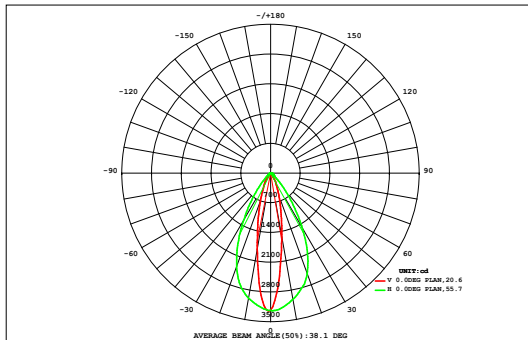

DATA OF LAMP		Eff:81.57lm/W	
MODEL		Imax (cd)	3249
NOMINAL POWER (W)	18	AVAILABILITY (%)	85.7
RATED VOLTAGE (V)	220	Avai. FLUX (lm)	1252
NOMINAL FLUX (lm)	121.67	LOR (%)	100.0
LAMPS INSIDE	12	TOTAL FLUX (lm)	1460
TEST VOLTAGE (V)	220	θ @50% (H,V)	21,56DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.01	0.02	0.03	0.05	0.10	0.22	0.37	0.52	0.52	0.38	0.23	0.11	0.06	0.03	0.02	0.01	0.01	2.69	0.00
72	0.00	0.01	0.02	0.05	0.10	0.18	0.37	0.62	0.87	0.88	0.67	0.43	0.22	0.12	0.06	0.02	0.01	0.01	4.64	0.00
64	0.01	0.01	0.03	0.08	0.18	0.38	0.75	1.17	1.54	1.56	1.23	0.84	0.48	0.23	0.10	0.03	0.01	0.01	8.63	0.00
56	0.01	0.02	0.04	0.12	0.34	0.85	1.71	2.94	4.38	4.44	3.11	1.89	0.95	0.39	0.14	0.05	0.02	0.01	21.4	1.96
48	0.01	0.02	0.06	0.15	0.51	1.45	3.31	6.91	11.8	11.9	7.33	3.76	1.69	0.58	0.16	0.07	0.03	0.01	49.8	34.3
40	0.01	0.03	0.08	0.17	0.59	2.29	5.58	12.1	23.4	23.9	13.1	6.39	2.83	0.73	0.19	0.08	0.04	0.01	91.5	79.3
32	0.01	0.04	0.09	0.22	0.81	3.31	8.06	17.3	35.7	36.8	19.4	9.13	3.91	1.19	0.27	0.10	0.04	0.01	136	126
24	0.01	0.04	0.10	0.27	1.21	4.18	9.74	22.4	44.5	46.5	24.6	10.8	4.94	1.78	0.35	0.11	0.05	0.01	172	161
	0.01	0.04	0.10	0.28	1.31	4.78	11.1	24.4	49.5	51.6	27.1	13.1	5.88	2.10	0.37	0.11	0.05	0.01	192	182
	0.01	0.04	0.10	0.32	1.49	5.19	12.3	27.9	53.8	54.6	29.6	13.8	6.11	2.19	0.39	0.11	0.05	0.01	208	199
	0.01	0.04	0.11	0.36	1.71	5.14	12.3	27.2	48.2	47.4	26.2	12.2	5.49	2.03	0.38	0.12	0.05	0.01	189	179
-24	0.01	0.04	0.11	0.31	1.42	4.45	10.4	21.5	39.7	39.1	20.2	9.88	4.48	1.45	0.30	0.11	0.04	0.01	153	143
-32	0.01	0.04	0.09	0.23	0.92	3.33	7.30	15.0	27.5	27.2	14.3	6.84	3.20	0.86	0.22	0.09	0.04	0.01	107	95.6
-40	0.01	0.03	0.08	0.19	0.70	1.99	4.37	8.79	14.6	14.5	8.49	4.07	1.85	0.65	0.18	0.07	0.03	0.01	60.6	45.9
-48	0.01	0.02	0.06	0.16	0.46	1.14	2.27	3.90	5.77	5.72	3.79	2.14	1.07	0.43	0.15	0.06	0.02	0.01	27.2	6.26
-56	0.01	0.02	0.04	0.12	0.27	0.55	0.99	1.45	1.87	1.86	1.42	0.93	0.49	0.22	0.10	0.04	0.01	0.01	10.4	0.00
-64	0.01	0.01	0.03	0.07	0.14	0.26	0.48	0.74	0.97	0.96	0.70	0.43	0.21	0.12	0.06	0.02	0.01	0.01	5.24	0.00
-72	0.00	0.01	0.02	0.04	0.08	0.13	0.27	0.44	0.61	0.60	0.43	0.25	0.11	0.06	0.03	0.02	0.01	0.00	3.12	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)	16	24	32	40	48	56	64	72			
Φ t	0.14	0.47	1.18	3.16	12.3	39.7	91.6	195	365	370	202	97.1	44.0	15.2	3.48	1.23	0.52	0.16	1443	---
Φ a	0.00	0.00	0.00	0.00	0.00	7.82	72.5	181	353	357	188	78.8	13.6	0.00	0.00	0.00	0.00	0.00	---	1252


one-half-peak spread: U:28.0,D:28.0 , L:10.5,R:10.5 IESNA Beam Type: Type 4 x 5 (H x V)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.89V I:0.0820A P:17.900W PF:0.9000 Freq:49.99Hz Lamp Flux:121.67x12 lm		
NAME:Edgeless Ground-500mm-3000K-20x55D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:20x55 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

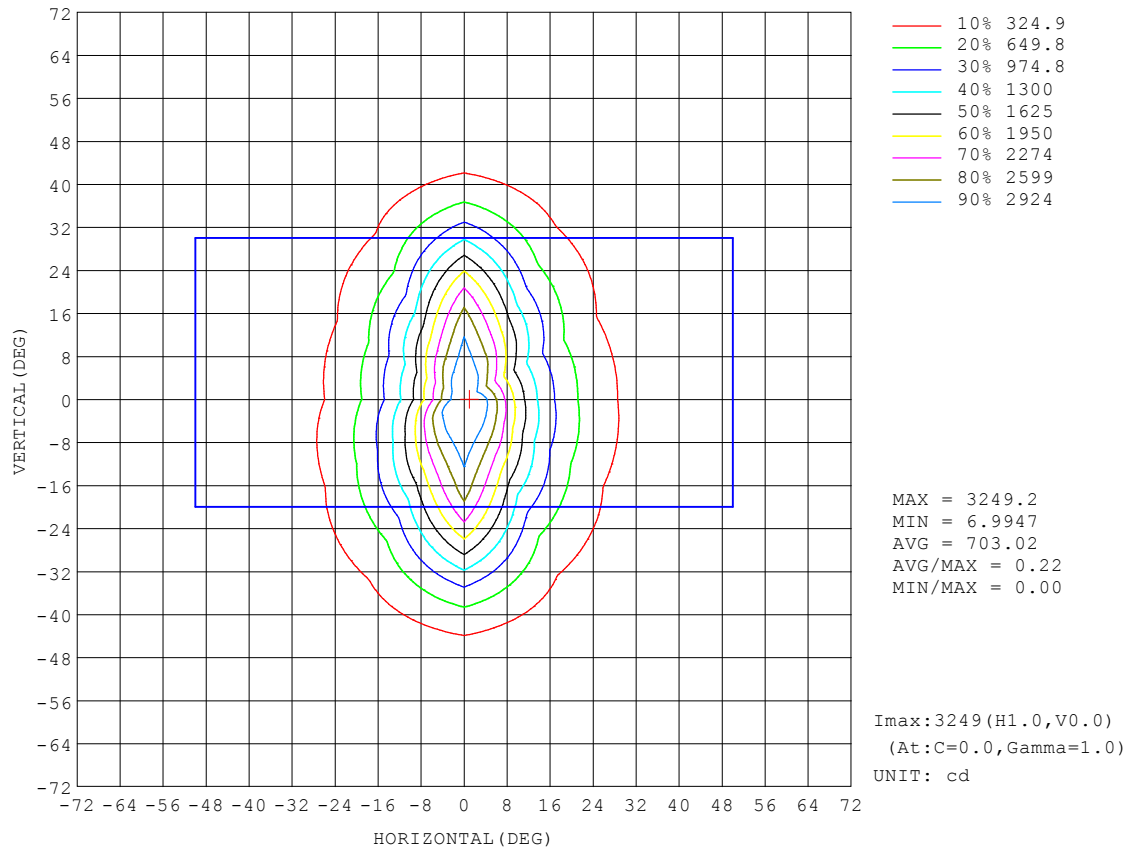


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.89V I:0.0820A P:17.900W PF:0.9000 Freq:49.99Hz Lamp Flux:121.67x12 lm		
NAME:Edgeless Ground-500mm-3000K-20x55D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:20x55 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

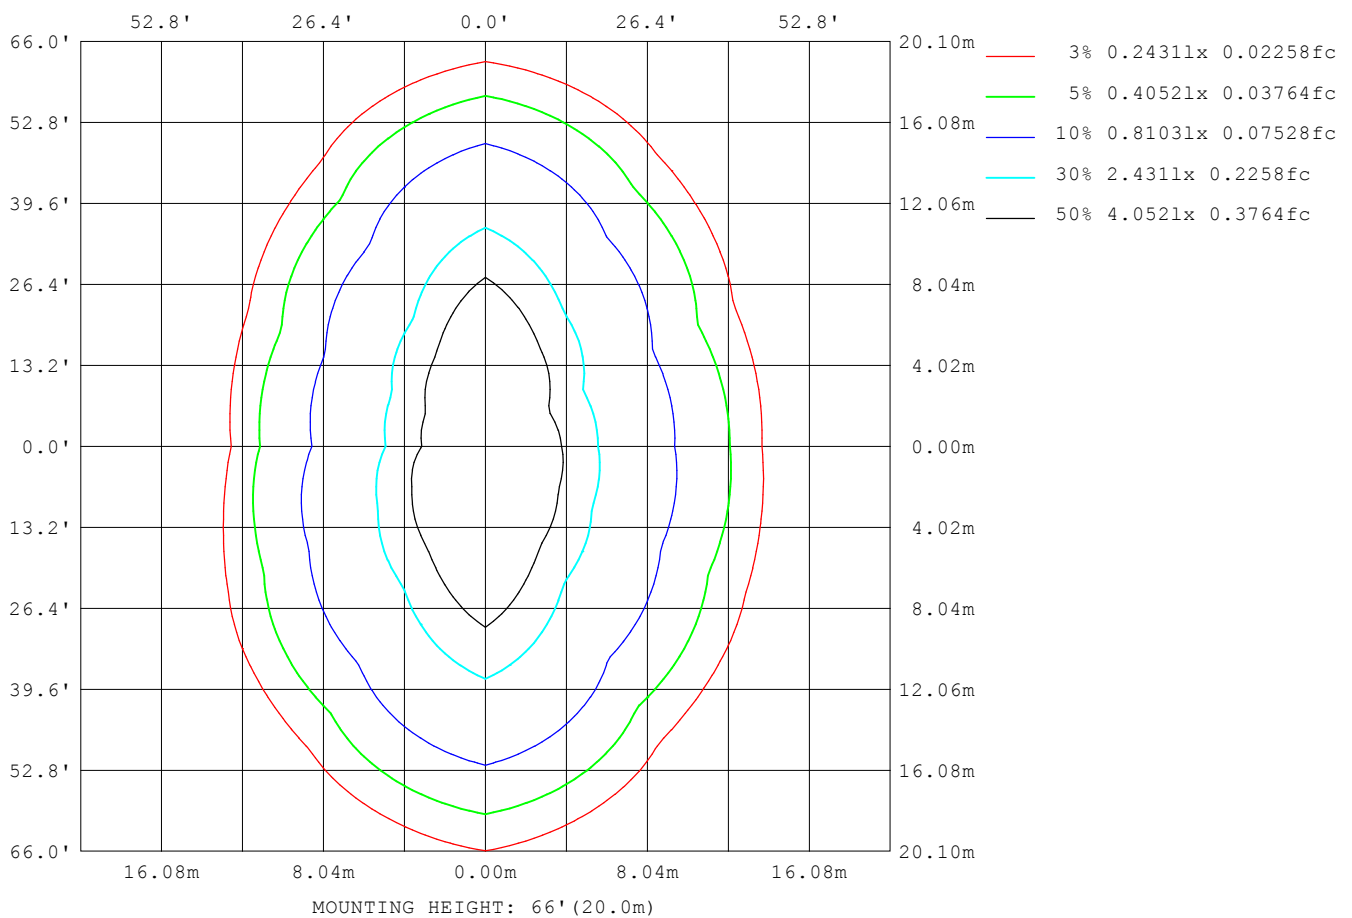

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

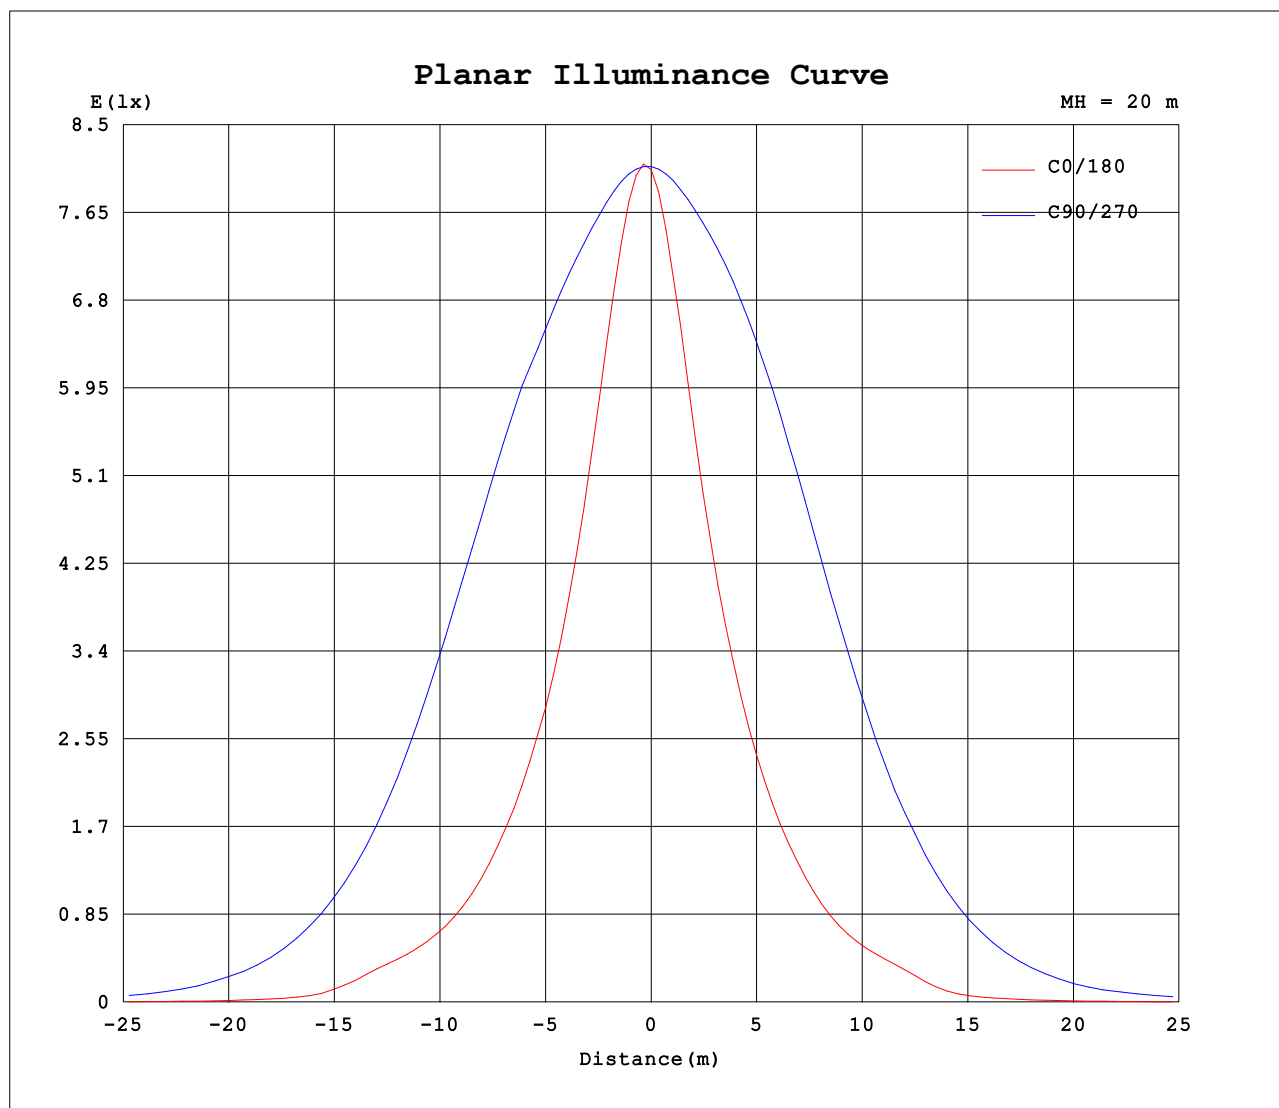


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.89V I:0.0820A P:17.900W PF:0.9000 Freq:49.99Hz Lamp Flux:121.67x12 lm		
NAME:Edgeless Ground-500mm-3000K-20x55D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:20x55 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

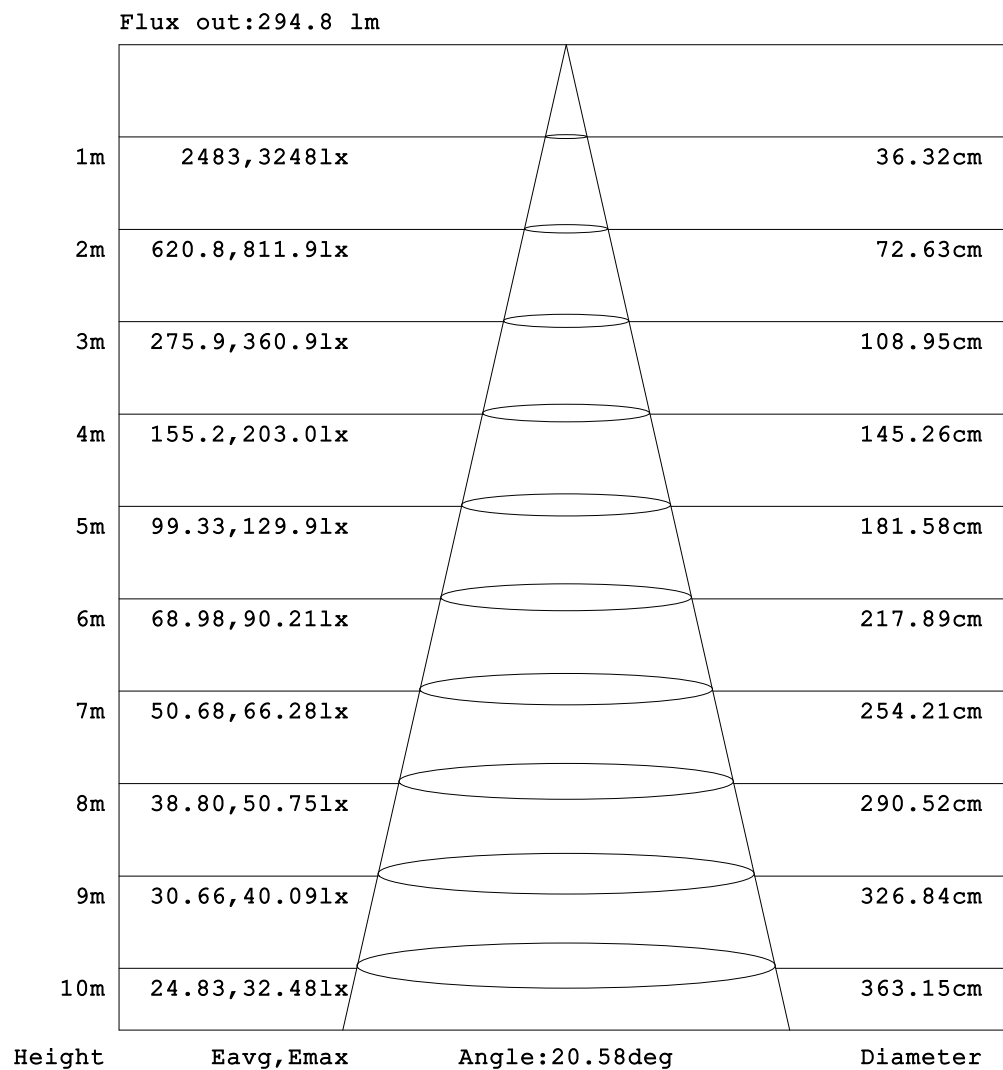

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:20DEG
 Operators:01
 Test Date:2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.700m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.89V I:0.0820A P:17.900W PF:0.9000 Freq:49.99Hz Lamp Flux:121.67x12 lm		
NAME:Edgeless Ground-500mm-3000K-20x55D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:20x55 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.07	0.07	0.08	0.10	0.11	0.13	0.16	0.24	0.39	0.63	1.02	1.61	2.53	3.92	5.62	6.99	7.40	7.27	7.32
-170	0.07	0.09	0.12	0.15	0.18	0.21	0.27	0.37	0.54	0.80	1.21	1.84	2.82	4.20	5.75	6.91	7.34	7.32	7.31
-160	0.07	0.10	0.15	0.19	0.24	0.29	0.36	0.46	0.62	0.85	1.22	1.71	2.46	3.61	4.85	5.89	6.47	6.45	6.28
-150	0.07	0.12	0.18	0.23	0.29	0.36	0.43	0.53	0.67	0.86	1.13	1.56	2.16	2.93	3.80	4.62	5.03	5.30	5.43
-140	0.07	0.13	0.20	0.27	0.34	0.42	0.50	0.59	0.71	0.87	1.08	1.37	1.74	2.20	2.72	3.15	3.51	3.77	3.96
-130	0.07	0.14	0.22	0.30	0.38	0.47	0.55	0.64	0.76	0.90	1.05	1.23	1.43	1.67	1.91	2.13	2.36	2.56	2.73
-120	0.07	0.15	0.23	0.32	0.41	0.50	0.59	0.69	0.81	0.93	1.06	1.20	1.34	1.48	1.60	1.74	1.86	1.99	2.10
-110	0.07	0.15	0.25	0.34	0.43	0.52	0.62	0.73	0.85	0.97	1.10	1.22	1.35	1.46	1.57	1.67	1.78	1.88	1.99
-100	0.07	0.16	0.25	0.35	0.44	0.53	0.63	0.75	0.87	0.99	1.12	1.24	1.36	1.47	1.58	1.68	1.79	1.89	2.00
-90	0.07	0.16	0.25	0.35	0.44	0.53	0.63	0.75	0.88	1.01	1.13	1.26	1.39	1.48	1.57	1.66	1.75	1.84	1.93
-80	0.07	0.15	0.25	0.35	0.46	0.58	0.70	0.88	1.06	1.26	1.46	1.65	1.84	3.33	5.08	6.94	8.84	10.7	12.6
-70	0.07	0.15	0.25	0.38	0.54	0.73	0.91	1.17	1.61	2.22	3.05	4.12	5.37	8.48	12.6	17.0	21.4	25.8	29.9
-60	0.07	0.14	0.27	0.44	0.65	0.89	1.13	1.59	2.86	4.59	6.71	9.34	12.7	17.8	25.8	33.7	41.2	48.2	54.5
-50	0.07	0.14	0.29	0.50	0.77	1.04	1.67	2.82	4.81	8.05	13.1	20.7	31.6	47.1	63.9	80.9	98.2	114	126
-40	0.07	0.14	0.30	0.56	0.84	1.42	2.62	4.42	6.47	10.8	21.0	40.3	71.2	113	170	252	354	461	554
-30	0.07	0.13	0.31	0.60	0.96	1.81	3.57	5.80	8.42	13.0	23.9	58.8	129	233	351	519	832	1177	1498
-20	0.07	0.12	0.30	0.59	1.02	2.13	4.25	6.68	10.3	17.7	37.0	103	205	343	560	870	1305	1936	2518
-10	0.07	0.11	0.28	0.56	0.97	2.22	4.44	6.90	10.7	19.6	49.2	120	244	408	672	1091	1746	2486	3020
0	0.07	0.09	0.25	0.51	0.82	2.00	4.14	6.32	9.10	15.5	30.6	80.4	226	354	589	958	1531	2426	3226
10	0.07	0.11	0.28	0.55	0.88	2.03	4.16	6.43	9.42	16.0	32.9	90.4	208	333	539	878	1460	2230	2992
20	0.07	0.12	0.29	0.56	0.88	1.79	3.72	5.91	8.50	13.3	24.3	53.7	145	265	433	680	1064	1719	2344
30	0.07	0.12	0.29	0.55	0.85	1.38	2.89	4.83	6.99	9.69	16.6	40.5	85.9	164	267	403	675	979	1264
40	0.07	0.13	0.28	0.52	0.77	1.07	1.90	3.37	5.07	8.25	15.7	30.2	52.9	85.1	128	192	272	358	431
50	0.07	0.13	0.26	0.45	0.69	0.93	1.20	1.87	3.42	5.70	8.95	13.9	22.1	34.2	49.4	64.1	77.7	89.8	98.9
60	0.07	0.14	0.25	0.39	0.57	0.78	0.98	1.28	1.98	3.19	4.77	6.60	8.73	12.5	19.9	27.7	35.4	42.7	49.6
70	0.07	0.14	0.23	0.35	0.48	0.62	0.78	0.99	1.26	1.64	2.22	2.91	3.71	6.33	9.96	13.8	17.7	21.6	25.2
80	0.07	0.14	0.23	0.32	0.42	0.52	0.62	0.77	0.93	1.10	1.26	1.43	1.62	2.69	4.00	5.43	6.93	8.42	9.85
90	0.07	0.15	0.23	0.31	0.39	0.47	0.56	0.68	0.81	0.93	1.06	1.18	1.31	1.41	1.51	1.62	1.72	1.83	1.93
100	0.07	0.15	0.23	0.31	0.39	0.47	0.55	0.67	0.80	0.92	1.05	1.17	1.30	1.41	1.52	1.62	1.73	1.84	1.95
110	0.07	0.14	0.22	0.30	0.38	0.46	0.53	0.64	0.76	0.89	1.01	1.14	1.27	1.38	1.47	1.57	1.67	1.77	1.87
120	0.07	0.14	0.21	0.29	0.36	0.43	0.50	0.59	0.71	0.83	0.96	1.09	1.23	1.36	1.47	1.58	1.69	1.80	1.90
130	0.07	0.13	0.20	0.27	0.33	0.40	0.46	0.53	0.62	0.75	0.90	1.07	1.26	1.49	1.69	1.91	2.13	2.34	2.53
140	0.07	0.12	0.18	0.24	0.30	0.36	0.41	0.47	0.54	0.68	0.89	1.14	1.45	1.84	2.33	2.76	3.14	3.45	3.69
150	0.07	0.11	0.16	0.21	0.26	0.30	0.36	0.42	0.52	0.68	0.85	1.21	1.82	2.51	3.36	4.23	4.81	5.01	5.02
160	0.07	0.10	0.14	0.18	0.21	0.25	0.30	0.38	0.52	0.68	0.97	1.45	2.07	3.15	4.37	5.37	5.93	6.04	5.99
170	0.07	0.08	0.11	0.14	0.16	0.19	0.23	0.32	0.48	0.68	1.10	1.67	2.55	3.87	5.36	6.58	7.11	7.19	7.07
180	0.07	0.07	0.08	0.10	0.11	0.13	0.16	0.24	0.39	0.63	1.02	1.61	2.53	3.92	5.62	6.99	7.40	7.27	7.35

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.89V I:0.0820A P:17.900W PF:0.9000 Freq:49.99Hz Lamp Flux:121.67x12 lm																		
NAME:Edgeless Ground-500mm-3000K-20x55D-REV2									TYPE:3000K					WEIGHT:00				
SPEC.:20x55 DEG									DIM.:500mm					SERIAL No.:01				
MFR.: 001									SUR.:0.8					Shielding Angle:				

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	7.67	7.86	7.30	5.95	4.20	2.68	1.66	1.03	0.62	0.37	0.22	0.14	0.11	0.10	0.09	0.09	0.09	0.09	
-170	7.18	7.19	6.76	5.60	4.09	2.72	1.77	1.15	0.74	0.48	0.33	0.24	0.19	0.15	0.13	0.12	0.10	0.09	
-160	6.37	6.33	5.65	4.61	3.36	2.25	1.57	1.09	0.77	0.55	0.41	0.32	0.25	0.21	0.17	0.14	0.11	0.09	
-150	5.24	4.91	4.44	3.55	2.70	1.97	1.39	0.99	0.75	0.59	0.46	0.38	0.32	0.26	0.21	0.17	0.13	0.09	
-140	3.71	3.38	2.97	2.49	1.99	1.57	1.23	0.96	0.76	0.61	0.51	0.43	0.36	0.30	0.24	0.19	0.14	0.09	
-130	2.52	2.28	2.03	1.77	1.53	1.32	1.12	0.95	0.80	0.66	0.56	0.48	0.40	0.34	0.27	0.21	0.15	0.09	
-120	1.97	1.82	1.67	1.52	1.39	1.24	1.10	0.97	0.84	0.72	0.60	0.51	0.44	0.36	0.29	0.22	0.15	0.09	
-110	1.87	1.74	1.62	1.50	1.37	1.25	1.13	1.00	0.88	0.76	0.64	0.54	0.46	0.38	0.30	0.23	0.16	0.09	
-100	1.88	1.76	1.64	1.52	1.40	1.28	1.15	1.03	0.91	0.79	0.66	0.54	0.47	0.39	0.31	0.24	0.16	0.09	
-90	1.82	1.72	1.61	1.51	1.40	1.30	1.17	1.04	0.92	0.79	0.67	0.54	0.47	0.39	0.32	0.24	0.17	0.09	
-80	10.7	8.78	6.85	4.97	3.21	1.70	1.52	1.33	1.14	0.96	0.78	0.63	0.53	0.44	0.36	0.28	0.18	0.09	
-70	25.5	20.9	16.3	11.7	7.40	4.27	3.29	2.50	1.86	1.36	1.03	0.82	0.67	0.52	0.41	0.30	0.21	0.09	
-60	47.2	39.4	31.1	22.7	14.5	10.1	7.60	5.57	3.85	2.39	1.36	1.05	0.83	0.65	0.47	0.33	0.22	0.09	
-50	113	96.5	78.7	61.6	44.3	28.4	17.4	10.8	6.89	4.28	2.55	1.49	1.01	0.77	0.55	0.35	0.22	0.09	
-40	457	345	240	158	106	66.5	38.0	19.6	9.91	6.08	4.25	2.57	1.33	0.88	0.62	0.38	0.22	0.09	
-30	1161	803	484	328	222	120	54.8	22.4	12.0	8.10	5.75	3.71	1.92	0.98	0.66	0.40	0.22	0.09	
-20	1894	1228	812	530	336	212	104	36.4	17.6	10.1	6.81	4.53	2.46	1.06	0.68	0.42	0.22	0.09	
-10	2429	1697	1069	681	427	276	155	53.9	21.7	11.2	7.28	4.91	2.76	1.11	0.68	0.42	0.21	0.09	
0	2794	1821	1154	726	444	288	154	44.2	20.3	10.4	7.08	4.82	2.72	1.04	0.66	0.40	0.20	0.09	
10	2382	1588	949	602	386	255	140	47.3	20.2	10.7	7.10	4.78	2.67	1.07	0.69	0.43	0.22	0.09	
20	1789	1186	773	491	301	180	83.5	31.1	15.7	9.36	6.49	4.28	2.30	1.02	0.69	0.43	0.23	0.09	
30	1001	714	452	306	199	106	48.1	19.2	10.7	7.53	5.30	3.38	1.72	0.98	0.68	0.42	0.23	0.09	
40	365	285	208	146	97.2	59.3	33.3	17.6	9.28	5.43	3.74	2.24	1.22	0.92	0.65	0.40	0.23	0.09	
50	91.2	80.2	67.5	53.9	40.0	27.4	17.9	11.1	6.68	3.84	2.11	1.35	1.07	0.81	0.59	0.39	0.24	0.09	
60	43.7	37.2	30.1	22.7	15.4	10.8	7.96	5.66	3.75	2.32	1.43	1.12	0.91	0.71	0.52	0.36	0.24	0.09	
70	21.8	18.1	14.4	10.7	7.14	4.44	3.43	2.61	1.94	1.45	1.12	0.91	0.75	0.60	0.47	0.34	0.22	0.09	
80	8.44	6.97	5.51	4.10	2.81	1.76	1.58	1.40	1.22	1.06	0.90	0.75	0.65	0.54	0.42	0.31	0.20	0.09	
90	1.84	1.75	1.66	1.58	1.49	1.40	1.28	1.16	1.03	0.91	0.79	0.67	0.57	0.48	0.38	0.28	0.19	0.09	
100	1.86	1.76	1.67	1.58	1.49	1.39	1.27	1.14	1.02	0.90	0.77	0.65	0.56	0.46	0.37	0.28	0.18	0.09	
110	1.78	1.70	1.62	1.54	1.46	1.36	1.23	1.11	0.98	0.86	0.74	0.63	0.54	0.45	0.36	0.27	0.18	0.09	
120	1.82	1.73	1.64	1.55	1.45	1.33	1.19	1.05	0.93	0.81	0.69	0.59	0.51	0.42	0.34	0.25	0.17	0.09	
130	2.38	2.20	2.01	1.81	1.60	1.38	1.17	0.99	0.84	0.72	0.62	0.54	0.46	0.39	0.31	0.23	0.16	0.09	
140	3.51	3.26	2.94	2.55	2.07	1.64	1.26	0.98	0.77	0.62	0.55	0.47	0.41	0.34	0.27	0.21	0.15	0.09	
150	5.06	4.92	4.46	3.60	2.71	2.01	1.43	1.01	0.75	0.59	0.47	0.40	0.34	0.28	0.23	0.18	0.14	0.09	
160	5.99	5.88	5.39	4.51	3.38	2.27	1.59	1.12	0.78	0.55	0.41	0.32	0.27	0.23	0.19	0.15	0.12	0.09	
170	6.98	6.79	6.42	5.47	4.08	2.74	1.78	1.16	0.75	0.49	0.33	0.24	0.19	0.16	0.14	0.12	0.10	0.09	
180	7.67	7.86	7.30	5.95	4.20	2.68	1.66	1.03	0.62	0.37	0.22	0.14	0.11	0.10	0.09	0.09	0.09	0.09	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks: