

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		1702.2 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		2.0 degrees horizontal
Beam Spread	At 10% of Imax	76.6V x 74.6H
	At 50% of Imax	40.0V x 39.8H
	At 90% of Imax	16.0V x 16.0H
Beam Flux	Total	1000.3 lumens per klm.
	To 10% of Imax	850.9 lumens per klm.
	To 50% of Imax	469.0 lumens per klm.
	To 90% of Imax	101.8 lumens per klm.
	Upward LOR	0.7 %
	Downward LOR	99.4 %
Luminaire Efficiency (Light Output Ratio)		100.0 %

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.90V I:0.0820A P:17.900W PF:0.9000 Freq:49.99Hz Lamp Flux:144.546x12 lm		
NAME:Edgeless Ground-500mm-3000K-40D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:40 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

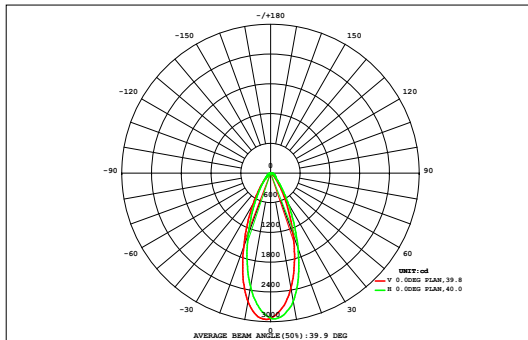

DATA OF LAMP		Eff:96.90lm/W	
MODEL		Imax(cd)	2953
NOMINAL POWER(W)	18	AVAILABILITY(%)	85.0
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	1475
NOMINAL FLUX(lm)	144.546	LOR(%)	100.0
LAMPS INSIDE	12	TOTAL FLUX(lm)	1735
TEST VOLTAGE(V)	220	θ @50% (H,V)	40,40DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.01	0.02	0.05	0.11	0.21	0.39	0.58	0.75	0.76	0.60	0.42	0.24	0.13	0.05	0.02	0.01	0.00	4.33	0.00
72	0.01	0.01	0.03	0.12	0.27	0.48	0.75	1.02	1.24	1.26	1.06	0.82	0.55	0.31	0.14	0.04	0.01	0.01	8.14	0.00
64	0.01	0.02	0.08	0.25	0.53	0.89	1.28	1.64	1.89	1.91	1.69	1.37	0.97	0.58	0.28	0.09	0.02	0.01	13.5	0.00
56	0.01	0.03	0.16	0.44	0.89	1.49	2.17	2.76	3.14	3.15	2.79	2.22	1.54	0.93	0.46	0.17	0.04	0.01	22.4	0.00
48	0.01	0.07	0.28	0.68	1.39	2.45	3.87	5.28	6.23	6.26	5.35	3.94	2.50	1.41	0.69	0.29	0.09	0.01	40.8	13.9
40	0.01	0.11	0.41	0.99	2.09	4.08	7.11	10.6	13.1	13.2	10.9	7.31	4.18	2.12	1.02	0.44	0.14	0.02	77.8	62.9
32	0.02	0.16	0.54	1.35	3.05	6.50	12.4	19.8	25.1	25.5	20.4	12.9	6.78	3.22	1.45	0.60	0.19	0.03	140	128
24	0.02	0.19	0.64	1.68	4.10	9.36	18.7	30.8	40.0	40.9	32.3	19.9	10.3	4.62	1.90	0.74	0.24	0.04	216	206
	0.02	0.21	0.70	1.90	4.82	11.5	23.6	39.0	50.9	52.7	42.6	27.0	13.7	5.79	2.24	0.84	0.26	0.04	278	269
	0.03	0.21	0.72	1.97	5.06	12.2	25.3	42.1	53.7	55.2	45.7	28.8	14.4	6.03	2.32	0.86	0.27	0.04	295	286
	0.03	0.21	0.70	1.87	4.71	11.0	22.4	35.8	45.2	46.0	37.2	23.7	12.0	5.23	2.09	0.80	0.25	0.04	249	240
-24	0.03	0.18	0.62	1.58	3.77	8.18	15.3	23.7	30.2	30.4	24.2	15.8	8.47	3.96	1.69	0.68	0.22	0.03	169	158
-32	0.02	0.15	0.50	1.21	2.63	5.13	8.86	13.2	16.4	16.4	13.3	9.01	5.24	2.68	1.25	0.52	0.17	0.03	96.7	83.0
-40	0.02	0.10	0.36	0.86	1.71	3.00	4.72	6.58	7.91	7.92	6.63	4.77	3.04	1.73	0.87	0.37	0.11	0.02	50.7	27.9
-48	0.01	0.06	0.24	0.58	1.10	1.79	2.58	3.33	3.87	3.88	3.35	2.60	1.81	1.10	0.57	0.23	0.06	0.01	27.2	0.00
-56	0.01	0.03	0.13	0.35	0.68	1.08	1.51	1.89	2.15	2.15	1.89	1.51	1.07	0.66	0.33	0.12	0.03	0.01	15.6	0.00
-64	0.01	0.01	0.06	0.18	0.37	0.61	0.89	1.15	1.36	1.35	1.14	0.86	0.57	0.34	0.16	0.05	0.01	0.01	9.13	0.00
-72	0.00	0.01	0.03	0.07	0.16	0.28	0.47	0.66	0.83	0.83	0.65	0.45	0.25	0.14	0.06	0.02	0.01	0.00	4.92	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)	16	24	32	40	48	56	64	72			
Φ t	0.27	1.77	6.20	16.1	37.4	80.2	152	240	304	310	252	163	87.6	41.0	17.6	6.87	2.13	0.36	1719	---
Φ a	0.00	0.00	0.00	0.00	11.7	61.4	135	222	286	292	234	146	69.1	17.4	0.00	0.00	0.00	0.00	---	1475

one-half-peak spread: U:19.6,D:20.7 , L:20.8,R:19.3


NEMA Beam Type: Type 5

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.90V I:0.0820A P:17.900W PF:0.9000 Freq:49.99Hz Lamp Flux:144.546x12 lm		
NAME:Edgeless Ground-500mm-3000K-40D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:40 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

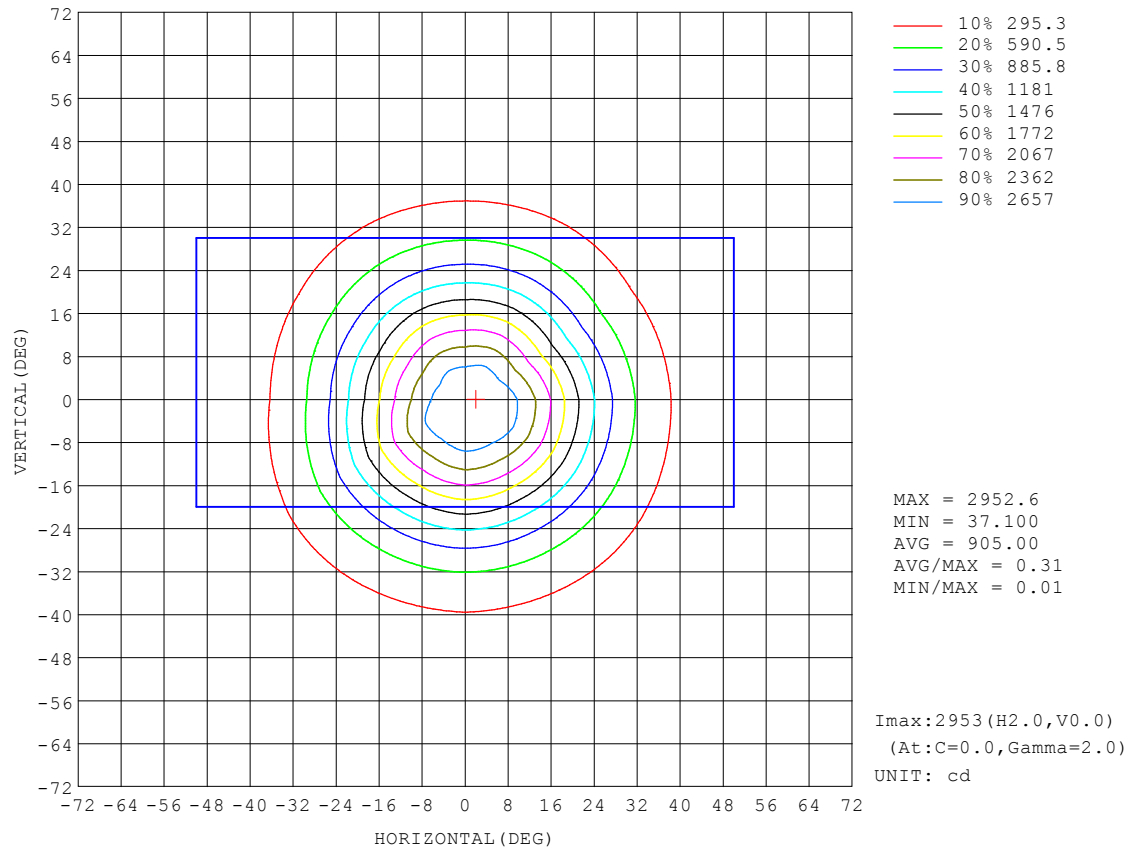


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.90V I:0.0820A P:17.900W PF:0.9000 Freq:49.99Hz Lamp Flux:144.546x12 lm		
NAME:Edgeless Ground-500mm-3000K-40D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:40 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

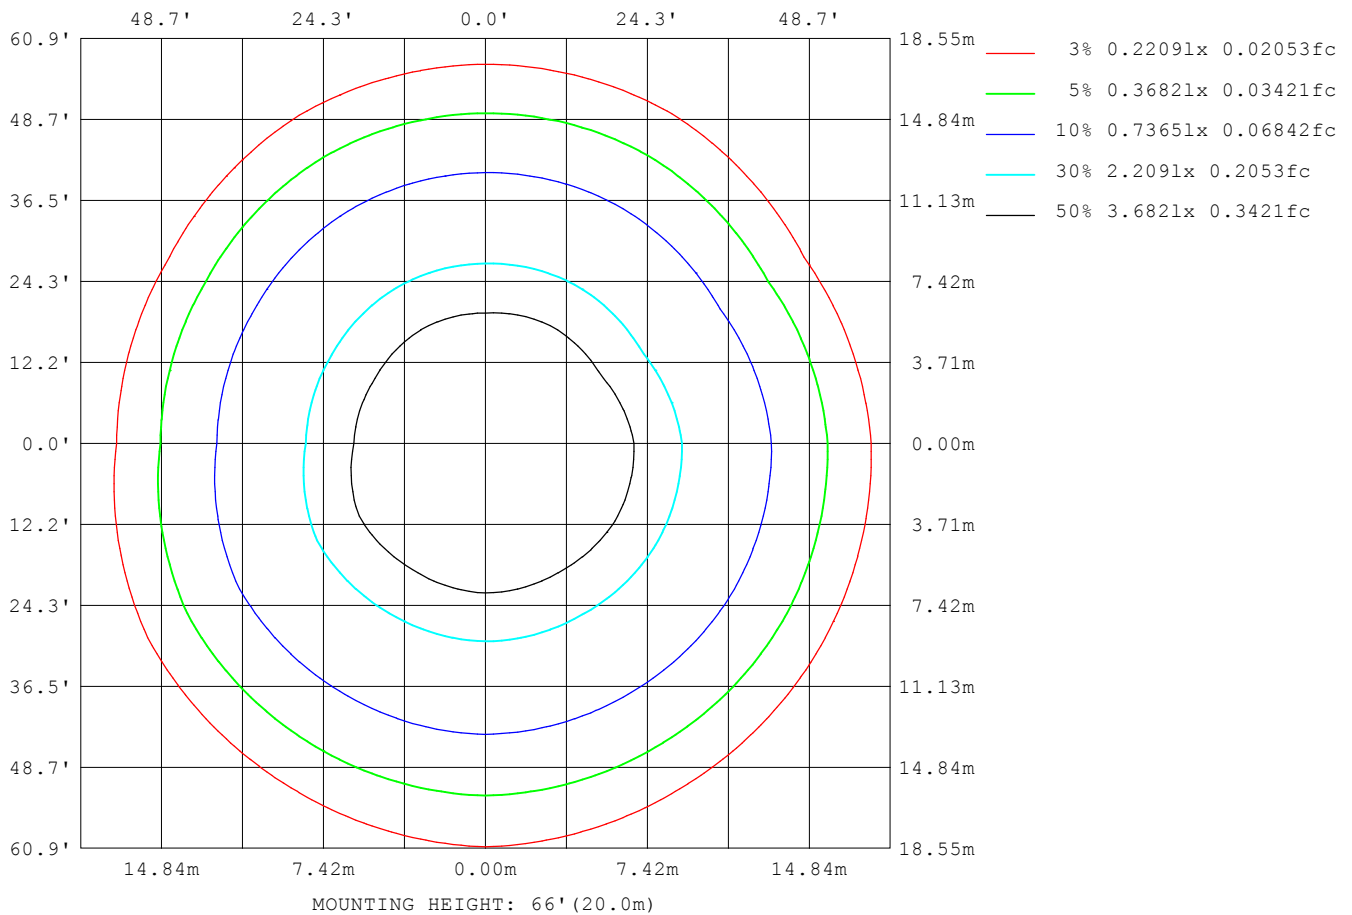

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

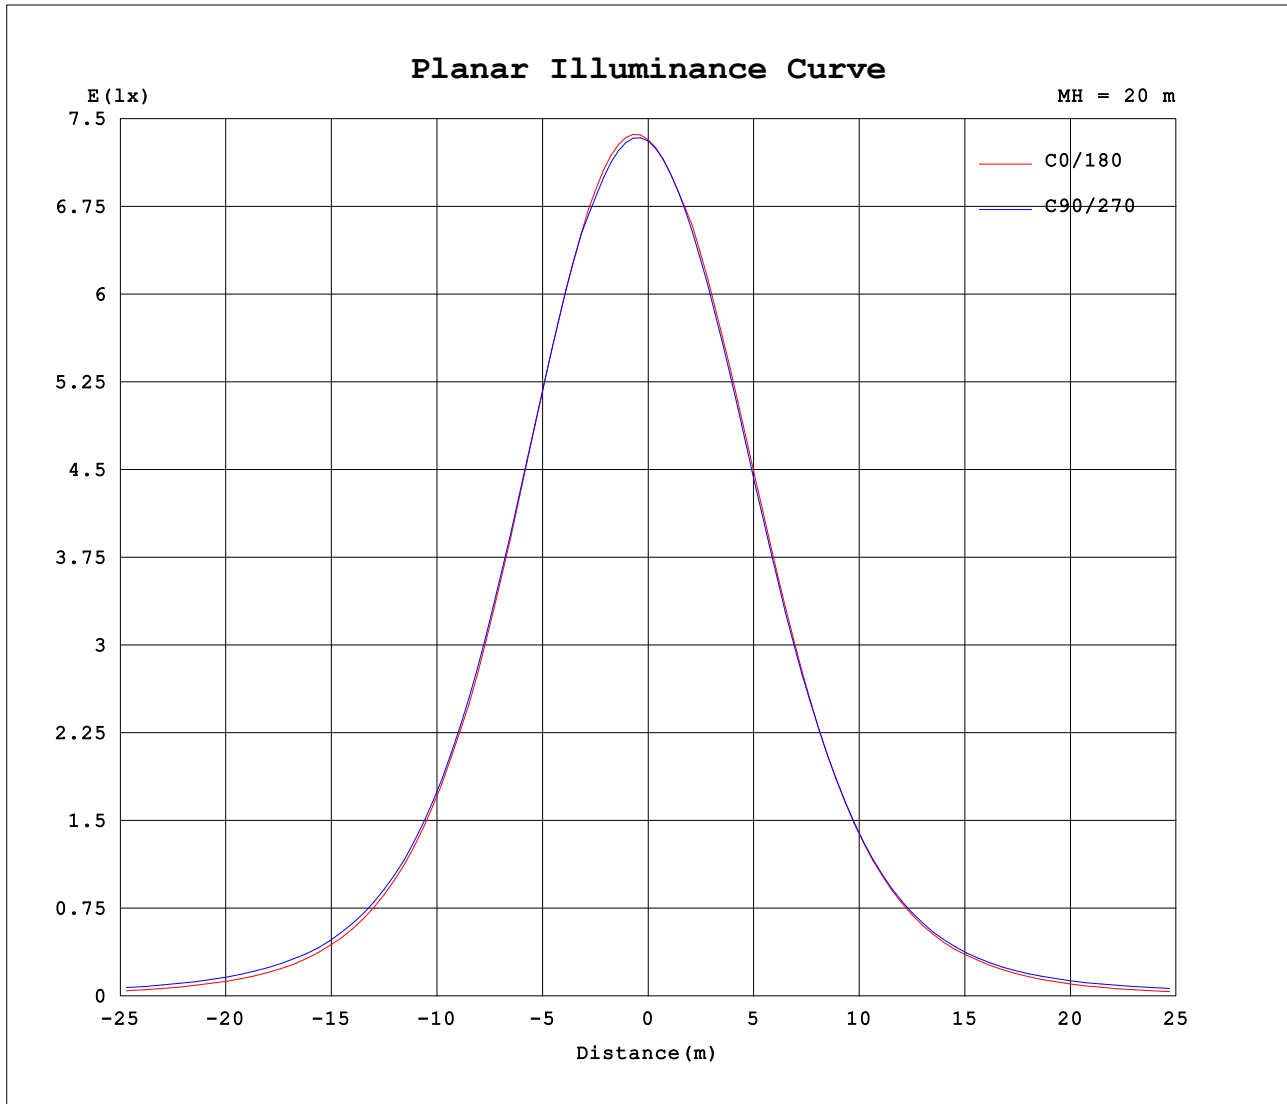


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.90V I:0.0820A P:17.900W PF:0.9000 Freq:49.99Hz Lamp Flux:144.546x12 lm		
NAME:Edgeless Ground-500mm-3000K-40D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:40 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

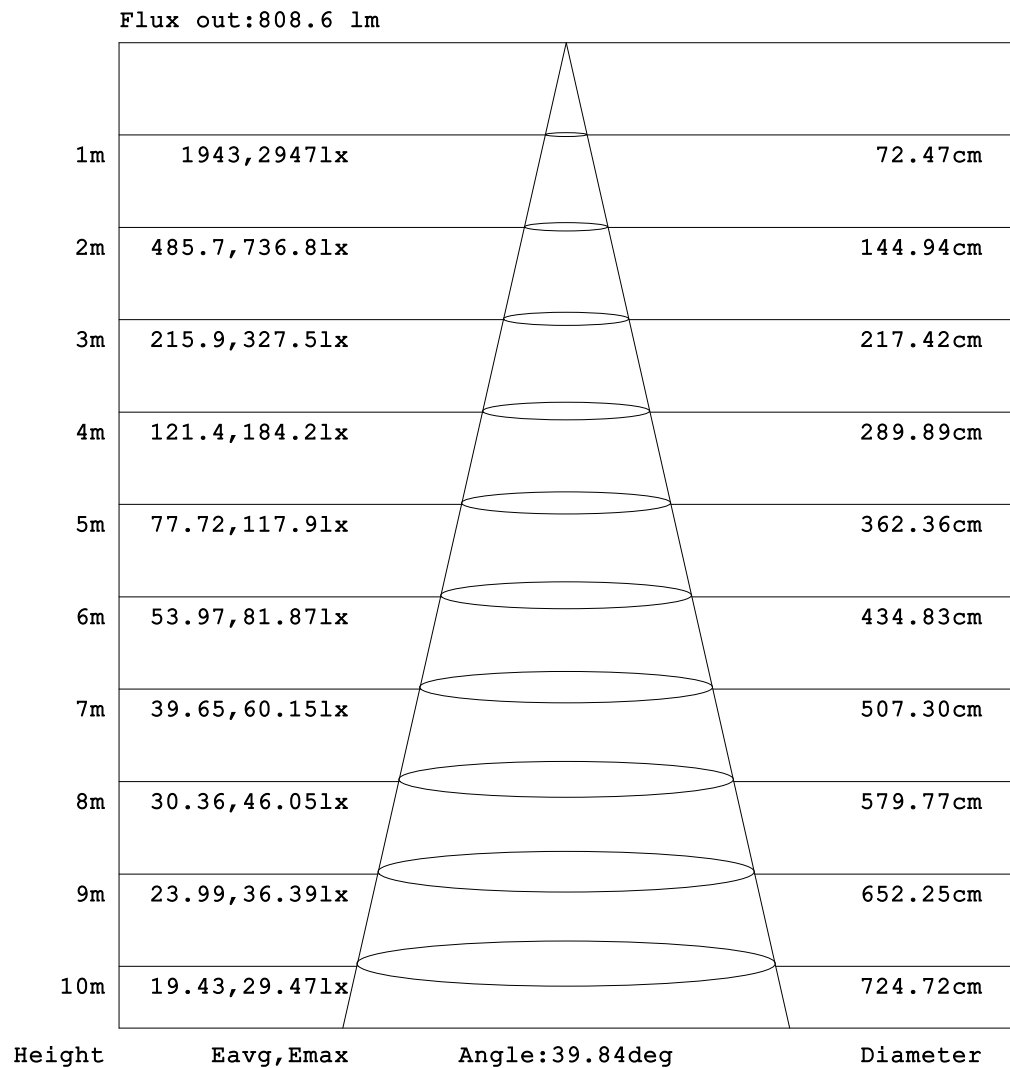

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:20DEG
 Operators:01
 Test Date:2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.700m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.90V I:0.0820A P:17.900W PF:0.9000 Freq:49.99Hz Lamp Flux:144.546x12 lm		
NAME:Edgeless Ground-500mm-3000K-40D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:40 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.07	0.09	0.11	0.14	0.18	0.27	0.40	0.60	0.94	1.44	2.17	3.15	4.32	5.57	6.69	7.60	8.19	8.73	9.06
-170	0.07	0.10	0.12	0.15	0.20	0.29	0.42	0.62	0.94	1.42	2.10	3.01	4.10	5.27	6.34	7.25	7.82	8.15	8.40
-160	0.07	0.10	0.13	0.16	0.21	0.30	0.41	0.58	0.84	1.22	1.74	2.44	3.29	4.19	5.07	5.82	6.37	6.74	6.83
-150	0.07	0.10	0.13	0.17	0.21	0.28	0.38	0.51	0.70	0.95	1.30	1.71	2.24	2.81	3.40	3.92	4.35	4.61	4.71
-140	0.07	0.10	0.13	0.17	0.21	0.27	0.35	0.44	0.56	0.72	0.91	1.14	1.41	1.69	1.98	2.24	2.47	2.64	2.73
-130	0.07	0.11	0.14	0.17	0.21	0.26	0.31	0.38	0.46	0.55	0.66	0.77	0.90	1.03	1.16	1.27	1.37	1.44	1.48
-120	0.07	0.11	0.14	0.17	0.21	0.24	0.29	0.33	0.39	0.45	0.52	0.59	0.65	0.72	0.78	0.84	0.90	0.95	0.98
-110	0.07	0.11	0.14	0.17	0.20	0.23	0.27	0.31	0.35	0.39	0.44	0.49	0.53	0.58	0.63	0.68	0.72	0.76	0.79
-100	0.07	0.11	0.14	0.17	0.19	0.22	0.25	0.29	0.33	0.37	0.41	0.45	0.49	0.52	0.56	0.61	0.65	0.69	0.73
-90	0.07	0.11	0.15	0.18	0.22	0.26	0.29	0.33	0.37	0.41	0.45	0.49	0.53	0.55	0.57	0.58	0.60	0.62	0.64
-80	0.07	0.12	0.17	0.23	0.31	0.41	0.50	0.61	0.73	0.87	1.02	1.16	1.30	2.73	4.52	6.41	8.32	10.2	12.0
-70	0.07	0.13	0.21	0.34	0.49	0.68	0.86	1.23	2.08	3.47	5.40	7.90	10.8	15.5	21.0	26.4	31.5	36.3	40.7
-60	0.07	0.14	0.27	0.47	0.71	0.99	1.29	2.28	5.90	11.1	17.3	24.3	31.7	39.6	48.1	55.8	62.7	68.6	73.4
-50	0.07	0.15	0.34	0.60	0.95	1.34	3.32	7.99	16.0	26.1	37.7	50.9	64.9	79.3	92.9	105	115	123	127
-40	0.07	0.17	0.40	0.74	1.15	2.83	7.75	17.1	29.4	46.1	66.5	91.1	120	151	185	219	251	274	286
-30	0.07	0.18	0.45	0.86	1.58	4.60	13.2	26.9	45.8	71.8	108	158	225	308	408	515	615	689	719
-20	0.07	0.19	0.47	0.93	1.95	6.22	17.9	35.8	61.2	99.7	160	258	399	590	830	1095	1334	1532	1624
-10	0.07	0.19	0.48	0.95	1.91	6.94	20.6	40.9	71.1	119	200	332	546	865	1299	1783	2187	2467	2632
0	0.07	0.18	0.47	0.93	1.50	6.13	20.0	40.4	70.6	120	202	336	558	892	1341	1867	2360	2727	2929
10	0.07	0.18	0.47	0.93	1.56	6.00	19.0	38.2	66.2	110	180	295	477	745	1100	1503	1919	2236	2338
20	0.07	0.18	0.45	0.89	1.44	4.61	15.1	31.1	53.3	85.8	134	205	314	470	670	899	1120	1275	1327
30	0.07	0.17	0.41	0.80	1.27	2.80	9.61	21.5	37.1	58.1	86.5	127	179	248	327	414	491	547	568
40	0.07	0.16	0.36	0.68	1.06	1.57	4.51	11.6	21.6	35.3	53.3	74.5	98.8	126	154	180	202	217	222
50	0.07	0.14	0.30	0.53	0.84	1.17	1.62	4.01	9.97	18.7	29.0	40.6	53.2	66.4	79.0	90.3	99.7	107	111
60	0.07	0.13	0.23	0.39	0.59	0.84	1.09	1.59	3.43	7.15	12.2	18.2	24.8	32.1	40.7	48.8	56.2	62.7	68.3
70	0.07	0.12	0.18	0.27	0.40	0.52	0.68	0.89	1.27	2.05	3.36	5.20	7.49	11.7	16.8	21.9	26.9	31.6	35.9
80	0.07	0.12	0.16	0.20	0.25	0.31	0.37	0.46	0.56	0.67	0.77	0.90	1.03	2.06	3.33	4.72	6.17	7.61	8.99
90	0.07	0.10	0.13	0.16	0.19	0.22	0.25	0.29	0.32	0.35	0.38	0.41	0.45	0.47	0.50	0.53	0.56	0.58	0.61
100	0.07	0.11	0.13	0.16	0.18	0.21	0.23	0.27	0.31	0.35	0.40	0.44	0.49	0.52	0.54	0.57	0.60	0.62	0.65
110	0.07	0.10	0.13	0.16	0.18	0.21	0.23	0.27	0.32	0.37	0.43	0.50	0.56	0.60	0.63	0.67	0.70	0.73	0.76
120	0.07	0.11	0.13	0.16	0.18	0.21	0.24	0.29	0.35	0.43	0.51	0.59	0.67	0.75	0.80	0.85	0.89	0.93	0.96
130	0.07	0.11	0.13	0.16	0.19	0.22	0.27	0.33	0.41	0.52	0.64	0.76	0.90	1.05	1.17	1.28	1.37	1.44	1.48
140	0.07	0.10	0.13	0.16	0.19	0.24	0.31	0.40	0.51	0.66	0.86	1.09	1.37	1.67	1.97	2.25	2.50	2.70	2.82
150	0.07	0.10	0.12	0.15	0.20	0.26	0.35	0.48	0.65	0.88	1.19	1.65	2.19	2.76	3.36	3.91	4.39	4.65	4.73
160	0.07	0.10	0.12	0.15	0.20	0.28	0.39	0.56	0.80	1.15	1.69	2.38	3.21	4.12	4.99	5.72	6.29	6.67	6.82
170	0.07	0.10	0.12	0.14	0.19	0.28	0.41	0.61	0.92	1.39	2.07	2.97	4.05	5.22	6.28	7.15	7.77	8.15	8.30
180	0.07	0.09	0.11	0.14	0.18	0.27	0.40	0.60	0.94	1.44	2.17	3.15	4.32	5.57	6.69	7.60	8.19	8.73	9.06

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.90V I:0.0820A P:17.900W PF:0.9000 Freq:49.99Hz Lamp Flux:144.546x12 lm																		
NAME:Edgeless Ground-500mm-3000K-40D-REV2									TYPE:3000K					WEIGHT:00				
SPEC.:40 DEG									DIM.:500mm					SERIAL No.:01				
MFR.: 001									SUR.:0.8					Shielding Angle:				

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	8.89	8.57	7.93	6.93	5.76	4.47	3.27	2.27	1.52	0.98	0.63	0.40	0.26	0.17	0.12	0.12	0.12	0.15	
-170	8.28	7.89	7.20	6.29	5.22	4.07	3.01	2.11	1.45	0.95	0.63	0.41	0.28	0.19	0.14	0.13	0.12	0.15	
-160	6.73	6.32	5.72	4.94	4.04	3.15	2.35	1.69	1.20	0.83	0.57	0.39	0.28	0.20	0.15	0.13	0.13	0.15	
-150	4.58	4.29	3.81	3.28	2.70	2.15	1.65	1.24	0.92	0.67	0.50	0.37	0.27	0.19	0.16	0.14	0.13	0.15	
-140	2.62	2.43	2.18	1.91	1.62	1.35	1.10	0.87	0.68	0.54	0.42	0.33	0.26	0.20	0.16	0.15	0.14	0.15	
-130	1.43	1.35	1.25	1.12	0.99	0.87	0.74	0.63	0.53	0.44	0.36	0.30	0.24	0.20	0.17	0.15	0.14	0.15	
-120	0.94	0.89	0.83	0.76	0.69	0.62	0.56	0.49	0.43	0.37	0.31	0.26	0.23	0.19	0.17	0.15	0.15	0.15	
-110	0.75	0.71	0.66	0.61	0.55	0.50	0.46	0.41	0.37	0.32	0.28	0.24	0.22	0.20	0.18	0.16	0.15	0.15	
-100	0.68	0.63	0.59	0.54	0.49	0.45	0.41	0.38	0.34	0.31	0.28	0.24	0.22	0.20	0.18	0.17	0.16	0.15	
-90	0.61	0.58	0.55	0.52	0.49	0.46	0.42	0.39	0.35	0.31	0.28	0.24	0.23	0.21	0.19	0.18	0.16	0.15	
-80	10.1	8.17	6.22	4.34	2.60	1.18	1.05	0.91	0.77	0.65	0.53	0.42	0.36	0.31	0.26	0.21	0.17	0.15	
-70	36.0	30.9	25.4	19.8	14.1	9.34	6.69	4.51	2.86	1.74	1.09	0.83	0.65	0.49	0.37	0.27	0.19	0.15	
-60	68.3	62.1	54.8	46.7	37.8	29.8	22.6	15.9	10.0	5.30	2.03	1.31	1.03	0.77	0.53	0.35	0.22	0.15	
-50	123	115	105	93.2	79.4	64.4	49.9	36.6	24.9	14.9	7.43	3.13	1.43	1.05	0.72	0.43	0.25	0.15	
-40	275	252	221	186	152	121	91.9	66.8	45.5	29.1	17.3	8.07	2.78	1.32	0.90	0.52	0.27	0.15	
-30	691	620	520	414	314	229	161	109	73.5	47.7	28.7	15.0	5.41	1.69	1.04	0.60	0.29	0.15	
-20	1548	1359	1122	854	610	411	270	169	107	66.8	39.7	21.2	8.31	2.11	1.14	0.66	0.31	0.15	
-10	2530	2281	1872	1388	949	611	375	226	136	81.5	47.3	25.4	10.5	2.40	1.21	0.70	0.32	0.15	
0	2909	2635	2165	1602	1096	693	419	246	144	85.7	49.1	26.3	10.8	2.27	1.23	0.71	0.32	0.15	
10	2310	2014	1588	1179	827	541	338	205	126	76.4	44.6	24.0	9.82	2.17	1.20	0.69	0.32	0.15	
20	1297	1155	933	696	489	325	216	142	92.4	58.6	35.2	19.0	7.26	1.76	1.11	0.65	0.31	0.15	
30	552	500	424	336	254	183	129	86.7	59.3	39.2	23.9	12.4	4.25	1.50	1.00	0.58	0.29	0.15	
40	218	203	182	157	128	101	76.3	54.6	35.9	22.3	13.3	5.98	1.92	1.26	0.87	0.50	0.27	0.15	
50	108	102	93.3	83.4	71.7	57.8	44.0	31.4	20.3	11.2	4.88	1.96	1.33	0.99	0.68	0.42	0.25	0.15	
60	63.7	58.1	51.6	44.2	36.2	28.3	20.9	14.2	8.38	4.03	1.70	1.19	0.95	0.72	0.50	0.34	0.23	0.15	
70	31.9	27.5	22.8	17.9	12.9	8.72	6.15	4.08	2.50	1.51	0.98	0.74	0.59	0.47	0.37	0.28	0.20	0.15	
80	7.62	6.17	4.73	3.34	2.08	1.05	0.93	0.81	0.69	0.59	0.49	0.41	0.36	0.32	0.27	0.23	0.18	0.15	
90	0.59	0.57	0.55	0.52	0.50	0.48	0.45	0.42	0.39	0.36	0.33	0.30	0.28	0.25	0.23	0.20	0.17	0.15	
100	0.63	0.61	0.58	0.56	0.53	0.51	0.47	0.43	0.39	0.35	0.32	0.29	0.26	0.23	0.21	0.18	0.17	0.15	
110	0.74	0.71	0.68	0.65	0.61	0.57	0.51	0.45	0.39	0.34	0.30	0.26	0.24	0.22	0.20	0.18	0.16	0.15	
120	0.93	0.90	0.85	0.81	0.75	0.68	0.60	0.52	0.44	0.36	0.29	0.25	0.23	0.21	0.19	0.17	0.15	0.15	
130	1.44	1.37	1.28	1.18	1.06	0.91	0.77	0.64	0.53	0.42	0.33	0.27	0.22	0.20	0.18	0.16	0.15	0.15	
140	2.70	2.51	2.25	1.96	1.67	1.39	1.11	0.87	0.67	0.51	0.40	0.31	0.24	0.19	0.17	0.15	0.14	0.15	
150	4.65	4.40	3.92	3.34	2.75	2.18	1.65	1.23	0.90	0.66	0.48	0.35	0.26	0.18	0.16	0.14	0.14	0.15	
160	6.67	6.30	5.71	4.95	4.07	3.16	2.37	1.70	1.20	0.82	0.56	0.38	0.27	0.19	0.15	0.14	0.13	0.15	
170	8.27	7.76	7.04	6.20	5.20	4.07	3.01	2.12	1.45	0.95	0.63	0.41	0.27	0.18	0.13	0.13	0.12	0.15	
180	8.89	8.57	7.93	6.93	5.76	4.47	3.27	2.27	1.52	0.98	0.63	0.40	0.26	0.17	0.12	0.12	0.12	0.15	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks: