

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		3509.5 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		1.0 degrees horizontal
Beam Spread	At 10% of Imax	52.1V x 50.1H
	At 50% of Imax	23.9V x 23.3H
	At 90% of Imax	9.0V x 8.8H
Beam Flux	Total	1000.5 lumens per klm.
	To 10% of Imax	712.7 lumens per klm.
	To 50% of Imax	341.2 lumens per klm.
	To 90% of Imax	64.8 lumens per klm.
	Upward LOR	0.7 %
	Downward LOR	99.4 %
Luminaire Efficiency (Light Output Ratio)		100.0 %

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.00V I:0.0820A P:17.900W PF:0.9000 Freq:49.99Hz Lamp Flux:135.493x12 lm		
NAME: Edgeless Ground-500mm-3000K-25D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:25 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

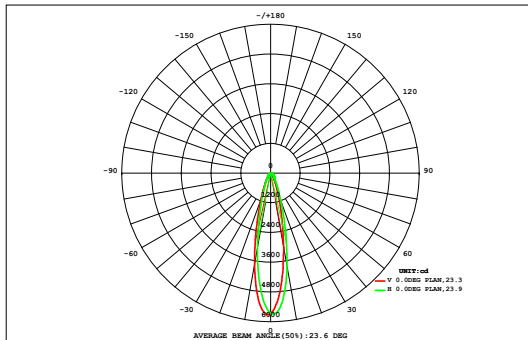

DATA OF LAMP		Eff:90.83lm/W	
MODEL		Imax(cd)	5706
NOMINAL POWER(W)	18	AVAILABILITY(%)	71.1
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	1156
NOMINAL FLUX(lm)	135.493	LOR(%)	100.0
LAMPS INSIDE	12	TOTAL FLUX(lm)	1626
TEST VOLTAGE(V)	220	θ @50% (H,V)	23,24DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.23	0.34	0.47	0.61	0.76	0.90	1.02	1.12	1.20	1.20	1.14	1.04	0.93	0.79	0.64	0.50	0.37	0.25	13.5	0.00
45	0.23	0.34	0.47	0.61	0.76	0.90	1.02	1.12	1.20	1.20	1.14	1.04	0.93	0.79	0.64	0.50	0.37	0.25	13.5	0.00
40	0.28	0.41	0.57	0.75	0.95	1.15	1.34	1.49	1.59	1.59	1.51	1.36	1.19	0.99	0.79	0.60	0.44	0.30	17.3	0.00
35	0.33	0.48	0.68	0.92	1.20	1.51	1.80	2.03	2.19	2.20	2.07	1.85	1.57	1.26	0.97	0.72	0.52	0.35	22.7	0.00
30	0.39	0.57	0.81	1.13	1.54	2.01	2.51	2.98	3.29	3.33	3.07	2.63	2.13	1.64	1.22	0.87	0.61	0.42	31.2	0.00
25	0.45	0.66	0.96	1.39	1.99	2.77	3.73	4.70	5.38	5.47	4.91	3.98	2.98	2.15	1.53	1.05	0.73	0.50	45.3	19.8
20	0.50	0.76	1.13	1.70	2.57	3.89	5.77	7.94	9.52	9.71	8.41	6.24	4.25	2.83	1.90	1.29	0.86	0.58	69.9	51.5
15	0.55	0.85	1.32	2.06	3.27	5.39	8.88	13.7	17.3	17.6	14.5	9.71	5.98	3.72	2.40	1.56	1.00	0.65	110	94.4
10	0.59	0.92	1.47	2.38	4.03	7.14	12.8	21.3	28.4	28.8	22.3	14.1	8.38	4.89	2.93	1.81	1.13	0.71	164	150
5	0.60	0.96	1.56	2.58	4.56	8.57	16.3	27.5	37.6	38.5	30.4	19.6	10.9	5.95	3.36	2.01	1.21	0.75	213	200
0	0.61	0.98	1.61	2.71	4.88	9.43	18.3	30.9	40.5	41.3	33.4	21.3	11.6	6.21	3.47	2.06	1.24	0.77	231	218
-5	0.62	0.99	1.61	2.70	4.84	9.20	17.1	26.6	33.4	33.5	26.8	17.6	9.97	5.56	3.23	1.96	1.21	0.75	198	184
-10	0.60	0.95	1.52	2.47	4.22	7.32	12.0	17.7	22.1	22.0	17.6	12.1	7.52	4.55	2.81	1.78	1.13	0.72	139	125
-15	0.56	0.87	1.36	2.11	3.29	5.12	7.68	10.5	12.6	12.6	10.4	7.72	5.27	3.50	2.32	1.55	1.01	0.66	89.1	72.3
-20	0.51	0.77	1.16	1.72	2.47	3.52	4.83	6.15	7.06	7.06	6.16	4.88	3.65	2.64	1.88	1.31	0.88	0.58	57.2	35.6
-25	0.45	0.67	0.97	1.36	1.87	2.47	3.16	3.79	4.22	4.23	3.83	3.23	2.58	1.99	1.49	1.07	0.75	0.51	38.6	5.68
-30	0.39	0.57	0.80	1.08	1.42	1.80	2.18	2.51	2.74	2.75	2.55	2.24	1.88	1.52	1.18	0.88	0.63	0.43	27.5	0.00
-35	0.34	0.48	0.66	0.87	1.10	1.35	1.59	1.80	1.95	1.96	1.83	1.64	1.41	1.17	0.94	0.72	0.53	0.37	20.7	0.00
-40	0.28	0.41	0.55	0.71	0.88	1.04	1.20	1.34	1.45	1.46	1.37	1.24	1.09	0.93	0.76	0.59	0.44	0.30	16.1	0.00
-45	0.23	0.34	0.47	0.61	0.76	0.90	1.02	1.12	1.20	1.20	1.14	1.04	0.93	0.79	0.64	0.50	0.37	0.25	13.5	0.00
HORIZONTAL(DEG)																				
Φ t	8.26	12.6	19.2	29.3	45.8	74.6	122	184	232	235	192	132	83.2	52.3	33.8	22.3	14.7	9.59	1504	---
Φ a	0.00	0.00	0.00	0.00	17.3	53.5	103	167	215	218	175	114	62.8	27.6	2.16	0.00	0.00	0.00	---	1156

one-half-peak spread: U:12.2,D:11.9 , L:11.7,R:11.8


NEMA Beam Type: Type 4

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.00V I:0.0820A P:17.900W PF:0.9000 Freq:49.99Hz Lamp Flux:135.493x12 lm		
NAME: Edgeless Ground-500mm-3000K-25D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:25 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

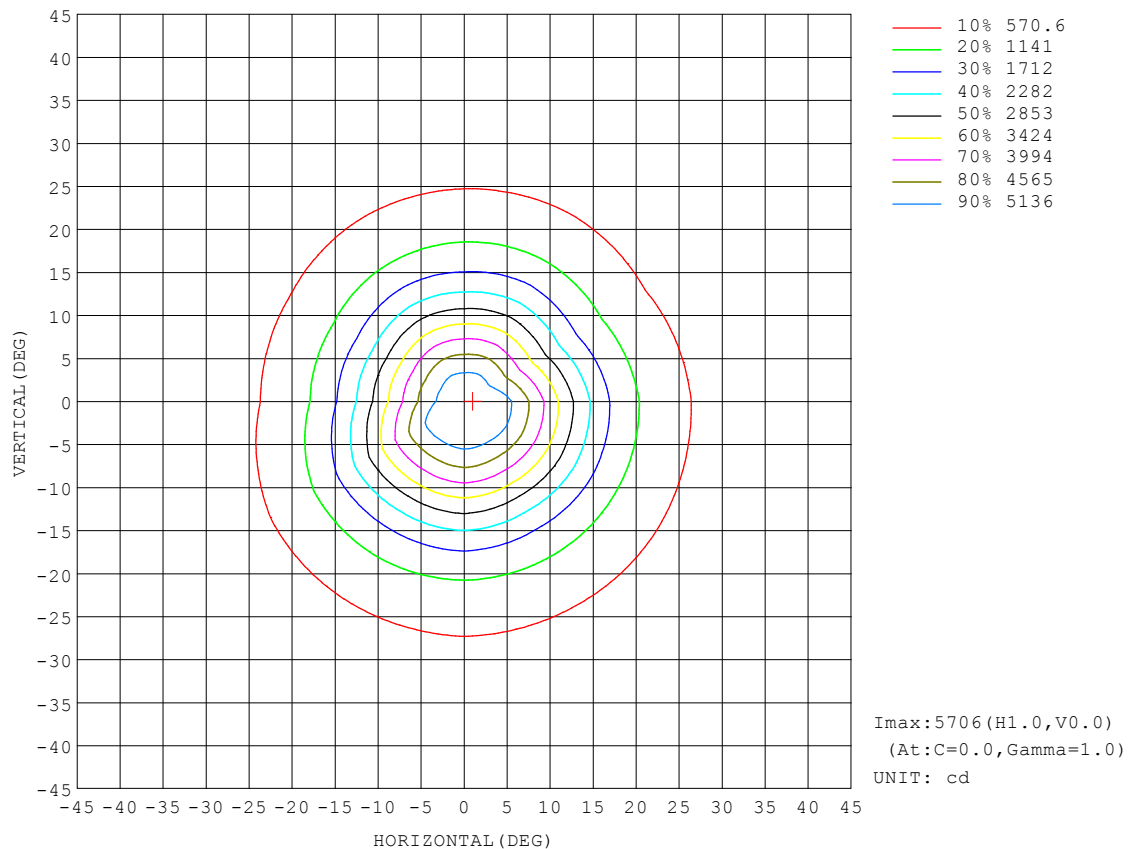


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:220.00V I:0.0820A P:17.900W PF:0.9000 Freq:49.99Hz Lamp Flux:135.493x12 lm		
NAME: Edgeless Ground-500mm-3000K-25D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:25 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

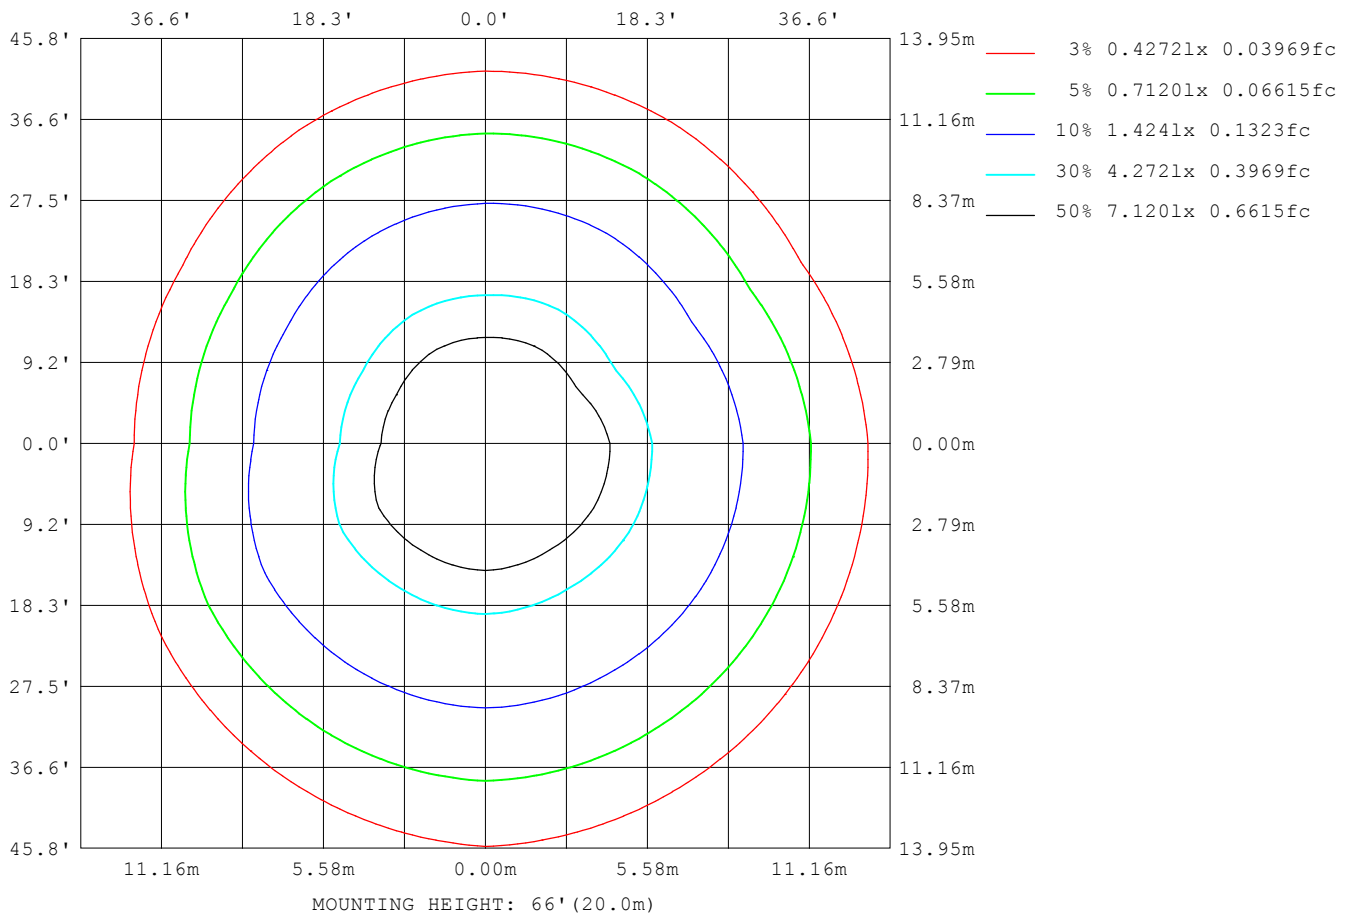

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

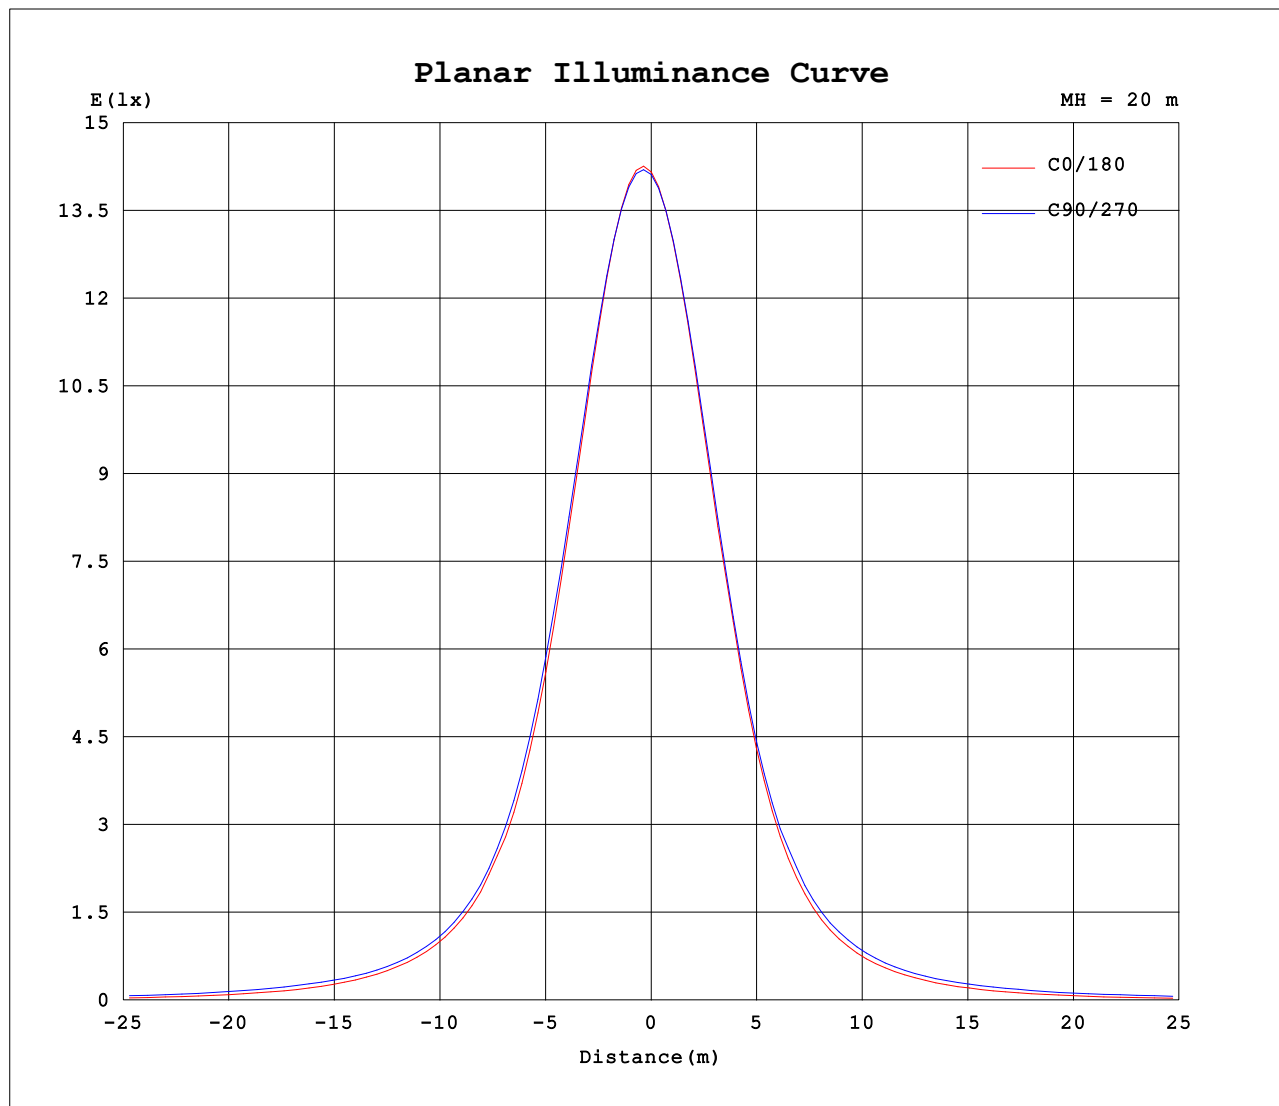


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.00V I:0.0820A P:17.900W PF:0.9000 Freq:49.99Hz Lamp Flux:135.493x12 lm		
NAME: Edgeless Ground-500mm-3000K-25D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:25 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

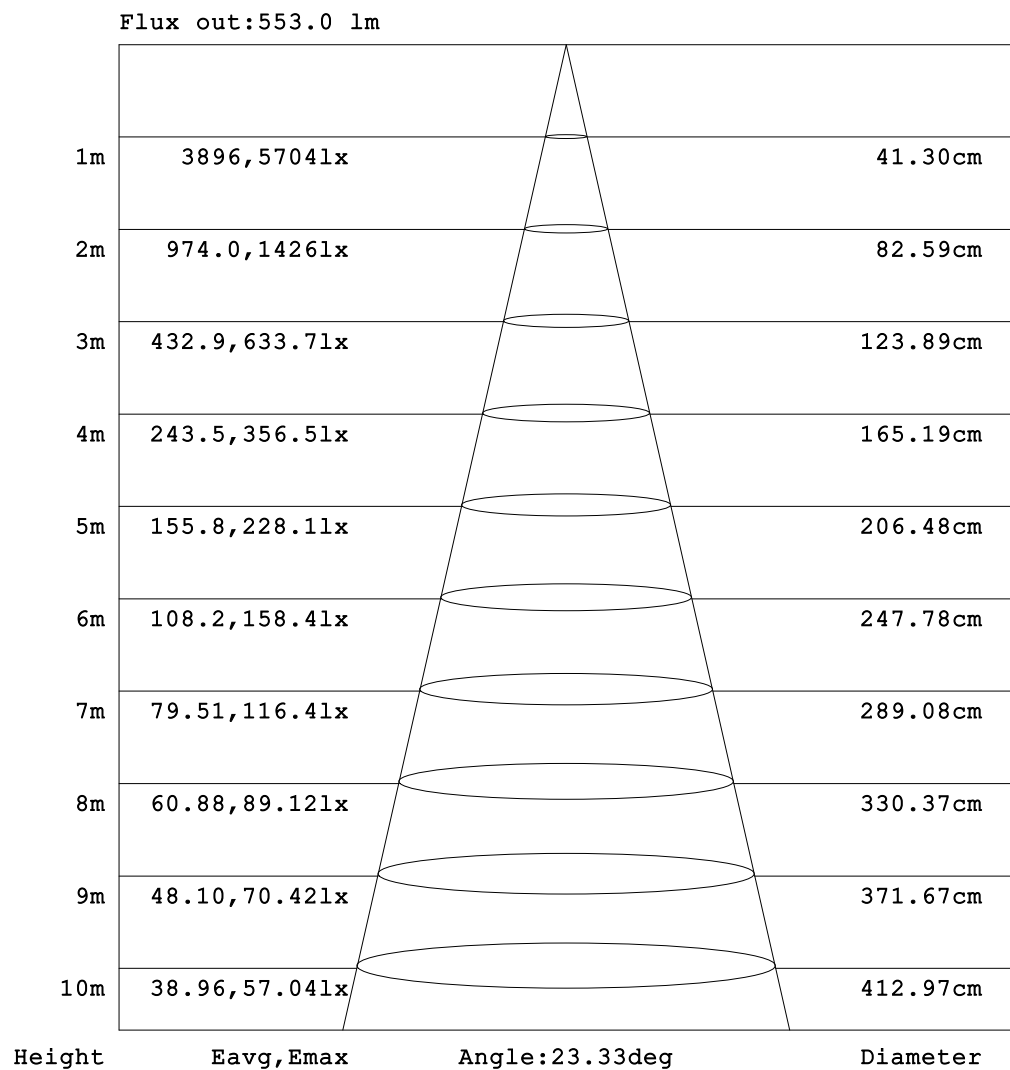

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.00V I:0.0820A P:17.900W PF:0.9000 Freq:49.99Hz Lamp Flux:135.493x12 lm		
NAME: Edgeless Ground-500mm-3000K-25D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:25 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.08	0.10	0.12	0.16	0.21	0.28	0.37	0.50	0.69	0.99	1.49	2.33	3.72	5.63	7.53	8.77	8.78	8.50	8.58
-170	0.08	0.11	0.13	0.17	0.24	0.31	0.40	0.54	0.73	1.02	1.47	2.24	3.48	5.18	6.99	8.41	8.99	8.97	8.98
-160	0.08	0.11	0.15	0.19	0.25	0.33	0.41	0.54	0.70	0.93	1.27	1.78	2.58	3.68	4.97	6.19	7.10	7.60	7.78
-150	0.08	0.11	0.15	0.19	0.25	0.32	0.41	0.51	0.65	0.81	1.03	1.32	1.68	2.18	2.79	3.43	3.97	4.32	4.45
-140	0.08	0.12	0.16	0.20	0.25	0.32	0.39	0.48	0.58	0.70	0.84	0.98	1.17	1.37	1.56	1.76	1.93	2.08	2.16
-130	0.08	0.12	0.16	0.20	0.25	0.30	0.37	0.44	0.52	0.61	0.70	0.80	0.90	0.99	1.09	1.17	1.25	1.31	1.36
-120	0.08	0.12	0.16	0.20	0.24	0.29	0.34	0.40	0.47	0.54	0.61	0.68	0.75	0.82	0.88	0.94	0.99	1.04	1.09
-110	0.08	0.12	0.16	0.20	0.24	0.28	0.32	0.37	0.43	0.48	0.54	0.60	0.66	0.71	0.76	0.81	0.86	0.90	0.95
-100	0.08	0.12	0.16	0.19	0.23	0.26	0.30	0.35	0.39	0.44	0.48	0.53	0.58	0.63	0.68	0.73	0.79	0.84	0.89
-90	0.08	0.12	0.15	0.19	0.22	0.26	0.29	0.34	0.39	0.44	0.49	0.53	0.58	0.62	0.65	0.68	0.72	0.75	0.79
-80	0.08	0.12	0.16	0.22	0.29	0.38	0.48	0.63	0.79	0.96	1.14	1.31	1.48	3.57	6.17	8.89	11.7	14.4	17.0
-70	0.08	0.12	0.19	0.31	0.49	0.72	0.96	1.40	2.50	4.31	6.89	10.2	14.2	20.4	27.5	34.5	41.2	47.4	53.1
-60	0.08	0.12	0.24	0.47	0.77	1.10	1.43	2.69	7.49	14.4	22.5	31.3	40.4	49.7	58.7	66.9	74.3	80.9	86.4
-50	0.08	0.13	0.31	0.64	1.05	1.49	4.06	9.91	19.4	30.9	43.1	56.0	69.6	83.2	95.6	107	117	125	131
-40	0.08	0.14	0.38	0.80	1.27	3.40	9.60	20.1	32.0	46.3	64.0	83.4	105	127	150	174	195	213	225
-30	0.08	0.15	0.44	0.94	1.78	5.69	15.9	29.3	44.8	63.3	86.9	118	156	204	258	318	376	423	447
-20	0.08	0.15	0.48	1.01	2.23	7.90	20.6	36.2	55.1	79.5	113	162	236	335	483	687	931	1156	1252
-10	0.08	0.15	0.49	1.03	2.13	9.03	22.9	39.9	60.5	89.1	131	197	303	491	857	1526	2463	3375	3824
0	0.08	0.14	0.48	1.01	1.59	8.28	22.1	39.0	59.1	87.4	129	193	300	495	876	1665	3050	4677	5665
10	0.08	0.15	0.48	1.00	1.67	7.91	21.3	37.7	57.3	83.8	122	177	266	408	657	1104	1850	2729	3091
20	0.08	0.15	0.45	0.95	1.55	5.94	17.5	32.3	49.5	71.1	99.7	137	190	269	378	527	708	871	945
30	0.08	0.14	0.39	0.86	1.36	3.41	11.8	23.9	37.7	53.8	73.6	100	133	170	215	262	302	335	352
40	0.08	0.13	0.33	0.71	1.14	1.71	5.60	13.8	24.1	37.4	53.2	71.1	89.8	110	130	148	164	176	183
50	0.08	0.12	0.26	0.53	0.90	1.26	1.77	4.93	12.1	22.3	34.0	46.3	58.7	71.1	82.7	93.3	102	110	116
60	0.08	0.12	0.21	0.37	0.61	0.90	1.16	1.75	4.12	8.83	15.1	22.6	30.9	39.8	49.3	58.0	65.9	72.8	78.8
70	0.08	0.11	0.17	0.25	0.36	0.51	0.70	0.95	1.41	2.40	4.13	6.51	9.48	15.0	21.7	28.3	34.7	40.8	46.5
80	0.08	0.11	0.14	0.19	0.24	0.29	0.36	0.46	0.57	0.70	0.84	0.99	1.14	2.67	4.53	6.55	8.66	10.8	12.8
90	0.08	0.11	0.14	0.17	0.20	0.23	0.25	0.30	0.34	0.38	0.43	0.47	0.52	0.56	0.60	0.64	0.68	0.72	0.76
100	0.08	0.11	0.14	0.17	0.20	0.22	0.25	0.30	0.35	0.40	0.46	0.52	0.58	0.63	0.67	0.72	0.77	0.81	0.86
110	0.08	0.11	0.14	0.17	0.20	0.22	0.24	0.30	0.36	0.43	0.50	0.57	0.65	0.70	0.75	0.79	0.83	0.87	0.91
120	0.08	0.11	0.14	0.17	0.20	0.23	0.27	0.32	0.40	0.48	0.56	0.65	0.73	0.81	0.86	0.90	0.95	0.98	1.02
130	0.08	0.11	0.14	0.17	0.21	0.25	0.30	0.36	0.44	0.54	0.64	0.75	0.86	0.98	1.06	1.13	1.19	1.24	1.28
140	0.08	0.11	0.14	0.17	0.22	0.27	0.33	0.41	0.49	0.61	0.76	0.91	1.08	1.29	1.51	1.68	1.84	1.98	2.06
150	0.08	0.11	0.14	0.17	0.22	0.28	0.36	0.45	0.57	0.72	0.88	1.17	1.56	2.02	2.58	3.21	3.76	4.14	4.29
160	0.08	0.11	0.14	0.17	0.23	0.30	0.37	0.50	0.65	0.83	1.16	1.65	2.37	3.43	4.68	5.81	6.67	7.26	7.47
170	0.08	0.10	0.13	0.17	0.23	0.29	0.39	0.51	0.70	0.96	1.42	2.15	3.35	4.99	6.76	8.14	8.71	8.72	8.70
180	0.08	0.10	0.12	0.16	0.21	0.28	0.37	0.50	0.69	0.99	1.49	2.33	3.72	5.63	7.53	8.77	8.78	8.50	8.60

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.00V I:0.0820A P:17.900W PF:0.9000 Freq:49.99Hz Lamp Flux:135.493x12 lm		
NAME: Edgeless Ground-500mm-3000K-25D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:25 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	8.97	9.54	9.25	7.87	5.87	3.88	2.39	1.48	0.97	0.66	0.47	0.33	0.24	0.16	0.12	0.09	0.09	0.10	
-170	9.16	9.14	8.40	6.91	5.10	3.40	2.16	1.41	0.96	0.68	0.49	0.36	0.27	0.18	0.13	0.10	0.09	0.10	
-160	7.60	7.05	6.04	4.76	3.44	2.36	1.63	1.17	0.86	0.64	0.48	0.37	0.27	0.20	0.14	0.11	0.10	0.10	
-150	4.26	3.84	3.26	2.61	2.01	1.55	1.19	0.93	0.73	0.58	0.45	0.36	0.27	0.20	0.15	0.12	0.10	0.10	
-140	2.05	1.87	1.67	1.47	1.26	1.07	0.90	0.75	0.62	0.51	0.42	0.33	0.27	0.21	0.16	0.12	0.10	0.10	
-130	1.29	1.21	1.12	1.03	0.93	0.83	0.73	0.63	0.54	0.45	0.37	0.31	0.25	0.20	0.16	0.13	0.11	0.10	
-120	1.03	0.97	0.90	0.84	0.77	0.69	0.62	0.54	0.47	0.41	0.33	0.29	0.24	0.20	0.16	0.13	0.11	0.10	
-110	0.89	0.84	0.78	0.72	0.66	0.59	0.53	0.48	0.42	0.36	0.31	0.26	0.22	0.19	0.16	0.14	0.12	0.10	
-100	0.83	0.77	0.70	0.64	0.58	0.51	0.47	0.42	0.38	0.34	0.29	0.25	0.21	0.19	0.16	0.14	0.12	0.10	
-90	0.74	0.70	0.66	0.61	0.57	0.53	0.48	0.43	0.38	0.33	0.28	0.24	0.21	0.19	0.17	0.15	0.12	0.10	
-80	14.3	11.5	8.68	5.97	3.45	1.37	1.20	1.03	0.86	0.70	0.56	0.43	0.36	0.30	0.25	0.21	0.14	0.10	
-70	47.1	40.6	33.6	26.4	19.1	12.8	9.04	5.96	3.63	2.05	1.17	0.86	0.67	0.50	0.37	0.26	0.19	0.10	
-60	81.1	74.8	67.4	59.0	49.5	39.9	30.5	21.5	13.4	6.72	2.16	1.33	1.05	0.79	0.53	0.34	0.21	0.10	
-50	126	119	111	100	88.0	73.3	58.6	44.9	31.8	19.8	9.97	3.63	1.43	1.07	0.72	0.42	0.23	0.10	
-40	216	200	181	159	136	113	90.4	69.2	49.9	34.5	22.1	10.7	3.16	1.32	0.90	0.51	0.26	0.10	
-30	427	384	328	272	220	172	131	96.9	70.6	50.2	33.7	19.1	6.93	1.69	1.05	0.59	0.28	0.10	
-20	1154	931	701	507	363	263	186	131	92.2	63.9	42.9	25.9	10.8	2.23	1.14	0.65	0.30	0.10	
-10	3370	2469	1547	920	560	358	237	158	108	72.8	48.5	29.9	13.4	2.60	1.20	0.69	0.30	0.10	
0	5263	3752	2179	1190	663	401	253	163	111	73.8	49.0	30.5	13.7	2.38	1.20	0.69	0.30	0.10	
10	2831	1988	1230	756	484	320	214	144	101	68.4	45.9	28.4	12.6	2.29	1.19	0.68	0.30	0.10	
20	901	755	570	411	295	211	153	112	80.5	56.7	38.6	23.3	9.39	1.78	1.12	0.64	0.30	0.10	
30	341	311	274	226	181	141	107	78.5	58.2	42.1	28.5	15.9	5.30	1.50	1.02	0.58	0.28	0.10	
40	177	166	152	135	115	94.8	75.6	57.5	40.4	27.1	17.0	7.80	2.04	1.28	0.88	0.50	0.26	0.10	
50	111	105	97.3	88.5	78.1	65.1	51.9	38.8	26.2	14.7	6.36	2.12	1.36	1.02	0.69	0.42	0.24	0.10	
60	74.3	68.9	62.5	55.3	47.1	37.8	28.3	19.3	11.2	5.09	1.87	1.24	0.99	0.74	0.51	0.34	0.22	0.10	
70	41.5	36.0	30.2	24.0	17.6	12.0	8.41	5.45	3.22	1.82	1.08	0.78	0.61	0.48	0.37	0.27	0.19	0.10	
80	10.8	8.69	6.61	4.60	2.75	1.25	1.09	0.94	0.79	0.65	0.53	0.43	0.37	0.31	0.26	0.21	0.15	0.10	
90	0.73	0.70	0.66	0.63	0.60	0.57	0.52	0.48	0.43	0.38	0.33	0.28	0.25	0.22	0.19	0.16	0.13	0.10	
100	0.82	0.78	0.74	0.70	0.66	0.62	0.56	0.50	0.44	0.38	0.33	0.28	0.25	0.21	0.18	0.15	0.13	0.10	
110	0.88	0.85	0.81	0.77	0.73	0.68	0.61	0.54	0.46	0.39	0.32	0.27	0.24	0.21	0.18	0.15	0.12	0.10	
120	0.99	0.95	0.91	0.87	0.82	0.75	0.66	0.59	0.50	0.42	0.34	0.29	0.24	0.20	0.17	0.14	0.12	0.10	
130	1.24	1.19	1.13	1.06	0.98	0.87	0.75	0.65	0.54	0.44	0.36	0.31	0.25	0.20	0.16	0.14	0.11	0.10	
140	1.98	1.84	1.68	1.50	1.28	1.08	0.90	0.74	0.60	0.49	0.40	0.33	0.26	0.20	0.16	0.13	0.11	0.10	
150	4.14	3.77	3.21	2.58	2.00	1.54	1.17	0.89	0.70	0.56	0.44	0.35	0.27	0.21	0.15	0.12	0.10	0.10	
160	7.28	6.72	5.80	4.66	3.39	2.33	1.61	1.15	0.84	0.62	0.47	0.36	0.27	0.20	0.14	0.11	0.10	0.10	
170	8.84	8.67	8.00	6.70	5.01	3.37	2.15	1.40	0.95	0.67	0.49	0.36	0.26	0.18	0.13	0.10	0.09	0.10	
180	8.97	9.54	9.25	7.87	5.87	3.88	2.39	1.48	0.97	0.66	0.47	0.33	0.24	0.16	0.12	0.09	0.09	0.10	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
γ Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks: