

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	2549.4 cd per klm.
(Luminaire orientation as tested.)	-1.0 degrees vertical
	-1.5 degrees horizontal

Beam Spread	At 10% of Imax	85.5V x 41.2H
	At 50% of Imax	55.3V x 20.4H
	At 90% of Imax	24.1V x 7.9H

Beam Flux	Total	1000.5 lumens per klm.
	To 10% of Imax	862.0 lumens per klm.
	To 50% of Imax	500.3 lumens per klm.
	To 90% of Imax	111.9 lumens per klm.

Upward LOR	1.0 %
Downward LOR	99.0 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.97V I:0.0820A P:17.900W PF:0.9000 Freq:49.99Hz Lamp Flux:69.0027x12 lm		
NAME:Edgeless Ground-500mm-3000K-20x55D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:20x55 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

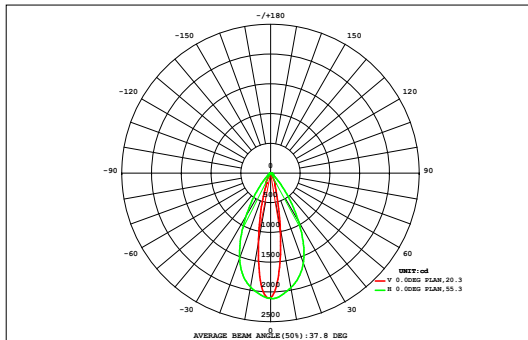

DATA OF LAMP		Eff:46.26lm/W	
MODEL		Imax(cd)	2111
NOMINAL POWER(W)	18	AVAILABILITY(%)	86.1
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	713.2
NOMINAL FLUX(lm)	69.0027	LOR(%)	100.0
LAMPS INSIDE	12	TOTAL FLUX(lm)	828.0
TEST VOLTAGE(V)	220	θ @50%(H,V)	20,55DEG

72 64 56 48 40 32 24 -24 -32 -40 -48 -56 -64 -72	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a	
	0.00	0.00	0.01	0.01	0.02	0.03	0.09	0.18	0.26	0.27	0.18	0.09	0.03	0.02	0.01	0.01	0.01	0.00	1.23	0.00	
	0.00	0.00	0.01	0.01	0.02	0.04	0.15	0.30	0.47	0.47	0.31	0.15	0.05	0.03	0.02	0.01	0.01	0.00	2.04	0.00	
	0.00	0.01	0.01	0.02	0.04	0.07	0.22	0.50	0.82	0.83	0.53	0.24	0.08	0.04	0.02	0.01	0.01	0.00	3.44	0.00	
	0.00	0.01	0.01	0.02	0.06	0.19	0.59	1.49	2.63	2.63	1.48	0.60	0.23	0.07	0.03	0.01	0.01	0.00	10.1	0.71	
	0.00	0.01	0.01	0.03	0.13	0.49	1.25	3.60	7.23	7.34	3.81	1.30	0.47	0.15	0.03	0.01	0.01	0.00	25.9	17.9	
	0.00	0.01	0.01	0.04	0.18	0.72	2.20	6.43	14.7	15.1	7.39	2.80	0.81	0.17	0.05	0.02	0.01	0.00	50.6	43.7	
	0.00	0.01	0.02	0.06	0.19	1.00	3.77	9.47	22.7	23.6	11.3	4.31	1.24	0.20	0.07	0.02	0.01	0.00	77.9	72.3	
	0.00	0.01	0.02	0.08	0.27	1.54	4.16	12.7	29.4	30.1	14.5	4.18	1.73	0.31	0.08	0.02	0.01	0.00	99.2	91.8	
	0.00	0.01	0.02	0.08	0.29	1.84	4.56	14.0	33.5	33.8	16.5	5.19	2.17	0.37	0.09	0.02	0.01	0.00	113	105	
	0.00	0.01	0.02	0.09	0.37	2.01	5.32	16.9	36.3	35.8	18.3	5.72	2.25	0.41	0.09	0.02	0.01	0.00	124	117	
	0.00	0.01	0.02	0.09	0.43	2.12	5.45	16.8	32.3	30.9	15.9	4.97	1.97	0.38	0.09	0.02	0.01	0.00	111	104	
	0.00	0.01	0.02	0.08	0.31	1.71	5.13	12.7	25.4	24.8	11.7	4.56	1.48	0.24	0.08	0.02	0.01	0.00	88.3	82.5	
	0.00	0.01	0.02	0.06	0.25	1.10	3.24	8.27	17.1	16.9	7.86	2.81	0.86	0.20	0.05	0.02	0.01	0.00	58.7	51.8	
	0.00	0.01	0.01	0.05	0.22	0.67	1.71	4.64	8.85	8.73	4.31	1.36	0.53	0.17	0.04	0.01	0.01	0.00	31.3	23.7	
	0.00	0.01	0.01	0.03	0.11	0.35	0.86	1.96	3.37	3.33	1.84	0.70	0.24	0.07	0.03	0.01	0.01	0.00	12.9	2.69	
	0.00	0.01	0.01	0.02	0.05	0.11	0.31	0.65	1.00	0.98	0.59	0.25	0.08	0.04	0.02	0.01	0.01	0.00	4.14	0.00	
	0.00	0.01	0.01	0.02	0.03	0.06	0.17	0.34	0.51	0.51	0.33	0.16	0.05	0.02	0.02	0.01	0.01	0.00	2.25	0.00	
	0.00	0.01	0.01	0.01	0.02	0.04	0.11	0.21	0.31	0.31	0.21	0.11	0.03	0.02	0.01	0.01	0.00	0.00	1.44	0.00	
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)				16	24	32	40	48	56	64	72	
Φ t	0.05	0.11	0.26	0.81	2.98	14.1	39.3	111	237	236	117	39.5	14.3	2.93	0.82	0.27	0.13	0.06	817	---	
Φ a	0.00	0.00	0.00	0.00	0.00	0.00	23.0	102	229	229	108	22.8	0.00	0.00	0.00	0.00	0.00	0.00	---	713	


one-half-peak spread: U:27.7,D:27.9 , L:10.3,R:10.3, Beam Type: Type 3 x 5 (H x V)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.97V I:0.0820A P:17.900W PF:0.9000 Freq:49.99Hz Lamp Flux:69.0027x12 lm		
NAME:Edgeless Ground-500mm-3000K-20x55D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:20x55 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

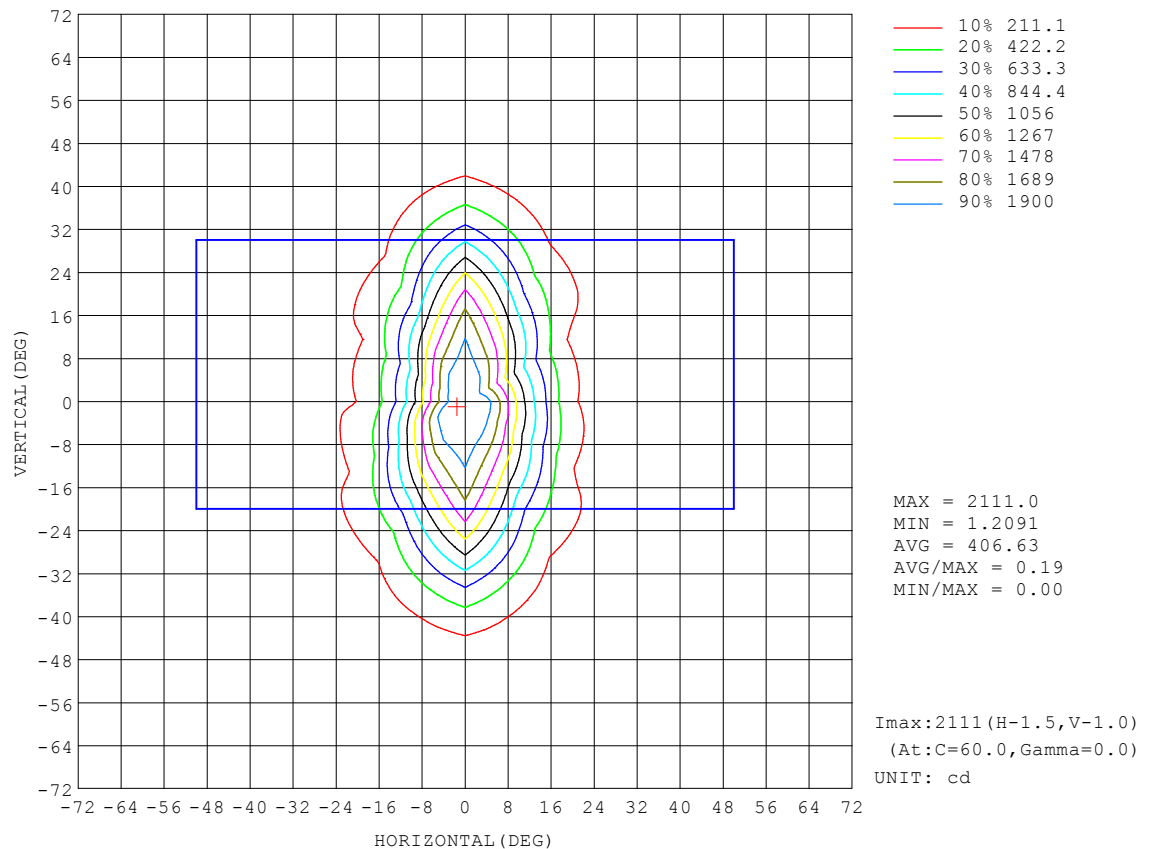


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.97V I:0.0820A P:17.900W PF:0.9000 Freq:49.99Hz Lamp Flux:69.0027x12 lm		
NAME:Edgeless Ground-500mm-3000K-20x55D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:20x55 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

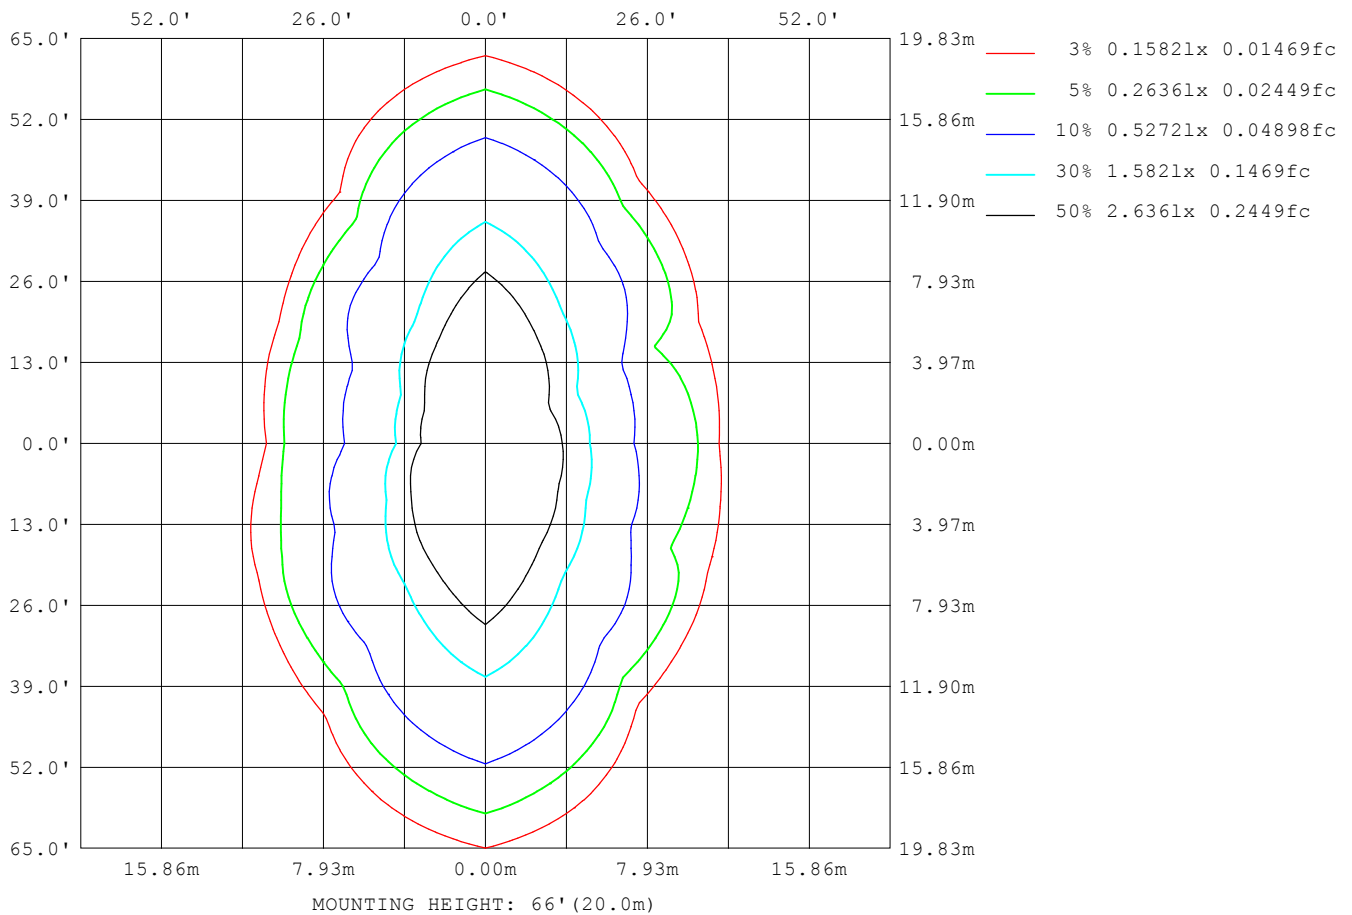

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

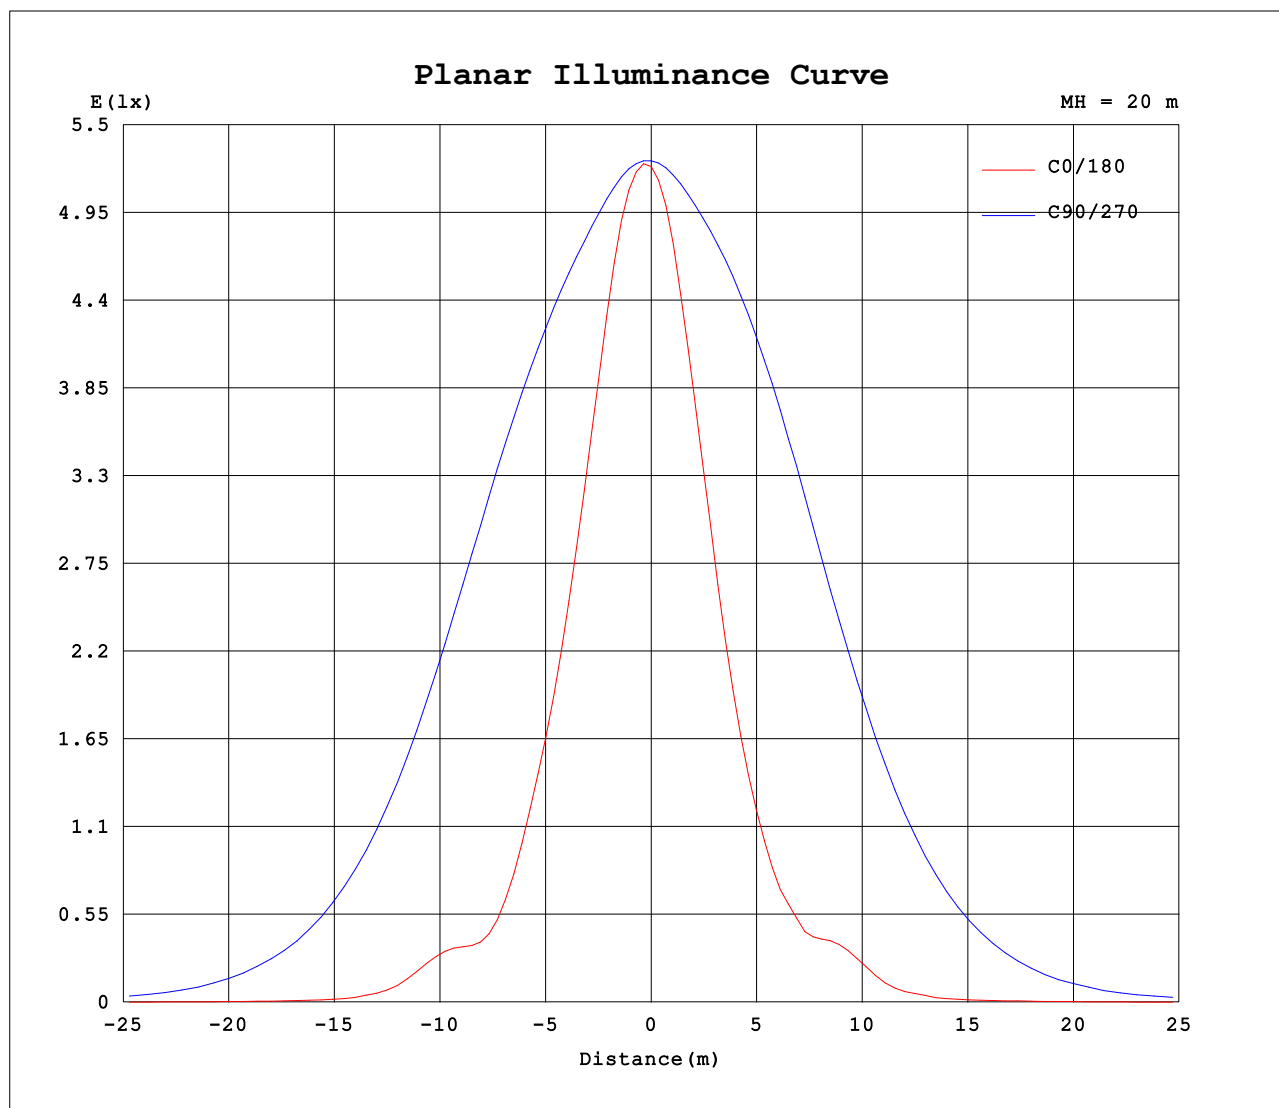


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.97V I:0.0820A P:17.900W PF:0.9000 Freq:49.99Hz Lamp Flux:69.0027x12 lm		
NAME:Edgeless Ground-500mm-3000K-20x55D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:20x55 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

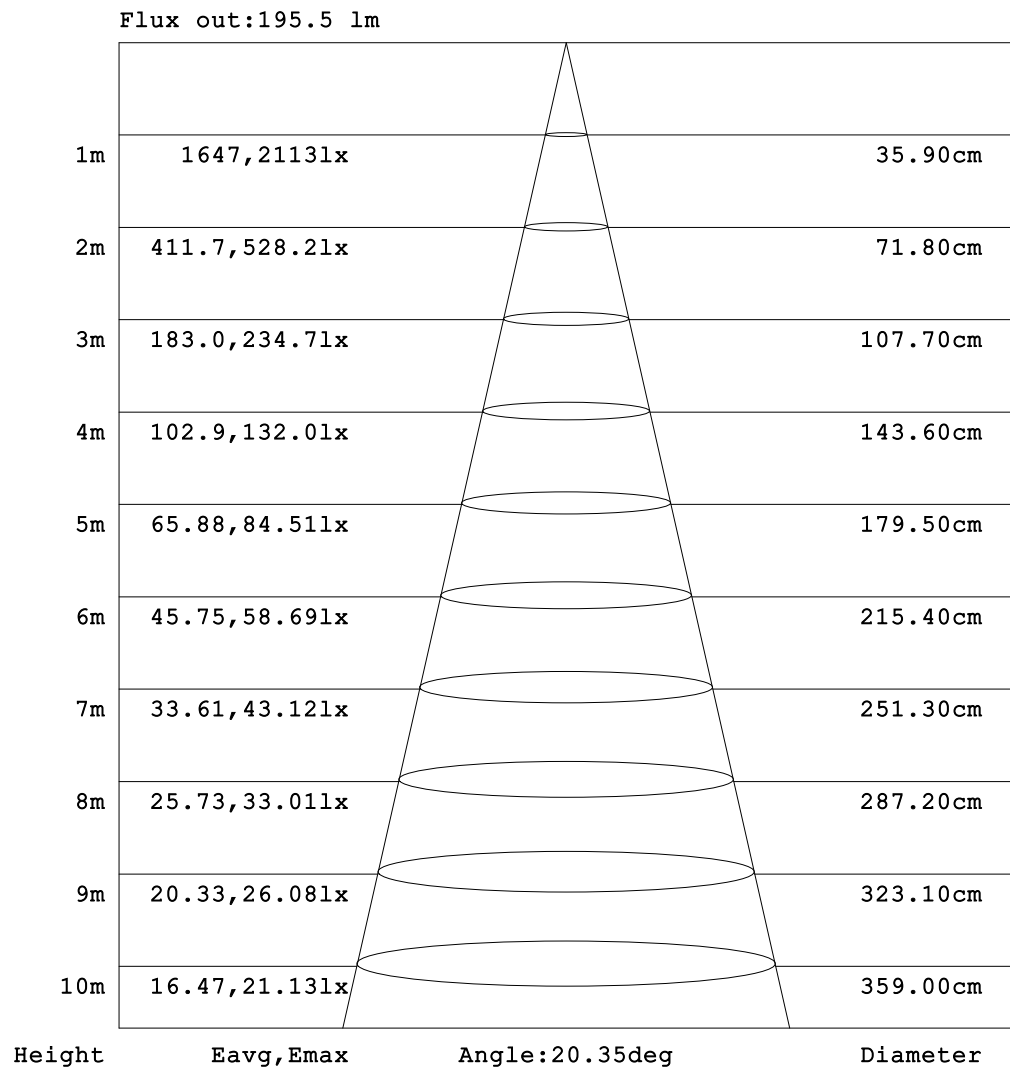

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:20DEG
 Operators:01
 Test Date:2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.700m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.97V I:0.0820A P:17.900W PF:0.9000 Freq:49.99Hz Lamp Flux:69.0027x12 lm		
NAME:Edgeless Ground-500mm-3000K-20x55D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:20x55 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.05	0.06	0.06	0.06	0.06	0.08	0.11	0.14	0.17	0.28	0.43	0.74	1.34	2.29	3.45	4.39	4.59	4.33	4.34
-170	0.05	0.07	0.09	0.10	0.12	0.14	0.18	0.23	0.28	0.39	0.58	0.93	1.54	2.46	3.51	4.31	4.59	4.52	4.46
-160	0.05	0.09	0.11	0.14	0.17	0.20	0.26	0.30	0.37	0.45	0.62	0.89	1.36	2.11	2.96	3.67	4.05	4.00	3.88
-150	0.05	0.10	0.14	0.18	0.22	0.26	0.32	0.37	0.44	0.52	0.63	0.88	1.25	1.76	2.35	2.90	3.15	3.29	3.35
-140	0.05	0.11	0.16	0.21	0.26	0.31	0.37	0.43	0.50	0.58	0.70	0.87	1.09	1.38	1.73	2.02	2.27	2.45	2.59
-130	0.05	0.12	0.18	0.24	0.30	0.36	0.42	0.49	0.57	0.66	0.76	0.87	1.00	1.14	1.30	1.46	1.62	1.77	1.90
-120	0.05	0.13	0.19	0.26	0.33	0.39	0.46	0.54	0.63	0.73	0.83	0.93	1.03	1.13	1.22	1.32	1.41	1.51	1.60
-110	0.05	0.13	0.20	0.27	0.35	0.42	0.49	0.58	0.68	0.78	0.88	0.97	1.08	1.16	1.25	1.33	1.42	1.50	1.59
-100	0.05	0.13	0.21	0.28	0.35	0.43	0.50	0.60	0.70	0.80	0.90	1.00	1.10	1.18	1.27	1.35	1.44	1.52	1.61
-90	0.05	0.13	0.20	0.28	0.35	0.42	0.50	0.60	0.70	0.80	0.91	1.01	1.11	1.19	1.27	1.34	1.42	1.50	1.57
-80	0.05	0.13	0.20	0.27	0.35	0.42	0.49	0.60	0.72	0.84	0.96	1.08	1.21	1.86	2.68	3.58	4.51	5.45	6.35
-70	0.05	0.12	0.19	0.26	0.34	0.42	0.52	0.65	0.79	0.94	1.11	1.29	1.48	2.92	5.16	7.65	10.3	12.9	15.5
-60	0.05	0.12	0.18	0.25	0.35	0.45	0.57	0.70	0.90	1.15	1.52	1.98	2.58	4.45	9.21	14.3	19.7	25.1	30.3
-50	0.05	0.11	0.17	0.25	0.37	0.49	0.63	0.78	1.06	1.58	2.39	3.64	5.83	10.4	20.4	33.1	47.1	61.2	72.9
-40	0.05	0.10	0.15	0.26	0.38	0.52	0.68	0.90	1.20	1.96	5.10	11.8	23.1	39.1	61.3	117	190	270	342
-30	0.05	0.09	0.14	0.25	0.38	0.54	0.74	1.04	1.58	3.55	6.84	17.7	38.7	82.0	145	251	472	717	948
-20	0.05	0.08	0.12	0.23	0.37	0.53	0.77	1.14	2.47	4.89	9.18	21.1	58.6	159	278	468	804	1239	1612
-10	0.05	0.07	0.10	0.21	0.34	0.51	0.75	1.20	2.37	5.58	10.9	29.5	91.6	171	278	575	1139	1713	1958
0	0.05	0.05	0.07	0.18	0.29	0.44	0.66	1.00	1.66	4.66	8.61	16.6	54.8	174	213	451	948	1659	2096
10	0.05	0.06	0.10	0.21	0.33	0.48	0.70	1.05	1.97	4.73	8.77	19.7	59.0	154	207	410	894	1516	1948
20	0.05	0.07	0.11	0.22	0.34	0.49	0.70	0.99	1.54	3.71	6.83	12.2	32.5	96.4	207	342	603	1079	1528
30	0.05	0.09	0.13	0.23	0.35	0.49	0.66	0.88	1.21	2.06	4.66	12.8	28.7	54.2	97.6	182	379	604	820
40	0.05	0.09	0.14	0.24	0.35	0.46	0.60	0.77	0.97	1.49	2.69	6.11	13.8	27.4	47.2	91.2	149	215	275
50	0.05	0.10	0.16	0.23	0.33	0.44	0.55	0.67	0.86	1.21	1.78	2.66	3.94	5.74	12.8	23.3	35.3	47.5	58.3
60	0.05	0.11	0.17	0.23	0.31	0.41	0.50	0.61	0.76	0.93	1.14	1.40	1.82	3.43	7.89	12.7	17.8	22.9	27.8
70	0.05	0.11	0.18	0.24	0.31	0.38	0.47	0.57	0.68	0.81	0.94	1.07	1.21	2.39	4.22	6.24	8.38	10.5	12.6
80	0.05	0.12	0.18	0.25	0.31	0.37	0.44	0.54	0.64	0.75	0.85	0.95	1.05	1.47	2.05	2.72	3.45	4.17	4.85
90	0.05	0.12	0.18	0.25	0.31	0.37	0.44	0.54	0.65	0.75	0.85	0.96	1.06	1.14	1.22	1.29	1.37	1.45	1.53
100	0.05	0.12	0.19	0.25	0.31	0.37	0.43	0.53	0.64	0.75	0.85	0.96	1.06	1.15	1.23	1.32	1.40	1.49	1.57
110	0.05	0.12	0.18	0.24	0.30	0.36	0.42	0.51	0.62	0.72	0.83	0.93	1.04	1.13	1.22	1.31	1.40	1.49	1.58
120	0.05	0.12	0.17	0.23	0.28	0.34	0.40	0.48	0.58	0.63	0.72	0.89	1.00	1.10	1.19	1.28	1.37	1.46	1.55
130	0.05	0.11	0.16	0.21	0.26	0.32	0.37	0.28	0.51	0.61	0.71	0.82	0.93	0.95	0.99	1.34	1.54	1.69	1.82
140	0.05	0.10	0.14	0.18	0.23	0.28	0.24	0.39	0.44	0.52	0.60	0.79	1.02	1.27	1.59	1.86	2.12	2.32	2.48
150	0.05	0.09	0.12	0.16	0.20	0.17	0.28	0.33	0.39	0.46	0.56	0.77	1.05	1.56	2.17	2.78	3.16	3.26	3.23
160	0.05	0.08	0.10	0.13	0.15	0.17	0.23	0.27	0.34	0.41	0.53	0.70	1.17	1.91	2.75	3.50	3.92	3.89	3.79
170	0.05	0.07	0.08	0.10	0.11	0.13	0.17	0.21	0.27	0.36	0.49	0.85	1.42	2.31	3.34	4.16	4.50	4.56	4.42
180	0.05	0.06	0.06	0.06	0.06	0.08	0.11	0.14	0.17	0.28	0.43	0.74	1.34	2.29	3.45	4.39	4.59	4.33	4.37

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.97V I:0.0820A P:17.900W PF:0.9000 Freq:49.99Hz Lamp Flux:69.0027x12 lm																		
NAME:Edgeless Ground-500mm-3000K-20x55D-REV2									TYPE:3000K					WEIGHT:00				
SPEC.:20x55 DEG									DIM.:500mm					SERIAL No.:01				
MFR.: 001									SUR.:0.8					Shielding Angle:				

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	4.67	4.97	4.61	3.68	2.48	1.46	0.81	0.47	0.31	0.20	0.15	0.13	0.11	0.10	0.09	0.09	0.09	0.10	
-170	4.40	4.48	4.25	3.46	2.43	1.51	0.90	0.57	0.39	0.28	0.22	0.19	0.16	0.14	0.12	0.11	0.10	0.10	
-160	3.95	3.95	3.52	2.83	1.98	1.23	0.81	0.57	0.43	0.34	0.28	0.24	0.21	0.18	0.15	0.13	0.11	0.10	
-150	3.26	3.09	2.82	2.20	1.62	1.14	0.79	0.57	0.46	0.39	0.34	0.29	0.25	0.21	0.18	0.15	0.12	0.10	
-140	2.41	2.19	1.90	1.58	1.27	0.99	0.79	0.63	0.52	0.43	0.38	0.34	0.29	0.25	0.21	0.17	0.13	0.10	
-130	1.74	1.57	1.39	1.21	1.05	0.91	0.80	0.69	0.59	0.50	0.43	0.37	0.32	0.28	0.23	0.18	0.14	0.10	
-120	1.49	1.38	1.28	1.17	1.07	0.97	0.87	0.77	0.67	0.57	0.47	0.41	0.35	0.30	0.24	0.19	0.14	0.10	
-110	1.49	1.40	1.31	1.21	1.12	1.02	0.92	0.82	0.71	0.61	0.51	0.43	0.37	0.31	0.25	0.20	0.15	0.10	
-100	1.51	1.42	1.33	1.23	1.14	1.05	0.94	0.84	0.74	0.63	0.53	0.43	0.38	0.32	0.26	0.21	0.16	0.10	
-90	1.49	1.40	1.32	1.23	1.15	1.06	0.96	0.85	0.75	0.65	0.54	0.44	0.38	0.33	0.27	0.21	0.16	0.10	
-80	5.44	4.49	3.54	2.64	1.81	1.15	1.03	0.91	0.78	0.66	0.54	0.43	0.38	0.33	0.27	0.21	0.16	0.10	
-70	12.9	10.2	7.56	5.06	2.80	1.35	1.19	1.03	0.88	0.73	0.60	0.48	0.41	0.34	0.27	0.21	0.15	0.10	
-60	24.9	19.4	13.9	8.67	3.83	2.07	1.60	1.26	1.03	0.83	0.65	0.54	0.45	0.37	0.29	0.22	0.15	0.10	
-50	59.3	43.5	28.1	15.0	6.59	4.46	2.99	1.99	1.36	0.95	0.73	0.61	0.50	0.40	0.31	0.22	0.15	0.10	
-40	264	180	105	49.8	31.5	17.5	7.97	3.32	1.72	1.10	0.86	0.68	0.55	0.42	0.32	0.22	0.15	0.10	
-30	709	456	226	121	62.1	30.2	14.6	5.76	3.07	1.42	1.02	0.76	0.58	0.44	0.33	0.22	0.15	0.10	
-20	1196	738	423	247	140	49.4	15.2	8.19	4.63	2.24	1.17	0.82	0.60	0.45	0.33	0.22	0.14	0.10	
-10	1598	1076	586	256	157	90.6	27.0	10.3	5.60	2.53	1.24	0.85	0.60	0.44	0.32	0.21	0.14	0.10	
0	1873	1195	634	250	182	91.0	22.6	9.81	5.37	2.44	1.19	0.81	0.57	0.41	0.30	0.20	0.13	0.10	
10	1547	982	488	201	146	78.1	22.3	9.45	5.22	2.34	1.22	0.84	0.61	0.44	0.33	0.22	0.14	0.10	
20	1142	717	409	234	123	37.3	12.5	7.13	4.11	1.83	1.14	0.82	0.61	0.46	0.34	0.23	0.15	0.10	
30	624	415	225	123	61.3	27.8	12.3	4.90	2.44	1.37	1.01	0.77	0.60	0.47	0.35	0.24	0.16	0.10	
40	215	148	88.0	42.8	26.8	15.9	7.92	3.11	1.66	1.09	0.88	0.71	0.58	0.46	0.35	0.25	0.16	0.10	
50	48.5	37.1	25.7	14.9	6.77	4.41	3.00	2.05	1.40	0.99	0.78	0.66	0.55	0.45	0.34	0.24	0.17	0.10	
60	23.0	18.0	13.0	8.24	3.82	2.18	1.72	1.33	1.08	0.88	0.72	0.62	0.52	0.43	0.33	0.25	0.17	0.10	
70	10.6	8.45	6.34	4.34	2.54	1.37	1.21	1.07	0.92	0.80	0.68	0.57	0.49	0.40	0.32	0.25	0.17	0.10	
80	4.19	3.48	2.78	2.13	1.57	1.17	1.06	0.96	0.85	0.74	0.64	0.54	0.47	0.39	0.31	0.24	0.17	0.10	
90	1.46	1.40	1.34	1.27	1.21	1.15	1.04	0.94	0.84	0.73	0.63	0.52	0.45	0.38	0.31	0.24	0.17	0.10	
100	1.50	1.43	1.36	1.29	1.22	1.14	1.04	0.93	0.83	0.72	0.62	0.52	0.45	0.38	0.31	0.24	0.17	0.10	
110	1.51	1.43	1.35	1.28	1.20	1.12	1.01	0.91	0.80	0.70	0.59	0.50	0.43	0.36	0.30	0.23	0.16	0.10	
120	1.48	1.40	1.33	1.25	1.18	1.07	0.96	0.86	0.75	0.65	0.55	0.48	0.41	0.34	0.28	0.22	0.15	0.10	
130	1.72	1.61	1.49	1.36	1.22	1.06	0.92	0.79	0.68	0.58	0.50	0.44	0.38	0.32	0.26	0.20	0.15	0.10	
140	2.37	2.22	2.02	1.78	1.43	1.16	0.92	0.73	0.60	0.51	0.45	0.39	0.33	0.28	0.23	0.19	0.14	0.10	
150	3.31	3.27	3.00	2.40	1.77	1.29	0.92	0.67	0.53	0.45	0.39	0.33	0.29	0.24	0.20	0.16	0.13	0.10	
160	3.82	3.79	3.49	2.91	2.13	1.38	0.93	0.66	0.49	0.38	0.32	0.27	0.23	0.20	0.17	0.14	0.12	0.10	
170	4.40	4.31	4.12	3.49	2.53	1.60	0.97	0.62	0.42	0.30	0.24	0.20	0.17	0.15	0.13	0.12	0.10	0.10	
180	4.67	4.97	4.61	3.68	2.48	1.46	0.81	0.47	0.31	0.20	0.15	0.13	0.11	0.10	0.09	0.09	0.09	0.10	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks: