

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	2301.4 cd per klm.
(Luminaire orientation as tested.)	-1.5 degrees vertical
	1.0 degrees horizontal

Beam Spread	At 10% of Imax	76.8V x 56.3H
	At 50% of Imax	40.1V x 30.4H
	At 90% of Imax	15.8V x 11.2H

Beam Flux	Total	1000.3 lumens per klm.
	To 10% of Imax	880.9 lumens per klm.
	To 50% of Imax	475.9 lumens per klm.
	To 90% of Imax	105.0 lumens per klm.

Upward LOR	0.6 %
Downward LOR	99.4 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.95V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:65.4334x12 lm		
NAME:Edgeless Ground-500mm-3000K-30x40D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:30x40 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

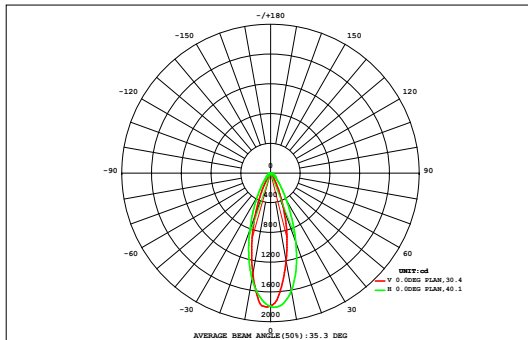

DATA OF LAMP		Eff:44.11lm/W	
MODEL		Imax(cd)	1807
NOMINAL POWER(W)	18	AVAILABILITY(%)	87.6
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	687.7
NOMINAL FLUX(lm)	65.4334	LOR(%)	100.0
LAMPS INSIDE	12	TOTAL FLUX(lm)	785.2
TEST VOLTAGE(V)	220	θ @50%(H,V)	30,40DEG

72 64 56 48 40 32 24 -24 -32 -40 -48 -56 -64 -72	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a	
	0.00	0.00	0.00	0.01	0.01	0.02	0.11	0.23	0.36	0.36	0.23	0.11	0.03	0.01	0.01	0.00	0.00	0.00	1.50	0.00	
	0.00	0.00	0.00	0.01	0.02	0.04	0.19	0.43	0.68	0.68	0.44	0.21	0.05	0.02	0.01	0.01	0.00	0.00	2.79	0.00	
	0.00	0.00	0.01	0.02	0.04	0.08	0.27	0.65	1.05	1.06	0.68	0.31	0.10	0.05	0.02	0.01	0.00	0.00	4.34	0.00	
	0.00	0.00	0.01	0.02	0.06	0.18	0.53	1.18	1.81	1.83	1.25	0.64	0.25	0.08	0.03	0.01	0.00	0.00	7.91	0.00	
	0.00	0.01	0.01	0.03	0.13	0.48	1.30	2.51	3.60	3.62	2.57	1.39	0.54	0.16	0.03	0.01	0.01	0.00	16.4	5.19	
	0.00	0.01	0.01	0.04	0.19	0.85	2.72	5.34	7.61	7.60	5.36	2.77	0.89	0.20	0.05	0.02	0.01	0.00	33.7	27.6	
	0.00	0.01	0.02	0.07	0.23	1.43	4.91	10.1	14.7	14.7	10.0	4.84	1.44	0.23	0.07	0.02	0.01	0.00	62.8	58.4	
	0.00	0.01	0.02	0.09	0.38	2.38	7.44	15.7	23.6	23.9	15.7	7.42	2.48	0.42	0.10	0.03	0.01	0.00	99.8	95.9	
	0.00	0.01	0.02	0.11	0.46	3.02	9.45	19.6	30.1	31.1	20.9	10.6	3.52	0.58	0.12	0.03	0.01	0.00	130	126	
	0.00	0.01	0.03	0.11	0.57	3.43	10.5	21.7	32.4	33.1	22.9	11.4	3.79	0.64	0.13	0.03	0.01	0.00	141	137	
	0.00	0.01	0.03	0.11	0.63	3.34	9.75	19.2	27.2	27.1	18.5	9.13	3.10	0.55	0.12	0.03	0.01	0.00	119	115	
	0.00	0.01	0.02	0.09	0.40	2.36	6.70	12.7	17.9	17.6	11.9	5.99	1.94	0.32	0.09	0.02	0.01	0.00	78.0	74.0	
	0.00	0.01	0.02	0.07	0.28	1.34	3.80	6.95	9.60	9.37	6.39	3.28	1.09	0.24	0.06	0.02	0.01	0.00	42.5	37.0	
	0.00	0.01	0.01	0.05	0.22	0.75	1.89	3.35	4.61	4.50	3.07	1.58	0.60	0.17	0.04	0.01	0.01	0.00	20.9	11.0	
	0.00	0.00	0.01	0.03	0.11	0.35	0.84	1.55	2.20	2.15	1.42	0.67	0.24	0.08	0.03	0.01	0.00	0.00	9.70	0.00	
	0.00	0.00	0.01	0.02	0.05	0.12	0.37	0.77	1.17	1.15	0.71	0.30	0.09	0.04	0.02	0.01	0.00	0.00	4.83	0.00	
	0.00	0.00	0.01	0.01	0.03	0.06	0.21	0.43	0.67	0.67	0.42	0.20	0.05	0.02	0.01	0.01	0.00	0.00	2.80	0.00	
	0.00	0.00	0.00	0.01	0.01	0.03	0.12	0.23	0.36	0.36	0.23	0.11	0.03	0.01	0.01	0.00	0.00	0.00	1.51	0.00	
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)				16	24	32	40	48	56	64	72	
Φ t	0.04	0.10	0.25	0.90	3.83	20.3	61.1	123	180	181	123	60.9	20.2	3.81	0.93	0.27	0.11	0.05	779	---	
Φ a	0.00	0.00	0.00	0.00	0.00	8.55	52.2	113	169	171	113	51.7	8.69	0.00	0.00	0.00	0.00	0.00	---	688	


one-half-peak spread: U:19.5,D:20.9 , L:16.4,R:14.4 Beam Type: Type 4 x 5 (H x V)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.95V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:65.4334x12 lm		
NAME:Edgeless Ground-500mm-3000K-30x40D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:30x40 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

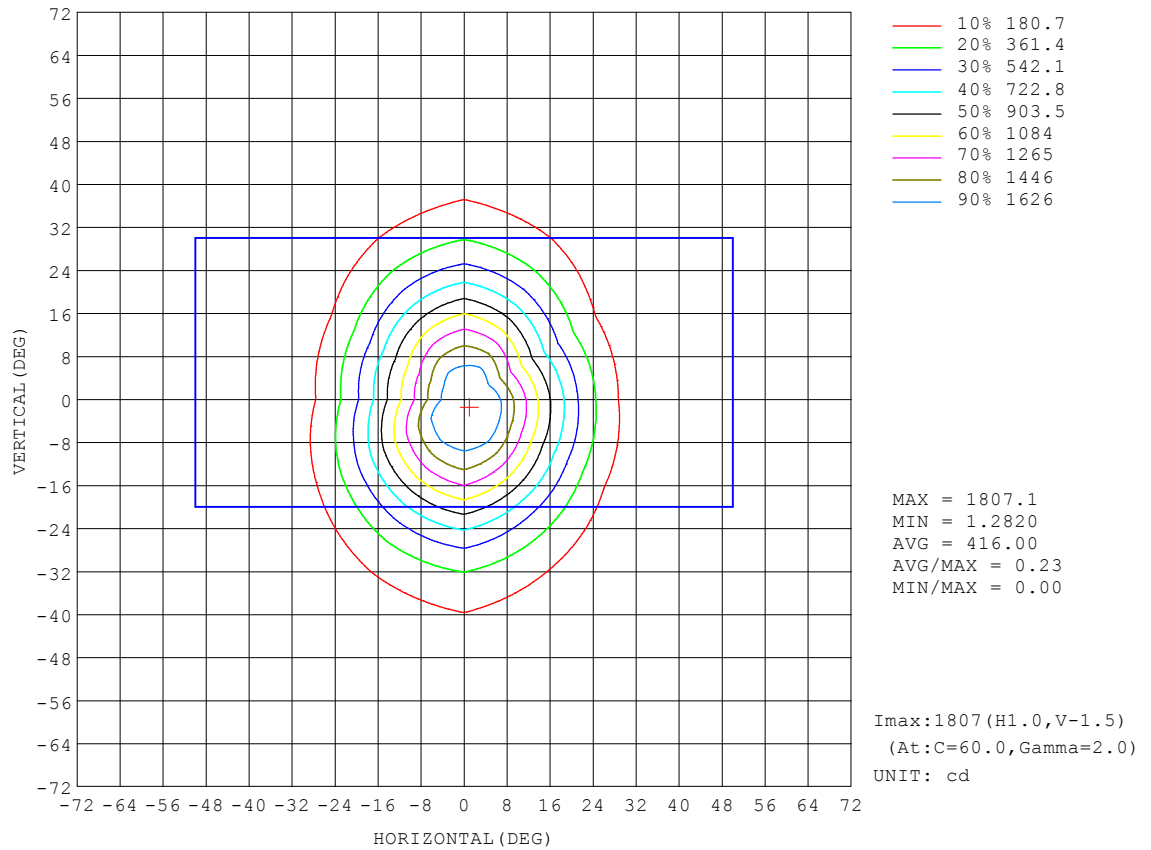


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.95V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:65.4334x12 lm		
NAME:Edgeless Ground-500mm-3000K-30x40D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:30x40 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

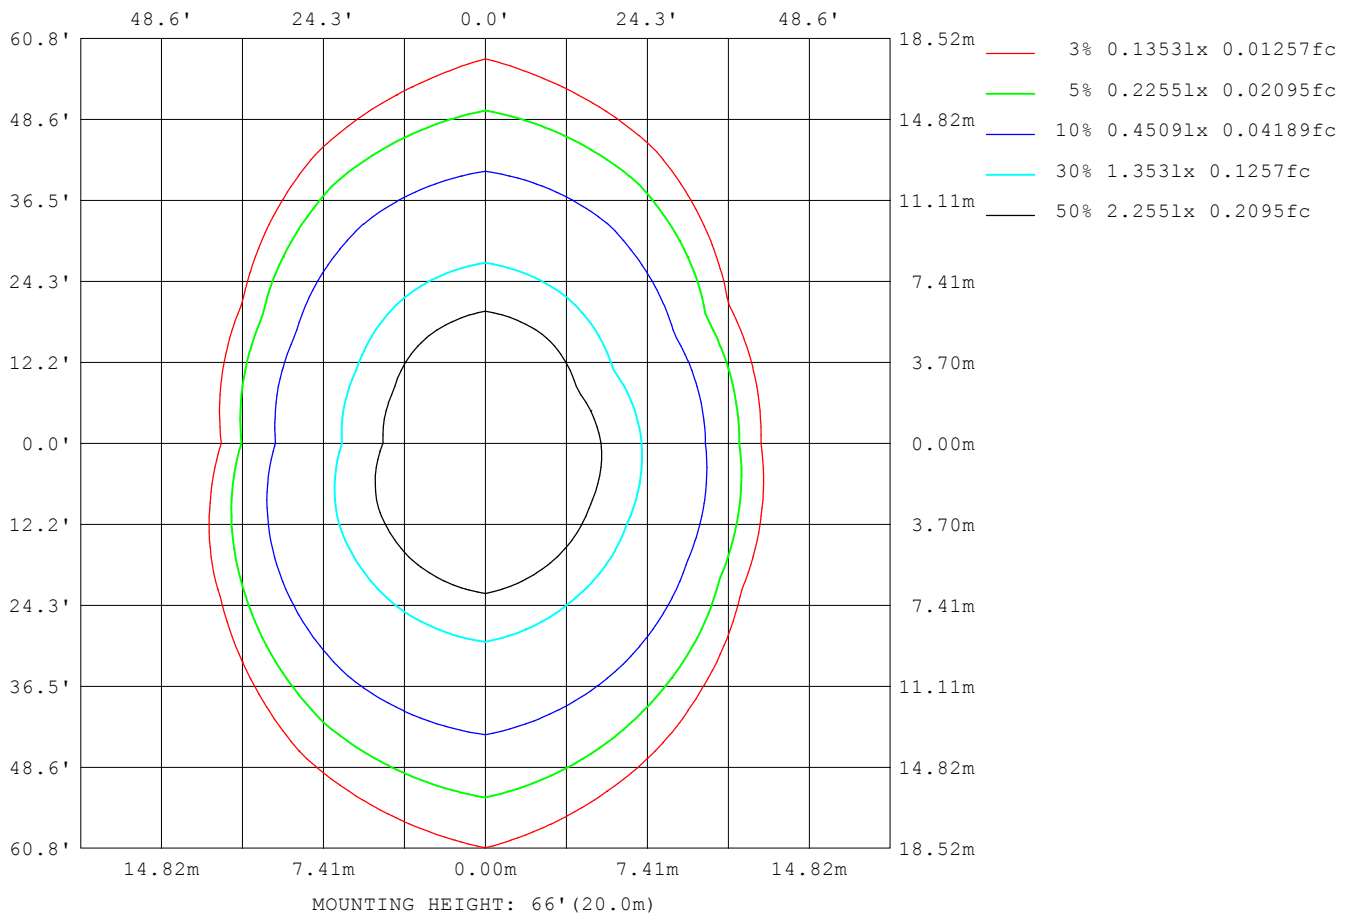

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

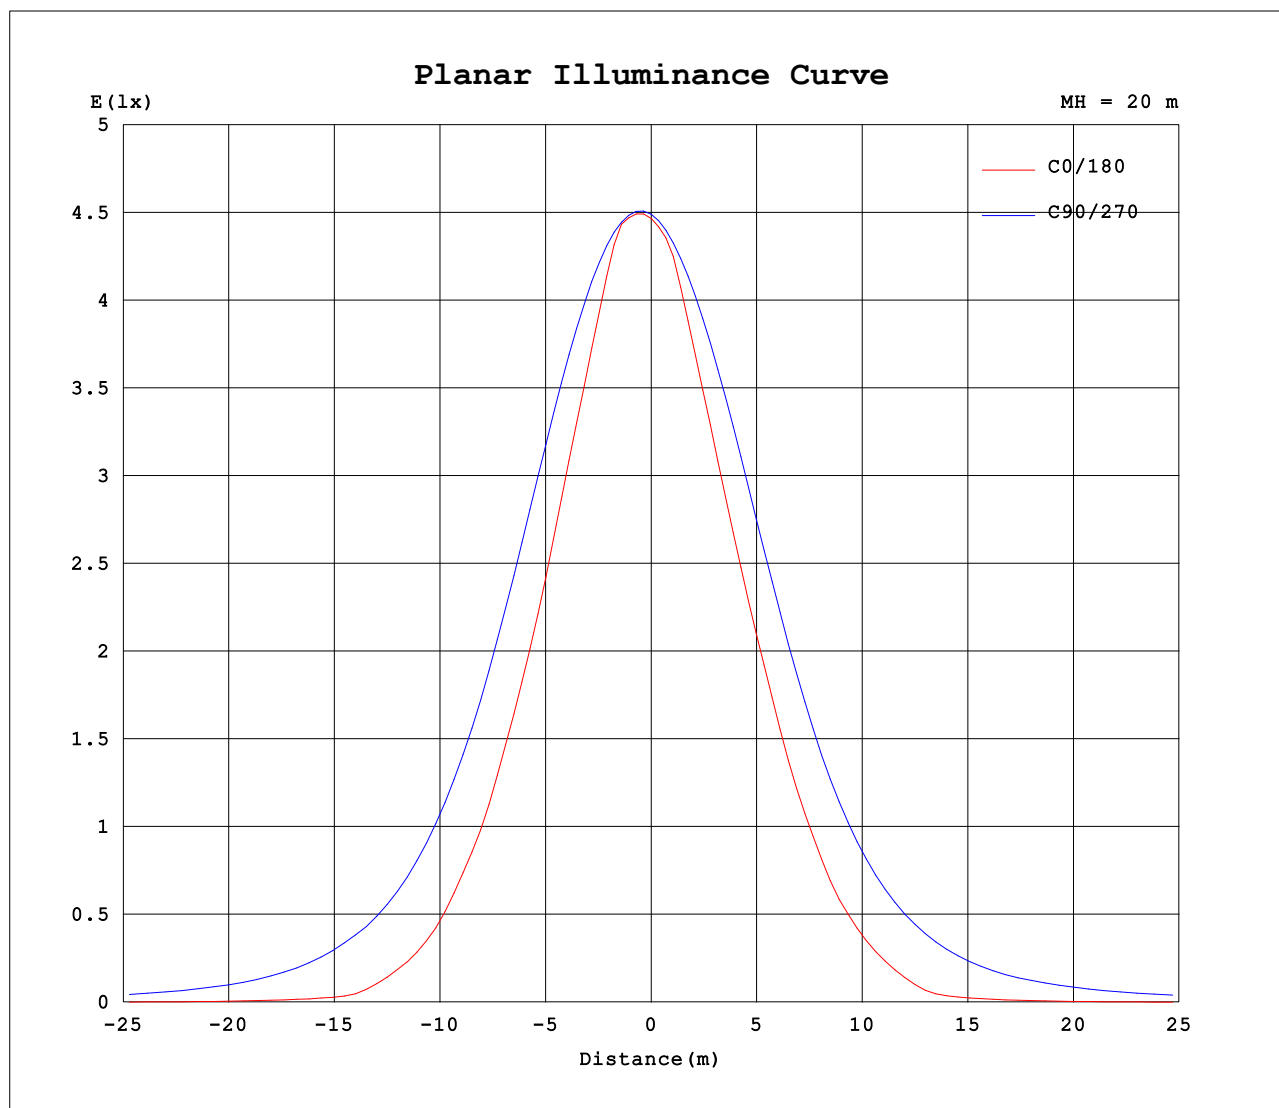


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.95V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:65.4334x12 lm		
NAME:Edgeless Ground-500mm-3000K-30x40D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:30x40 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

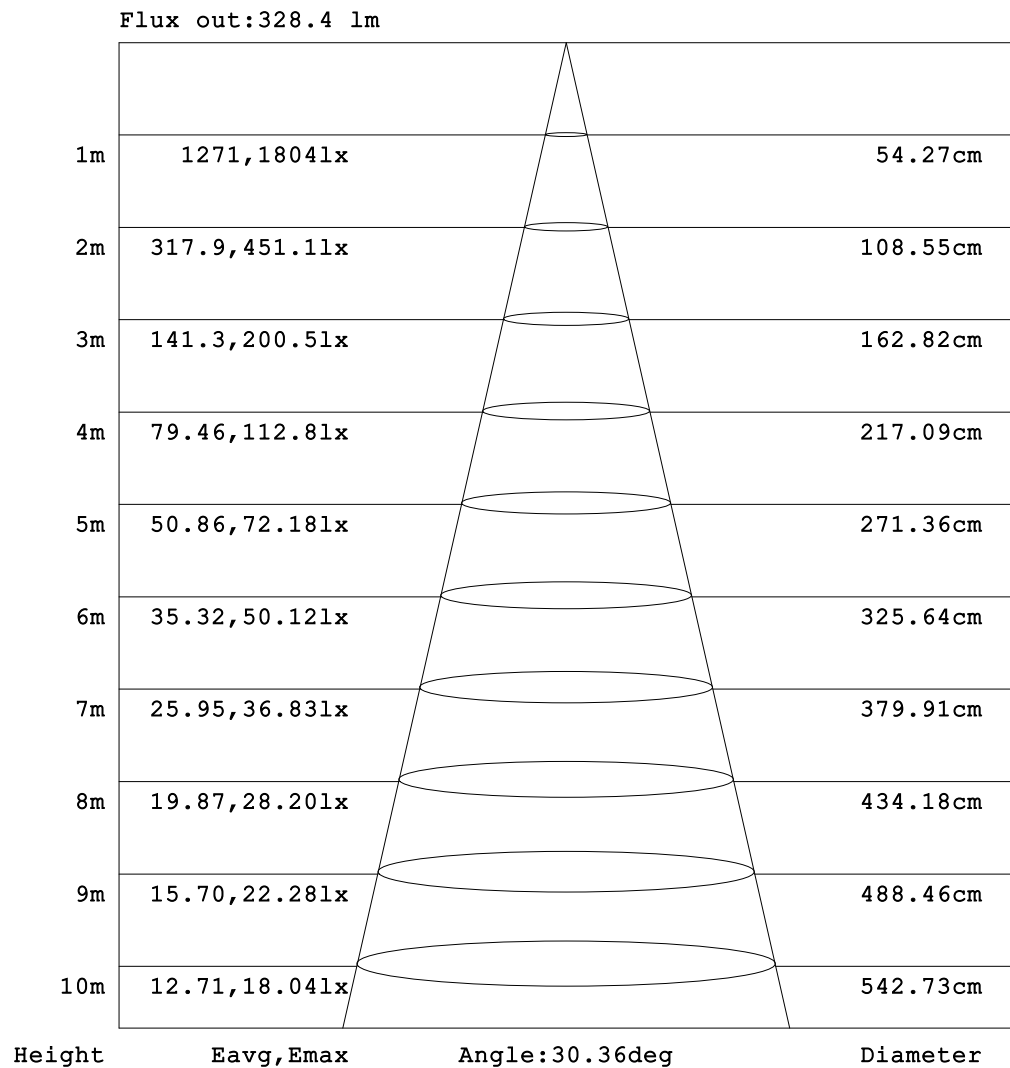

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:20DEG
 Operators:01
 Test Date:2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.700m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.95V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:65.4334x12 lm								
NAME:Edgeless Ground-500mm-3000K-30x40D-REV2					TYPE:3000K			WEIGHT:00
SPEC.:30x40 DEG					DIM.:500mm			SERIAL No.:01
MFR.: 001					SUR.:0.8			Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.03	0.05	0.04	0.04	0.05	0.06	0.07	0.09	0.15	0.30	0.59	1.07	1.71	2.52	3.30	3.89	4.19	4.40	4.55
-170	0.03	0.05	0.05	0.05	0.06	0.07	0.09	0.11	0.18	0.33	0.61	1.05	1.66	2.40	3.15	3.76	4.10	4.24	4.35
-160	0.03	0.05	0.05	0.06	0.07	0.08	0.09	0.11	0.17	0.29	0.49	0.83	1.28	1.83	2.42	2.93	3.30	3.51	3.57
-150	0.03	0.05	0.06	0.06	0.07	0.08	0.10	0.12	0.16	0.22	0.35	0.56	0.84	1.19	1.55	1.91	2.17	2.36	2.46
-140	0.03	0.05	0.06	0.07	0.08	0.09	0.10	0.12	0.14	0.18	0.26	0.36	0.51	0.68	0.87	1.05	1.22	1.36	1.46
-130	0.03	0.05	0.06	0.07	0.08	0.09	0.11	0.12	0.14	0.16	0.20	0.25	0.31	0.39	0.48	0.55	0.63	0.69	0.74
-120	0.03	0.05	0.06	0.08	0.08	0.10	0.11	0.12	0.14	0.15	0.17	0.20	0.23	0.26	0.30	0.35	0.39	0.43	0.46
-110	0.03	0.05	0.06	0.07	0.09	0.10	0.11	0.12	0.14	0.16	0.17	0.19	0.20	0.22	0.25	0.28	0.31	0.33	0.36
-100	0.03	0.05	0.06	0.07	0.08	0.09	0.10	0.12	0.14	0.16	0.17	0.19	0.20	0.22	0.24	0.26	0.28	0.30	0.31
-90	0.03	0.05	0.06	0.07	0.08	0.09	0.10	0.12	0.14	0.16	0.18	0.20	0.22	0.23	0.24	0.25	0.26	0.27	0.28
-80	0.03	0.05	0.06	0.07	0.08	0.10	0.11	0.15	0.19	0.23	0.28	0.32	0.37	0.82	1.37	1.94	2.54	3.13	3.70
-70	0.03	0.05	0.06	0.07	0.10	0.14	0.18	0.25	0.33	0.42	0.54	0.68	0.84	2.54	5.23	8.19	11.3	14.4	17.4
-60	0.03	0.05	0.06	0.09	0.15	0.21	0.28	0.37	0.54	0.78	1.20	1.81	2.61	5.04	11.3	18.3	25.6	32.9	39.9
-50	0.03	0.04	0.06	0.12	0.20	0.29	0.40	0.53	0.83	1.50	2.60	4.12	6.44	11.2	23.4	37.9	52.4	65.9	77.9
-40	0.03	0.04	0.07	0.16	0.26	0.38	0.53	0.75	1.06	1.99	5.16	11.7	23.3	41.5	67.3	98.2	129	155	175
-30	0.03	0.04	0.08	0.18	0.31	0.46	0.67	1.01	1.60	3.48	7.15	19.7	45.6	96.9	171	255	332	397	440
-20	0.03	0.04	0.09	0.21	0.34	0.52	0.79	1.24	2.56	5.41	10.8	25.2	90.2	206	359	548	741	899	996
-10	0.03	0.04	0.10	0.22	0.36	0.56	0.86	1.41	2.73	6.68	14.1	46.6	138	305	558	884	1216	1495	1608
0	0.03	0.03	0.10	0.22	0.36	0.55	0.83	1.32	2.26	6.11	12.6	27.0	114	270	519	852	1206	1571	1787
10	0.03	0.04	0.10	0.22	0.36	0.54	0.82	1.28	2.33	5.72	11.6	26.9	100	232	435	703	1023	1309	1444
20	0.03	0.04	0.09	0.21	0.33	0.50	0.73	1.10	1.78	4.13	8.05	15.2	43.3	138	262	423	594	735	826
30	0.03	0.04	0.08	0.18	0.30	0.44	0.62	0.87	1.28	2.22	4.78	12.8	30.7	63.8	121	192	256	312	351
40	0.03	0.04	0.07	0.15	0.26	0.36	0.49	0.66	0.88	1.51	2.83	5.83	13.0	25.0	43.0	71.0	98.1	121	140
50	0.03	0.05	0.06	0.12	0.20	0.28	0.37	0.47	0.66	1.09	1.81	2.89	4.32	6.14	15.6	28.8	43.1	57.3	70.4
60	0.03	0.05	0.07	0.09	0.15	0.21	0.27	0.34	0.45	0.61	0.83	1.12	1.64	3.94	10.6	17.9	25.5	33.2	40.7
70	0.03	0.05	0.06	0.08	0.11	0.14	0.19	0.23	0.28	0.34	0.41	0.50	0.60	2.17	4.78	7.74	10.9	14.1	17.2
80	0.03	0.05	0.06	0.08	0.09	0.11	0.14	0.15	0.17	0.19	0.22	0.24	0.27	0.57	0.94	1.35	1.78	2.21	2.62
90	0.03	0.05	0.06	0.07	0.08	0.09	0.10	0.11	0.13	0.14	0.16	0.17	0.18	0.20	0.21	0.23	0.24	0.25	0.27
100	0.03	0.05	0.06	0.07	0.08	0.09	0.10	0.11	0.13	0.15	0.16	0.18	0.19	0.20	0.22	0.23	0.24	0.25	0.26
110	0.03	0.05	0.06	0.07	0.08	0.09	0.10	0.11	0.13	0.14	0.16	0.18	0.20	0.22	0.23	0.25	0.26	0.27	0.28
120	0.03	0.05	0.06	0.07	0.08	0.09	0.09	0.10	0.12	0.14	0.17	0.19	0.22	0.25	0.28	0.31	0.34	0.36	0.38
130	0.03	0.05	0.06	0.07	0.07	0.08	0.09	0.10	0.11	0.14	0.17	0.22	0.28	0.37	0.43	0.51	0.57	0.63	0.68
140	0.03	0.05	0.06	0.06	0.07	0.08	0.09	0.09	0.10	0.12	0.19	0.29	0.44	0.62	0.82	1.03	1.26	1.45	1.60
150	0.03	0.05	0.05	0.06	0.07	0.07	0.08	0.09	0.11	0.15	0.25	0.45	0.74	1.10	1.49	1.87	2.20	2.40	2.48
160	0.03	0.05	0.05	0.05	0.06	0.07	0.08	0.09	0.13	0.22	0.41	0.72	1.16	1.72	2.33	2.84	3.21	3.42	3.49
170	0.03	0.05	0.05	0.05	0.05	0.06	0.08	0.09	0.15	0.29	0.56	1.00	1.59	2.31	3.05	3.64	4.00	4.20	4.25
180	0.03	0.05	0.04	0.04	0.05	0.06	0.07	0.09	0.15	0.30	0.59	1.07	1.71	2.52	3.30	3.89	4.19	4.40	4.58

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.95V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:65.4334x12 lm																		
NAME:Edgeless Ground-500mm-3000K-30x40D-REV2									TYPE:3000K					WEIGHT:00				
SPEC.:30x40 DEG									DIM.:500mm					SERIAL No.:01				
MFR.: 001									SUR.:0.8					Shielding Angle:				

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	4.55	4.48	4.14	3.51	2.69	1.84	1.15	0.64	0.32	0.14	0.07	0.05	0.05	0.05	0.05	0.05	0.05	0.06	
-170	4.27	4.12	3.77	3.19	2.45	1.71	1.11	0.63	0.33	0.17	0.09	0.06	0.06	0.06	0.05	0.05	0.05	0.06	
-160	3.51	3.28	2.91	2.41	1.83	1.29	0.83	0.49	0.28	0.16	0.10	0.08	0.07	0.06	0.06	0.05	0.05	0.06	
-150	2.36	2.16	1.88	1.53	1.18	0.83	0.54	0.34	0.22	0.14	0.11	0.09	0.08	0.07	0.06	0.06	0.05	0.06	
-140	1.35	1.21	1.03	0.85	0.66	0.49	0.35	0.25	0.17	0.13	0.11	0.10	0.08	0.07	0.07	0.06	0.05	0.06	
-130	0.69	0.61	0.54	0.45	0.37	0.30	0.23	0.19	0.16	0.13	0.12	0.10	0.09	0.08	0.07	0.06	0.06	0.06	
-120	0.42	0.38	0.34	0.29	0.24	0.21	0.18	0.16	0.14	0.13	0.11	0.10	0.09	0.08	0.07	0.06	0.06	0.06	
-110	0.33	0.30	0.27	0.24	0.21	0.19	0.17	0.16	0.15	0.13	0.11	0.10	0.09	0.08	0.07	0.07	0.06	0.06	
-100	0.29	0.27	0.25	0.23	0.21	0.19	0.18	0.16	0.15	0.13	0.12	0.10	0.09	0.09	0.08	0.07	0.06	0.06	
-90	0.27	0.25	0.24	0.23	0.21	0.20	0.18	0.17	0.15	0.13	0.12	0.10	0.09	0.09	0.08	0.07	0.06	0.06	
-80	3.12	2.52	1.92	1.34	0.80	0.34	0.29	0.25	0.21	0.17	0.14	0.10	0.10	0.09	0.08	0.07	0.07	0.06	
-70	14.4	11.2	8.09	5.10	2.40	0.70	0.58	0.47	0.38	0.30	0.23	0.18	0.14	0.12	0.10	0.08	0.06	0.06	
-60	32.6	25.1	17.6	10.5	4.14	1.88	1.32	0.92	0.67	0.49	0.35	0.27	0.22	0.17	0.13	0.10	0.07	0.06	
-50	64.0	48.6	32.6	17.4	7.02	4.90	3.28	2.05	1.23	0.74	0.51	0.40	0.31	0.24	0.17	0.11	0.07	0.06	
-40	150	120	86.5	54.4	32.1	17.1	7.93	3.58	1.77	1.02	0.74	0.55	0.41	0.31	0.21	0.13	0.08	0.06	
-30	385	310	225	146	79.6	37.7	16.3	6.16	3.17	1.53	1.03	0.71	0.51	0.36	0.25	0.15	0.08	0.06	
-20	879	698	500	322	174	70.3	19.4	10.1	5.31	2.51	1.32	0.87	0.59	0.42	0.28	0.16	0.09	0.06	
-10	1493	1195	840	533	292	133	40.3	14.1	7.01	3.19	1.54	0.97	0.65	0.45	0.31	0.17	0.09	0.06	
0	1747	1383	982	623	335	143	34.9	14.8	7.28	3.52	1.58	1.00	0.67	0.46	0.32	0.18	0.09	0.06	
10	1340	1031	693	437	244	111	30.4	12.7	6.40	2.92	1.48	0.95	0.64	0.45	0.31	0.17	0.09	0.06	
20	737	594	419	258	136	46.5	15.0	8.31	4.51	2.05	1.23	0.83	0.58	0.41	0.28	0.17	0.09	0.06	
30	313	258	195	124	66.4	32.6	13.9	4.95	2.41	1.35	0.94	0.67	0.50	0.36	0.25	0.15	0.08	0.06	
40	123	101	75.6	49.6	30.5	17.0	8.39	3.34	1.62	0.89	0.67	0.52	0.40	0.30	0.21	0.13	0.08	0.06	
50	58.7	45.8	32.3	18.5	7.79	5.30	3.55	2.22	1.27	0.71	0.47	0.39	0.31	0.24	0.17	0.12	0.08	0.06	
60	33.4	25.9	18.4	11.2	4.66	2.22	1.52	0.99	0.68	0.47	0.34	0.27	0.23	0.18	0.14	0.10	0.07	0.06	
70	14.1	11.0	7.82	4.87	2.27	0.69	0.56	0.45	0.36	0.29	0.23	0.19	0.16	0.13	0.11	0.09	0.07	0.06	
80	2.21	1.79	1.36	0.95	0.58	0.28	0.25	0.22	0.20	0.17	0.15	0.13	0.12	0.10	0.09	0.07	0.07	0.06	
90	0.25	0.24	0.23	0.22	0.20	0.19	0.18	0.16	0.15	0.13	0.12	0.10	0.09	0.09	0.08	0.07	0.06	0.06	
100	0.25	0.24	0.24	0.23	0.21	0.20	0.18	0.17	0.15	0.13	0.12	0.10	0.09	0.08	0.07	0.07	0.06	0.06	
110	0.27	0.26	0.25	0.24	0.23	0.21	0.19	0.17	0.15	0.13	0.11	0.10	0.09	0.08	0.07	0.06	0.06	0.06	
120	0.37	0.35	0.33	0.30	0.28	0.24	0.21	0.17	0.15	0.13	0.11	0.09	0.09	0.08	0.07	0.06	0.06	0.06	
130	0.67	0.66	0.61	0.52	0.42	0.32	0.24	0.18	0.14	0.11	0.10	0.09	0.08	0.08	0.07	0.06	0.05	0.06	
140	1.48	1.31	1.12	0.92	0.71	0.53	0.40	0.22	0.13	0.10	0.09	0.08	0.08	0.07	0.07	0.06	0.05	0.06	
150	2.44	2.28	1.99	1.60	1.21	0.85	0.55	0.31	0.17	0.10	0.08	0.08	0.07	0.07	0.06	0.06	0.05	0.06	
160	3.43	3.25	2.91	2.43	1.86	1.29	0.83	0.49	0.26	0.13	0.08	0.07	0.06	0.06	0.06	0.05	0.05	0.06	
170	4.25	4.00	3.64	3.12	2.44	1.72	1.10	0.63	0.33	0.15	0.07	0.06	0.06	0.05	0.05	0.05	0.05	0.06	
180	4.55	4.48	4.14	3.51	2.69	1.84	1.15	0.64	0.32	0.14	0.07	0.05	0.05	0.05	0.05	0.05	0.05	0.06	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
γ Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks: