

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	7731.4 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	4.0 degrees horizontal

Beam Spread	At 10% of Imax	39.1V x 33.2H
	At 50% of Imax	14.7V x 13.8H
	At 90% of Imax	5.4V x 5.5H

Beam Flux	Total	1000.8 lumens per klm.
	To 10% of Imax	656.9 lumens per klm.
	To 50% of Imax	268.6 lumens per klm.
	To 90% of Imax	54.6 lumens per klm.

Upward LOR	0.8 %
Downward LOR	99.3 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-08-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.90V I:0.0890A P:18.500W PF:0.9000 Freq:49.99Hz Lamp Flux:141.388x9 lm		
NAME:Lumino Ground-500mm-3000K-15D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:15 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

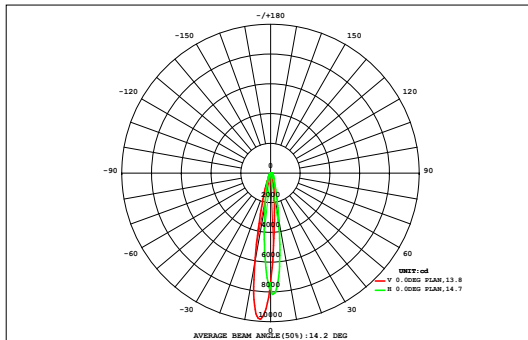

DATA OF LAMP		Eff:68.78lm/W	
MODEL		Imax(cd)	9838
NOMINAL POWER(W)	18	AVAILABILITY(%)	65.7
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	836.6
NOMINAL FLUX(lm)	141.388	LOR(%)	100.0
LAMPS INSIDE	9	TOTAL FLUX(lm)	1272
TEST VOLTAGE(V)	220	θ @50% (H,V)	14,15DEG

	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.25	0.37	0.51	0.66	0.81	0.93	1.04	1.12	1.19	1.22	1.20	1.15	1.07	0.96	0.77	0.58	0.41	0.27	14.5	0.00
27	0.25	0.37	0.51	0.66	0.81	0.93	1.04	1.12	1.19	1.22	1.20	1.15	1.07	0.96	0.77	0.58	0.41	0.27	14.5	0.00
24	0.28	0.42	0.59	0.78	0.97	1.13	1.28	1.41	1.51	1.56	1.54	1.47	1.36	1.17	0.91	0.67	0.47	0.31	17.8	0.00
21	0.31	0.48	0.69	0.91	1.14	1.37	1.59	1.79	1.96	2.05	2.04	1.94	1.75	1.45	1.11	0.79	0.52	0.33	22.2	0.00
18	0.35	0.56	0.80	1.07	1.35	1.66	1.99	2.33	2.63	2.80	2.81	2.63	2.29	1.85	1.39	0.96	0.60	0.35	28.4	6.49
15	0.41	0.64	0.92	1.22	1.58	2.01	2.53	3.11	3.63	4.00	4.07	3.72	3.08	2.41	1.77	1.19	0.73	0.44	37.4	22.6
12	0.47	0.74	1.03	1.37	1.82	2.43	3.22	4.22	5.26	6.16	6.39	5.46	4.20	3.14	2.24	1.53	0.97	0.57	51.2	38.7
9	0.52	0.81	1.14	1.53	2.06	2.83	4.01	5.75	8.00	10.1	10.5	8.46	5.85	4.09	2.94	1.98	1.22	0.71	72.5	61.1
	0.55	0.86	1.23	1.68	2.30	3.22	4.70	7.54	12.0	16.6	17.0	13.2	9.02	5.79	3.76	2.43	1.47	0.83	104	94.4
	0.56	0.88	1.27	1.75	2.45	3.53	5.38	8.86	15.4	23.3	24.0	20.1	13.6	7.77	4.55	2.81	1.66	0.91	139	129
	0.58	0.91	1.31	1.83	2.61	3.89	6.39	11.5	19.4	23.7	25.9	22.4	15.0	8.39	4.79	2.92	1.72	0.95	154	145
	0.62	0.95	1.35	1.90	2.72	4.09	6.65	10.8	16.3	20.8	21.9	18.9	12.7	7.36	4.39	2.75	1.65	0.93	137	128
	0.63	0.94	1.33	1.84	2.59	3.71	5.39	7.88	11.6	14.5	15.0	12.8	9.12	5.87	3.77	2.45	1.50	0.86	102	92.2
-12	0.61	0.90	1.25	1.69	2.28	3.09	4.14	5.66	7.56	8.96	9.05	7.84	6.04	4.34	3.07	2.06	1.28	0.75	70.6	59.5
-15	0.58	0.84	1.14	1.49	1.93	2.50	3.20	4.08	4.98	5.57	5.55	4.96	4.09	3.20	2.38	1.65	1.04	0.63	49.8	37.5
-18	0.51	0.75	1.00	1.28	1.61	1.99	2.45	2.97	3.43	3.68	3.65	3.37	2.92	2.37	1.81	1.28	0.84	0.50	36.4	19.5
-21	0.44	0.64	0.86	1.09	1.34	1.60	1.90	2.21	2.46	2.59	2.56	2.40	2.14	1.79	1.39	1.01	0.69	0.43	27.5	2.83
-24	0.37	0.54	0.73	0.92	1.12	1.31	1.50	1.68	1.83	1.90	1.87	1.77	1.61	1.38	1.10	0.82	0.56	0.37	21.4	0.00
-27	0.32	0.45	0.61	0.78	0.93	1.06	1.19	1.31	1.40	1.44	1.41	1.34	1.23	1.10	0.88	0.66	0.46	0.31	16.9	0.00
	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL(DEG)	6	9	12	15	18	21	24	27			
Φ t	8.37	12.7	17.8	23.8	31.6	42.4	58.5	84.2	120	151	156	134	97.0	64.4	43.0	28.5	17.8	10.5	1103	---
Φ a	0.00	0.00	0.00	0.00	5.96	24.8	44.3	71.5	109	140	146	123	85.0	50.6	27.6	8.54	0.00	0.00	---	837

one-half-peak spread: U:7.6,D:7.1 , L:6.5,R:7.4


NEMA Beam Type: Type 3

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.90V I:0.0890A P:18.500W PF:0.9000 Freq:49.99Hz Lamp Flux:141.388x9 lm		
NAME:Lumino Ground-500mm-3000K-15D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:15 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

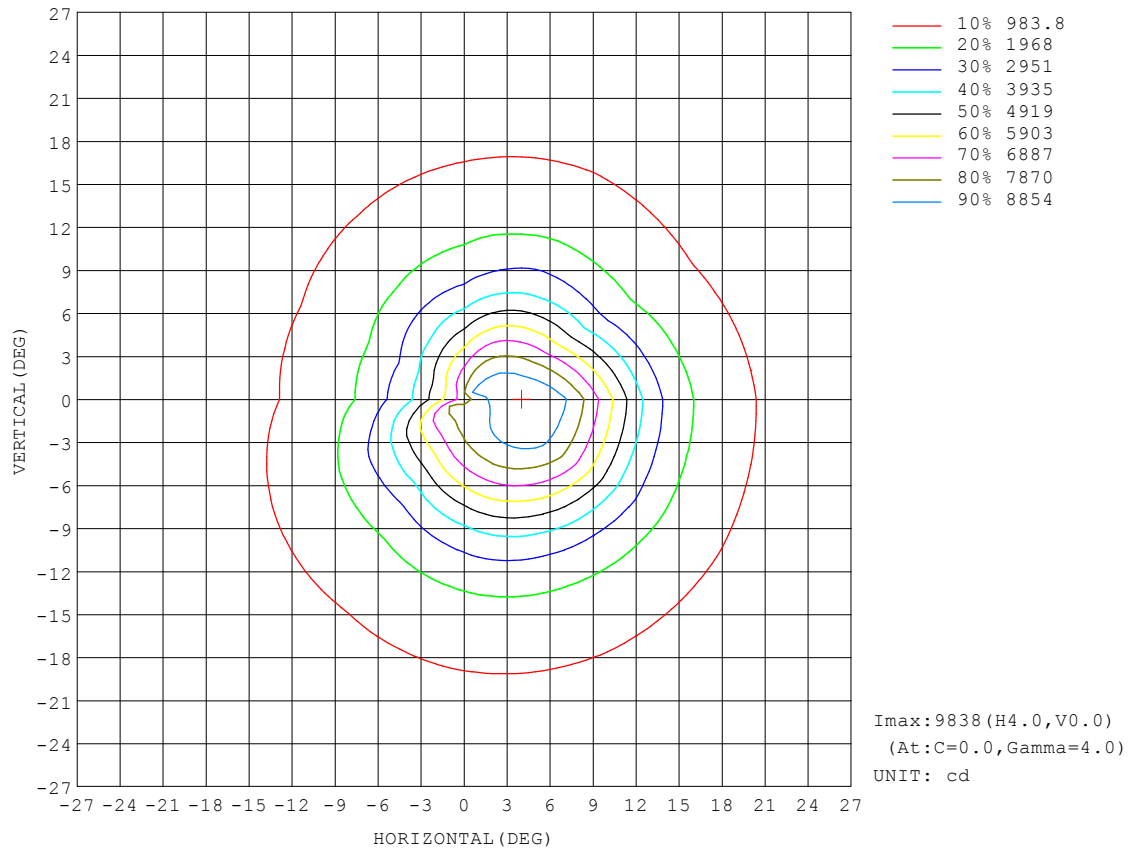


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.90V I:0.0890A P:18.500W PF:0.9000 Freq:49.99Hz Lamp Flux:141.388x9 lm		
NAME:Lumino Ground-500mm-3000K-15D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:15 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

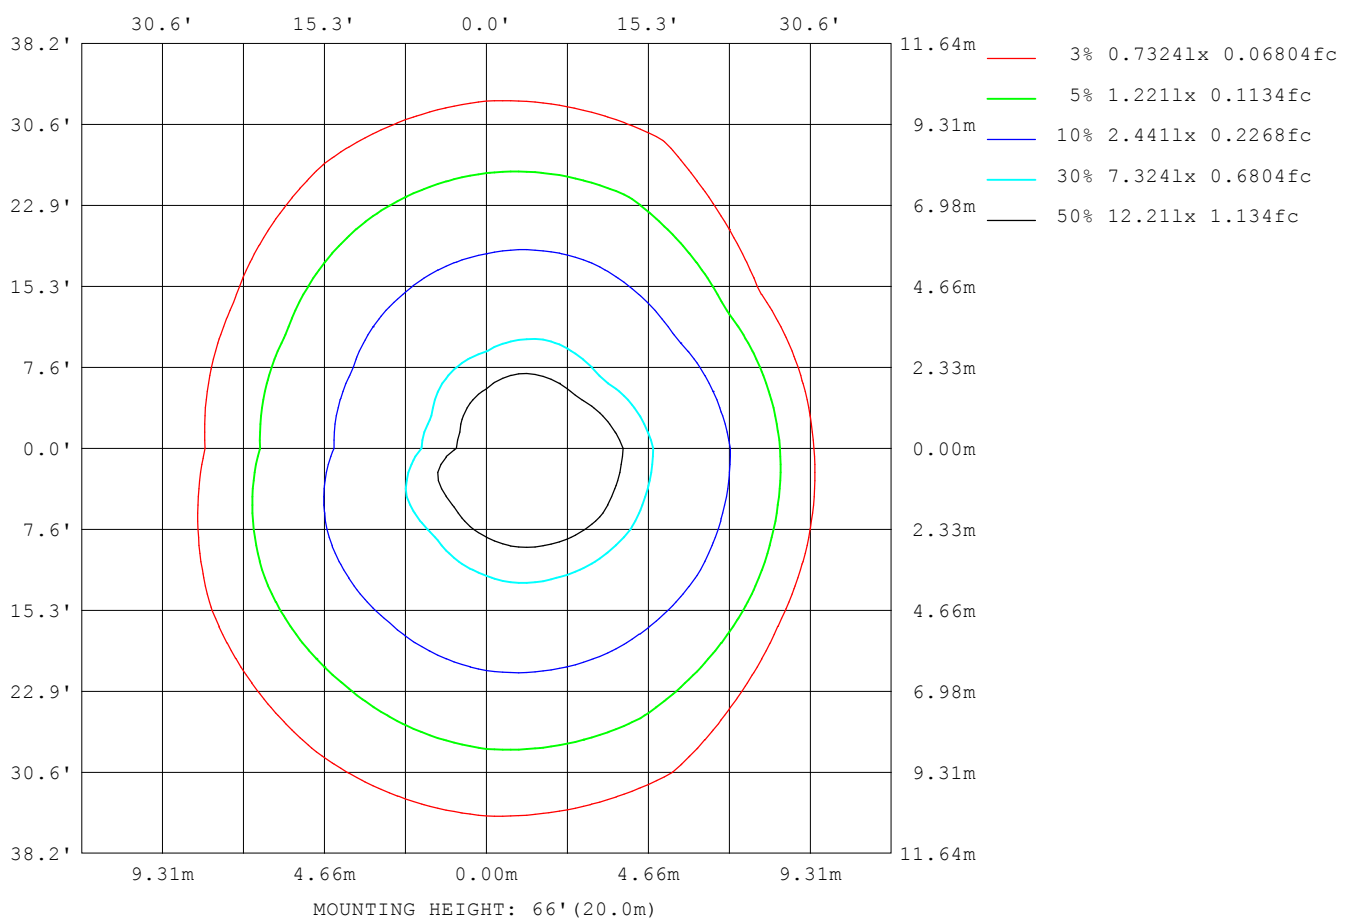

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

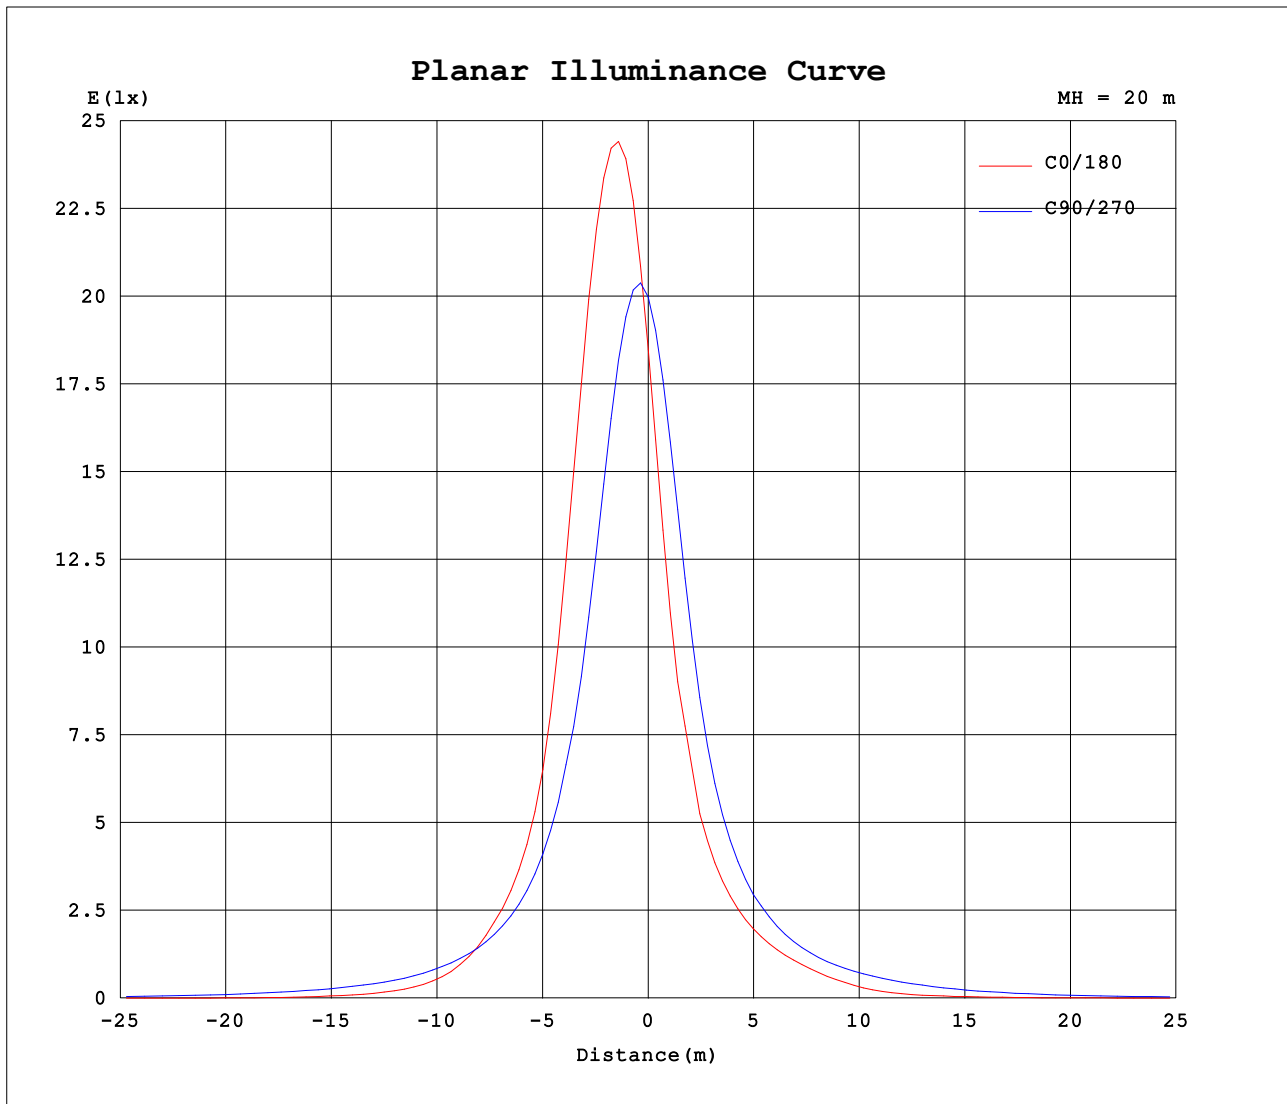


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-08-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.90V I:0.0890A P:18.500W PF:0.9000 Freq:49.99Hz Lamp Flux:141.388x9 lm		
NAME:Lumino Ground-500mm-3000K-15D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:15 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

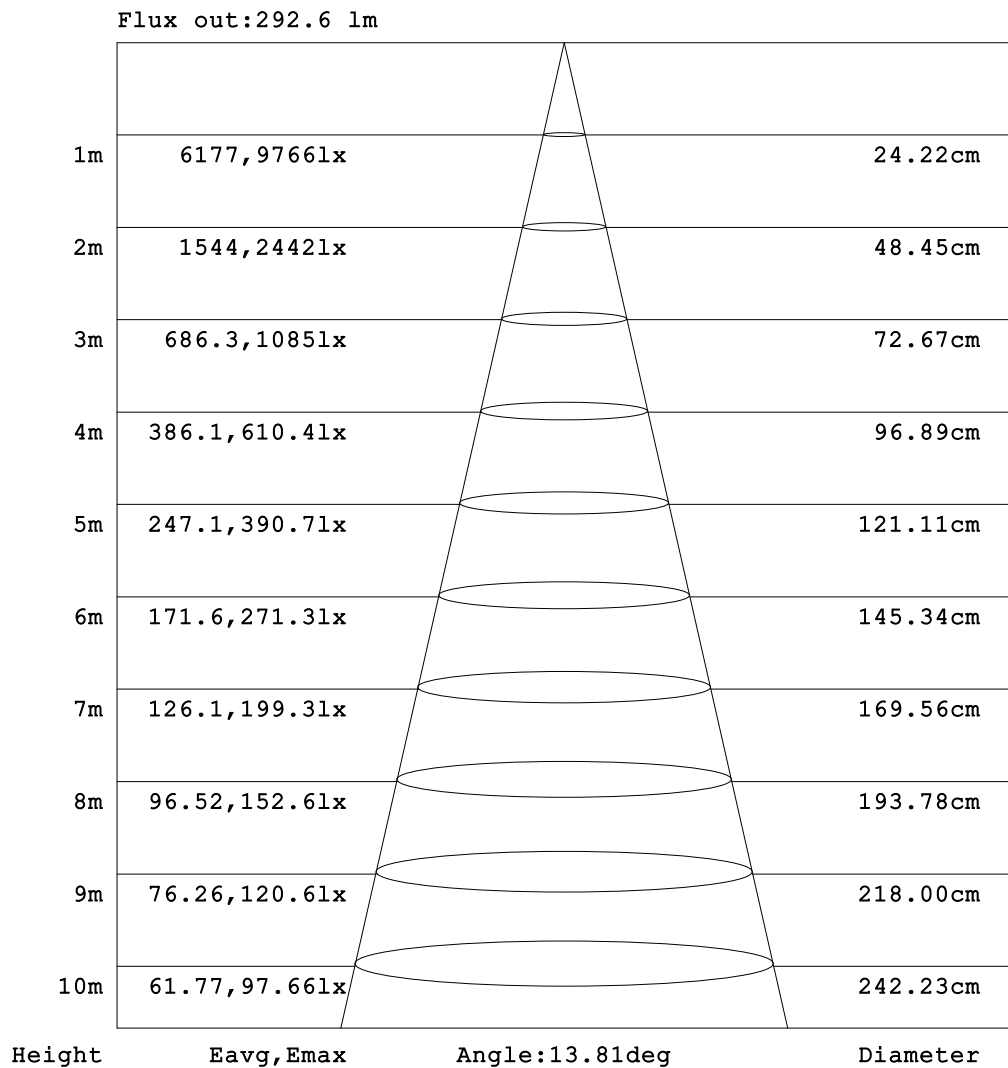

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:20DEG
 Operators:01
 Test Date:2025-08-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.700m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.90V I:0.0890A P:18.500W PF:0.9000 Freq:49.99Hz Lamp Flux:141.388x9 lm								
NAME:Lumino Ground-500mm-3000K-15D-REV2					TYPE:3000K			WEIGHT:00
SPEC.:15 DEG					DIM.:500mm			SERIAL No.:01
MFR.: 001					SUR.:0.8			Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.07	0.07	0.07	0.07	0.07	0.08	0.10	0.12	0.19	0.35	0.76	1.63	3.47	6.07	7.96	8.07	6.78	6.16	7.04
-170	0.07	0.08	0.09	0.11	0.12	0.14	0.16	0.20	0.28	0.45	0.82	1.56	3.04	5.29	7.34	8.34	8.28	8.03	8.23
-160	0.07	0.09	0.11	0.14	0.16	0.19	0.22	0.27	0.33	0.47	0.73	1.18	1.95	3.19	4.72	6.03	6.85	7.20	7.20
-150	0.07	0.10	0.13	0.17	0.20	0.24	0.28	0.33	0.38	0.47	0.62	0.88	1.21	1.66	2.21	2.80	3.26	3.51	3.52
-140	0.07	0.11	0.15	0.19	0.24	0.28	0.33	0.38	0.43	0.51	0.62	0.75	0.92	1.12	1.34	1.50	1.65	1.76	1.83
-130	0.07	0.11	0.17	0.21	0.26	0.32	0.37	0.42	0.49	0.57	0.66	0.75	0.87	1.00	1.12	1.23	1.33	1.44	1.54
-120	0.07	0.12	0.18	0.23	0.29	0.34	0.40	0.47	0.55	0.63	0.71	0.80	0.89	0.98	1.06	1.15	1.24	1.33	1.42
-110	0.07	0.13	0.19	0.25	0.30	0.36	0.42	0.50	0.59	0.67	0.76	0.84	0.93	1.01	1.09	1.18	1.27	1.35	1.44
-100	0.07	0.13	0.19	0.25	0.32	0.38	0.44	0.52	0.61	0.69	0.78	0.87	0.96	1.04	1.12	1.20	1.27	1.35	1.43
-90	0.07	0.14	0.22	0.30	0.37	0.45	0.52	0.62	0.71	0.80	0.89	0.98	1.07	1.12	1.16	1.21	1.25	1.30	1.34
-80	0.07	0.18	0.29	0.38	0.48	0.58	0.67	0.80	0.93	1.06	1.19	1.33	1.46	2.47	3.68	4.98	6.33	7.67	8.97
-70	0.07	0.21	0.32	0.44	0.58	0.73	0.92	1.13	1.36	1.61	1.85	2.12	2.40	5.41	9.99	14.9	20.0	25.0	29.8
-60	0.07	0.23	0.35	0.51	0.73	0.99	1.26	1.52	1.93	2.59	3.69	5.24	7.19	10.9	18.4	26.0	33.6	41.0	48.1
-50	0.07	0.24	0.39	0.61	0.92	1.27	1.65	2.05	2.84	4.42	7.04	10.8	16.2	23.5	35.5	49.0	62.1	74.0	83.9
-40	0.07	0.24	0.41	0.71	1.13	1.59	2.07	2.68	3.56	6.08	12.1	21.9	37.8	61.0	89.9	116	141	161	175
-30	0.07	0.24	0.44	0.81	1.31	1.85	2.57	3.57	5.37	9.50	16.2	33.5	63.3	108	171	240	291	331	354
-20	0.07	0.24	0.46	0.91	1.47	2.09	2.96	4.41	7.83	13.4	22.8	41.2	85.2	184	312	444	589	753	877
-10	0.07	0.23	0.45	0.95	1.54	2.30	3.34	5.04	8.70	15.8	28.2	55.7	126	266	466	755	1237	2052	3243
0	0.07	0.22	0.43	0.93	1.53	2.35	3.41	5.10	8.23	15.0	26.0	46.6	98.5	241	462	779	1400	3138	7395
10	0.07	0.23	0.44	0.93	1.51	2.26	3.22	4.70	7.91	14.3	24.5	44.4	93.9	210	387	605	969	1547	2192
20	0.07	0.23	0.44	0.88	1.42	2.02	2.85	3.99	6.41	11.3	18.7	30.6	57.4	133	247	377	502	618	698
30	0.07	0.24	0.42	0.76	1.26	1.73	2.42	3.12	4.46	7.10	12.4	24.9	49.1	90.2	148	212	259	295	317
40	0.07	0.23	0.39	0.65	1.07	1.46	1.91	2.45	2.96	4.75	8.40	15.1	25.6	41.4	65.0	91.1	114	133	146
50	0.07	0.23	0.37	0.55	0.83	1.18	1.48	1.81	2.35	3.41	5.12	7.69	11.3	16.0	25.9	37.6	49.4	60.6	70.5
60	0.07	0.22	0.33	0.47	0.64	0.87	1.11	1.36	1.65	2.00	2.55	3.34	4.56	7.75	14.8	21.9	29.0	36.0	42.7
70	0.07	0.20	0.30	0.40	0.53	0.64	0.78	0.95	1.15	1.36	1.59	1.82	2.04	4.64	8.62	12.9	17.4	21.9	26.2
80	0.07	0.16	0.27	0.36	0.43	0.51	0.59	0.71	0.82	0.93	1.04	1.16	1.28	2.09	3.08	4.16	5.29	6.42	7.50
90	0.07	0.12	0.18	0.24	0.30	0.35	0.41	0.50	0.60	0.69	0.78	0.88	0.97	1.11	1.26	1.40	1.54	1.68	1.82
100	0.07	0.12	0.18	0.23	0.29	0.34	0.40	0.49	0.59	0.69	0.79	0.89	0.99	1.12	1.25	1.39	1.53	1.66	1.80
110	0.07	0.12	0.17	0.23	0.28	0.33	0.39	0.47	0.57	0.67	0.78	0.91	1.04	1.19	1.36	1.53	1.71	1.88	2.06
120	0.07	0.11	0.17	0.21	0.26	0.31	0.36	0.43	0.54	0.66	0.79	0.92	1.08	1.33	1.61	1.76	1.90	2.07	2.26
130	0.07	0.11	0.16	0.20	0.24	0.29	0.34	0.38	0.47	0.62	0.79	0.92	1.08	1.33	1.61	1.76	1.90	2.07	2.26
140	0.07	0.10	0.14	0.18	0.22	0.26	0.30	0.34	0.39	0.44	0.45	0.58	0.72	0.93	1.21	1.45	1.61	1.73	1.80
150	0.07	0.10	0.13	0.16	0.19	0.22	0.25	0.29	0.33	0.29	0.43	0.73	1.15	1.64	2.25	2.90	3.35	3.65	3.74
160	0.07	0.09	0.11	0.13	0.15	0.18	0.20	0.24	0.23	0.35	0.63	1.12	1.92	3.22	4.78	6.08	6.89	7.25	7.29
170	0.07	0.08	0.09	0.10	0.11	0.13	0.15	0.18	0.21	0.40	0.79	1.55	3.05	5.30	7.29	8.07	7.81	7.44	7.65
180	0.07	0.07	0.07	0.07	0.07	0.08	0.10	0.12	0.19	0.35	0.76	1.63	3.47	6.07	7.96	8.07	6.78	6.16	7.05

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.90V I:0.0890A P:18.500W PF:0.9000 Freq:49.99Hz Lamp Flux:141.388x9 lm																		
NAME:Lumino Ground-500mm-3000K-15D-REV2									TYPE:3000K					WEIGHT:00				
SPEC.:15 DEG									DIM.:500mm					SERIAL No.:01				
MFR.: 001									SUR.:0.8					Shielding Angle:				

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	8.51	9.17	8.36	6.13	3.57	1.93	1.12	0.65	0.37	0.21	0.13	0.10	0.08	0.07	0.07	0.07	0.08	0.14	
-170	8.67	8.47	7.11	4.97	3.00	1.79	1.12	0.71	0.45	0.28	0.20	0.16	0.13	0.11	0.10	0.09	0.09	0.14	
-160	6.72	5.75	4.38	3.02	2.00	1.36	0.95	0.66	0.46	0.33	0.26	0.21	0.17	0.15	0.13	0.11	0.10	0.14	
-150	3.20	2.72	2.21	1.75	1.37	1.05	0.80	0.60	0.46	0.37	0.31	0.26	0.22	0.19	0.16	0.13	0.11	0.14	
-140	1.72	1.57	1.41	1.24	1.05	0.88	0.72	0.59	0.49	0.41	0.36	0.30	0.26	0.22	0.18	0.15	0.11	0.14	
-130	1.43	1.31	1.19	1.07	0.95	0.86	0.78	0.70	0.58	0.46	0.39	0.34	0.29	0.24	0.20	0.16	0.12	0.14	
-120	1.36	1.29	1.23	1.17	1.09	0.95	0.83	0.71	0.61	0.51	0.42	0.36	0.31	0.27	0.22	0.17	0.12	0.14	
-110	1.35	1.26	1.17	1.08	0.99	0.89	0.80	0.71	0.62	0.54	0.46	0.39	0.33	0.28	0.23	0.18	0.13	0.14	
-100	1.34	1.25	1.16	1.07	0.98	0.89	0.81	0.73	0.64	0.56	0.48	0.39	0.34	0.29	0.24	0.18	0.14	0.14	
-90	1.28	1.22	1.16	1.09	1.03	0.97	0.88	0.79	0.71	0.62	0.53	0.45	0.40	0.34	0.29	0.24	0.19	0.14	
-80	7.64	6.26	4.88	3.55	2.31	1.28	1.16	1.04	0.92	0.80	0.69	0.58	0.52	0.47	0.41	0.36	0.27	0.14	
-70	24.8	19.6	14.4	9.43	4.82	1.83	1.62	1.41	1.20	1.02	0.85	0.70	0.60	0.52	0.44	0.37	0.31	0.14	
-60	40.1	31.7	23.2	14.9	7.03	3.79	2.77	2.11	1.64	1.29	1.01	0.85	0.74	0.60	0.48	0.39	0.32	0.14	
-50	69.6	54.2	38.7	24.3	13.4	9.50	6.38	3.97	2.50	1.69	1.31	1.06	0.85	0.70	0.54	0.41	0.32	0.14	
-40	153	123	89.4	54.5	33.9	20.4	11.6	6.53	3.47	1.86	1.59	1.31	1.01	0.78	0.60	0.43	0.31	0.14	
-30	346	314	258	170	95.0	48.4	23.2	9.92	4.87	2.95	1.87	1.52	1.17	0.85	0.65	0.44	0.32	0.14	
-20	879	769	572	358	180	77.1	38.3	18.8	8.31	4.18	2.36	1.68	1.29	0.92	0.68	0.46	0.32	0.14	
-10	3543	2518	1435	764	334	140	61.5	27.7	11.2	5.10	2.75	1.79	1.36	0.95	0.69	0.46	0.31	0.14	
0	9801	6278	2358	1047	411	161	69.6	30.1	11.3	5.01	2.81	1.82	1.37	0.94	0.68	0.45	0.31	0.14	
10	2515	1713	1051	576	259	116	53.4	24.7	10.1	4.81	2.64	1.79	1.36	0.95	0.69	0.46	0.32	0.14	
20	707	632	464	277	141	57.5	30.0	15.3	7.00	3.83	2.19	1.68	1.29	0.92	0.68	0.46	0.32	0.14	
30	310	285	245	164	89.7	43.1	19.5	7.92	4.23	2.62	1.84	1.52	1.16	0.86	0.66	0.45	0.32	0.14	
40	131	108	81.0	52.2	32.3	19.0	10.8	6.04	3.09	1.83	1.59	1.30	1.00	0.80	0.61	0.44	0.32	0.14	
50	59.2	46.9	34.5	22.5	12.9	9.09	6.11	3.95	2.50	1.68	1.29	1.06	0.88	0.72	0.56	0.42	0.33	0.14	
60	35.8	28.6	21.2	14.0	6.85	3.83	2.82	2.12	1.63	1.28	1.03	0.89	0.77	0.63	0.51	0.41	0.32	0.14	
70	21.8	17.3	12.8	8.44	4.41	1.82	1.61	1.41	1.22	1.04	0.88	0.74	0.65	0.56	0.48	0.40	0.30	0.14	
80	6.41	5.28	4.15	3.06	2.06	1.26	1.15	1.05	0.94	0.84	0.75	0.66	0.59	0.52	0.44	0.35	0.27	0.14	
90	1.70	1.57	1.44	1.32	1.19	1.06	0.96	0.86	0.77	0.67	0.57	0.47	0.41	0.36	0.30	0.25	0.20	0.14	
100	1.69	1.58	1.48	1.37	1.26	1.15	1.04	0.92	0.80	0.68	0.56	0.45	0.39	0.33	0.26	0.20	0.15	0.14	
110	1.93	1.79	1.64	1.50	1.35	1.20	1.04	0.90	0.77	0.65	0.53	0.44	0.38	0.32	0.26	0.20	0.14	0.14	
120	2.15	2.04	1.94	1.83	1.73	1.50	1.22	0.98	0.79	0.63	0.49	0.41	0.35	0.30	0.24	0.19	0.13	0.14	
130	1.20	1.22	1.24	1.16	1.07	1.12	1.10	0.96	0.75	0.54	0.43	0.38	0.32	0.27	0.22	0.18	0.13	0.14	
140	1.67	1.51	1.36	1.27	1.08	0.90	0.73	0.61	0.53	0.42	0.37	0.33	0.29	0.24	0.20	0.16	0.12	0.14	
150	3.37	2.88	2.41	1.86	1.36	1.03	0.79	0.58	0.44	0.37	0.32	0.27	0.24	0.21	0.17	0.14	0.11	0.14	
160	6.77	5.86	4.46	3.07	2.03	1.32	0.94	0.65	0.45	0.33	0.26	0.22	0.19	0.16	0.14	0.12	0.10	0.14	
170	8.29	8.26	6.99	4.94	2.95	1.78	1.10	0.71	0.44	0.28	0.20	0.16	0.13	0.12	0.11	0.10	0.09	0.14	
180	8.51	9.17	8.36	6.13	3.57	1.93	1.12	0.65	0.37	0.21	0.13	0.10	0.08	0.07	0.07	0.07	0.08	0.14	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks: