

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		2366.0 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		5.0 degrees horizontal
Beam Spread	At 10% of Imax	86.3V x 47.0H
	At 50% of Imax	55.8V x 21.6H
	At 90% of Imax	24.6V x 7.3H
Beam Flux	Total	1000.3 lumens per klm.
	To 10% of Imax	888.0 lumens per klm.
	To 50% of Imax	485.8 lumens per klm.
	To 90% of Imax	78.3 lumens per klm.
	Upward LOR	1.1 %
	Downward LOR	99.0 %
Luminaire Efficiency (Light Output Ratio)		100.0 %

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 20DEG
 Operators: 01
 Test Date: 2025-08-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 7.700m [K=1.0000]
 Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.92V I:0.0890A P:18.500W PF:0.9000 Freq:49.99Hz Lamp Flux:139.193x9 lm		
NAME:Lumino Ground-500mm-3000K-20x55D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:20x55 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

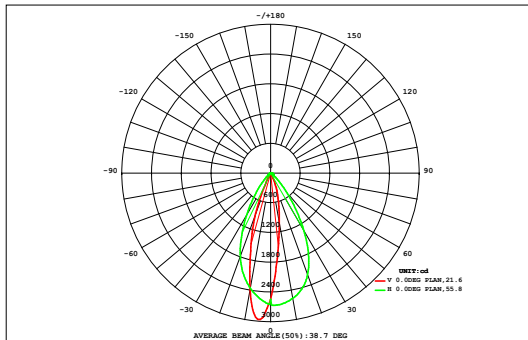

DATA OF LAMP		Eff:67.72lm/W	
MODEL		Imax(cd)	2964
NOMINAL POWER(W)	18	AVAILABILITY(%)	88.3
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	1106
NOMINAL FLUX(lm)	139.193	LOR(%)	100.0
LAMPS INSIDE	9	TOTAL FLUX(lm)	1253
TEST VOLTAGE(V)	220	θ @50% (H,V)	22,56DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.01	0.01	0.02	0.02	0.04	0.06	0.18	0.33	0.48	0.48	0.33	0.18	0.06	0.03	0.02	0.02	0.01	0.01	2.26	0.00
72	0.01	0.01	0.02	0.03	0.05	0.09	0.25	0.48	0.72	0.72	0.48	0.25	0.09	0.05	0.03	0.02	0.01	0.01	3.32	0.00
64	0.01	0.01	0.02	0.05	0.08	0.14	0.34	0.71	1.13	1.14	0.73	0.35	0.13	0.07	0.04	0.02	0.01	0.01	4.98	0.00
56	0.01	0.02	0.03	0.06	0.12	0.25	0.70	1.83	3.17	3.27	2.04	0.90	0.31	0.11	0.05	0.02	0.01	0.01	12.9	0.18
48	0.01	0.02	0.03	0.07	0.19	0.67	2.02	4.95	8.83	9.52	6.46	3.09	0.91	0.21	0.06	0.02	0.01	0.01	37.1	24.8
40	0.01	0.02	0.04	0.09	0.25	1.14	3.46	8.66	17.6	19.9	13.8	6.57	1.84	0.28	0.07	0.03	0.01	0.01	73.8	64.9
32	0.01	0.02	0.05	0.11	0.22	1.00	4.76	11.9	26.5	32.9	23.4	9.28	1.87	0.25	0.09	0.04	0.02	0.01	112	106
24	0.01	0.02	0.06	0.12	0.27	1.21	6.02	14.9	32.3	45.5	31.0	11.9	2.25	0.36	0.10	0.04	0.02	0.01	146	140
	0.01	0.02	0.06	0.12	0.28	1.44	7.02	16.4	35.3	52.8	35.5	16.0	3.01	0.42	0.11	0.04	0.02	0.01	169	163
	0.01	0.03	0.06	0.13	0.32	1.84	7.89	18.9	39.7	54.7	39.2	17.5	3.48	0.46	0.11	0.04	0.02	0.01	184	178
	0.01	0.03	0.06	0.14	0.35	2.13	7.97	18.6	37.1	49.4	35.2	15.2	3.13	0.46	0.11	0.04	0.02	0.01	170	164
-24	0.01	0.03	0.06	0.13	0.30	1.60	6.76	15.2	32.7	38.9	26.8	11.5	2.45	0.32	0.10	0.04	0.02	0.01	137	131
-32	0.01	0.02	0.05	0.11	0.37	1.62	4.70	11.7	23.9	26.2	16.9	7.80	2.20	0.34	0.08	0.03	0.01	0.01	96.1	87.6
-40	0.01	0.02	0.04	0.10	0.32	1.17	3.02	7.25	13.1	13.7	8.58	3.69	1.12	0.27	0.07	0.03	0.01	0.01	52.5	41.8
-48	0.01	0.02	0.03	0.07	0.17	0.48	1.36	3.14	5.22	5.21	3.06	1.23	0.42	0.14	0.05	0.02	0.01	0.01	20.6	5.56
-56	0.01	0.02	0.03	0.06	0.11	0.19	0.47	0.99	1.59	1.58	0.97	0.43	0.15	0.08	0.04	0.02	0.01	0.01	6.73	0.00
-64	0.01	0.01	0.02	0.04	0.07	0.12	0.30	0.55	0.81	0.80	0.53	0.27	0.09	0.05	0.03	0.02	0.01	0.01	3.73	0.00
-72	0.01	0.01	0.02	0.03	0.04	0.08	0.20	0.37	0.54	0.53	0.36	0.19	0.06	0.03	0.02	0.01	0.01	0.00	2.52	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)	16	24	32	40	48	56	64	72			
Φ t	0.15	0.34	0.71	1.47	3.53	15.2	57.4	137	281	357	245	106	23.6	3.94	1.17	0.51	0.23	0.12	1235	---
Φ a	0.00	0.00	0.00	0.00	0.00	0.00	34.6	124	269	346	235	93.9	3.23	0.00	0.00	0.00	0.00	0.00	---	1106


one-half-peak spread: U:28.3,D:27.8 , L:11.3,R:10.8 Beam Type: Type 4 x 5 (H x V)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.92V I:0.0890A P:18.500W PF:0.9000 Freq:49.99Hz Lamp Flux:139.193x9 lm		
NAME:Lumino Ground-500mm-3000K-20x55D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:20x55 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

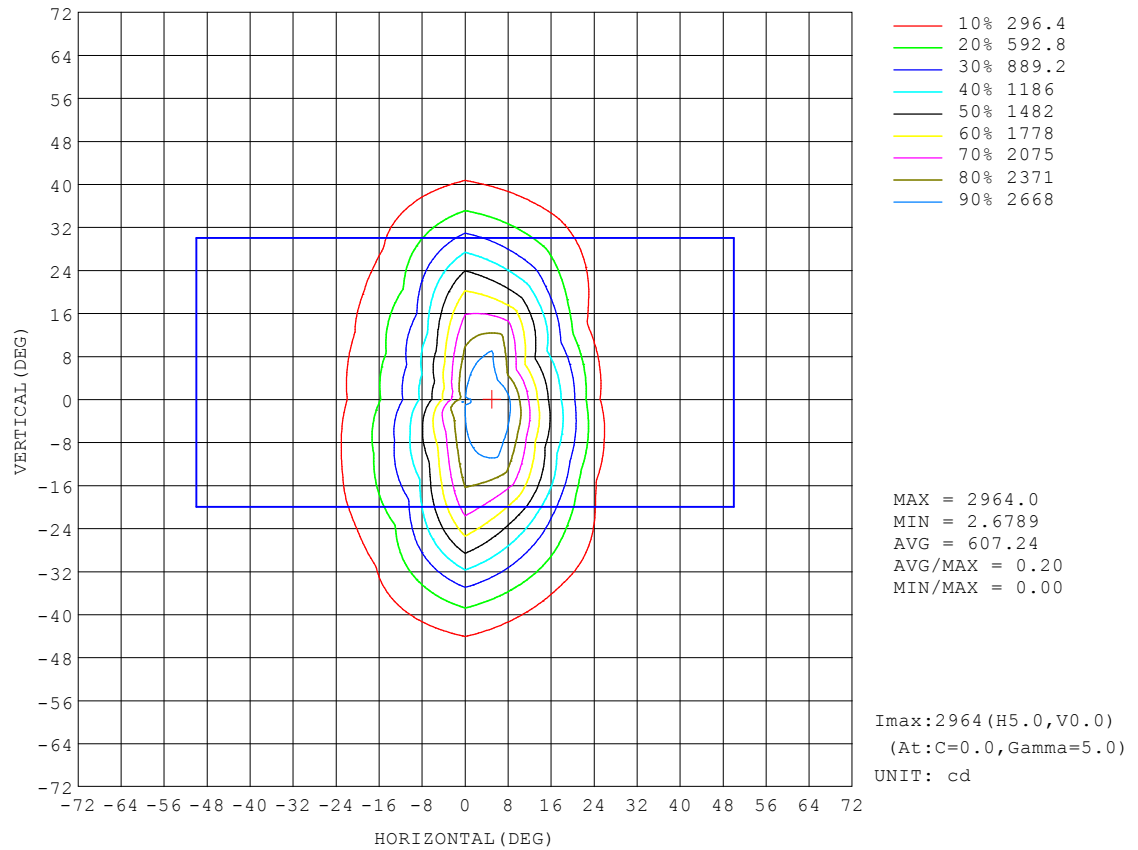


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.92V I:0.0890A P:18.500W PF:0.9000 Freq:49.99Hz Lamp Flux:139.193x9 lm		
NAME:Lumino Ground-500mm-3000K-20x55D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:20x55 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

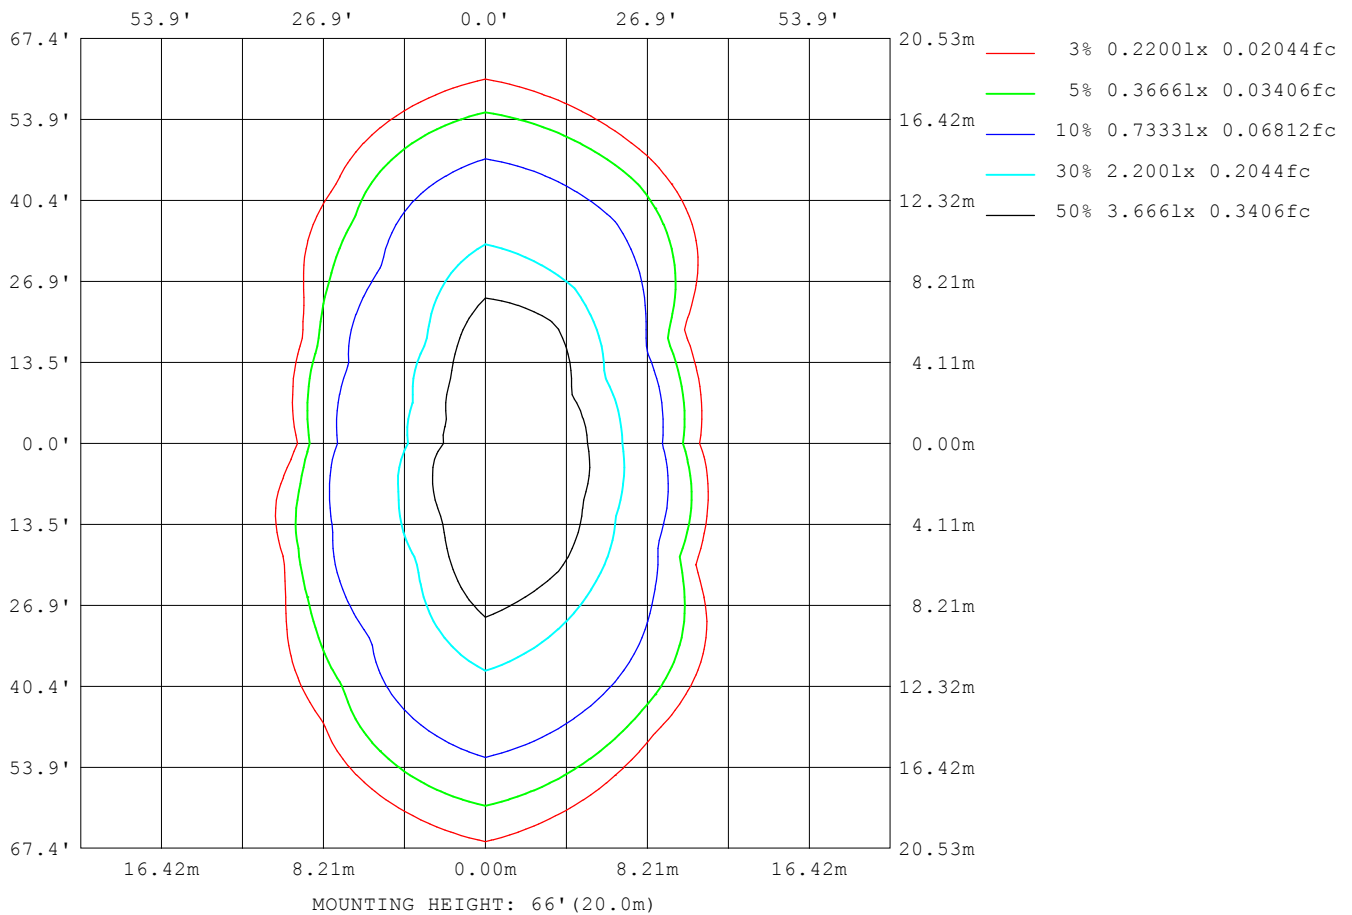

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

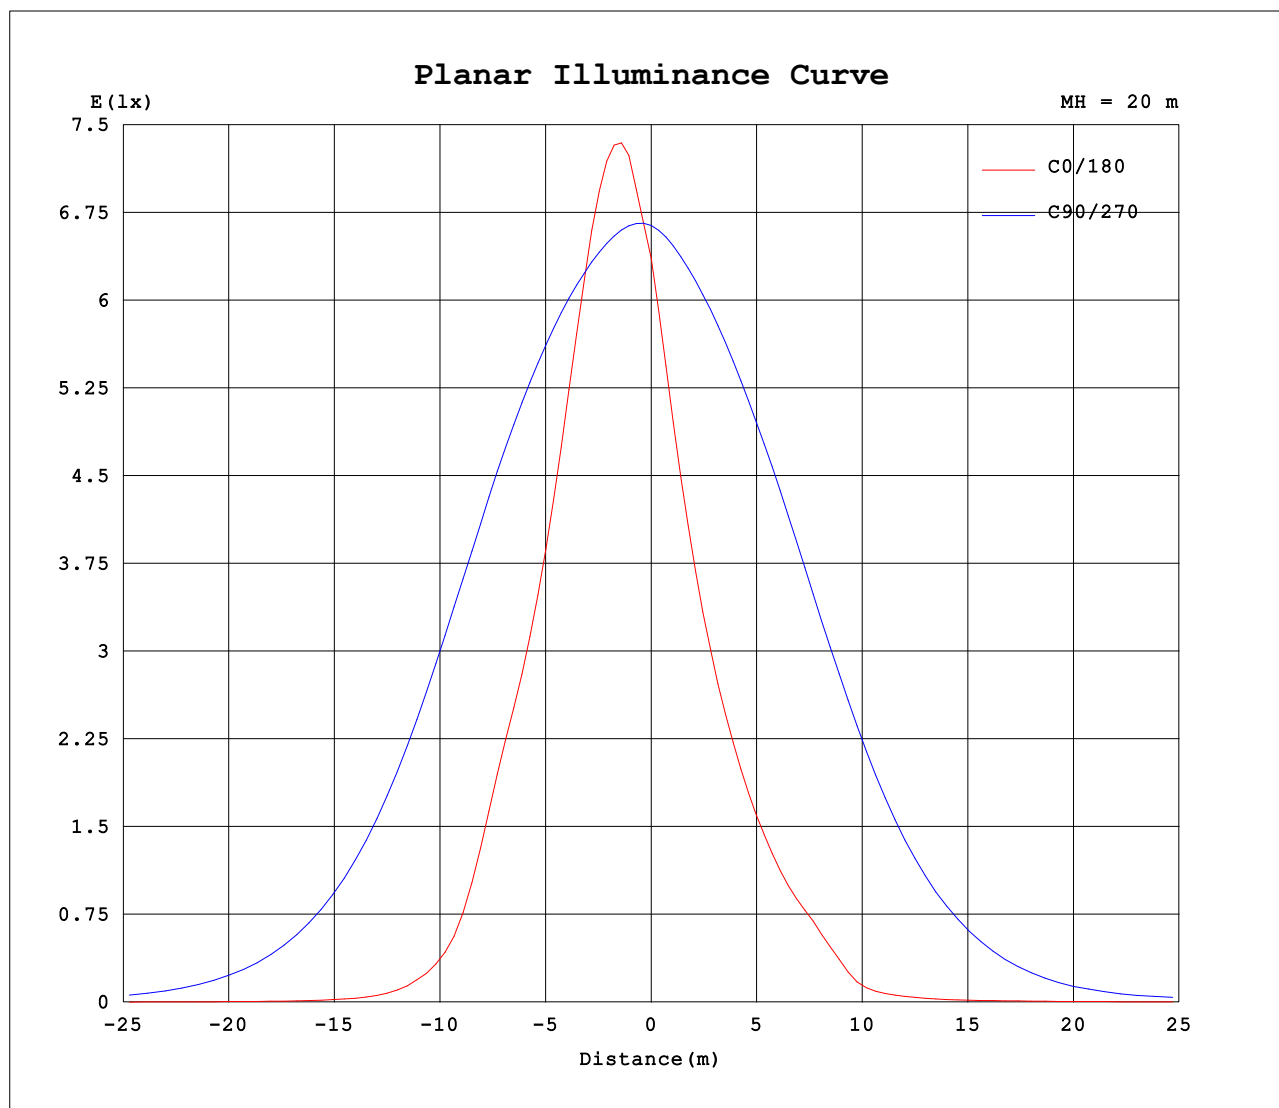


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-08-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.92V I:0.0890A P:18.500W PF:0.9000 Freq:49.99Hz Lamp Flux:139.193x9 lm		
NAME:Lumino Ground-500mm-3000K-20x55D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:20x55 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

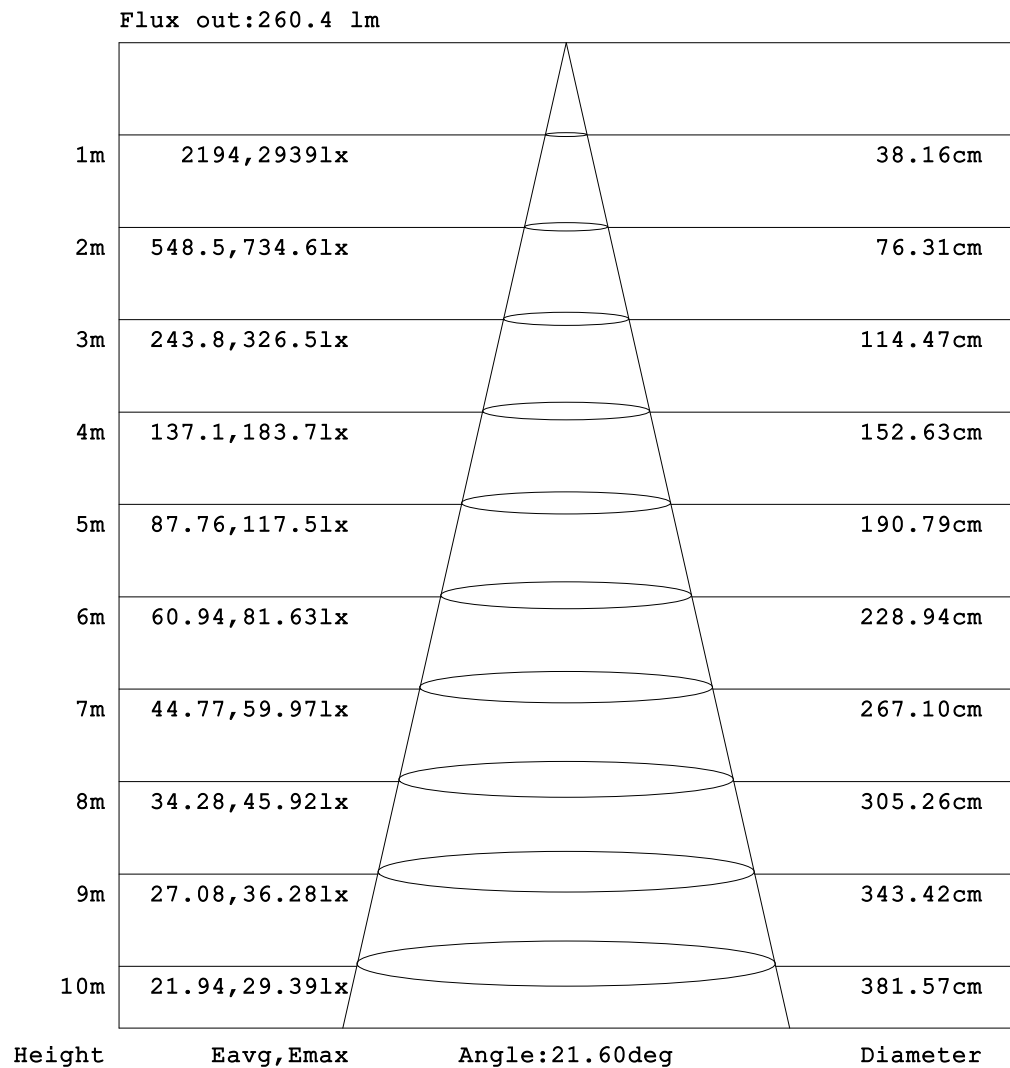

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 20DEG
 Operators: 01
 Test Date: 2025-08-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 7.700m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.92V I:0.0890A P:18.500W PF:0.9000 Freq:49.99Hz Lamp Flux:139.193x9 lm								
NAME:Lumino Ground-500mm-3000K-20x55D-REV2					TYPE:3000K			WEIGHT:00
SPEC.:20x55 DEG					DIM.:500mm			SERIAL No.:01
MFR.: 001					SUR.:0.8			Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.10	0.10	0.10	0.10	0.12	0.13	0.14	0.14	0.14	0.39	0.84	1.66	2.97	4.61	6.05	6.72	6.68	6.78	7.24
-170	0.10	0.11	0.13	0.15	0.17	0.19	0.21	0.23	0.27	0.52	0.97	1.79	3.00	4.44	5.70	6.39	6.48	6.37	6.45
-160	0.10	0.13	0.15	0.19	0.21	0.25	0.28	0.31	0.36	0.52	0.87	1.47	2.38	3.59	4.58	5.20	5.46	5.52	5.46
-150	0.10	0.14	0.18	0.22	0.26	0.30	0.34	0.38	0.42	0.51	0.73	1.19	1.87	2.72	3.64	4.58	5.65	6.60	7.51
-140	0.10	0.15	0.20	0.26	0.30	0.35	0.39	0.44	0.49	0.59	0.76	1.02	1.39	1.87	2.42	2.97	3.61	4.25	4.77
-130	0.10	0.17	0.22	0.28	0.34	0.40	0.45	0.50	0.75	1.02	1.04	1.07	1.18	1.39	1.75	2.03	2.26	2.47	2.67
-120	0.10	0.18	0.25	0.31	0.38	0.44	0.51	0.61	0.93	1.43	1.97	2.41	2.62	2.96	3.73	4.50	5.31	6.19	7.18
-110	0.10	0.19	0.27	0.34	0.41	0.48	0.55	0.70	0.88	1.11	1.38	1.72	2.12	2.61	3.22	3.95	4.76	5.52	6.19
-100	0.10	0.19	0.28	0.37	0.45	0.53	0.61	0.75	0.91	1.08	1.26	1.43	1.61	1.83	2.06	2.28	2.50	2.72	2.94
-90	0.10	0.20	0.30	0.40	0.50	0.61	0.71	0.85	0.98	1.12	1.26	1.39	1.53	1.67	1.81	1.95	2.09	2.22	2.36
-80	0.10	0.21	0.34	0.47	0.59	0.71	0.84	0.99	1.16	1.33	1.51	1.68	1.86	3.04	4.45	5.94	7.49	9.03	10.5
-70	0.10	0.24	0.37	0.51	0.66	0.83	1.04	1.27	1.53	1.81	2.10	2.41	2.75	5.58	9.74	14.2	18.7	23.3	27.6
-60	0.10	0.25	0.39	0.55	0.78	1.04	1.32	1.60	2.05	2.72	3.59	4.65	5.92	8.99	16.1	23.8	31.7	39.6	47.1
-50	0.10	0.25	0.41	0.62	0.91	1.24	1.61	2.07	2.79	3.95	5.60	7.81	10.8	15.2	28.5	48.3	71.6	95.5	116
-40	0.10	0.25	0.42	0.68	1.05	1.46	1.95	2.59	3.43	5.33	8.74	15.8	33.0	66.5	115	198	303	415	516
-30	0.10	0.24	0.42	0.73	1.14	1.62	2.28	3.17	4.70	6.93	10.5	28.2	65.7	131	228	384	684	1024	1350
-20	0.10	0.23	0.42	0.77	1.21	1.73	2.48	3.69	5.73	8.34	12.0	19.7	43.8	161	370	596	938	1569	2187
-10	0.10	0.22	0.39	0.76	1.20	1.78	2.60	3.81	6.03	8.83	13.1	23.9	70.7	219	433	739	1194	1777	2567
0	0.10	0.20	0.36	0.72	1.13	1.70	2.48	3.58	5.62	8.02	10.9	16.9	37.2	139	379	635	1030	1651	2543
10	0.10	0.22	0.39	0.75	1.17	1.72	2.48	3.52	5.59	8.09	11.2	18.3	39.9	142	339	575	973	1529	2361
20	0.10	0.23	0.41	0.75	1.15	1.62	2.32	3.20	4.94	7.20	9.90	14.1	28.6	99.0	254	457	738	1266	1791
30	0.10	0.24	0.41	0.69	1.08	1.47	2.06	2.71	3.77	5.58	8.03	17.0	43.6	93.1	169	285	493	733	962
40	0.10	0.24	0.41	0.64	0.98	1.32	1.72	2.25	2.80	4.05	6.28	9.82	16.6	31.2	61.0	121	192	264	325
50	0.10	0.24	0.40	0.58	0.84	1.14	1.42	1.75	2.32	3.19	4.34	5.87	7.78	10.1	19.5	32.8	47.4	62.4	76.1
60	0.10	0.24	0.37	0.54	0.71	0.94	1.18	1.43	1.75	2.13	2.74	3.53	4.46	7.12	13.7	20.8	28.0	35.2	42.3
70	0.10	0.23	0.35	0.48	0.64	0.79	0.94	1.14	1.37	1.61	1.87	2.14	2.41	4.92	8.74	12.8	16.9	21.0	25.1
80	0.10	0.20	0.32	0.44	0.54	0.65	0.78	0.96	1.13	1.29	1.45	1.62	1.79	2.81	4.02	5.32	6.66	7.99	9.29
90	0.10	0.18	0.27	0.35	0.44	0.53	0.61	0.76	0.90	1.05	1.19	1.34	1.48	1.66	1.84	2.02	2.20	2.38	2.56
100	0.10	0.18	0.27	0.35	0.44	0.52	0.61	0.75	0.89	1.04	1.18	1.32	1.47	1.69	1.91	2.13	2.35	2.57	2.79
110	0.10	0.18	0.26	0.34	0.43	0.50	0.56	0.68	0.83	0.97	1.12	1.27	1.43	1.63	1.88	2.16	2.45	2.75	3.03
120	0.10	0.17	0.25	0.32	0.38	0.45	0.52	0.58	0.72	0.87	1.00	0.96	0.87	1.23	1.82	1.70	1.71	1.80	1.88
130	0.10	0.16	0.23	0.29	0.35	0.40	0.45	0.52	0.59	0.69	0.91	1.09	1.29	1.50	1.90	2.20	2.42	2.67	2.97
140	0.10	0.15	0.21	0.26	0.31	0.35	0.41	0.47	0.53	0.64	0.66	0.92	1.22	1.87	2.53	2.95	3.31	3.64	3.88
150	0.10	0.14	0.18	0.22	0.26	0.31	0.36	0.41	0.44	0.33	0.67	1.18	1.90	2.78	3.76	4.42	4.66	4.97	5.24
160	0.10	0.13	0.15	0.19	0.21	0.25	0.29	0.33	0.25	0.49	0.87	1.45	2.34	3.57	4.69	5.43	5.77	5.75	5.64
170	0.10	0.11	0.13	0.15	0.17	0.20	0.22	0.22	0.23	0.50	0.97	1.77	2.97	4.43	5.71	6.38	6.60	6.54	6.50
180	0.10	0.10	0.10	0.10	0.12	0.13	0.14	0.14	0.14	0.39	0.84	1.66	2.97	4.61	6.05	6.72	6.68	6.78	7.26

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.92V I:0.0890A P:18.500W PF:0.9000 Freq:49.99Hz Lamp Flux:139.193x9 lm																		
NAME:Lumino Ground-500mm-3000K-20x55D-REV2									TYPE:3000K					WEIGHT:00				
SPEC.:20x55 DEG									DIM.:500mm					SERIAL No.:01				
MFR.: 001									SUR.:0.8					Shielding Angle:				

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	7.43	7.05	5.99	4.44	2.90	1.78	1.08	0.64	0.38	0.25	0.21	0.18	0.16	0.13	0.10	0.10	0.10	0.17	
-170	6.42	6.12	5.25	3.96	2.69	1.72	1.09	0.68	0.43	0.31	0.26	0.23	0.20	0.16	0.14	0.12	0.11	0.17	
-160	5.34	5.03	4.24	3.22	2.20	1.34	0.89	0.61	0.44	0.34	0.30	0.27	0.24	0.20	0.17	0.14	0.12	0.17	
-150	6.30	5.04	3.59	2.59	1.83	1.24	0.81	0.55	0.43	0.39	0.35	0.31	0.27	0.24	0.20	0.16	0.13	0.17	
-140	4.01	3.16	2.35	1.71	1.34	1.04	0.80	0.64	0.52	0.43	0.39	0.35	0.31	0.27	0.23	0.18	0.14	0.17	
-130	2.38	2.09	1.80	1.48	1.16	1.03	0.96	0.91	0.81	0.61	0.43	0.39	0.35	0.30	0.25	0.20	0.15	0.17	
-120	6.16	5.23	4.32	3.38	2.35	1.90	1.75	1.50	1.15	0.79	0.53	0.44	0.39	0.34	0.28	0.22	0.16	0.17	
-110	5.43	4.58	3.72	2.95	2.31	1.82	1.50	1.22	0.98	0.78	0.61	0.49	0.42	0.36	0.29	0.23	0.16	0.17	
-100	2.69	2.45	2.20	1.96	1.71	1.47	1.30	1.13	0.97	0.81	0.65	0.51	0.44	0.38	0.31	0.24	0.18	0.17	
-90	2.21	2.06	1.91	1.76	1.61	1.46	1.32	1.18	1.04	0.90	0.76	0.62	0.55	0.47	0.40	0.32	0.24	0.17	
-80	9.00	7.42	5.84	4.31	2.88	1.66	1.50	1.35	1.19	1.04	0.88	0.74	0.65	0.56	0.48	0.40	0.30	0.17	
-70	23.1	18.4	13.7	9.23	5.04	2.25	1.97	1.70	1.45	1.22	1.03	0.85	0.72	0.60	0.50	0.40	0.32	0.17	
-60	39.1	30.7	22.4	14.4	7.00	4.12	3.23	2.50	1.92	1.51	1.18	0.96	0.81	0.67	0.52	0.41	0.32	0.17	
-50	94.9	70.6	47.0	26.7	12.7	8.24	5.61	3.79	2.62	1.84	1.42	1.15	0.90	0.72	0.56	0.41	0.32	0.17	
-40	425	313	200	104	56.1	28.4	13.5	6.62	3.59	2.04	1.64	1.33	1.02	0.77	0.59	0.42	0.31	0.17	
-30	1135	876	610	367	181	70.5	24.3	7.88	4.80	3.13	1.90	1.46	1.12	0.80	0.61	0.43	0.31	0.17	
-20	1967	1606	1098	609	255	64.2	21.0	10.3	6.17	4.02	2.31	1.54	1.17	0.83	0.60	0.42	0.30	0.17	
-10	2729	2222	1461	882	341	108	32.9	12.9	6.90	4.42	2.61	1.57	1.17	0.82	0.58	0.40	0.29	0.17	
0	2964	2393	1546	940	304	87.6	25.8	11.3	6.28	4.19	2.50	1.49	1.11	0.77	0.54	0.38	0.28	0.17	
10	2580	1966	1230	700	249	83.3	26.2	11.4	6.40	4.20	2.46	1.55	1.17	0.82	0.59	0.41	0.29	0.17	
20	1674	1416	936	487	200	45.8	16.2	8.77	5.53	3.64	2.09	1.53	1.17	0.84	0.62	0.43	0.31	0.17	
30	843	683	508	309	154	60.0	19.5	6.61	4.15	2.68	1.81	1.45	1.12	0.82	0.64	0.45	0.32	0.17	
40	279	217	147	83.2	43.6	21.5	10.3	5.45	3.09	1.94	1.63	1.33	1.04	0.81	0.63	0.45	0.33	0.17	
50	63.5	49.1	34.5	20.6	10.4	7.47	5.30	3.74	2.64	1.86	1.43	1.18	0.95	0.79	0.61	0.45	0.34	0.17	
60	35.2	27.9	20.6	13.6	6.96	4.29	3.37	2.60	1.98	1.55	1.24	1.06	0.90	0.74	0.59	0.46	0.34	0.17	
70	21.0	16.9	12.8	8.68	4.84	2.34	2.06	1.80	1.57	1.35	1.14	0.97	0.83	0.70	0.57	0.46	0.33	0.17	
80	8.00	6.67	5.34	4.05	2.85	1.85	1.69	1.52	1.36	1.20	1.04	0.90	0.79	0.67	0.55	0.43	0.31	0.17	
90	2.42	2.28	2.13	1.99	1.85	1.71	1.55	1.38	1.22	1.06	0.89	0.73	0.64	0.54	0.45	0.35	0.26	0.17	
100	2.63	2.47	2.32	2.16	2.01	1.85	1.67	1.48	1.29	1.09	0.90	0.71	0.61	0.51	0.40	0.30	0.21	0.17	
110	2.84	2.64	2.42	2.21	2.01	1.80	1.57	1.37	1.18	1.00	0.82	0.67	0.58	0.49	0.39	0.29	0.19	0.17	
120	1.95	2.04	2.22	2.60	2.43	2.14	1.80	1.46	1.17	0.92	0.73	0.63	0.54	0.45	0.37	0.28	0.19	0.17	
130	2.68	2.40	2.08	1.59	1.18	1.29	1.42	1.29	1.06	0.80	0.63	0.56	0.49	0.41	0.33	0.25	0.18	0.17	
140	3.53	3.08	2.61	2.16	1.68	1.25	0.98	0.75	0.72	0.58	0.54	0.49	0.42	0.36	0.29	0.23	0.16	0.17	
150	4.87	4.49	4.29	3.27	2.30	1.53	0.97	0.63	0.56	0.51	0.45	0.41	0.36	0.31	0.25	0.20	0.15	0.17	
160	5.48	5.32	4.54	3.65	2.54	1.54	1.04	0.68	0.48	0.42	0.38	0.34	0.30	0.25	0.20	0.17	0.13	0.17	
170	6.39	6.02	5.22	4.01	2.76	1.84	1.17	0.75	0.45	0.34	0.30	0.26	0.23	0.19	0.16	0.13	0.11	0.17	
180	7.43	7.05	5.99	4.44	2.90	1.78	1.08	0.64	0.38	0.25	0.21	0.18	0.16	0.13	0.10	0.10	0.10	0.17	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks: