

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		3769.2 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		2.0 degrees horizontal
Beam Spread	At 10% of Imax	53.9V x 47.0H
	At 50% of Imax	24.3V x 22.7H
	At 90% of Imax	9.2V x 8.7H
Beam Flux	Total	1000.6 lumens per klm.
	To 10% of Imax	754.6 lumens per klm.
	To 50% of Imax	365.3 lumens per klm.
	To 90% of Imax	74.9 lumens per klm.
	Upward LOR	0.7 %
	Downward LOR	99.3 %
Luminaire Efficiency (Light Output Ratio)		100.0 %

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-08-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.92V I:0.0890A P:18.600W PF:0.9000 Freq:49.99Hz Lamp Flux:147.448x9 lm		
NAME:Lumino Ground-500mm-3000K-25D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:25 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

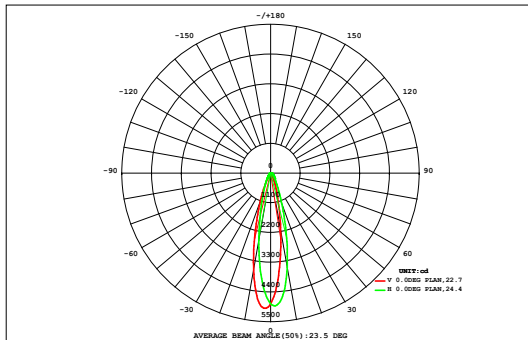

DATA OF LAMP		Eff:71.35lm/W	
MODEL		Imax (cd)	5002
NOMINAL POWER (W)	18	AVAILABILITY (%)	75.2
RATED VOLTAGE (V)	220	Avai. FLUX (lm)	998.1
NOMINAL FLUX (lm)	147.448	LOR (%)	100.0
LAMPS INSIDE	9	TOTAL FLUX (lm)	1327
TEST VOLTAGE (V)	220	θ @50% (H,V)	23,24DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.08	0.16	0.27	0.39	0.53	0.67	0.80	0.91	0.99	0.97	0.85	0.71	0.55	0.39	0.27	0.18	0.10	0.05	8.87	0.00
45	0.11	0.21	0.35	0.51	0.70	0.90	1.08	1.23	1.33	1.32	1.19	1.00	0.78	0.56	0.38	0.24	0.14	0.06	12.1	0.00
40	0.14	0.27	0.43	0.64	0.91	1.21	1.49	1.73	1.90	1.91	1.73	1.47	1.14	0.79	0.51	0.31	0.17	0.08	16.8	0.00
35	0.18	0.31	0.51	0.80	1.17	1.63	2.11	2.54	2.88	2.92	2.65	2.20	1.64	1.08	0.66	0.38	0.21	0.11	24.0	0.00
30	0.23	0.37	0.61	0.98	1.50	2.18	3.05	3.94	4.63	4.80	4.32	3.44	2.39	1.51	0.85	0.45	0.26	0.15	35.7	16.2
25	0.26	0.44	0.74	1.17	1.86	2.94	4.49	6.34	7.89	8.36	7.45	5.54	3.58	2.09	1.12	0.59	0.33	0.18	55.4	41.7
20	0.29	0.51	0.86	1.41	2.29	3.85	6.54	10.3	13.8	15.0	12.9	8.83	5.27	2.94	1.57	0.78	0.41	0.22	87.7	75.5
15	0.31	0.55	0.96	1.63	2.78	4.94	8.96	15.6	22.5	24.7	20.3	13.3	7.83	4.19	2.08	0.96	0.47	0.24	132	122
10	0.32	0.56	1.01	1.75	3.09	5.82	11.3	20.4	30.4	34.0	28.4	19.2	10.7	5.38	2.50	1.10	0.52	0.26	177	166
5	0.33	0.58	1.05	1.85	3.35	6.54	13.2	24.1	34.3	37.1	31.9	21.2	11.6	5.72	2.63	1.15	0.54	0.27	197	188
0	0.34	0.60	1.08	1.89	3.42	6.65	12.9	21.7	29.3	31.3	26.4	17.9	9.99	5.05	2.42	1.11	0.52	0.27	173	163
-5	0.33	0.58	1.03	1.76	3.06	5.54	9.69	15.2	20.3	21.4	17.8	12.3	7.35	3.96	2.02	0.96	0.48	0.25	124	113
-10	0.30	0.53	0.92	1.53	2.51	4.13	6.58	9.52	12.0	12.5	10.6	7.72	4.94	2.89	1.56	0.77	0.41	0.22	79.7	67.6
-15	0.27	0.46	0.78	1.27	1.98	2.99	4.33	5.76	6.92	7.08	6.13	4.71	3.26	2.06	1.16	0.61	0.34	0.18	50.3	35.5
-20	0.23	0.39	0.65	1.02	1.52	2.15	2.88	3.60	4.16	4.20	3.70	2.98	2.19	1.45	0.88	0.51	0.28	0.15	32.9	9.60
-25	0.20	0.34	0.54	0.81	1.16	1.56	1.98	2.37	2.66	2.67	2.37	1.96	1.50	1.04	0.67	0.41	0.23	0.11	22.6	0.00
-30	0.16	0.28	0.44	0.64	0.89	1.16	1.42	1.66	1.84	1.83	1.62	1.35	1.04	0.75	0.50	0.31	0.18	0.08	16.1	0.00
-35	0.12	0.22	0.35	0.50	0.68	0.86	1.03	1.19	1.31	1.30	1.14	0.94	0.73	0.52	0.36	0.23	0.13	0.06	11.7	0.00
-40	0.12	0.22	0.35	0.50	0.68	0.86	1.03	1.19	1.31	1.30	1.14	0.94	0.73	0.52	0.36	0.23	0.13	0.06	11.7	0.00
-45	0.12	0.22	0.35	0.50	0.68	0.86	1.03	1.19	1.31	1.30	1.14	0.94	0.73	0.52	0.36	0.23	0.13	0.06	11.7	0.00
HORIZONTAL (DEG)																				
Φ t	4.19	7.37	12.6	20.6	33.4	55.7	93.9	148	199	213	181	127	76.5	42.4	22.1	11.0	5.72	2.95	1257	---
Φ a	0.00	0.00	0.00	0.00	4.92	35.7	77.4	133	185	199	167	112	60.1	23.5	0.84	0.00	0.00	0.00	---	998

one-half-peak spread: U:12.2,D:12.4 , L:10.9,R:12.0


NEMA Beam Type: Type 4

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.92V I:0.0890A P:18.600W PF:0.9000 Freq:49.99Hz Lamp Flux:147.448x9 lm		
NAME:Lumino Ground-500mm-3000K-25D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:25 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

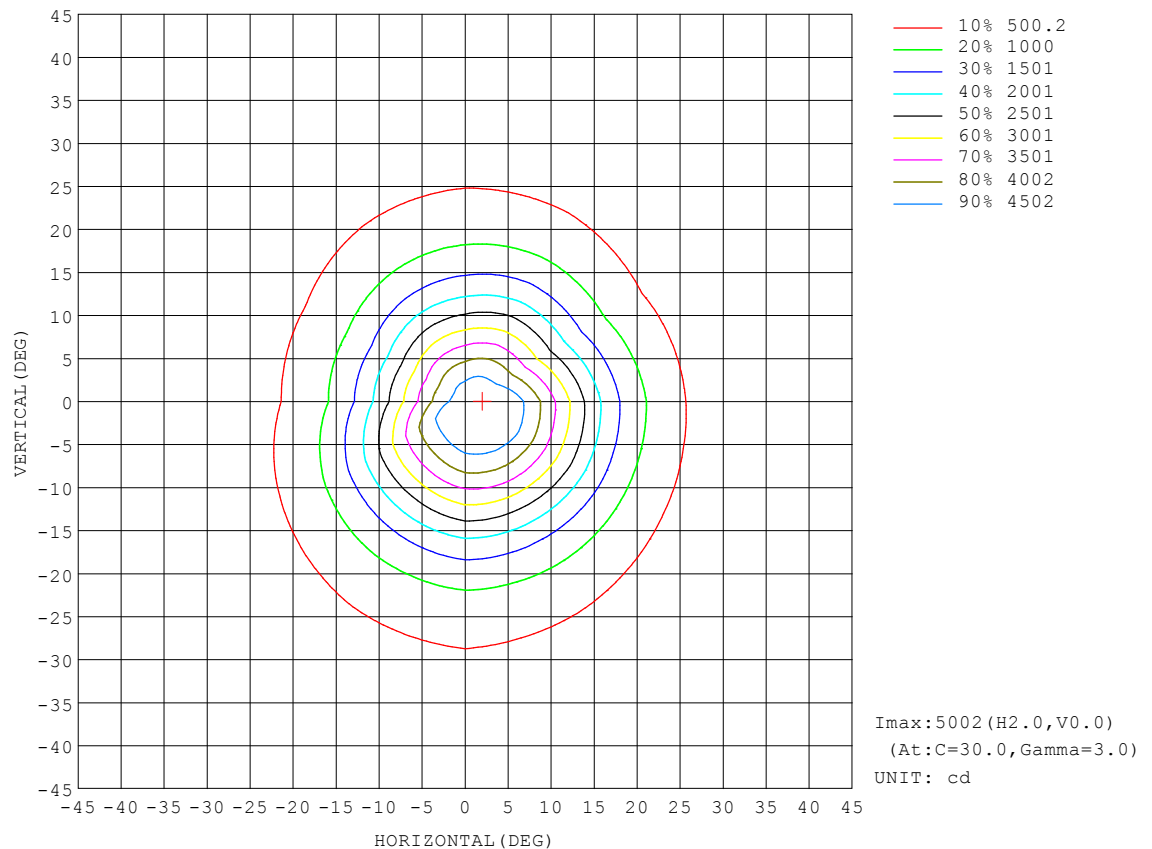


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.92V I:0.0890A P:18.600W PF:0.9000 Freq:49.99Hz Lamp Flux:147.448x9 lm		
NAME:Lumino Ground-500mm-3000K-25D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:25 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

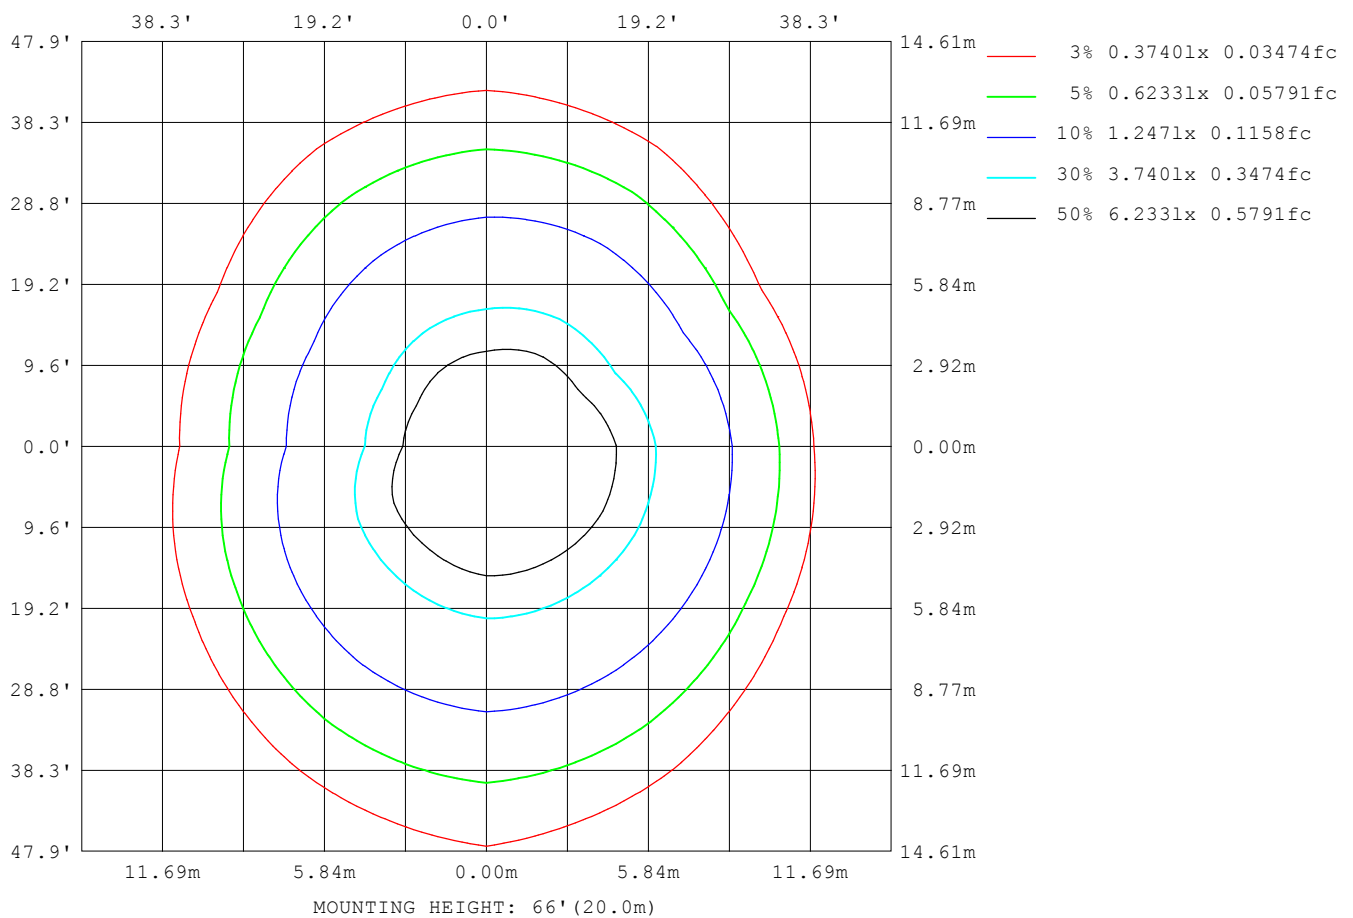

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

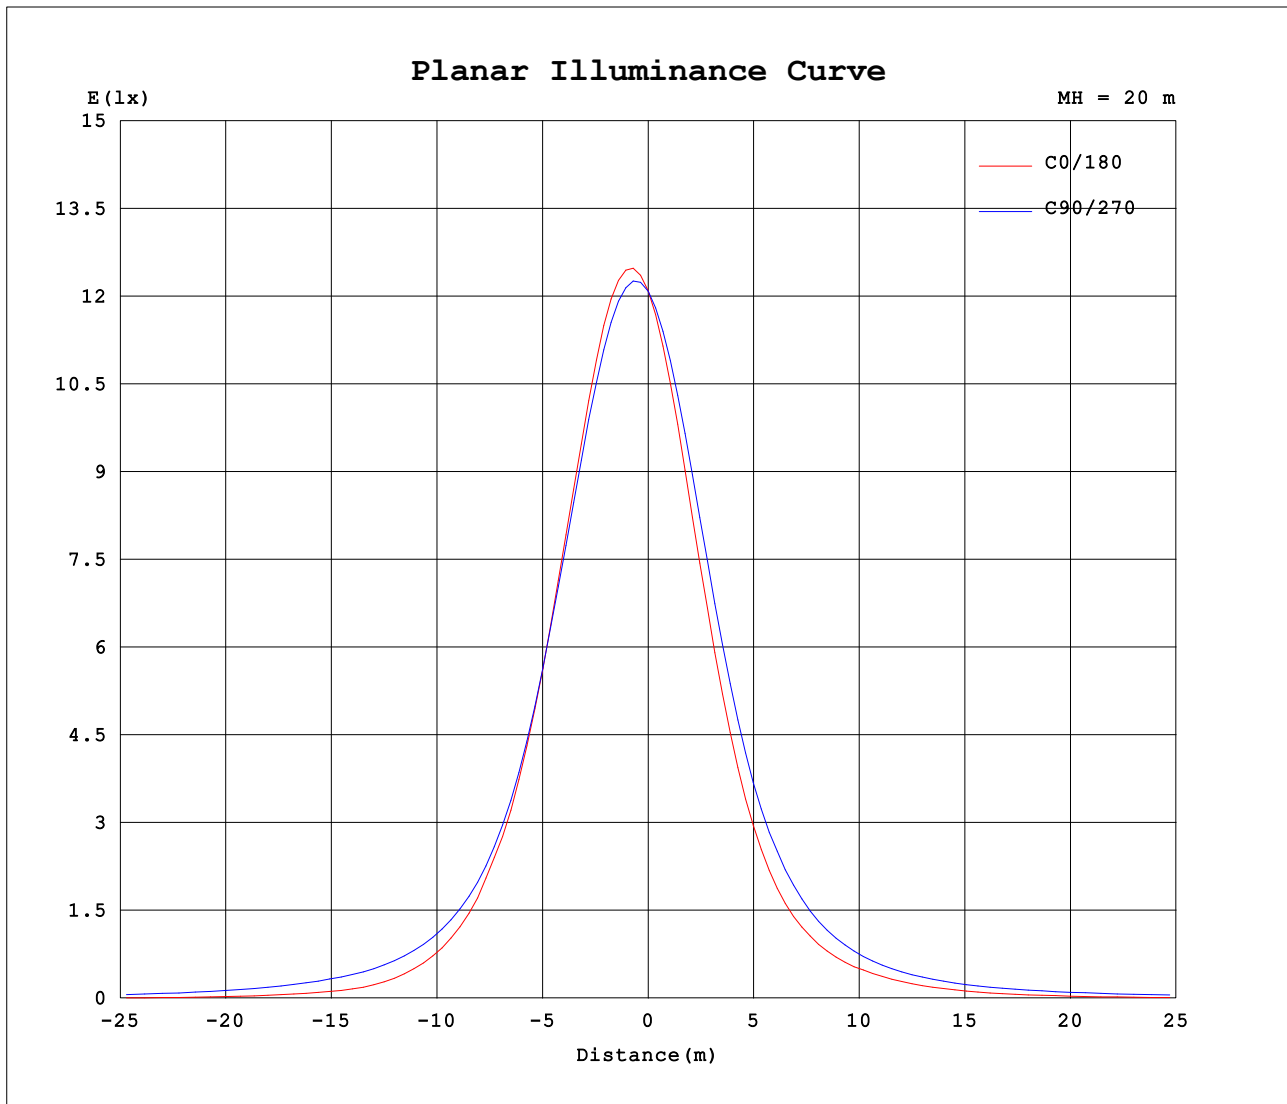


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-08-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.92V I:0.0890A P:18.600W PF:0.9000 Freq:49.99Hz Lamp Flux:147.448x9 lm		
NAME:Lumino Ground-500mm-3000K-25D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:25 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

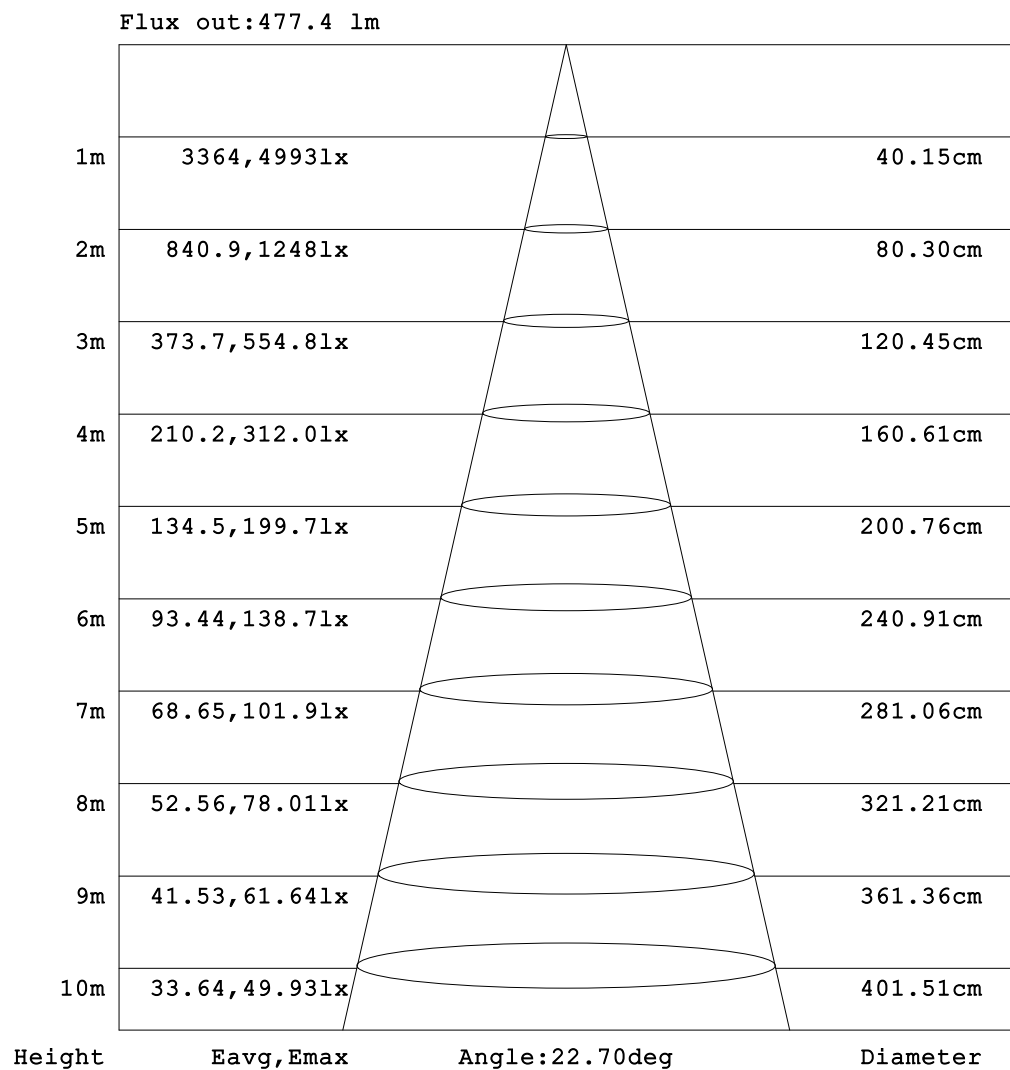

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:20DEG
 Operators:01
 Test Date:2025-08-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.700m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.92V I:0.0890A P:18.600W PF:0.9000 Freq:49.99Hz Lamp Flux:147.448x9 lm								
NAME:Lumino Ground-500mm-3000K-25D-REV2					TYPE:3000K			WEIGHT:00
SPEC.:25 DEG					DIM.:500mm			SERIAL No.:01
MFR.: 001					SUR.:0.8			Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.07	0.07	0.07	0.07	0.09	0.10	0.13	0.18	0.30	0.54	1.02	1.87	3.25	5.04	6.68	7.59	7.40	7.24	7.51
-170	0.07	0.08	0.09	0.10	0.13	0.15	0.19	0.25	0.37	0.60	1.03	1.77	2.97	4.54	6.12	7.28	7.69	7.68	7.77
-160	0.07	0.09	0.11	0.13	0.16	0.19	0.24	0.30	0.41	0.58	0.88	1.37	2.10	3.12	4.25	5.26	5.99	6.38	6.46
-150	0.07	0.10	0.12	0.15	0.19	0.23	0.28	0.34	0.42	0.54	0.72	0.98	1.35	1.82	2.40	2.97	3.47	3.86	4.08
-140	0.07	0.10	0.14	0.18	0.22	0.26	0.31	0.37	0.43	0.54	0.65	0.78	0.96	1.17	1.40	1.59	1.77	1.92	2.02
-130	0.07	0.11	0.15	0.20	0.24	0.29	0.34	0.39	0.47	0.56	0.76	0.92	0.97	0.98	1.09	1.22	1.33	1.44	1.55
-120	0.07	0.12	0.16	0.21	0.26	0.31	0.36	0.42	0.49	0.57	0.65	0.74	0.85	0.99	1.14	1.24	1.30	1.34	1.37
-110	0.07	0.12	0.17	0.22	0.27	0.33	0.38	0.44	0.52	0.59	0.67	0.74	0.82	0.90	0.98	1.06	1.14	1.23	1.31
-100	0.07	0.13	0.18	0.23	0.28	0.34	0.39	0.46	0.54	0.61	0.69	0.76	0.84	0.91	0.99	1.06	1.14	1.21	1.29
-90	0.07	0.14	0.21	0.28	0.35	0.41	0.48	0.56	0.64	0.72	0.81	0.89	0.97	1.02	1.07	1.12	1.17	1.23	1.28
-80	0.07	0.18	0.28	0.36	0.45	0.55	0.65	0.80	0.97	1.15	1.33	1.51	1.69	3.50	5.64	7.91	10.3	12.6	14.9
-70	0.07	0.21	0.31	0.44	0.59	0.79	1.03	1.32	1.68	2.07	2.51	3.11	4.17	9.66	17.3	25.1	32.8	40.2	47.3
-60	0.07	0.23	0.36	0.55	0.83	1.16	1.50	1.88	3.02	5.18	8.40	12.6	17.9	25.3	35.6	45.5	55.0	63.7	71.6
-50	0.07	0.23	0.41	0.69	1.10	1.53	2.06	2.73	4.62	8.81	16.7	27.8	40.3	53.7	67.7	80.8	92.5	102	110
-40	0.07	0.24	0.46	0.83	1.35	1.95	2.71	3.63	6.84	17.5	32.7	50.6	71.5	96.5	125	149	174	195	210
-30	0.07	0.25	0.50	0.99	1.58	2.31	3.34	6.32	15.2	29.5	47.2	73.8	112	160	218	285	350	409	446
-20	0.07	0.25	0.52	1.08	1.75	2.62	4.11	9.29	21.7	39.8	64.3	104	164	256	390	587	842	1092	1249
-10	0.07	0.25	0.52	1.12	1.81	2.82	4.65	9.99	24.4	45.3	75.8	127	211	351	619	1146	1981	2926	3550
0	0.07	0.24	0.50	1.10	1.77	2.80	4.24	8.01	22.2	43.2	70.1	120	201	330	588	1130	2178	3652	4836
10	0.07	0.24	0.51	1.09	1.74	2.71	4.03	8.06	21.8	41.8	68.0	112	179	282	458	778	1338	2080	2531
20	0.07	0.25	0.50	1.01	1.63	2.41	3.56	6.13	16.5	33.6	54.0	83.5	128	194	286	416	575	726	819
30	0.07	0.24	0.47	0.92	1.45	2.03	2.94	3.97	9.10	21.2	37.2	59.2	87.8	125	169	216	257	291	310
40	0.07	0.24	0.43	0.75	1.20	1.66	2.25	3.01	3.77	10.1	22.8	39.2	56.7	76.0	96.9	115	132	144	153
50	0.07	0.23	0.38	0.61	0.96	1.31	1.66	2.12	3.47	6.63	11.8	19.8	30.4	42.2	55.1	67.2	77.8	86.9	94.5
60	0.07	0.22	0.34	0.49	0.69	0.97	1.20	1.49	1.96	2.96	5.14	8.48	12.7	19.3	29.7	39.9	49.5	58.5	66.9
70	0.07	0.21	0.30	0.40	0.52	0.66	0.82	1.04	1.28	1.57	1.92	2.29	2.67	6.59	12.7	19.4	26.3	33.2	39.8
80	0.07	0.18	0.27	0.34	0.42	0.50	0.58	0.68	0.78	0.90	1.03	1.17	1.30	2.44	3.93	5.62	7.39	9.17	10.8
90	0.07	0.13	0.18	0.23	0.28	0.33	0.38	0.44	0.50	0.56	0.62	0.68	0.73	0.79	0.85	0.91	0.97	1.03	1.08
100	0.07	0.12	0.17	0.21	0.25	0.28	0.32	0.38	0.44	0.50	0.56	0.63	0.70	0.76	0.82	0.88	0.94	1.01	1.07
110	0.07	0.12	0.15	0.19	0.22	0.25	0.28	0.34	0.41	0.47	0.54	0.61	0.68	0.75	0.80	0.86	0.92	0.98	1.04
120	0.07	0.11	0.14	0.17	0.20	0.23	0.27	0.31	0.38	0.43	0.48	0.54	0.63	0.71	0.75	0.81	0.88	0.96	1.04
130	0.07	0.10	0.13	0.16	0.19	0.22	0.25	0.24	0.21	0.27	0.35	0.49	0.66	0.83	0.93	0.98	1.03	1.11	1.17
140	0.07	0.10	0.12	0.14	0.17	0.20	0.18	0.13	0.15	0.36	0.52	0.64	0.85	1.09	1.31	1.47	1.74	1.89	1.98
150	0.07	0.09	0.11	0.13	0.15	0.16	0.12	0.15	0.32	0.39	0.52	0.84	1.23	1.80	2.43	3.06	3.57	3.91	4.06
160	0.07	0.08	0.10	0.11	0.13	0.13	0.12	0.23	0.32	0.46	0.77	1.30	2.08	3.19	4.42	5.53	6.27	6.62	6.68
170	0.07	0.08	0.08	0.09	0.11	0.11	0.13	0.22	0.32	0.54	0.99	1.76	3.00	4.61	6.21	7.27	7.54	7.40	7.36
180	0.07	0.07	0.07	0.07	0.09	0.10	0.13	0.18	0.30	0.54	1.02	1.87	3.25	5.04	6.68	7.59	7.40	7.24	7.51

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
γ Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.92V I:0.0890A P:18.600W PF:0.9000 Freq:49.99Hz Lamp Flux:147.448x9 lm		
NAME:Lumino Ground-500mm-3000K-25D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:25 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	7.99	8.29	7.80	6.35	4.48	2.77	1.61	0.95	0.59	0.37	0.24	0.15	0.11	0.07	0.07	0.07	0.07	0.09	
-170	7.92	7.72	6.85	5.41	3.80	2.43	1.51	0.95	0.63	0.43	0.30	0.21	0.15	0.11	0.10	0.09	0.08	0.09	
-160	6.22	5.62	4.69	3.61	2.54	1.72	1.19	0.85	0.61	0.45	0.34	0.25	0.19	0.15	0.13	0.11	0.09	0.09	
-150	3.72	3.21	2.64	2.10	1.62	1.24	0.95	0.73	0.57	0.45	0.35	0.28	0.22	0.18	0.15	0.12	0.10	0.09	
-140	1.89	1.71	1.52	1.33	1.12	0.95	0.80	0.69	0.57	0.45	0.37	0.30	0.25	0.21	0.17	0.14	0.10	0.09	
-130	1.44	1.33	1.23	1.13	1.08	1.02	0.90	0.75	0.58	0.46	0.38	0.32	0.27	0.23	0.18	0.15	0.11	0.09	
-120	1.33	1.29	1.24	1.16	1.03	0.86	0.73	0.64	0.56	0.47	0.40	0.34	0.29	0.24	0.20	0.16	0.12	0.09	
-110	1.22	1.14	1.05	0.96	0.87	0.79	0.71	0.63	0.56	0.49	0.41	0.34	0.30	0.25	0.21	0.16	0.12	0.09	
-100	1.20	1.12	1.04	0.96	0.87	0.79	0.72	0.65	0.57	0.50	0.43	0.36	0.31	0.26	0.21	0.17	0.13	0.09	
-90	1.20	1.13	1.05	0.98	0.90	0.83	0.75	0.67	0.60	0.52	0.44	0.36	0.32	0.27	0.23	0.18	0.14	0.09	
-80	12.5	10.1	7.73	5.39	3.19	1.35	1.20	1.05	0.90	0.76	0.62	0.50	0.44	0.38	0.32	0.25	0.16	0.09	
-70	39.3	31.0	22.7	14.6	7.12	2.30	2.01	1.72	1.43	1.18	0.93	0.72	0.58	0.47	0.37	0.29	0.20	0.09	
-60	61.3	50.4	39.0	27.3	15.6	9.29	6.15	3.89	2.40	1.66	1.26	0.99	0.81	0.61	0.44	0.32	0.23	0.09	
-50	97.7	83.2	67.4	51.0	35.9	25.4	16.2	9.24	4.96	2.61	1.73	1.36	1.02	0.78	0.54	0.36	0.24	0.09	
-40	190	165	136	104	75.0	51.4	32.8	18.3	7.49	2.63	2.16	1.72	1.28	0.92	0.64	0.39	0.25	0.09	
-30	413	355	285	208	140	90.1	55.0	30.5	15.9	6.22	2.58	2.02	1.50	1.04	0.72	0.43	0.25	0.09	
-20	1160	933	668	436	265	141	79.0	47.4	26.2	11.8	3.85	2.23	1.67	1.13	0.78	0.45	0.26	0.09	
-10	3315	2515	1576	874	456	230	112	61.3	33.0	15.2	4.99	2.37	1.75	1.18	0.80	0.46	0.26	0.09	
0	4837	3645	2197	1160	553	257	118	63.4	33.1	14.8	4.71	2.38	1.74	1.16	0.79	0.45	0.25	0.09	
10	2494	1822	1129	661	366	189	95.9	54.6	29.8	13.7	4.47	2.33	1.73	1.16	0.79	0.46	0.26	0.09	
20	794	670	486	318	191	102	61.6	38.3	21.5	9.58	3.20	2.18	1.63	1.10	0.77	0.45	0.26	0.09	
30	294	261	215	158	106	67.7	41.3	23.0	11.9	4.71	2.44	1.94	1.44	1.00	0.71	0.42	0.25	0.09	
40	140	122	101	76.6	56.1	39.2	25.2	13.9	5.62	2.45	2.05	1.62	1.20	0.90	0.62	0.39	0.25	0.09	
50	82.9	70.0	56.1	41.7	28.5	20.3	13.1	7.97	4.51	2.43	1.59	1.25	0.98	0.75	0.53	0.36	0.24	0.09	
60	57.0	46.6	35.9	25.0	14.1	8.53	5.70	3.57	2.18	1.52	1.16	0.96	0.77	0.59	0.44	0.33	0.22	0.09	
70	33.0	26.0	18.9	12.2	6.02	2.12	1.86	1.59	1.33	1.08	0.85	0.68	0.57	0.47	0.38	0.29	0.20	0.09	
80	9.15	7.35	5.55	3.85	2.34	1.19	1.06	0.94	0.82	0.70	0.60	0.51	0.45	0.37	0.30	0.24	0.16	0.09	
90	1.03	0.97	0.91	0.85	0.80	0.74	0.68	0.61	0.55	0.49	0.43	0.36	0.32	0.27	0.23	0.18	0.14	0.09	
100	1.01	0.96	0.90	0.85	0.80	0.74	0.67	0.60	0.54	0.47	0.41	0.35	0.30	0.26	0.21	0.17	0.13	0.09	
110	0.99	0.94	0.90	0.85	0.80	0.74	0.66	0.59	0.52	0.45	0.39	0.33	0.29	0.25	0.20	0.16	0.12	0.09	
120	1.00	0.96	0.92	0.87	0.83	0.75	0.66	0.57	0.50	0.42	0.35	0.31	0.27	0.23	0.19	0.15	0.12	0.09	
130	1.13	1.07	1.05	1.01	0.93	0.80	0.67	0.56	0.46	0.38	0.32	0.28	0.25	0.21	0.18	0.14	0.11	0.09	
140	1.89	1.77	1.54	1.35	1.12	0.92	0.75	0.58	0.45	0.35	0.30	0.26	0.22	0.19	0.16	0.13	0.10	0.09	
150	3.82	3.41	2.88	2.24	1.62	1.21	0.88	0.63	0.48	0.37	0.29	0.23	0.19	0.16	0.14	0.12	0.10	0.09	
160	6.44	5.90	4.99	3.86	2.69	1.75	1.17	0.79	0.55	0.40	0.29	0.21	0.17	0.14	0.12	0.11	0.09	0.09	
170	7.51	7.41	6.74	5.47	3.91	2.49	1.52	0.93	0.60	0.40	0.27	0.19	0.14	0.11	0.10	0.09	0.08	0.09	
180	7.99	8.29	7.80	6.35	4.48	2.77	1.61	0.95	0.59	0.37	0.24	0.15	0.11	0.07	0.07	0.07	0.07	0.09	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks: