

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		1847.5 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		4.0 degrees horizontal
Beam Spread	At 10% of Imax	76.1V x 69.5H
	At 50% of Imax	40.0V x 38.8H
	At 90% of Imax	16.1V x 15.5H
Beam Flux	Total	1000.3 lumens per klm.
	To 10% of Imax	873.6 lumens per klm.
	To 50% of Imax	488.5 lumens per klm.
	To 90% of Imax	106.0 lumens per klm.
	Upward LOR	0.7 %
	Downward LOR	99.3 %
Luminaire Efficiency (Light Output Ratio)		100.0 %

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-08-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.93V I:0.0890A P:18.600W PF:0.9000 Freq:49.99Hz Lamp Flux:171.144x9 lm		
NAME:Lumino Ground-500mm-3000K-40D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:40 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

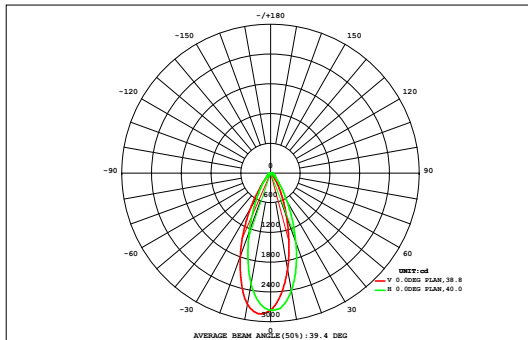

DATA OF LAMP		Eff:82.81lm/W	
MODEL		Imax(cd)	2846
NOMINAL POWER(W)	18	AVAILABILITY(%)	87.4
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	1346
NOMINAL FLUX(lm)	171.144	LOR(%)	100.0
LAMPS INSIDE	9	TOTAL FLUX(lm)	1540
TEST VOLTAGE(V)	220	θ @50% (H,V)	39,40DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.01	0.01	0.02	0.03	0.04	0.08	0.24	0.44	0.65	0.65	0.44	0.23	0.07	0.04	0.03	0.02	0.01	0.01	3.00	0.00
72	0.01	0.01	0.02	0.04	0.10	0.20	0.45	0.76	1.05	1.04	0.74	0.42	0.18	0.09	0.04	0.02	0.01	0.01	5.20	0.00
64	0.01	0.02	0.03	0.08	0.20	0.41	0.76	1.16	1.49	1.48	1.13	0.72	0.36	0.17	0.07	0.03	0.02	0.01	8.16	0.00
56	0.01	0.02	0.04	0.11	0.35	0.80	1.42	2.05	2.55	2.62	2.19	1.51	0.79	0.31	0.10	0.04	0.02	0.01	14.9	0.00
48	0.01	0.02	0.05	0.17	0.63	1.49	2.75	4.19	5.37	5.71	4.98	3.46	1.76	0.63	0.15	0.04	0.02	0.01	31.4	9.78
40	0.01	0.03	0.07	0.31	1.05	2.60	5.21	8.61	11.7	12.7	11.0	7.36	3.62	1.30	0.30	0.06	0.03	0.01	66.0	54.3
32	0.01	0.03	0.10	0.50	1.63	4.17	9.06	16.1	22.8	25.3	21.8	14.1	6.82	2.46	0.61	0.09	0.03	0.01	126	117
24	0.02	0.03	0.13	0.68	2.28	6.07	13.6	25.2	36.9	41.3	34.6	22.4	11.5	4.13	1.03	0.13	0.03	0.02	200	192
	0.02	0.03	0.14	0.77	2.69	7.44	17.1	31.9	46.8	52.3	44.8	30.2	15.9	5.62	1.36	0.16	0.03	0.02	257	251
	0.02	0.04	0.15	0.83	2.88	7.98	18.5	34.5	48.6	53.0	46.8	31.9	16.7	5.94	1.44	0.17	0.04	0.02	269	263
	0.02	0.04	0.17	0.83	2.76	7.37	16.5	29.0	40.0	43.7	38.2	26.3	13.7	4.92	1.21	0.16	0.03	0.02	225	218
-24	0.02	0.04	0.16	0.69	2.19	5.52	11.4	19.3	26.8	29.3	25.3	17.4	9.07	3.33	0.81	0.12	0.03	0.01	151	143
-32	0.01	0.03	0.12	0.50	1.50	3.51	6.70	10.8	14.7	16.0	13.8	9.50	4.96	1.87	0.43	0.08	0.03	0.01	84.6	74.0
-40	0.01	0.03	0.07	0.31	0.96	2.07	3.65	5.55	7.21	7.65	6.57	4.57	2.42	0.91	0.21	0.05	0.03	0.01	42.3	23.7
-48	0.01	0.02	0.05	0.18	0.55	1.18	2.00	2.84	3.55	3.63	2.98	2.04	1.09	0.43	0.12	0.04	0.02	0.01	20.8	0.00
-56	0.01	0.02	0.04	0.11	0.29	0.62	1.06	1.52	1.90	1.87	1.44	0.93	0.47	0.20	0.08	0.03	0.02	0.01	10.6	0.00
-64	0.01	0.02	0.03	0.07	0.14	0.28	0.56	0.87	1.15	1.12	0.80	0.46	0.18	0.09	0.04	0.02	0.01	0.01	5.86	0.00
-72	0.01	0.01	0.02	0.03	0.06	0.12	0.30	0.51	0.73	0.72	0.48	0.26	0.08	0.04	0.03	0.02	0.01	0.01	3.42	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)	16	24	32	40	48	56	64	72			
Φ t	0.21	0.46	1.40	6.24	20.3	51.9	111	195	274	300	258	174	89.7	32.5	8.06	1.29	0.43	0.21	1525	---
Φ a	0.00	0.00	0.00	0.00	0.00	33.0	95.0	179	257	284	244	161	76.5	15.8	0.00	0.00	0.00	0.00	---	1346


one-half-peak spread: U:20.3,D:19.9 , L:19.3,R:19.3,Beam Type: Type 4 x 5 (H x V)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.93V I:0.0890A P:18.600W PF:0.9000 Freq:49.99Hz Lamp Flux:171.144x9 lm		
NAME:Lumino Ground-500mm-3000K-40D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:40 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

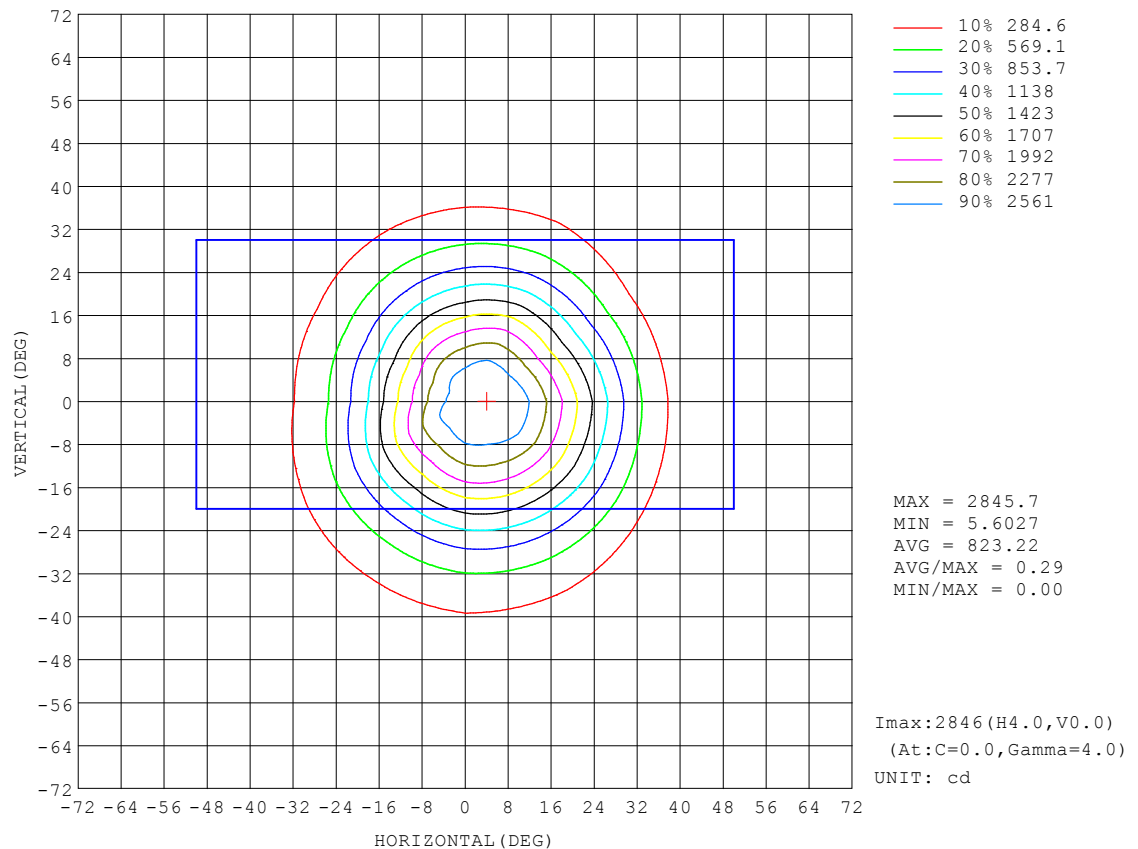


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.93V I:0.0890A P:18.600W PF:0.9000 Freq:49.99Hz Lamp Flux:171.144x9 lm		
NAME:Lumino Ground-500mm-3000K-40D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:40 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

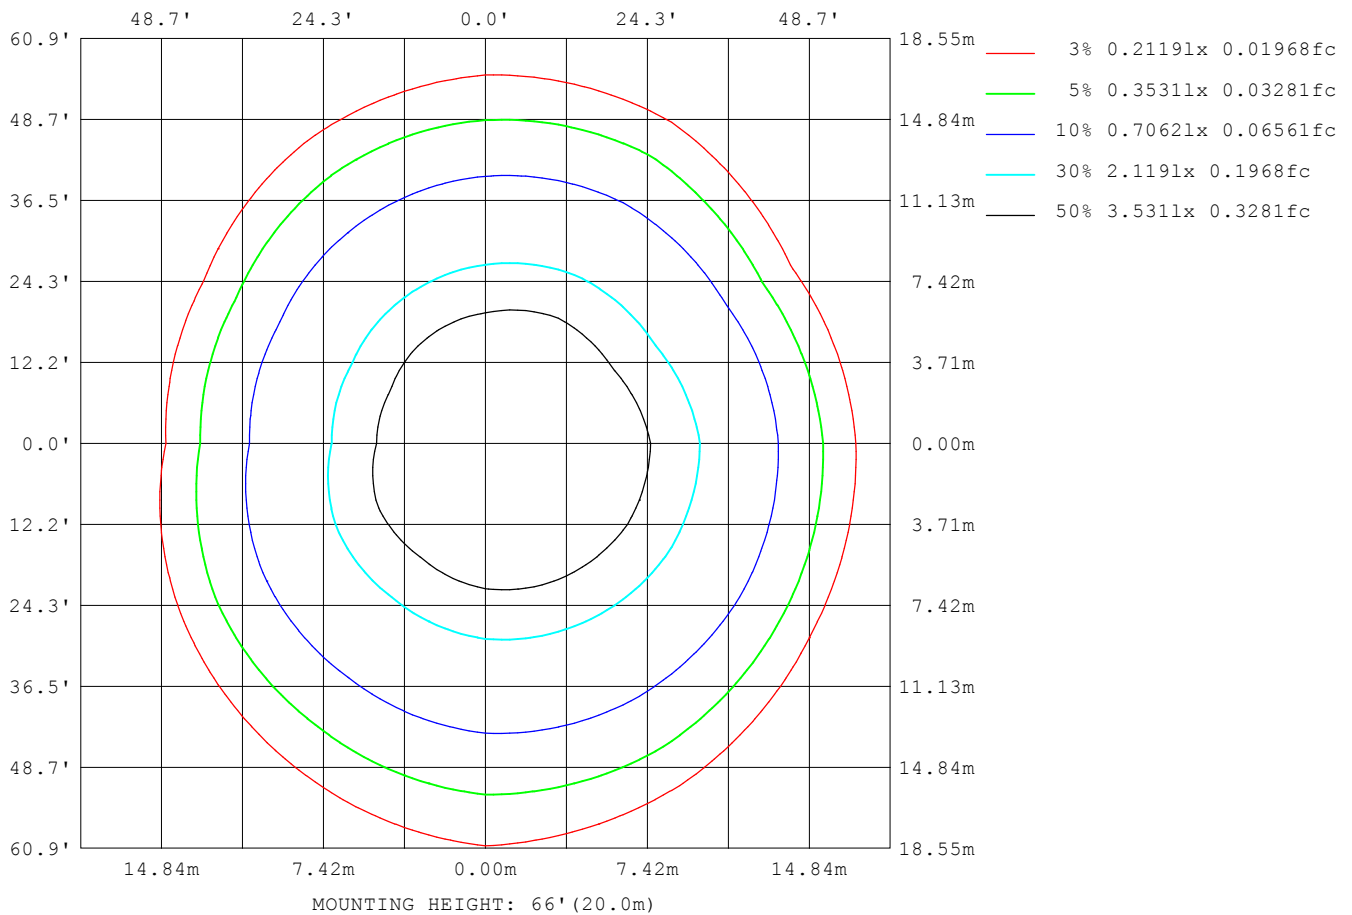

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

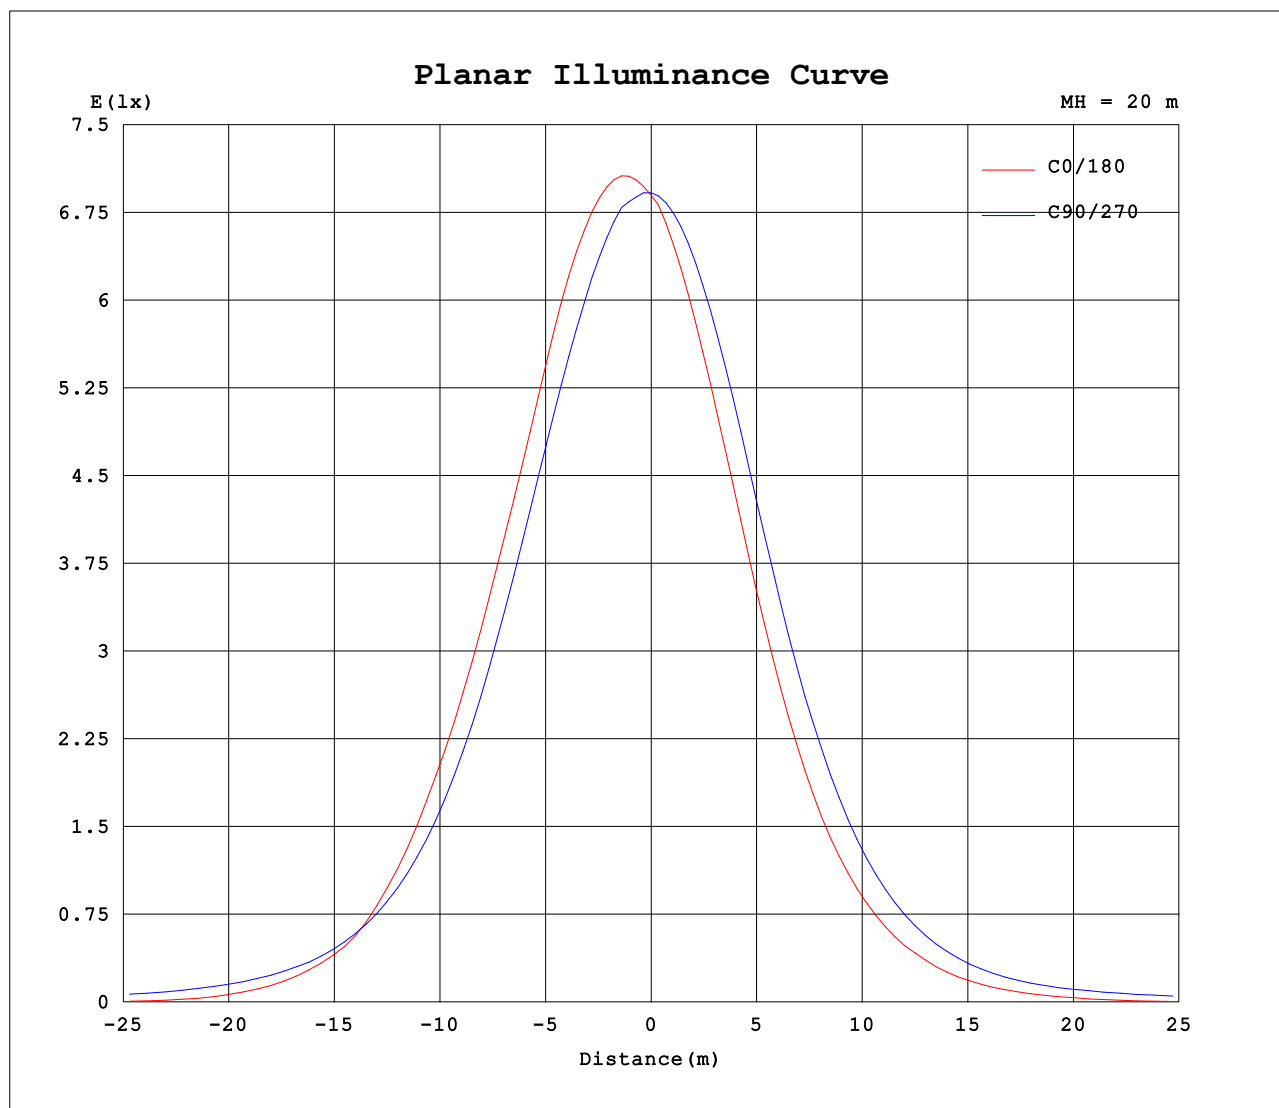


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-08-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.93V I:0.0890A P:18.600W PF:0.9000 Freq:49.99Hz Lamp Flux:171.144x9 lm		
NAME:Lumino Ground-500mm-3000K-40D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:40 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

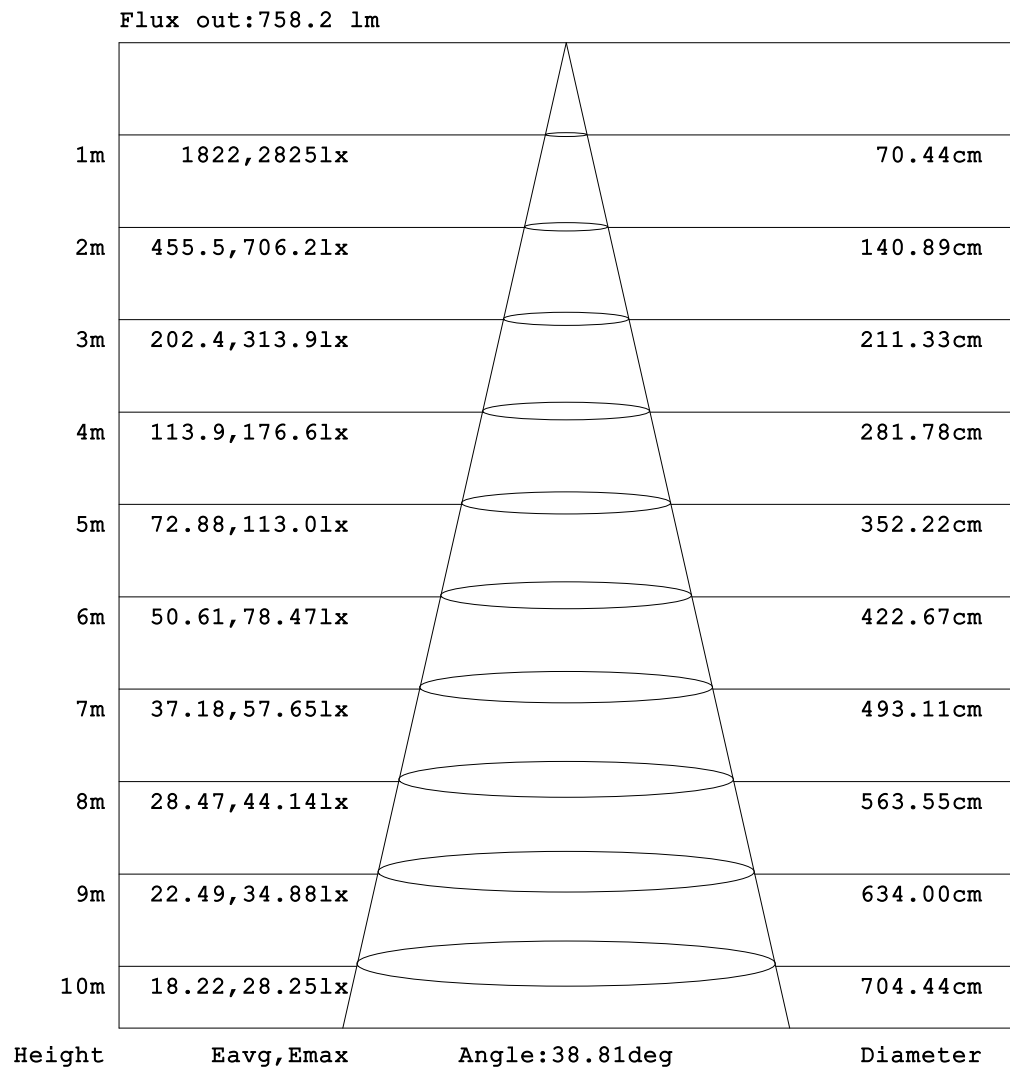

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:20DEG
 Operators:01
 Test Date:2025-08-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.700m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.93V I:0.0890A P:18.600W PF:0.9000 Freq:49.99Hz Lamp Flux:171.144x9 lm								
NAME:Lumino Ground-500mm-3000K-40D-REV2					TYPE:3000K			WEIGHT:00
SPEC.:40 DEG					DIM.:500mm			SERIAL No.:01
MFR.: 001					SUR.:0.8			Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.09	0.08	0.08	0.09	0.10	0.13	0.21	0.41	0.78	1.39	2.23	3.30	4.50	5.71	6.70	7.51	7.97	8.39	8.56
-170	0.09	0.09	0.10	0.11	0.13	0.16	0.25	0.43	0.78	1.34	2.12	3.12	4.24	5.39	6.39	7.14	7.49	7.62	7.71
-160	0.09	0.10	0.11	0.13	0.16	0.19	0.27	0.41	0.68	1.11	1.70	2.48	3.37	4.29	5.12	5.76	6.16	6.36	6.35
-150	0.09	0.10	0.12	0.15	0.18	0.21	0.27	0.37	0.55	0.81	1.20	1.67	2.24	2.85	3.45	3.97	4.42	4.68	4.76
-140	0.09	0.11	0.13	0.16	0.19	0.23	0.28	0.35	0.44	0.61	0.80	1.05	1.34	1.64	1.96	2.24	2.54	2.75	2.88
-130	0.09	0.11	0.14	0.17	0.21	0.24	0.28	0.33	0.40	0.49	0.61	0.80	0.95	1.01	1.16	1.31	1.42	1.50	1.56
-120	0.09	0.12	0.15	0.19	0.22	0.26	0.29	0.34	0.40	0.46	0.53	0.60	0.69	0.76	0.85	0.93	1.02	1.09	1.15
-110	0.09	0.13	0.16	0.19	0.23	0.27	0.31	0.36	0.41	0.47	0.52	0.58	0.64	0.69	0.75	0.82	0.89	0.95	1.01
-100	0.09	0.14	0.17	0.20	0.24	0.28	0.32	0.37	0.43	0.48	0.54	0.59	0.65	0.70	0.75	0.80	0.85	0.90	0.94
-90	0.09	0.16	0.24	0.32	0.40	0.47	0.55	0.60	0.64	0.69	0.73	0.78	0.82	0.85	0.87	0.89	0.91	0.94	0.96
-80	0.09	0.22	0.40	0.53	0.63	0.73	0.84	0.95	1.08	1.22	1.37	1.51	1.65	2.87	4.34	5.94	7.58	9.23	10.8
-70	0.09	0.33	0.51	0.64	0.80	1.00	1.22	1.47	1.76	2.10	2.45	2.84	3.40	7.48	13.5	19.7	26.0	32.1	37.9
-60	0.09	0.41	0.57	0.77	1.03	1.34	1.68	2.05	2.78	4.20	6.40	9.52	13.7	20.1	29.8	39.3	48.5	57.0	64.7
-50	0.09	0.44	0.63	0.91	1.27	1.69	2.17	2.75	4.17	7.45	13.6	23.2	36.0	51.1	67.1	82.6	96.8	109	118
-40	0.09	0.46	0.69	1.04	1.50	2.04	2.68	3.49	5.26	13.0	28.5	50.4	77.8	110	144	181	218	249	271
-30	0.09	0.47	0.73	1.15	1.68	2.31	3.14	4.85	11.0	26.0	52.2	92.2	148	221	310	411	520	615	677
-20	0.09	0.47	0.76	1.23	1.80	2.50	3.47	6.73	17.1	40.5	82.2	151	262	411	614	856	1110	1344	1500
-10	0.09	0.47	0.76	1.25	1.84	2.57	3.72	7.01	18.9	48.2	103	198	353	595	947	1390	1823	2163	2413
0	0.09	0.46	0.74	1.23	1.79	2.49	3.44	5.11	14.6	43.4	95.2	188	346	593	956	1439	1974	2451	2758
10	0.09	0.46	0.74	1.22	1.78	2.47	3.39	5.33	14.6	40.7	87.8	167	300	502	791	1167	1621	2039	2273
20	0.09	0.46	0.72	1.17	1.70	2.32	3.14	4.58	10.7	28.5	61.3	112	191	316	487	700	933	1139	1261
30	0.09	0.46	0.69	1.07	1.56	2.07	2.76	3.57	6.12	14.5	33.0	64.4	108	166	241	321	406	479	525
40	0.09	0.45	0.64	0.93	1.35	1.78	2.29	2.92	3.60	7.33	16.7	32.0	52.8	77.7	106	133	158	179	192
50	0.09	0.43	0.58	0.80	1.11	1.47	1.82	2.23	3.19	5.56	9.48	15.3	23.6	33.9	47.1	60.4	72.3	82.6	91.0
60	0.09	0.38	0.52	0.68	0.85	1.12	1.38	1.68	2.08	2.72	4.09	6.33	9.44	15.0	24.7	34.3	43.6	52.5	60.9
70	0.09	0.30	0.47	0.57	0.69	0.81	0.93	1.13	1.38	1.65	1.96	2.28	2.60	5.74	10.6	16.0	21.7	27.3	32.7
80	0.09	0.18	0.34	0.46	0.55	0.61	0.68	0.76	0.86	0.96	1.06	1.16	1.26	2.12	3.24	4.49	5.80	7.11	8.34
90	0.09	0.13	0.18	0.22	0.26	0.31	0.35	0.40	0.46	0.51	0.56	0.61	0.66	0.72	0.77	0.82	0.87	0.92	0.97
100	0.09	0.12	0.16	0.20	0.23	0.27	0.30	0.36	0.41	0.47	0.53	0.60	0.66	0.72	0.78	0.84	0.89	0.95	1.00
110	0.09	0.12	0.15	0.19	0.21	0.24	0.26	0.31	0.38	0.46	0.53	0.62	0.71	0.79	0.86	0.91	0.97	1.01	1.06
120	0.09	0.12	0.15	0.17	0.19	0.22	0.25	0.29	0.37	0.46	0.48	0.68	0.80	0.95	1.02	1.11	1.20	1.28	1.35
130	0.09	0.11	0.14	0.15	0.18	0.21	0.23	0.26	0.34	0.48	0.66	0.84	1.00	1.07	1.18	1.32	1.47	1.61	1.72
140	0.09	0.11	0.13	0.15	0.17	0.19	0.22	0.28	0.36	0.53	0.71	0.95	1.34	1.81	2.25	2.62	2.93	2.89	2.81
150	0.09	0.10	0.11	0.13	0.16	0.18	0.23	0.32	0.48	0.68	1.12	1.68	2.36	3.09	3.76	4.32	4.91	5.27	5.53
160	0.09	0.10	0.10	0.12	0.14	0.17	0.23	0.37	0.60	1.06	1.67	2.44	3.34	4.29	5.12	5.76	6.18	6.36	6.34
170	0.09	0.09	0.09	0.11	0.12	0.15	0.24	0.41	0.75	1.33	2.10	3.10	4.21	5.34	6.31	7.06	7.52	7.75	7.69
180	0.09	0.08	0.08	0.09	0.10	0.13	0.21	0.41	0.78	1.39	2.23	3.30	4.50	5.71	6.70	7.51	7.97	8.39	8.53

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.93V I:0.0890A P:18.600W PF:0.9000 Freq:49.99Hz Lamp Flux:171.144x9 lm																		
NAME:Lumino Ground-500mm-3000K-40D-REV2									TYPE:3000K					WEIGHT:00				
SPEC.:40 DEG									DIM.:500mm					SERIAL No.:01				
MFR.: 001									SUR.:0.8					Shielding Angle:				

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	8.21	7.70	6.89	5.80	4.57	3.34	2.29	1.49	0.90	0.53	0.30	0.18	0.11	0.09	0.09	0.10	0.11	0.21	
-170	7.52	7.04	6.24	5.26	4.16	3.07	2.14	1.42	0.90	0.55	0.34	0.22	0.15	0.12	0.11	0.11	0.12	0.21	
-160	6.09	5.59	4.90	4.08	3.18	2.35	1.67	1.16	0.78	0.52	0.34	0.24	0.18	0.15	0.13	0.13	0.12	0.21	
-150	4.42	3.93	3.27	2.69	2.13	1.63	1.20	0.86	0.63	0.45	0.33	0.25	0.20	0.17	0.15	0.14	0.13	0.21	
-140	2.62	2.29	1.91	1.57	1.31	1.06	0.84	0.68	0.53	0.40	0.32	0.27	0.22	0.19	0.17	0.16	0.14	0.21	
-130	1.46	1.34	1.21	1.08	0.98	0.88	0.76	0.60	0.47	0.39	0.33	0.27	0.24	0.20	0.18	0.16	0.15	0.21	
-120	1.09	1.03	0.95	0.85	0.75	0.67	0.60	0.52	0.45	0.39	0.33	0.29	0.25	0.22	0.20	0.17	0.15	0.21	
-110	0.95	0.88	0.82	0.75	0.69	0.62	0.56	0.50	0.45	0.39	0.34	0.29	0.26	0.23	0.20	0.18	0.15	0.21	
-100	0.89	0.84	0.78	0.73	0.67	0.62	0.57	0.51	0.46	0.41	0.35	0.30	0.27	0.24	0.21	0.19	0.17	0.21	
-90	0.92	0.88	0.84	0.80	0.76	0.72	0.67	0.61	0.56	0.51	0.45	0.40	0.37	0.34	0.30	0.27	0.24	0.21	
-80	9.19	7.50	5.81	4.18	2.67	1.42	1.29	1.17	1.05	0.92	0.80	0.69	0.62	0.55	0.48	0.41	0.33	0.21	
-70	31.6	25.1	18.5	12.2	6.26	2.48	2.23	1.97	1.71	1.47	1.24	1.04	0.88	0.73	0.60	0.49	0.38	0.21	
-60	55.5	45.4	34.9	24.2	13.7	8.24	5.65	3.90	2.78	2.12	1.72	1.43	1.19	0.95	0.74	0.56	0.42	0.21	
-50	108	93.9	77.5	59.6	41.9	27.6	16.8	9.33	5.21	3.17	2.34	1.89	1.50	1.18	0.89	0.64	0.45	0.21	
-40	262	240	206	163	118	75.1	42.1	20.2	8.38	3.70	2.96	2.38	1.83	1.39	1.03	0.71	0.47	0.21	
-30	677	630	544	429	306	196	110	48.6	18.0	6.85	3.69	2.82	2.14	1.57	1.15	0.77	0.49	0.21	
-20	1509	1401	1200	949	677	421	230	112	41.8	12.6	5.00	3.16	2.38	1.71	1.23	0.81	0.50	0.21	
-10	2420	2287	1969	1546	1101	692	364	177	67.4	18.3	6.00	3.42	2.52	1.78	1.27	0.83	0.51	0.21	
0	2845	2688	2292	1800	1284	812	415	201	74.4	18.7	5.79	3.45	2.54	1.78	1.27	0.83	0.51	0.21	
10	2356	2131	1735	1336	957	599	313	154	58.3	15.8	5.54	3.36	2.49	1.76	1.26	0.83	0.51	0.21	
20	1305	1220	1011	763	520	303	169	84.7	31.5	9.88	4.43	3.09	2.33	1.68	1.22	0.81	0.50	0.21	
30	530	495	427	327	226	140	76.0	32.2	12.6	5.60	3.42	2.71	2.06	1.53	1.13	0.77	0.49	0.21	
40	189	176	152	122	85.7	53.7	30.0	14.5	6.56	3.38	2.81	2.25	1.75	1.36	1.01	0.71	0.47	0.21	
50	82.4	71.7	59.0	44.7	30.7	20.9	13.3	8.25	5.00	3.03	2.17	1.77	1.44	1.15	0.87	0.64	0.45	0.21	
60	52.0	42.6	32.9	23.0	13.4	8.39	5.81	3.93	2.67	1.99	1.61	1.37	1.15	0.93	0.73	0.57	0.42	0.21	
70	27.3	21.6	15.9	10.5	5.49	2.37	2.12	1.87	1.63	1.39	1.17	0.99	0.86	0.73	0.61	0.49	0.37	0.21	
80	7.11	5.81	4.50	3.25	2.14	1.30	1.19	1.09	0.98	0.88	0.79	0.71	0.63	0.56	0.48	0.39	0.32	0.21	
90	0.92	0.88	0.83	0.79	0.74	0.70	0.65	0.59	0.54	0.49	0.44	0.39	0.36	0.33	0.30	0.27	0.24	0.21	
100	0.95	0.90	0.85	0.80	0.75	0.70	0.64	0.58	0.52	0.47	0.41	0.36	0.32	0.29	0.25	0.21	0.19	0.21	
110	1.01	0.95	0.90	0.84	0.79	0.73	0.65	0.58	0.52	0.45	0.39	0.34	0.30	0.27	0.23	0.20	0.17	0.21	
120	1.23	1.10	0.96	0.85	0.81	0.74	0.66	0.58	0.51	0.43	0.37	0.32	0.28	0.25	0.22	0.19	0.16	0.21	
130	1.62	1.51	1.41	1.32	1.18	0.93	0.76	0.57	0.47	0.39	0.33	0.30	0.26	0.23	0.20	0.18	0.16	0.21	
140	2.72	2.60	2.19	1.77	1.44	1.15	0.91	0.70	0.51	0.39	0.32	0.27	0.24	0.21	0.18	0.17	0.14	0.21	
150	5.01	4.44	3.65	2.96	2.31	1.73	1.25	0.86	0.57	0.44	0.32	0.25	0.21	0.18	0.16	0.15	0.13	0.21	
160	6.09	5.62	4.86	4.07	3.27	2.39	1.70	1.18	0.77	0.49	0.33	0.23	0.18	0.15	0.14	0.13	0.13	0.21	
170	7.49	6.91	6.10	5.17	4.09	3.09	2.16	1.43	0.91	0.54	0.33	0.21	0.15	0.12	0.11	0.12	0.12	0.21	
180	8.21	7.70	6.89	5.80	4.57	3.34	2.29	1.49	0.90	0.53	0.30	0.18	0.11	0.09	0.09	0.10	0.11	0.21	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
γ Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks: