

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		2705.1 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		6.0 degrees horizontal
Beam Spread	At 10% of Imax	73.5V x 52.3H
	At 50% of Imax	38.8V x 25.7H
	At 90% of Imax	15.0V x 10.3H
Beam Flux	Total	1000.4 lumens per klm.
	To 10% of Imax	865.5 lumens per klm.
	To 50% of Imax	463.0 lumens per klm.
	To 90% of Imax	101.0 lumens per klm.
	Upward LOR	0.7 %
	Downward LOR	99.3 %
Luminaire Efficiency (Light Output Ratio)		100.0 %

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-08-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.90V I:0.0890A P:18.500W PF:0.9000 Freq:49.99Hz Lamp Flux:86.5129x9 lm		
NAME:Lumino Ground-500mm-3000K-20x40D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:20x40 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

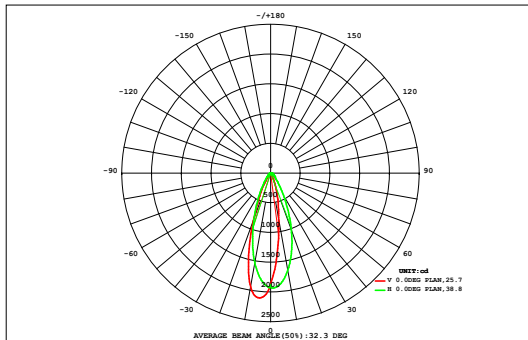

DATA OF LAMP		Eff:42.09lm/W	
MODEL		Imax(cd)	2106
NOMINAL POWER(W)	18	AVAILABILITY(%)	86.3
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	671.9
NOMINAL FLUX(lm)	86.5129	LOR(%)	100.0
LAMPS INSIDE	9	TOTAL FLUX(lm)	778.6
TEST VOLTAGE(V)	220	θ @50% (H,V)	26,39DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.01	0.01	0.01	0.02	0.10	0.20	0.30	0.31	0.20	0.10	0.03	0.01	0.01	0.01	0.00	0.00	1.32	0.00
72	0.00	0.00	0.01	0.01	0.02	0.03	0.14	0.32	0.51	0.52	0.34	0.18	0.06	0.03	0.01	0.01	0.00	0.00	2.19	0.00
64	0.00	0.00	0.01	0.01	0.02	0.04	0.18	0.44	0.74	0.77	0.52	0.27	0.11	0.05	0.02	0.01	0.01	0.00	3.21	0.00
56	0.00	0.01	0.01	0.02	0.04	0.08	0.24	0.73	1.30	1.42	1.04	0.58	0.25	0.09	0.03	0.01	0.01	0.00	5.86	0.00
48	0.00	0.01	0.01	0.02	0.06	0.19	0.63	1.66	2.89	3.22	2.46	1.44	0.57	0.17	0.05	0.02	0.01	0.00	13.4	1.38
40	0.00	0.01	0.01	0.03	0.09	0.42	1.43	3.52	6.51	7.72	6.08	3.21	1.12	0.25	0.07	0.02	0.01	0.00	30.5	22.4
32	0.00	0.01	0.02	0.04	0.12	0.52	2.52	6.19	12.7	16.6	13.3	6.27	2.05	0.43	0.11	0.03	0.01	0.00	61.0	55.1
24	0.00	0.01	0.02	0.05	0.17	0.84	3.85	9.87	20.9	28.8	22.1	9.91	3.59	0.81	0.15	0.04	0.01	0.00	101	96.0
	0.00	0.01	0.02	0.06	0.19	1.11	4.98	12.4	27.1	37.9	30.1	14.6	5.16	1.14	0.18	0.05	0.01	0.00	135	131
	0.00	0.01	0.02	0.06	0.22	1.34	5.62	14.4	29.9	38.5	32.1	15.8	5.56	1.24	0.19	0.05	0.01	0.00	145	141
	0.00	0.01	0.02	0.06	0.22	1.38	5.22	12.6	24.3	31.2	25.3	12.5	4.53	1.03	0.17	0.05	0.01	0.00	119	114
-24	0.00	0.01	0.02	0.05	0.16	0.89	3.62	8.21	16.1	20.1	16.0	8.07	2.88	0.62	0.13	0.04	0.01	0.00	76.9	71.5
-32	0.00	0.01	0.02	0.04	0.15	0.65	2.05	4.77	8.76	10.2	7.75	4.13	1.53	0.34	0.09	0.03	0.01	0.00	40.5	33.0
-40	0.00	0.01	0.01	0.03	0.10	0.38	1.06	2.51	4.26	4.62	3.35	1.88	0.74	0.22	0.06	0.02	0.01	0.00	19.3	7.27
-48	0.00	0.01	0.01	0.02	0.06	0.14	0.45	1.18	1.97	2.08	1.44	0.75	0.31	0.11	0.04	0.01	0.01	0.00	8.60	0.00
-56	0.00	0.01	0.01	0.02	0.04	0.07	0.25	0.62	1.03	1.06	0.69	0.33	0.12	0.06	0.03	0.01	0.01	0.00	4.35	0.00
-64	0.00	0.00	0.01	0.01	0.02	0.04	0.19	0.41	0.65	0.65	0.43	0.21	0.06	0.03	0.02	0.01	0.00	0.00	2.75	0.00
-72	0.00	0.00	0.01	0.01	0.01	0.03	0.13	0.26	0.40	0.41	0.27	0.14	0.04	0.02	0.01	0.01	0.00	0.00	1.75	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)	16	24	32	40	48	56	64	72			
Φ t	0.06	0.12	0.22	0.54	1.70	8.18	32.7	80.3	160	206	163	80.4	28.7	6.65	1.35	0.42	0.15	0.07	771	---
Φ a	0.00	0.00	0.00	0.00	0.00	0.00	18.3	68.6	149	195	153	70.7	16.4	0.00	0.00	0.00	0.00	0.00	---	672


one-half-peak spread: U:20.0,D:19.0 , L:13.6,R:12.5, Beam Type: Type 4 x 5 (H x V)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.90V I:0.0890A P:18.500W PF:0.9000 Freq:49.99Hz Lamp Flux:86.5129x9 lm		
NAME:Lumino Ground-500mm-3000K-20x40D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:20x40 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

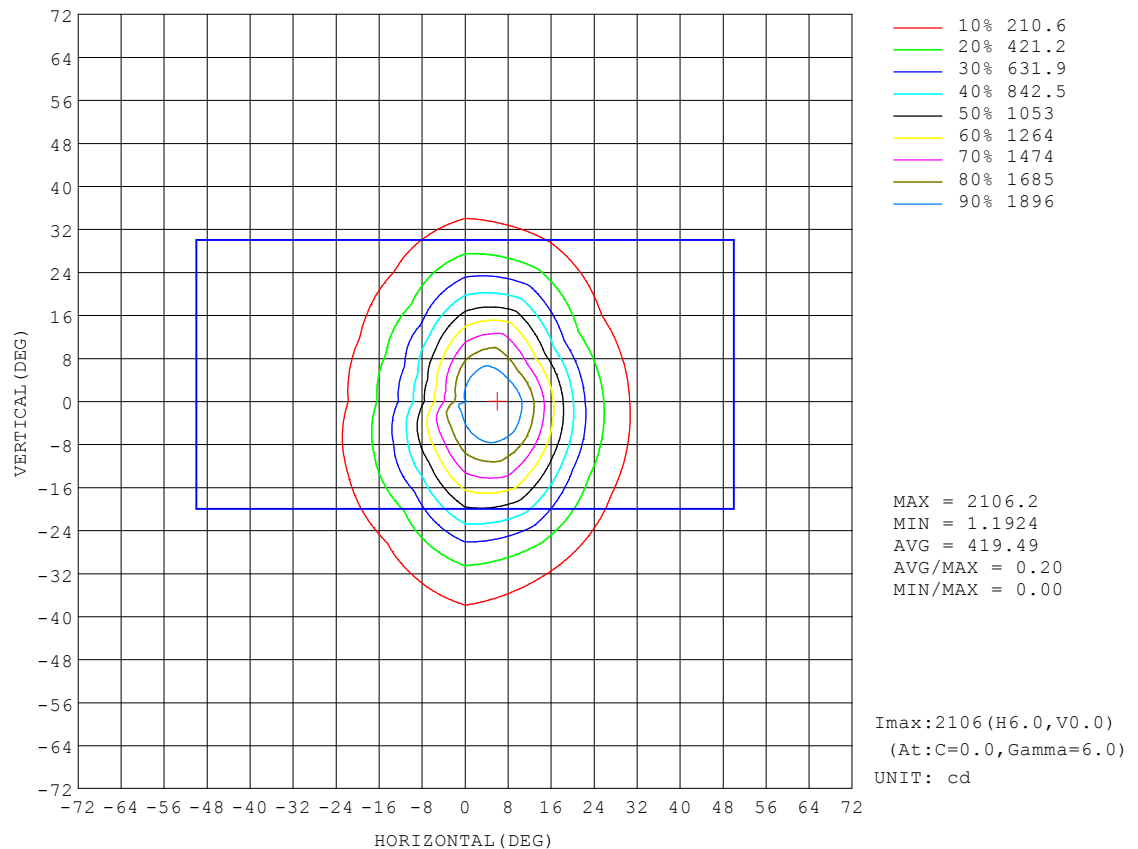


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.90V I:0.0890A P:18.500W PF:0.9000 Freq:49.99Hz Lamp Flux:86.5129x9 lm		
NAME:Lumino Ground-500mm-3000K-20x40D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:20x40 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

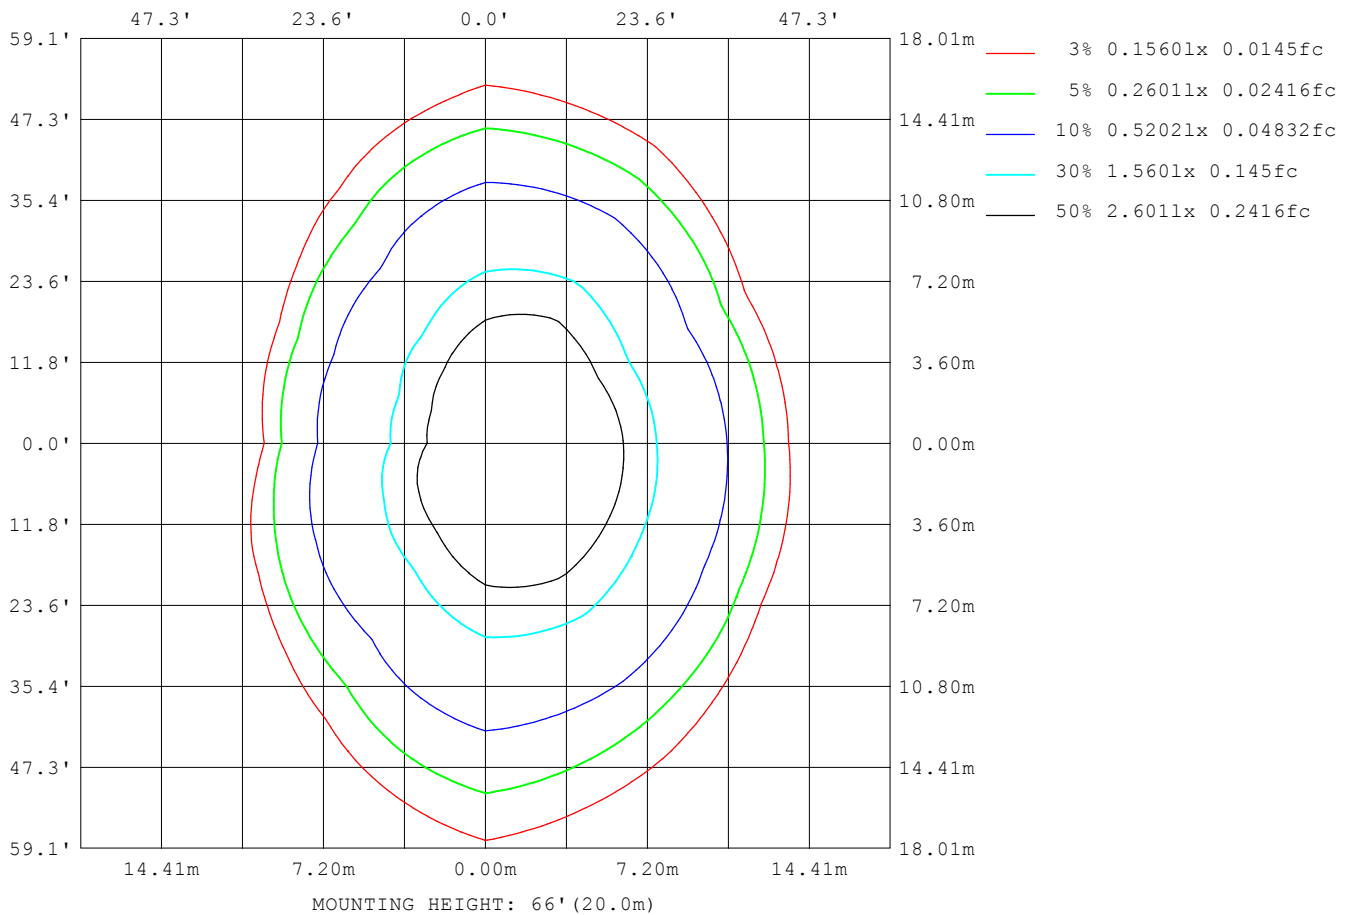

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

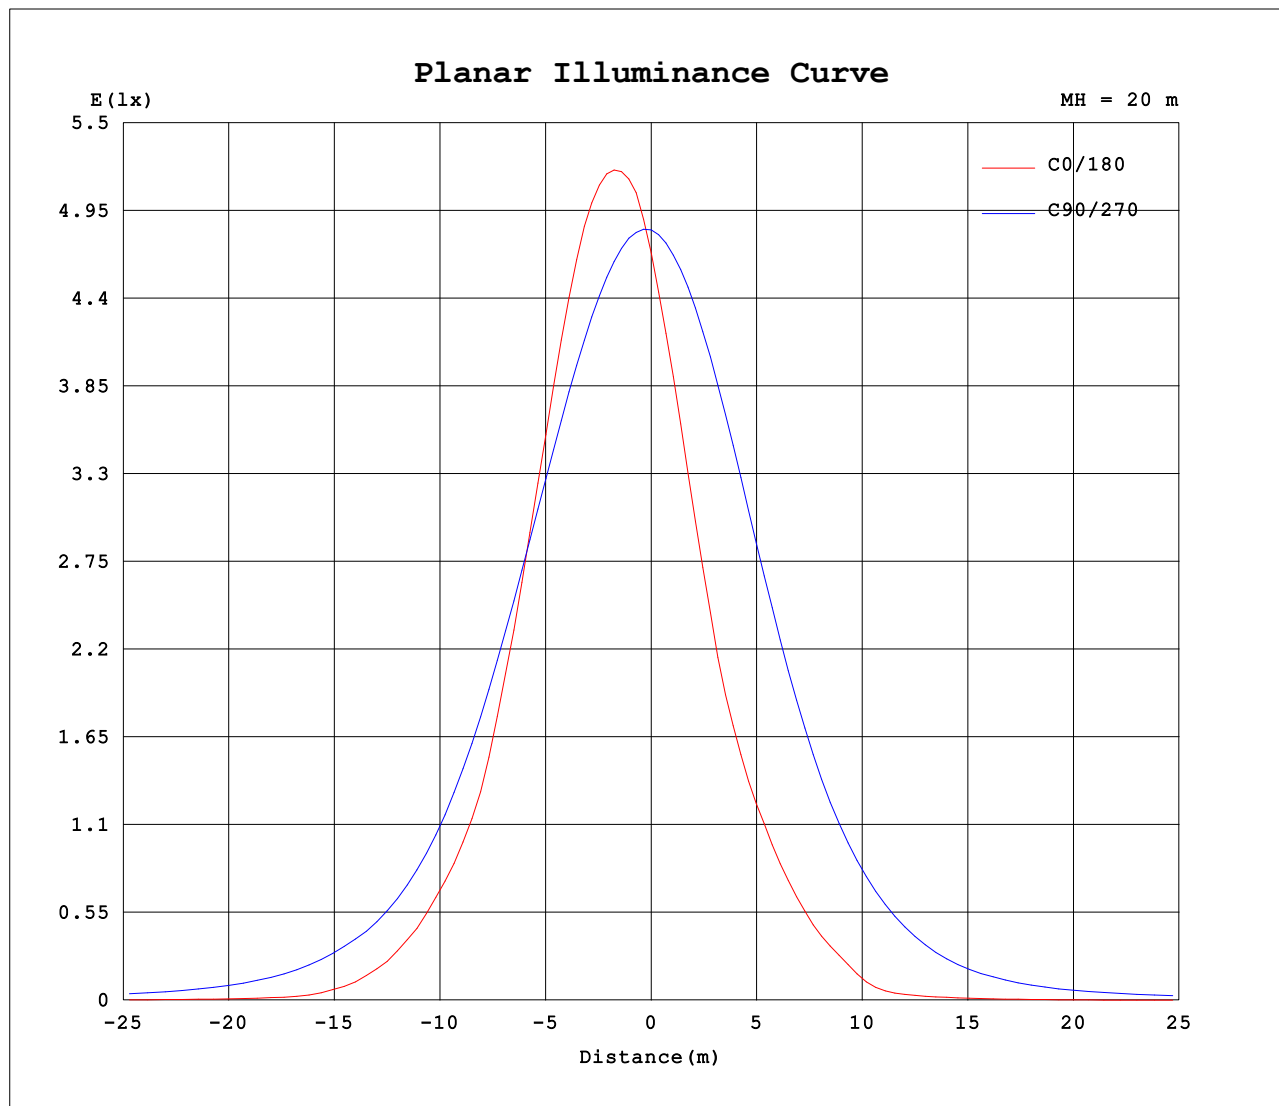


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-08-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.90V I:0.0890A P:18.500W PF:0.9000 Freq:49.99Hz Lamp Flux:86.5129x9 lm		
NAME:Lumino Ground-500mm-3000K-20x40D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:20x40 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

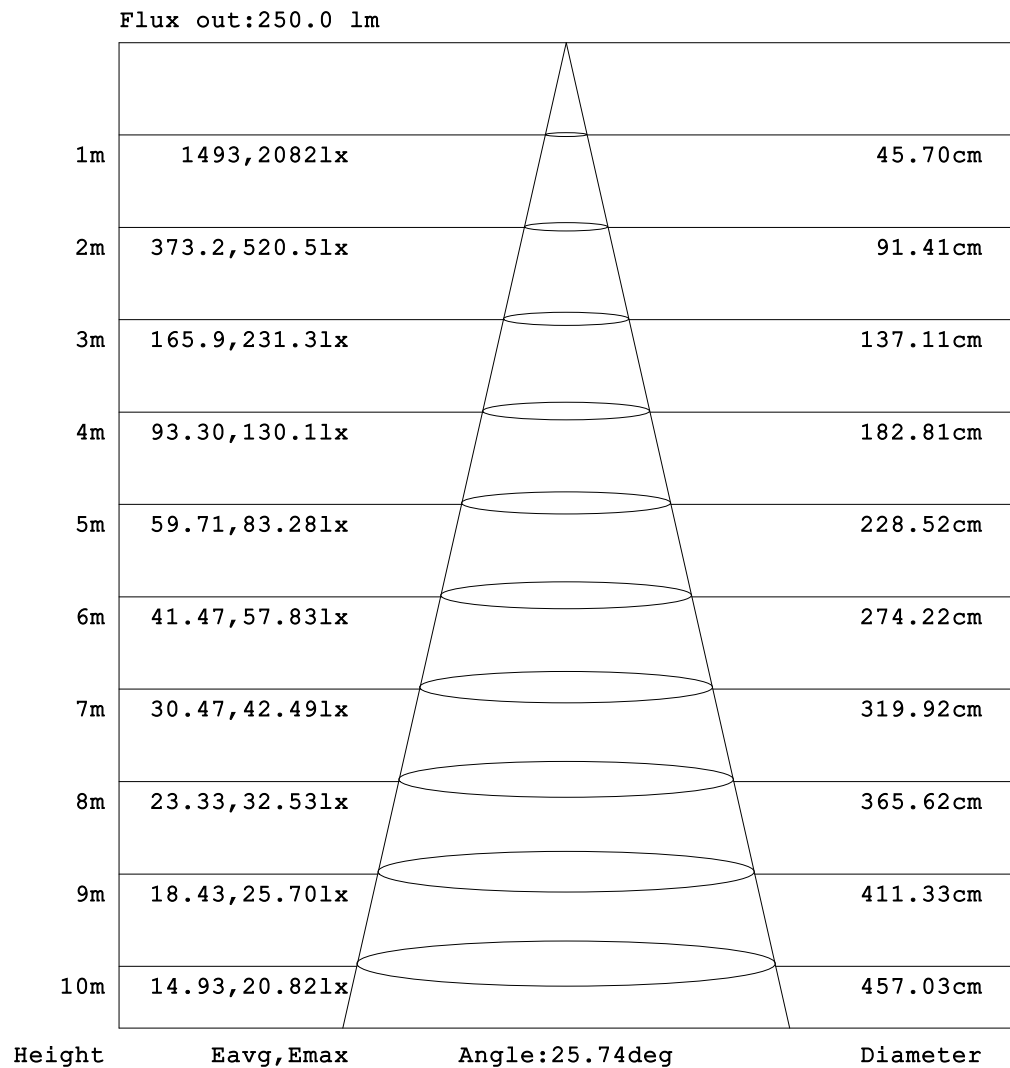

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.90V I:0.0890A P:18.500W PF:0.9000 Freq:49.99Hz Lamp Flux:86.5129x9 lm		
NAME:Lumino Ground-500mm-3000K-20x40D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:20x40 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.04	0.04	0.04	0.05	0.05	0.06	0.07	0.10	0.21	0.41	0.80	1.45	2.33	3.32	4.07	4.44	4.42	4.50	4.70
-170	0.04	0.05	0.05	0.06	0.07	0.08	0.09	0.13	0.23	0.43	0.81	1.41	2.22	3.12	3.87	4.29	4.31	4.24	4.30
-160	0.04	0.05	0.06	0.07	0.08	0.10	0.12	0.15	0.22	0.37	0.64	1.08	1.68	2.34	2.94	3.34	3.54	3.61	3.57
-150	0.04	0.05	0.07	0.08	0.10	0.11	0.13	0.15	0.20	0.29	0.44	0.70	1.05	1.45	1.87	2.20	2.40	2.48	2.47
-140	0.04	0.06	0.07	0.09	0.10	0.12	0.14	0.17	0.19	0.26	0.34	0.45	0.61	0.81	1.03	1.18	1.31	1.37	1.39
-130	0.04	0.06	0.08	0.09	0.11	0.13	0.15	0.17	0.20	0.23	0.28	0.38	0.50	0.52	0.57	0.64	0.72	0.79	0.84
-120	0.04	0.06	0.08	0.10	0.12	0.14	0.16	0.18	0.21	0.24	0.27	0.30	0.34	0.37	0.41	0.45	0.49	0.53	0.56
-110	0.04	0.06	0.08	0.11	0.13	0.15	0.17	0.19	0.22	0.25	0.28	0.31	0.34	0.37	0.40	0.42	0.45	0.48	0.51
-100	0.04	0.07	0.09	0.11	0.13	0.15	0.17	0.20	0.23	0.26	0.29	0.32	0.35	0.38	0.40	0.43	0.45	0.48	0.50
-90	0.04	0.07	0.10	0.13	0.15	0.18	0.21	0.24	0.28	0.31	0.35	0.38	0.42	0.43	0.45	0.46	0.48	0.50	0.51
-80	0.04	0.08	0.13	0.17	0.21	0.25	0.28	0.33	0.38	0.44	0.50	0.56	0.62	1.08	1.66	2.29	2.94	3.60	4.22
-70	0.04	0.10	0.16	0.21	0.24	0.29	0.34	0.41	0.50	0.61	0.71	0.84	0.97	3.07	6.37	9.94	13.6	17.4	21.0
-60	0.04	0.12	0.18	0.22	0.28	0.35	0.43	0.53	0.68	0.87	1.11	1.39	1.85	4.00	10.3	17.2	24.4	31.7	38.8
-50	0.04	0.14	0.19	0.24	0.32	0.42	0.54	0.67	0.87	1.26	1.86	2.73	3.88	5.38	14.4	27.4	41.8	56.7	70.7
-40	0.04	0.14	0.19	0.26	0.36	0.50	0.66	0.83	1.04	1.57	2.65	4.65	9.91	19.2	34.9	67.2	103	139	171
-30	0.04	0.14	0.19	0.28	0.41	0.58	0.77	1.00	1.35	1.86	4.03	10.1	24.4	50.4	93.8	156	251	354	445
-20	0.04	0.14	0.20	0.28	0.44	0.63	0.86	1.17	1.63	3.12	5.80	11.0	24.2	49.0	90.0	195	322	499	776
-10	0.04	0.14	0.19	0.28	0.46	0.66	0.90	1.25	1.86	3.35	7.52	15.0	48.9	141	294	515	850	1270	1667
0	0.04	0.14	0.19	0.27	0.45	0.65	0.90	1.23	1.73	2.75	7.00	13.2	27.8	120	269	491	802	1336	1873
10	0.04	0.14	0.19	0.28	0.45	0.65	0.88	1.20	1.67	2.89	6.45	12.1	27.2	101	221	396	681	1088	1537
20	0.04	0.14	0.19	0.28	0.42	0.61	0.82	1.09	1.47	2.15	4.52	8.12	15.7	50.7	135	240	377	608	823
30	0.04	0.14	0.19	0.27	0.39	0.55	0.72	0.93	1.19	1.57	2.34	5.90	14.2	32.3	64.3	112	182	258	325
40	0.04	0.14	0.19	0.25	0.34	0.46	0.61	0.76	0.94	1.27	1.95	3.02	4.80	8.49	16.7	39.5	65.1	90.8	113
50	0.04	0.13	0.18	0.23	0.30	0.38	0.49	0.61	0.76	0.97	1.32	1.83	2.52	3.41	9.94	19.1	29.3	39.7	49.8
60	0.04	0.11	0.17	0.21	0.26	0.32	0.39	0.47	0.57	0.69	0.83	1.00	1.20	2.78	7.78	13.3	19.1	25.0	30.7
70	0.04	0.09	0.16	0.20	0.23	0.27	0.31	0.36	0.41	0.48	0.55	0.61	0.69	2.09	4.40	6.99	9.73	12.5	15.1
80	0.04	0.07	0.10	0.15	0.19	0.23	0.26	0.28	0.31	0.35	0.38	0.41	0.44	0.69	1.03	1.43	1.86	2.28	2.68
90	0.04	0.06	0.08	0.10	0.12	0.13	0.15	0.18	0.21	0.25	0.28	0.31	0.34	0.37	0.40	0.43	0.46	0.49	0.52
100	0.04	0.06	0.08	0.09	0.11	0.12	0.13	0.17	0.20	0.24	0.28	0.32	0.36	0.40	0.44	0.48	0.51	0.55	0.59
110	0.04	0.06	0.07	0.09	0.10	0.11	0.13	0.16	0.21	0.29	0.39	0.48	0.57	0.62	0.66	0.72	0.79	0.86	0.92
120	0.04	0.06	0.07	0.08	0.09	0.11	0.12	0.14	0.21	0.28	0.36	0.45	0.54	0.62	0.70	0.77	0.84	0.90	0.97
130	0.04	0.06	0.07	0.08	0.09	0.10	0.10	0.10	0.15	0.22	0.31	0.39	0.49	0.53	0.58	0.68	0.79	0.88	0.97
140	0.04	0.05	0.06	0.08	0.08	0.08	0.09	0.09	0.10	0.15	0.24	0.35	0.54	0.75	1.01	1.31	1.57	1.79	1.95
150	0.04	0.05	0.06	0.07	0.08	0.07	0.08	0.09	0.11	0.18	0.33	0.60	1.01	1.47	1.91	2.26	2.54	2.69	2.68
160	0.04	0.05	0.05	0.06	0.07	0.07	0.08	0.10	0.15	0.30	0.56	1.00	1.59	2.29	2.91	3.35	3.57	3.60	3.52
170	0.04	0.05	0.05	0.06	0.06	0.06	0.07	0.10	0.19	0.40	0.77	1.37	2.17	3.06	3.79	4.20	4.31	4.31	4.22
180	0.04	0.04	0.04	0.05	0.05	0.06	0.07	0.10	0.21	0.41	0.80	1.45	2.33	3.32	4.07	4.44	4.42	4.50	4.72

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.90V I:0.0890A P:18.500W PF:0.9000 Freq:49.99Hz Lamp Flux:86.5129x9 lm																		
NAME:Lumino Ground-500mm-3000K-20x40D-REV2									TYPE:3000K					WEIGHT:00				
SPEC.:20x40 DEG									DIM.:500mm					SERIAL No.:01				
MFR.: 001									SUR.:0.8					Shielding Angle:				

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	4.75	4.47	3.79	2.85	1.87	1.11	0.62	0.32	0.15	0.07	0.05	0.05	0.05	0.05	0.05	0.07	0.07	0.10	
-170	4.24	3.98	3.34	2.52	1.71	1.07	0.62	0.34	0.18	0.11	0.08	0.08	0.07	0.07	0.06	0.07	0.07	0.10	
-160	3.38	3.03	2.48	1.85	1.25	0.78	0.48	0.30	0.19	0.13	0.11	0.10	0.09	0.08	0.07	0.07	0.08	0.10	
-150	2.23	1.93	1.54	1.16	0.82	0.56	0.38	0.25	0.18	0.15	0.13	0.11	0.10	0.09	0.08	0.08	0.08	0.10	
-140	1.24	1.06	0.85	0.65	0.50	0.39	0.30	0.25	0.19	0.16	0.14	0.13	0.12	0.10	0.09	0.09	0.08	0.10	
-130	0.74	0.64	0.54	0.47	0.42	0.34	0.27	0.24	0.21	0.18	0.16	0.14	0.13	0.11	0.10	0.09	0.08	0.10	
-120	0.52	0.47	0.42	0.38	0.34	0.31	0.28	0.26	0.23	0.20	0.17	0.15	0.14	0.12	0.11	0.10	0.08	0.10	
-110	0.48	0.45	0.42	0.39	0.36	0.33	0.30	0.27	0.24	0.21	0.19	0.16	0.14	0.13	0.12	0.10	0.09	0.10	
-100	0.48	0.45	0.42	0.40	0.37	0.34	0.32	0.29	0.26	0.23	0.19	0.17	0.15	0.13	0.12	0.10	0.10	0.10	
-90	0.49	0.47	0.45	0.43	0.41	0.39	0.35	0.32	0.28	0.24	0.21	0.17	0.16	0.15	0.14	0.12	0.11	0.10	
-80	3.59	2.94	2.28	1.64	1.06	0.60	0.54	0.48	0.42	0.36	0.31	0.25	0.23	0.21	0.18	0.16	0.13	0.10	
-70	17.4	13.7	10.0	6.46	3.17	1.05	0.88	0.73	0.61	0.50	0.41	0.34	0.30	0.26	0.22	0.18	0.15	0.10	
-60	32.0	25.0	18.0	11.3	5.15	2.77	2.02	1.43	0.99	0.72	0.54	0.44	0.37	0.31	0.26	0.20	0.16	0.10	
-50	59.2	46.5	33.3	20.6	10.5	6.80	4.35	2.78	1.75	1.05	0.72	0.57	0.46	0.37	0.29	0.23	0.16	0.10	
-40	151	124	94.5	63.0	38.0	20.9	11.0	5.66	2.83	1.43	1.02	0.74	0.56	0.43	0.32	0.25	0.17	0.10	
-30	415	352	268	177	106	52.0	21.2	8.92	4.77	2.60	1.41	0.94	0.66	0.48	0.35	0.26	0.18	0.10	
-20	1034	934	682	432	244	113	42.9	14.7	7.73	4.00	1.98	1.14	0.74	0.53	0.37	0.27	0.18	0.10	
-10	1768	1600	1197	727	406	206	78.6	24.1	10.2	5.09	2.30	1.28	0.80	0.56	0.39	0.27	0.18	0.10	
0	2106	1945	1439	857	461	234	84.4	22.0	10.6	5.17	2.29	1.31	0.81	0.56	0.39	0.27	0.18	0.10	
10	1682	1448	989	579	335	169	64.1	19.4	9.24	4.66	2.12	1.24	0.79	0.55	0.38	0.27	0.18	0.10	
20	855	785	554	335	179	76.9	29.4	11.8	6.44	3.40	1.68	1.07	0.72	0.52	0.37	0.27	0.18	0.10	
30	310	272	212	138	79.1	37.9	16.4	6.80	3.66	2.04	1.26	0.87	0.64	0.47	0.35	0.26	0.18	0.10	
40	103	88.2	69.4	49.5	30.2	16.7	8.67	4.50	2.13	1.22	0.91	0.69	0.54	0.42	0.32	0.25	0.17	0.10	
50	42.3	33.9	25.0	16.2	8.97	6.05	3.87	2.55	1.61	0.96	0.66	0.55	0.45	0.37	0.29	0.23	0.16	0.10	
60	25.5	20.1	14.7	9.51	4.70	2.71	1.95	1.36	0.93	0.67	0.51	0.43	0.37	0.31	0.26	0.20	0.15	0.10	
70	12.6	9.88	7.19	4.63	2.34	0.92	0.77	0.64	0.54	0.46	0.39	0.33	0.30	0.26	0.22	0.18	0.15	0.10	
80	2.29	1.87	1.46	1.07	0.73	0.49	0.45	0.41	0.37	0.33	0.29	0.25	0.23	0.20	0.18	0.16	0.13	0.10	
90	0.50	0.47	0.45	0.42	0.40	0.37	0.34	0.30	0.27	0.24	0.20	0.17	0.16	0.15	0.14	0.12	0.11	0.10	
100	0.59	0.58	0.57	0.56	0.53	0.49	0.41	0.34	0.28	0.23	0.19	0.16	0.14	0.13	0.12	0.10	0.10	0.10	
110	0.85	0.78	0.71	0.65	0.60	0.57	0.50	0.43	0.35	0.28	0.20	0.14	0.13	0.12	0.11	0.10	0.09	0.10	
120	0.87	0.78	0.70	0.62	0.54	0.48	0.42	0.35	0.29	0.22	0.16	0.13	0.12	0.11	0.10	0.10	0.08	0.10	
130	0.85	0.73	0.61	0.48	0.37	0.31	0.27	0.25	0.22	0.17	0.13	0.12	0.11	0.10	0.09	0.09	0.08	0.10	
140	1.67	1.34	1.01	0.72	0.53	0.37	0.25	0.18	0.14	0.12	0.11	0.11	0.10	0.09	0.08	0.08	0.08	0.10	
150	2.46	2.09	1.63	1.23	0.86	0.56	0.32	0.17	0.11	0.10	0.10	0.09	0.09	0.08	0.08	0.08	0.08	0.10	
160	3.35	3.05	2.53	1.89	1.27	0.76	0.44	0.25	0.13	0.09	0.08	0.08	0.08	0.07	0.07	0.07	0.07	0.10	
170	4.18	3.87	3.27	2.50	1.71	1.06	0.61	0.32	0.16	0.08	0.07	0.07	0.06	0.06	0.06	0.07	0.07	0.10	
180	4.75	4.47	3.79	2.85	1.87	1.11	0.62	0.32	0.15	0.07	0.05	0.05	0.05	0.05	0.05	0.07	0.07	0.10	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks: