

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		2747.6 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		5.0 degrees horizontal
Beam Spread	At 10% of Imax	86.0V x 40.6H
	At 50% of Imax	55.7V x 17.5H
	At 90% of Imax	25.6V x 5.5H
Beam Flux	Total	1000.4 lumens per klm.
	To 10% of Imax	867.9 lumens per klm.
	To 50% of Imax	433.8 lumens per klm.
	To 90% of Imax	82.6 lumens per klm.
	Upward LOR	1.5 %
	Downward LOR	98.6 %
Luminaire Efficiency (Light Output Ratio)		100.0 %

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-08-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.92V I:0.0890A P:18.500W PF:0.9000 Freq:49.99Hz Lamp Flux:79.8601x9 lm		
NAME:Lumino Ground-500mm-3000K-20x55D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:20x55 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

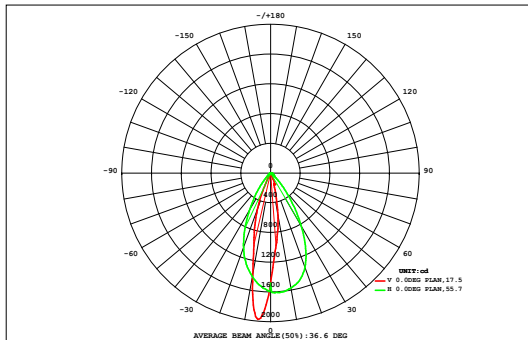

DATA OF LAMP		Eff:38.85lm/W	
MODEL		Imax (cd)	1975
NOMINAL POWER (W)	18	AVAILABILITY (%)	86.1
RATED VOLTAGE (V)	220	Avai. FLUX (lm)	619.1
NOMINAL FLUX (lm)	79.8601	LOR (%)	100.0
LAMPS INSIDE	9	TOTAL FLUX (lm)	718.7
TEST VOLTAGE (V)	220	θ @50% (H,V)	18,56DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.01	0.01	0.01	0.02	0.03	0.09	0.16	0.24	0.24	0.16	0.09	0.03	0.02	0.01	0.01	0.01	0.00	1.15	0.00
72	0.00	0.01	0.01	0.01	0.02	0.03	0.12	0.25	0.39	0.39	0.26	0.14	0.05	0.03	0.02	0.01	0.01	0.00	1.74	0.00
64	0.00	0.01	0.01	0.02	0.03	0.04	0.15	0.37	0.62	0.64	0.42	0.21	0.08	0.04	0.02	0.01	0.01	0.00	2.69	0.00
56	0.00	0.01	0.01	0.02	0.04	0.08	0.26	0.89	1.72	1.84	1.17	0.52	0.19	0.07	0.03	0.01	0.01	0.00	6.88	0.00
48	0.00	0.01	0.01	0.02	0.06	0.22	0.72	2.34	4.89	5.48	3.67	1.78	0.56	0.14	0.04	0.01	0.01	0.00	20.0	11.2
40	0.00	0.01	0.02	0.03	0.09	0.41	1.13	3.88	9.91	11.5	7.82	3.71	1.12	0.21	0.05	0.02	0.01	0.00	39.9	34.1
32	0.00	0.01	0.02	0.04	0.10	0.40	1.94	5.93	15.4	19.2	13.0	5.29	1.13	0.25	0.08	0.02	0.01	0.00	62.9	57.8
24	0.00	0.01	0.02	0.05	0.13	0.54	2.44	7.26	18.9	28.2	18.1	6.96	1.39	0.35	0.10	0.03	0.01	0.00	84.4	79.2
	0.00	0.01	0.02	0.05	0.14	0.66	2.64	8.21	20.2	34.1	20.2	9.20	1.90	0.41	0.11	0.03	0.01	0.00	97.9	92.4
	0.00	0.01	0.02	0.05	0.16	0.84	3.05	10.0	22.8	35.4	22.5	9.95	2.16	0.43	0.11	0.03	0.01	0.00	108	102
	0.00	0.01	0.02	0.05	0.17	0.95	3.05	9.82	22.0	31.3	20.6	8.61	1.87	0.40	0.11	0.03	0.01	0.00	99.1	93.9
-24	0.00	0.01	0.02	0.05	0.13	0.69	3.08	8.08	19.7	23.5	15.2	6.54	1.42	0.31	0.09	0.03	0.01	0.00	78.9	74.2
-32	0.00	0.01	0.02	0.04	0.14	0.55	1.76	5.99	14.3	15.9	9.74	4.28	1.31	0.26	0.06	0.02	0.01	0.00	54.4	48.4
-40	0.00	0.01	0.01	0.03	0.10	0.40	1.04	3.64	7.79	8.38	5.01	2.11	0.68	0.16	0.04	0.01	0.01	0.00	29.4	22.6
-48	0.00	0.01	0.01	0.02	0.05	0.14	0.52	1.65	3.12	3.22	1.85	0.69	0.22	0.08	0.03	0.01	0.01	0.00	11.6	2.79
-56	0.00	0.01	0.01	0.02	0.03	0.05	0.20	0.54	0.94	0.96	0.58	0.25	0.09	0.04	0.02	0.01	0.00	0.00	3.75	0.00
-64	0.00	0.00	0.01	0.01	0.02	0.04	0.14	0.30	0.47	0.48	0.31	0.15	0.04	0.02	0.01	0.01	0.00	0.00	2.03	0.00
-72	0.00	0.00	0.01	0.01	0.02	0.03	0.10	0.19	0.29	0.29	0.20	0.10	0.03	0.02	0.01	0.01	0.00	0.00	1.32	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)	16	24	32	40	48	56	64	72			
Φ t	0.06	0.13	0.25	0.53	1.44	6.09	22.4	69.5	164	221	141	60.6	14.3	3.23	0.93	0.31	0.12	0.06	706	---
Φ a	0.00	0.00	0.00	0.00	0.00	0.00	3.72	58.9	156	214	133	51.0	1.76	0.00	0.00	0.00	0.00	0.00	---	619


one-half-peak spread: U:26.6,D:27.4 , L:9.5,R:8.3NEMA Beam Type: Type 3 x 5 (H x V)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.92V I:0.0890A P:18.500W PF:0.9000 Freq:49.99Hz Lamp Flux:79.8601x9 lm		
NAME:Lumino Ground-500mm-3000K-20x55D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:20x55 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

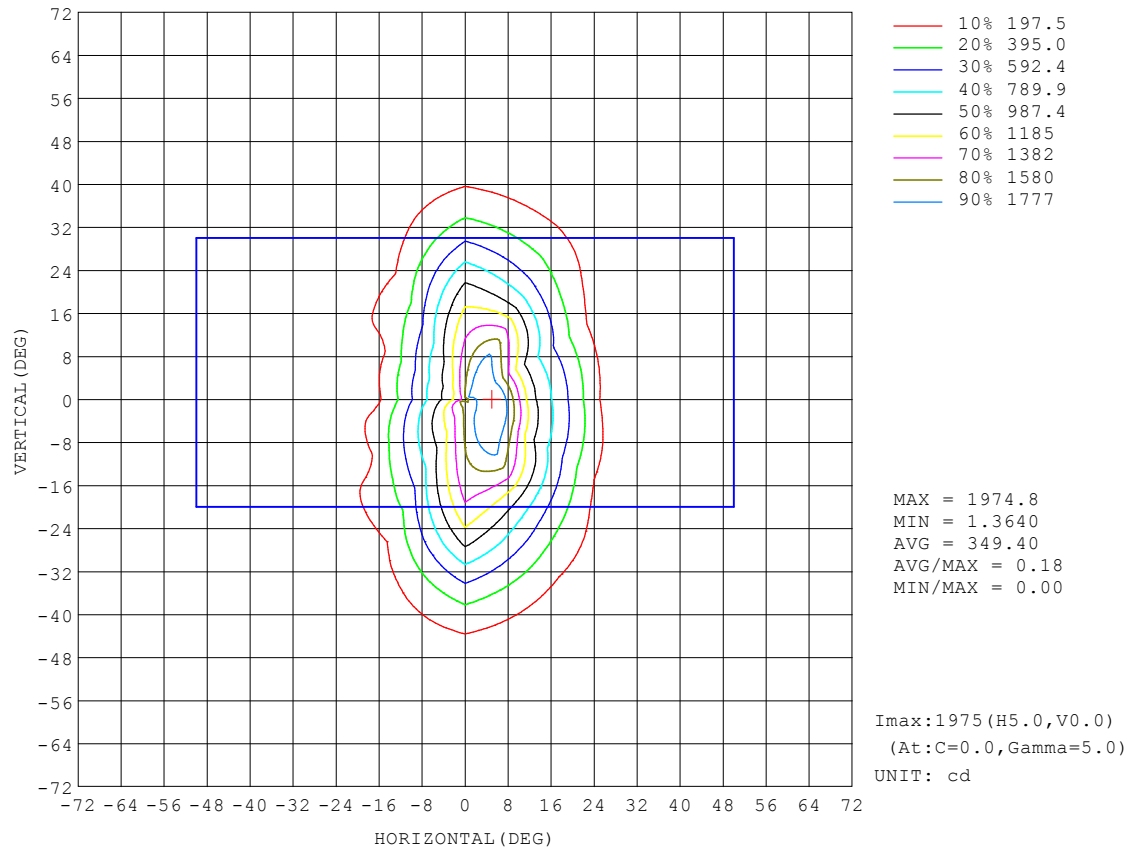


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.92V I:0.0890A P:18.500W PF:0.9000 Freq:49.99Hz Lamp Flux:79.8601x9 lm		
NAME:Lumino Ground-500mm-3000K-20x55D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:20x55 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

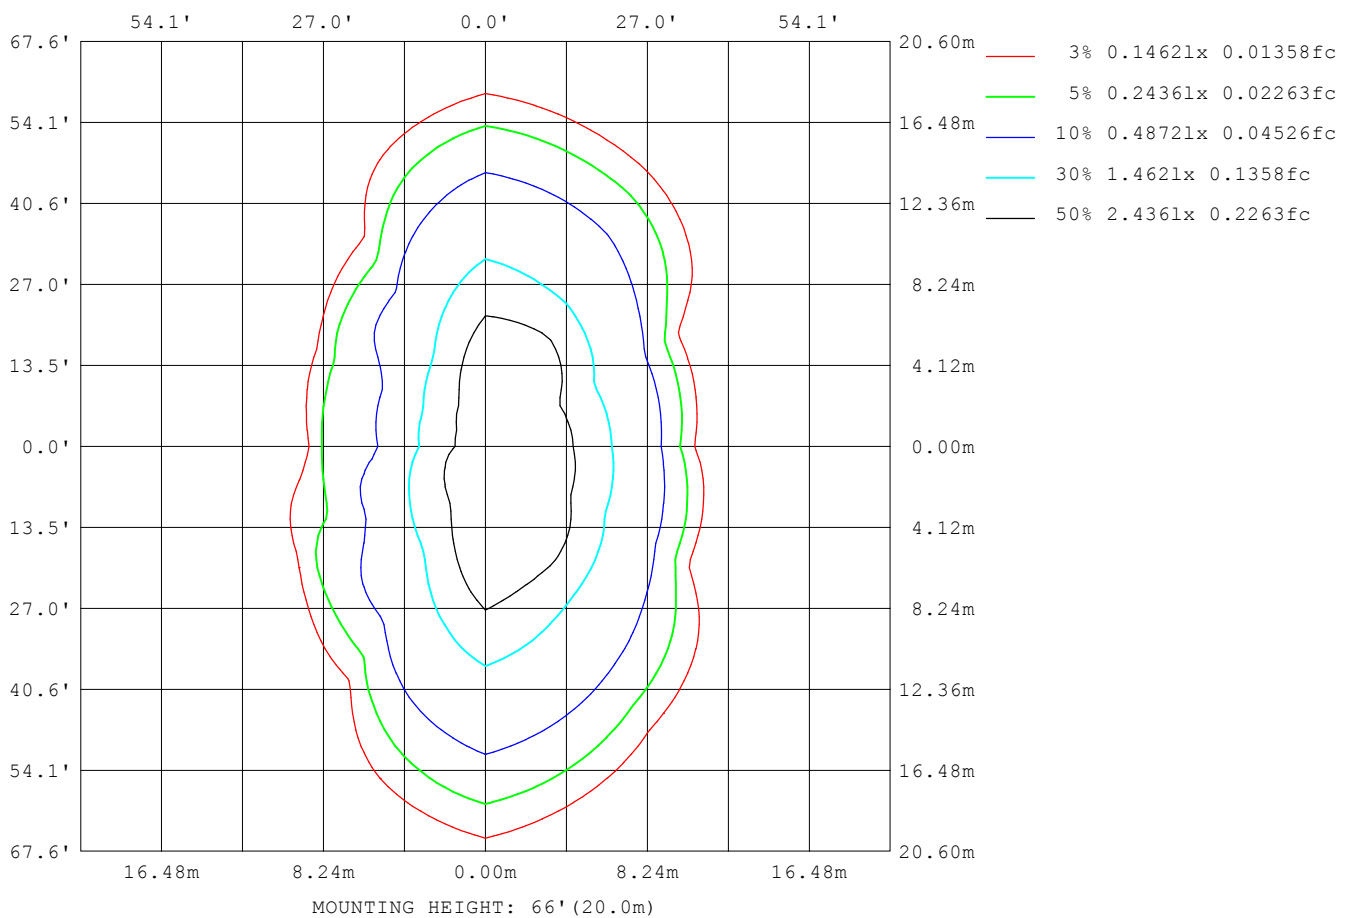

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

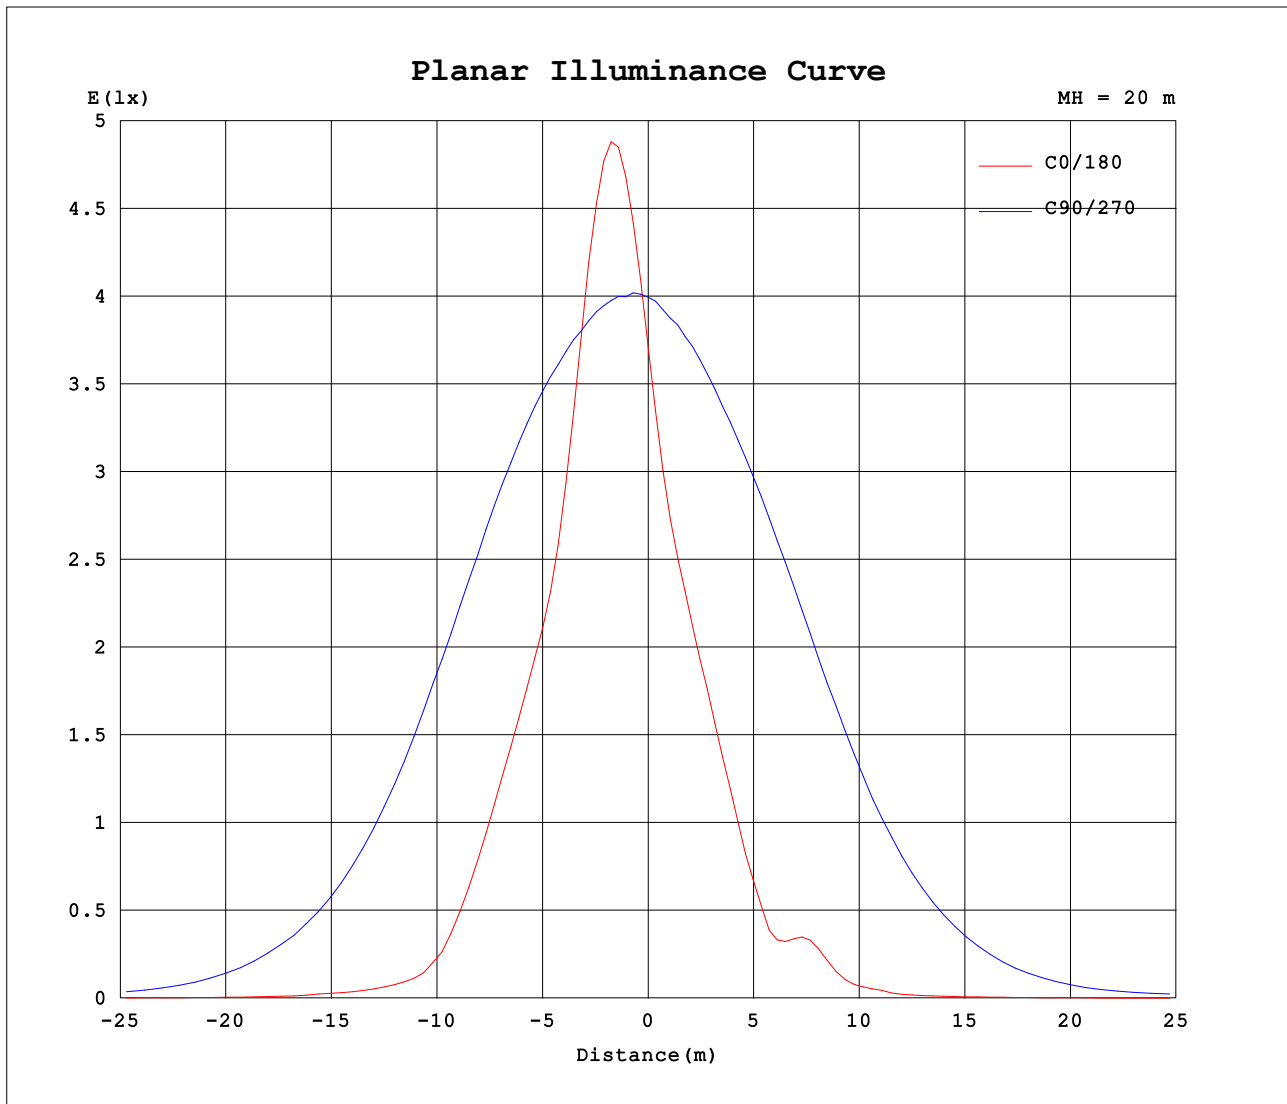


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-08-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.92V I:0.0890A P:18.500W PF:0.9000 Freq:49.99Hz Lamp Flux:79.8601x9 lm		
NAME:Lumino Ground-500mm-3000K-20x55D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:20x55 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

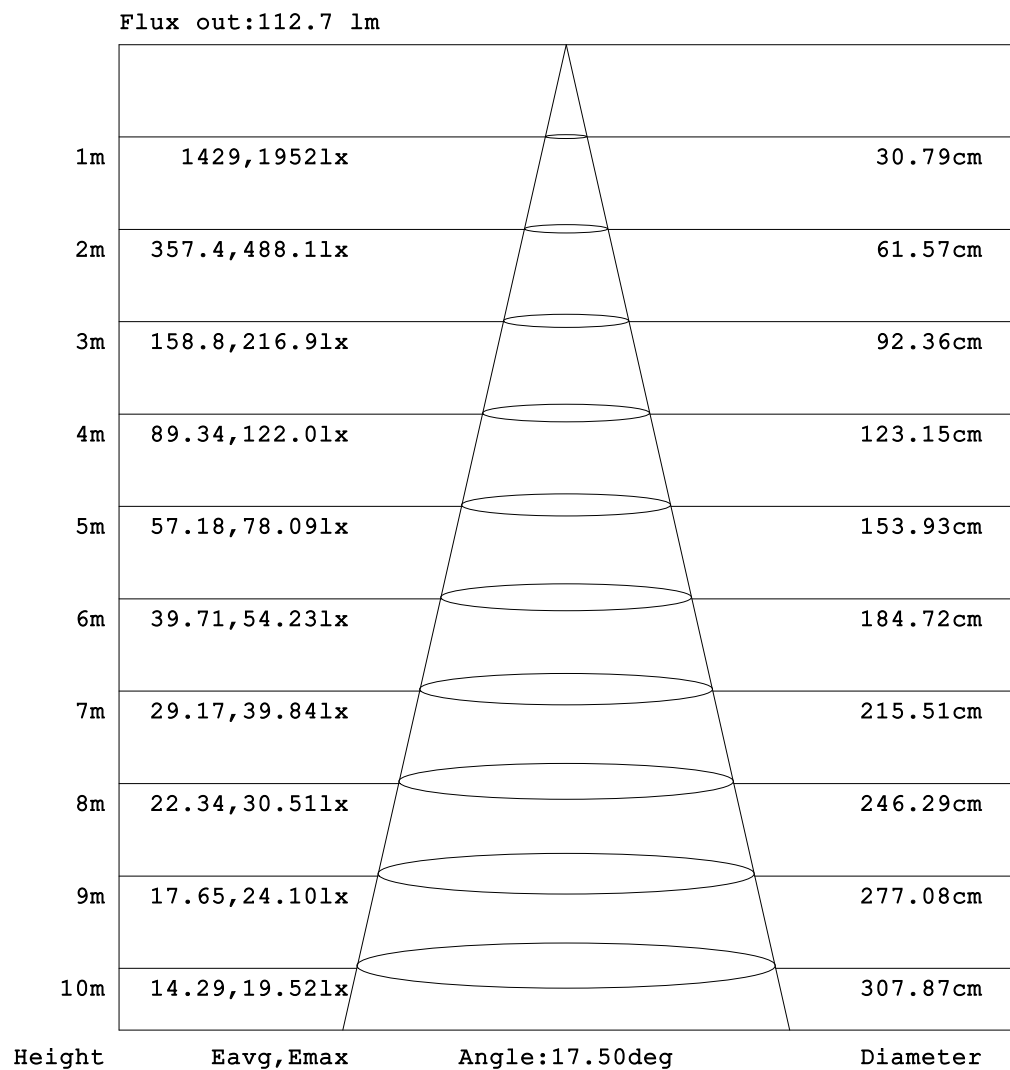

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:20DEG
 Operators:01
 Test Date:2025-08-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.700m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.92V I:0.0890A P:18.500W PF:0.9000 Freq:49.99Hz Lamp Flux:79.8601x9 lm								
NAME:Lumino Ground-500mm-3000K-20x55D-REV2					TYPE:3000K			WEIGHT:00
SPEC.:20x55 DEG					DIM.:500mm			SERIAL No.:01
MFR.: 001					SUR.:0.8			Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.08	0.11	0.20	0.46	0.93	1.63	2.64	3.56	3.93	3.84	3.79	4.03
-170	0.07	0.08	0.09	0.10	0.11	0.12	0.13	0.16	0.21	0.33	0.60	1.09	1.81	2.72	3.50	3.94	3.89	3.78	3.81
-160	0.07	0.09	0.11	0.13	0.15	0.17	0.19	0.23	0.28	0.39	0.61	0.98	1.54	2.25	2.87	3.24	3.37	3.35	3.28
-150	0.07	0.10	0.13	0.15	0.18	0.21	0.25	0.28	0.33	0.42	0.57	0.85	1.24	1.74	2.25	2.69	3.07	3.38	3.64
-140	0.07	0.11	0.14	0.18	0.21	0.25	0.29	0.33	0.39	0.47	0.58	0.75	0.98	1.27	1.58	1.87	2.18	2.44	2.65
-130	0.07	0.11	0.15	0.20	0.24	0.28	0.33	0.38	0.63	0.84	0.83	0.80	0.87	0.99	1.25	1.46	1.63	1.78	1.93
-120	0.07	0.12	0.16	0.21	0.26	0.31	0.36	0.55	1.16	1.65	1.98	2.19	2.29	2.56	3.29	4.00	4.75	5.57	6.50
-110	0.07	0.12	0.17	0.22	0.28	0.33	0.38	0.59	0.95	1.49	2.26	3.16	4.00	4.93	6.08	7.35	8.71	10.1	11.5
-100	0.07	0.12	0.18	0.23	0.29	0.34	0.39	0.58	0.78	0.99	1.22	1.47	1.73	2.03	2.33	2.61	2.89	3.15	3.41
-90	0.07	0.12	0.18	0.23	0.29	0.34	0.40	0.58	0.77	0.95	1.14	1.32	1.50	1.80	2.10	2.40	2.69	2.99	3.29
-80	0.07	0.12	0.18	0.23	0.29	0.35	0.41	0.54	0.67	0.80	0.91	1.03	1.15	1.78	2.52	3.30	4.11	4.92	5.71
-70	0.07	0.12	0.18	0.24	0.30	0.37	0.43	0.55	0.67	0.80	0.92	1.04	1.16	2.62	4.83	7.24	9.80	12.4	14.9
-60	0.07	0.12	0.18	0.24	0.31	0.39	0.49	0.61	0.78	0.94	1.11	1.31	1.59	3.07	7.51	12.4	17.6	22.9	28.0
-50	0.07	0.11	0.18	0.25	0.33	0.45	0.59	0.75	0.93	1.21	1.60	2.17	2.98	4.14	11.8	24.3	39.6	56.3	71.2
-40	0.07	0.12	0.17	0.25	0.37	0.52	0.70	0.90	1.12	1.53	2.37	4.59	9.91	21.2	40.1	94.4	165	245	320
-30	0.07	0.11	0.16	0.25	0.39	0.58	0.81	1.05	1.38	1.93	3.86	10.4	23.2	41.2	75.2	160	368	604	832
-20	0.07	0.10	0.15	0.25	0.41	0.62	0.88	1.18	1.62	2.94	5.13	8.91	21.1	67.0	172	293	521	941	1353
-10	0.07	0.09	0.14	0.24	0.41	0.64	0.91	1.23	1.84	3.06	5.96	11.6	30.7	100	139	338	672	1020	1572
0	0.07	0.08	0.13	0.22	0.38	0.62	0.88	1.18	1.59	2.61	5.09	8.79	19.1	57.8	168	235	577	938	1483
10	0.07	0.10	0.15	0.26	0.42	0.66	0.92	1.22	1.65	2.68	5.11	8.80	20.8	60.5	143	199	518	879	1413
20	0.07	0.11	0.18	0.28	0.44	0.66	0.92	1.18	1.54	2.28	4.08	6.66	12.2	39.8	98.4	210	385	728	1068
30	0.07	0.13	0.19	0.30	0.44	0.63	0.87	1.09	1.36	1.73	2.63	6.01	15.7	33.5	54.6	97.9	235	402	565
40	0.07	0.13	0.21	0.31	0.44	0.59	0.79	0.99	1.18	1.49	2.04	3.01	5.04	9.87	19.6	53.7	96.7	144	186
50	0.07	0.13	0.23	0.32	0.42	0.55	0.69	0.86	1.06	1.24	1.52	1.91	2.45	3.18	8.55	16.3	25.1	34.2	42.9
60	0.07	0.13	0.23	0.32	0.42	0.52	0.64	0.76	0.90	1.06	1.22	1.38	1.53	2.71	6.38	10.4	14.6	18.9	23.0
70	0.07	0.14	0.23	0.33	0.42	0.51	0.61	0.72	0.84	0.96	1.09	1.21	1.32	2.44	4.20	6.14	8.15	10.2	12.1
80	0.07	0.14	0.21	0.29	0.39	0.51	0.60	0.71	0.82	0.92	1.04	1.15	1.25	1.63	2.09	2.60	3.13	3.67	4.18
90	0.07	0.14	0.21	0.28	0.35	0.42	0.49	0.61	0.73	0.86	0.98	1.10	1.22	1.40	1.58	1.76	1.94	2.12	2.30
100	0.07	0.14	0.21	0.27	0.32	0.38	0.44	0.55	0.66	0.77	0.89	1.02	1.18	1.43	1.66	1.88	2.10	2.32	2.54
110	0.07	0.14	0.19	0.25	0.31	0.36	0.42	0.53	0.67	0.83	0.99	1.17	1.39	1.71	2.12	2.57	3.06	3.54	4.00
120	0.07	0.13	0.18	0.23	0.28	0.35	0.41	0.49	0.64	0.82	1.04	1.27	1.33	1.32	2.05	3.13	4.10	5.01	5.95
130	0.07	0.12	0.17	0.21	0.27	0.32	0.35	0.40	0.54	0.57	0.62	0.74	0.86	1.00	1.34	1.55	1.69	1.84	2.01
140	0.07	0.11	0.15	0.19	0.24	0.27	0.31	0.36	0.41	0.48	0.46	0.65	0.78	1.18	1.63	1.96	2.29	2.59	2.83
150	0.07	0.10	0.13	0.17	0.20	0.22	0.27	0.30	0.35	0.22	0.46	0.78	1.23	1.80	2.42	2.86	3.17	3.04	2.92
160	0.07	0.09	0.11	0.14	0.15	0.18	0.20	0.24	0.17	0.32	0.56	0.90	1.43	2.18	2.89	3.33	3.50	3.42	3.29
170	0.07	0.08	0.09	0.10	0.11	0.13	0.14	0.15	0.16	0.30	0.57	1.04	1.74	2.66	3.49	3.91	3.92	3.89	3.79
180	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.08	0.11	0.20	0.46	0.93	1.63	2.64	3.56	3.93	3.84	3.79	4.06

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.92V I:0.0890A P:18.500W PF:0.9000 Freq:49.99Hz Lamp Flux:79.8601x9 lm																		
NAME:Lumino Ground-500mm-3000K-20x55D-REV2									TYPE:3000K					WEIGHT:00				
SPEC.:20x55 DEG									DIM.:500mm					SERIAL No.:01				
MFR.: 001									SUR.:0.8					Shielding Angle:				

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	4.18	4.06	3.45	2.46	1.52	0.90	0.53	0.33	0.24	0.10	0.15	0.13	0.12	0.10	0.08	0.08	0.08	0.10	
-170	3.78	3.64	3.13	2.30	1.51	0.96	0.62	0.42	0.30	0.19	0.20	0.18	0.16	0.13	0.11	0.10	0.09	0.10	
-160	3.23	3.07	2.57	1.92	1.30	0.86	0.60	0.45	0.34	0.26	0.26	0.22	0.20	0.17	0.13	0.11	0.10	0.10	
-150	3.17	2.65	2.05	1.53	1.14	0.83	0.59	0.45	0.37	0.33	0.29	0.26	0.23	0.19	0.16	0.13	0.10	0.10	
-140	2.28	1.88	1.45	1.10	0.88	0.72	0.59	0.50	0.44	0.37	0.33	0.29	0.26	0.21	0.18	0.14	0.11	0.10	
-130	1.71	1.50	1.29	1.07	0.83	0.76	0.74	0.74	0.68	0.52	0.36	0.32	0.28	0.24	0.20	0.16	0.12	0.10	
-120	5.54	4.68	3.85	2.98	2.00	1.59	1.47	1.30	1.07	0.77	0.45	0.35	0.30	0.25	0.21	0.16	0.12	0.10	
-110	9.82	8.09	6.38	4.72	3.19	2.10	1.68	1.30	0.97	0.71	0.50	0.37	0.32	0.27	0.22	0.17	0.13	0.10	
-100	3.06	2.70	2.33	1.97	1.60	1.26	1.09	0.94	0.79	0.64	0.50	0.37	0.32	0.27	0.22	0.18	0.14	0.10	
-90	2.93	2.56	2.20	1.84	1.47	1.11	0.99	0.86	0.74	0.62	0.50	0.37	0.33	0.28	0.24	0.19	0.15	0.10	
-80	4.90	4.07	3.24	2.43	1.67	1.02	0.91	0.81	0.70	0.60	0.49	0.39	0.35	0.30	0.26	0.21	0.15	0.10	
-70	12.4	9.80	7.23	4.81	2.59	1.11	0.97	0.84	0.72	0.60	0.49	0.40	0.35	0.30	0.26	0.22	0.17	0.10	
-60	23.1	18.0	12.9	8.11	3.68	1.99	1.51	1.14	0.86	0.66	0.51	0.43	0.37	0.32	0.26	0.21	0.17	0.10	
-50	57.5	41.9	27.5	15.4	7.57	5.18	3.12	1.96	1.26	0.80	0.58	0.48	0.40	0.33	0.27	0.21	0.17	0.10	
-40	262	193	122	62.0	31.1	15.2	7.79	4.14	2.11	1.02	0.73	0.55	0.43	0.34	0.27	0.21	0.16	0.10	
-30	685	513	338	198	103	47.5	16.8	6.38	3.50	1.88	0.95	0.64	0.47	0.35	0.27	0.21	0.16	0.10	
-20	1174	907	613	352	139	43.5	21.0	9.75	5.31	2.80	1.32	0.73	0.49	0.36	0.26	0.20	0.15	0.10	
-10	1796	1327	823	491	215	64.1	29.2	13.9	6.50	3.31	1.44	0.78	0.50	0.36	0.26	0.19	0.15	0.10	
0	1975	1399	862	532	199	57.9	27.1	12.3	6.32	3.18	1.27	0.76	0.48	0.34	0.24	0.18	0.14	0.10	
10	1666	1172	697	402	160	52.1	25.4	12.2	6.02	3.10	1.35	0.79	0.52	0.38	0.27	0.20	0.15	0.10	
20	968	783	519	278	112	34.3	17.6	8.13	4.68	2.48	1.17	0.76	0.54	0.41	0.30	0.22	0.16	0.10	
30	488	388	287	175	90.0	39.0	13.7	5.32	2.93	1.59	0.98	0.71	0.55	0.42	0.33	0.24	0.17	0.10	
40	160	124	86.2	50.3	26.0	12.7	6.48	3.51	1.74	1.08	0.84	0.67	0.54	0.43	0.33	0.25	0.18	0.10	
50	35.8	27.9	19.9	12.3	6.56	4.69	3.09	2.08	1.40	0.97	0.75	0.64	0.53	0.43	0.34	0.26	0.19	0.10	
60	19.2	15.2	11.2	7.33	3.74	2.27	1.77	1.38	1.08	0.88	0.72	0.61	0.52	0.43	0.35	0.27	0.20	0.10	
70	10.2	8.19	6.21	4.28	2.52	1.39	1.23	1.08	0.94	0.83	0.71	0.59	0.51	0.43	0.35	0.27	0.19	0.10	
80	3.67	3.15	2.62	2.12	1.67	1.30	1.18	1.07	0.95	0.82	0.70	0.58	0.50	0.42	0.35	0.27	0.18	0.10	
90	2.16	2.02	1.87	1.73	1.59	1.44	1.29	1.14	0.99	0.84	0.69	0.53	0.46	0.39	0.32	0.25	0.17	0.10	
100	2.38	2.23	2.07	1.91	1.75	1.58	1.40	1.22	1.05	0.86	0.68	0.51	0.44	0.37	0.30	0.23	0.16	0.10	
110	3.69	3.35	2.98	2.61	2.23	1.88	1.54	1.25	1.01	0.81	0.63	0.49	0.42	0.35	0.29	0.22	0.15	0.10	
120	5.18	4.47	3.79	3.11	2.47	2.19	1.97	1.65	1.22	0.83	0.55	0.45	0.39	0.33	0.27	0.21	0.14	0.10	
130	1.82	1.65	1.49	1.30	1.08	1.09	1.10	1.03	0.89	0.66	0.45	0.41	0.36	0.30	0.24	0.19	0.14	0.10	
140	2.48	2.08	1.65	1.24	0.89	0.78	0.68	0.59	0.52	0.43	0.40	0.36	0.32	0.27	0.22	0.17	0.13	0.10	
150	2.90	2.87	2.41	1.86	1.32	0.84	0.56	0.44	0.39	0.36	0.33	0.31	0.27	0.23	0.19	0.15	0.12	0.10	
160	3.27	3.16	2.69	2.09	1.39	0.81	0.51	0.39	0.33	0.28	0.28	0.25	0.22	0.19	0.15	0.13	0.10	0.10	
170	3.76	3.56	3.08	2.21	1.54	0.97	0.59	0.37	0.29	0.19	0.21	0.19	0.17	0.15	0.12	0.10	0.09	0.10	
180	4.18	4.06	3.45	2.46	1.52	0.90	0.53	0.33	0.24	0.10	0.15	0.13	0.12	0.10	0.08	0.08	0.08	0.10	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks: