

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		3944.8 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		2.0 degrees horizontal
Beam Spread	At 10% of Imax	52.2V x 46.8H
	At 50% of Imax	23.6V x 22.0H
	At 90% of Imax	8.8V x 8.3H
Beam Flux	Total	1000.6 lumens per klm.
	To 10% of Imax	744.0 lumens per klm.
	To 50% of Imax	352.9 lumens per klm.
	To 90% of Imax	74.3 lumens per klm.
	Upward LOR	0.7 %
	Downward LOR	99.4 %
Luminaire Efficiency (Light Output Ratio)		100.0 %

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-08-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.00V I:0.0500A P:6.6000W PF:0.9000 Freq:50.00Hz Lamp Flux:272.31x1 lm		
NAME:Lumino Ground-500mm-RGBW 4000K-25D-REV2	TYPE:RGBW-4000K	WEIGHT:00
SPEC.:25 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

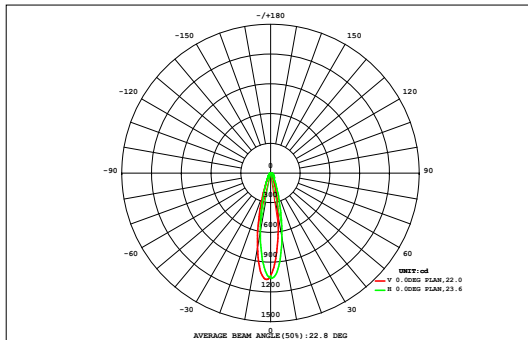

DATA OF LAMP		Eff:41.26lm/W	
MODEL		Imax(cd)	1074
NOMINAL POWER(W)	6.4	AVAILABILITY(%)	74.3
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	202.4
NOMINAL FLUX(lm)	272.31	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	272.3
TEST VOLTAGE(V)	220	θ @50% (H,V)	22,24DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.02	0.03	0.06	0.09	0.12	0.16	0.19	0.22	0.24	0.24	0.20	0.16	0.12	0.09	0.06	0.04	0.02	0.01	2.07	0.00
45	0.02	0.04	0.07	0.11	0.16	0.21	0.25	0.29	0.32	0.31	0.28	0.23	0.17	0.12	0.08	0.05	0.03	0.01	2.77	0.00
40	0.03	0.05	0.09	0.14	0.20	0.27	0.34	0.39	0.43	0.43	0.38	0.32	0.24	0.17	0.11	0.07	0.04	0.02	3.73	0.00
35	0.03	0.06	0.10	0.16	0.25	0.36	0.47	0.57	0.65	0.65	0.58	0.47	0.35	0.23	0.15	0.09	0.05	0.03	5.25	0.00
30	0.04	0.07	0.11	0.20	0.32	0.48	0.69	0.89	1.06	1.08	0.95	0.74	0.51	0.33	0.19	0.11	0.06	0.04	7.86	3.92
25	0.05	0.08	0.13	0.24	0.41	0.66	1.02	1.47	1.86	1.96	1.71	1.22	0.76	0.45	0.25	0.14	0.08	0.05	12.5	9.67
20	0.05	0.09	0.16	0.29	0.50	0.87	1.49	2.40	3.29	3.59	3.03	1.98	1.11	0.62	0.35	0.18	0.10	0.05	20.2	17.6
15	0.05	0.09	0.17	0.33	0.61	1.09	1.99	3.54	5.23	5.81	4.70	2.97	1.64	0.86	0.45	0.23	0.12	0.06	29.9	27.7
10	0.05	0.09	0.18	0.35	0.66	1.26	2.39	4.36	6.73	7.59	6.22	4.13	2.21	1.08	0.53	0.26	0.13	0.07	38.3	36.1
5	0.05	0.09	0.18	0.36	0.69	1.35	2.62	4.88	7.20	7.75	6.55	4.32	2.31	1.12	0.55	0.27	0.13	0.07	40.5	38.4
0	0.05	0.09	0.18	0.36	0.69	1.32	2.46	4.17	5.71	6.07	5.08	3.38	1.89	0.97	0.50	0.25	0.13	0.07	33.4	31.2
-5	0.05	0.09	0.17	0.32	0.60	1.06	1.79	2.76	3.67	3.89	3.24	2.24	1.35	0.76	0.42	0.22	0.12	0.06	22.8	20.4
-10	0.04	0.08	0.14	0.27	0.47	0.77	1.18	1.68	2.12	2.20	1.86	1.36	0.90	0.56	0.33	0.18	0.10	0.06	14.3	11.5
-15	0.04	0.07	0.12	0.21	0.35	0.54	0.77	1.01	1.21	1.24	1.08	0.84	0.60	0.41	0.25	0.14	0.08	0.05	9.02	5.33
-20	0.03	0.06	0.10	0.17	0.26	0.38	0.52	0.64	0.73	0.74	0.66	0.54	0.42	0.30	0.19	0.12	0.07	0.04	5.96	0.52
-25	0.02	0.05	0.08	0.13	0.20	0.28	0.36	0.43	0.48	0.49	0.44	0.37	0.30	0.22	0.15	0.10	0.06	0.03	4.18	0.00
-30	0.02	0.04	0.07	0.10	0.15	0.20	0.26	0.31	0.34	0.35	0.31	0.27	0.22	0.17	0.12	0.08	0.05	0.02	3.06	0.00
-35	0.01	0.03	0.05	0.08	0.11	0.15	0.19	0.22	0.25	0.26	0.23	0.20	0.16	0.12	0.09	0.06	0.04	0.02	2.26	0.00
-40	0.01	0.03	0.05	0.08	0.11	0.15	0.19	0.22	0.25	0.26	0.23	0.20	0.16	0.12	0.09	0.06	0.04	0.02	2.26	0.00
-45	0.01	0.03	0.05	0.08	0.11	0.15	0.19	0.22	0.25	0.26	0.23	0.20	0.16	0.12	0.09	0.06	0.04	0.02	2.26	0.00
HORIZONTAL(DEG)																				
Φ t	0.66	1.19	2.17	3.91	6.75	11.4	19.0	30.2	41.5	44.6	37.5	25.7	15.3	8.58	4.78	2.58	1.40	0.75	258	---
Φ a	0.00	0.00	0.00	0.00	0.87	7.12	15.4	26.8	38.3	41.4	34.3	22.4	11.6	4.29	0.00	0.00	0.00	0.00	---	202

one-half-peak spread: U:11.8,D:11.9 , L:10.5,R:11.8


NEMA Beam Type: Type 4

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.00V I:0.0500A P:6.6000W PF:0.9000 Freq:50.00Hz Lamp Flux:272.31x1 lm		
NAME:Lumino Ground-500mm-RGBW 4000K-25D-REV2	TYPE:RGBW-4000K	WEIGHT:00
SPEC.:25 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

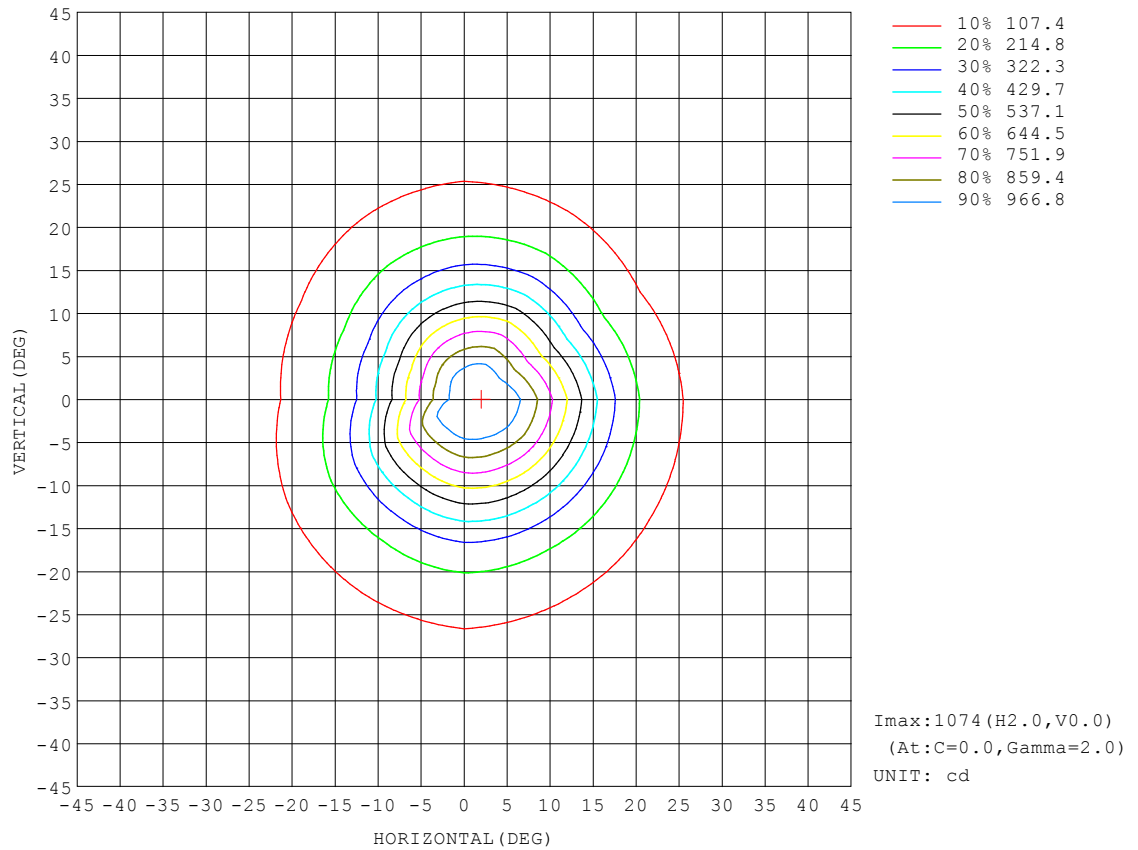


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:220.00V I:0.0500A P:6.6000W PF:0.9000 Freq:50.00Hz Lamp Flux:272.31x1 lm		
NAME:Lumino Ground-500mm-RGBW 4000K-25D-REV2	TYPE:RGBW-4000K	WEIGHT:00
SPEC.:25 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

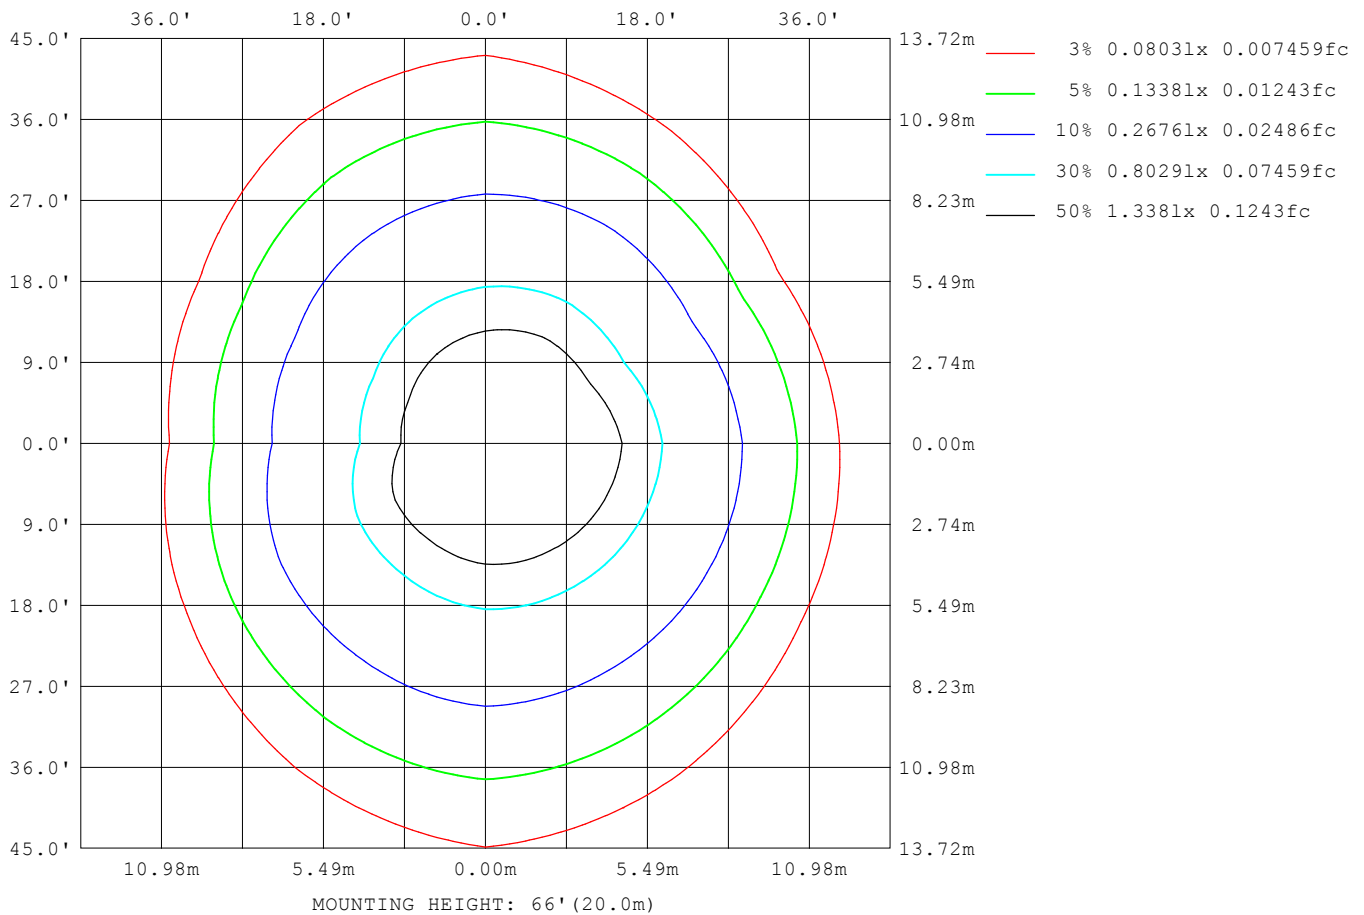

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

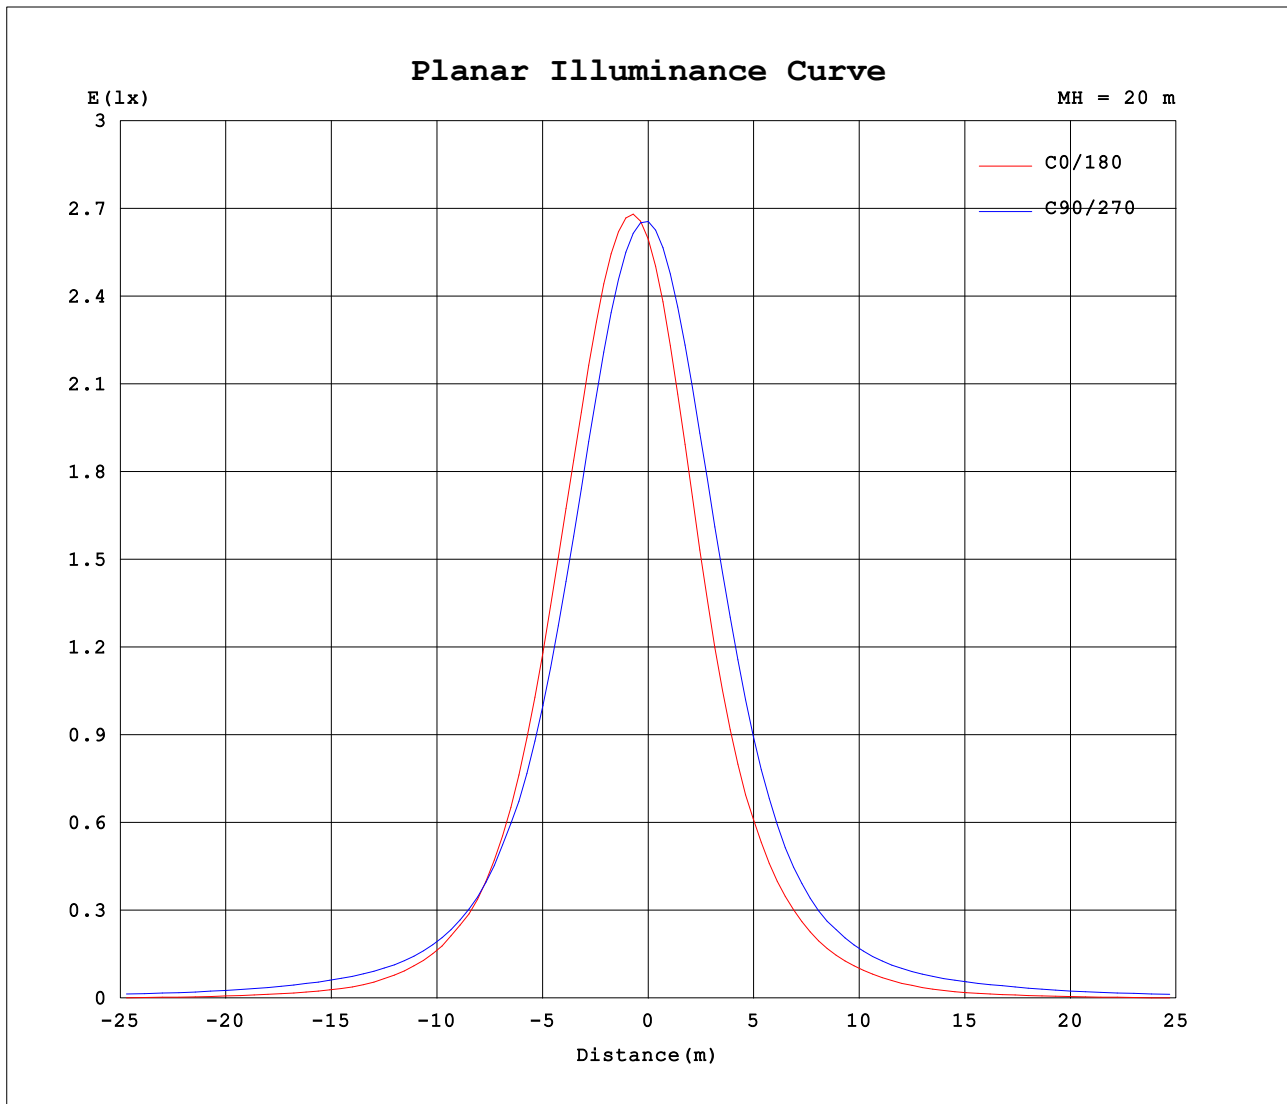


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.00V I:0.0500A P:6.6000W PF:0.9000 Freq:50.00Hz Lamp Flux:272.31x1 lm		
NAME:Lumino Ground-500mm-RGBW 4000K-25D-REV2	TYPE:RGBW-4000K	WEIGHT:00
SPEC.:25 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

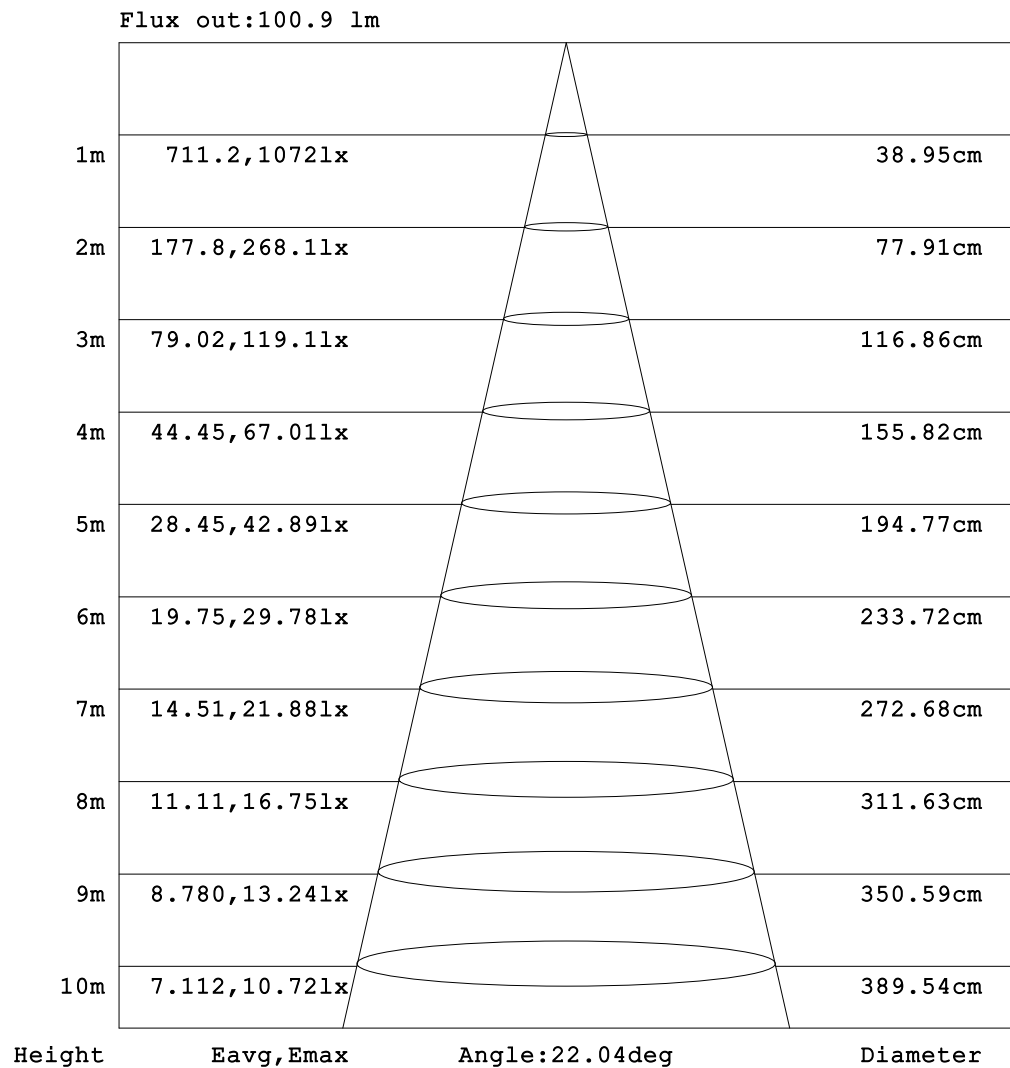

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:20DEG
 Operators:01
 Test Date:2025-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.700m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.00V I:0.0500A P:6.6000W PF:0.9000 Freq:50.00Hz Lamp Flux:272.31x1 lm									
NAME:Lumino Ground-500mm-RGBW 4000K-25D-REV2					TYPE:RGBW-4000K			WEIGHT:00	
SPEC.:25 DEG					DIM.:500mm			SERIAL No.:01	
MFR.: 001					SUR.:0.8			Shielding Angle:	

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.02	0.02	0.02	0.02	0.02	0.03	0.03	0.04	0.08	0.12	0.22	0.39	0.68	1.06	1.40	1.51	1.46	1.45	1.49
-170	0.02	0.02	0.02	0.03	0.03	0.04	0.04	0.06	0.09	0.13	0.22	0.38	0.63	0.97	1.31	1.54	1.56	1.54	1.55
-160	0.02	0.02	0.03	0.03	0.04	0.05	0.06	0.07	0.09	0.13	0.18	0.29	0.44	0.66	0.90	1.12	1.27	1.38	1.43
-150	0.02	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.10	0.12	0.15	0.19	0.26	0.35	0.46	0.59	0.70	0.78	0.81
-140	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.09	0.10	0.12	0.13	0.15	0.16	0.19	0.22	0.27	0.32	0.36	0.38
-130	0.02	0.03	0.04	0.05	0.06	0.07	0.09	0.10	0.11	0.12	0.13	0.14	0.15	0.16	0.17	0.18	0.20	0.21	0.23
-120	0.02	0.03	0.04	0.06	0.07	0.08	0.09	0.11	0.12	0.13	0.14	0.14	0.15	0.16	0.17	0.17	0.17	0.18	0.18
-110	0.02	0.03	0.04	0.06	0.07	0.09	0.10	0.11	0.12	0.13	0.14	0.15	0.16	0.17	0.17	0.17	0.18	0.18	0.18
-100	0.02	0.03	0.05	0.06	0.08	0.09	0.10	0.12	0.13	0.14	0.15	0.16	0.17	0.18	0.18	0.18	0.18	0.18	0.18
-90	0.02	0.03	0.05	0.06	0.08	0.09	0.10	0.12	0.13	0.15	0.16	0.17	0.19	0.19	0.19	0.18	0.18	0.18	0.18
-80	0.02	0.03	0.05	0.06	0.08	0.09	0.10	0.13	0.16	0.19	0.23	0.27	0.31	0.62	1.01	1.44	1.89	2.33	2.76
-70	0.02	0.03	0.04	0.06	0.08	0.10	0.12	0.18	0.24	0.29	0.37	0.45	0.54	1.49	2.94	4.52	6.16	7.80	9.38
-60	0.02	0.03	0.04	0.06	0.09	0.14	0.20	0.28	0.39	0.53	0.87	1.43	2.20	3.64	6.23	8.81	11.4	13.8	16.1
-50	0.02	0.03	0.04	0.07	0.13	0.21	0.30	0.39	0.65	1.26	2.23	3.67	5.61	7.83	11.2	14.7	18.2	21.3	24.1
-40	0.02	0.03	0.04	0.09	0.17	0.28	0.40	0.59	0.77	1.73	4.10	7.14	10.9	15.4	20.7	26.5	32.0	36.8	40.6
-30	0.02	0.02	0.04	0.11	0.22	0.35	0.53	0.76	1.51	3.55	6.55	11.0	17.2	26.5	38.2	51.1	62.8	72.8	79.1
-20	0.02	0.02	0.04	0.12	0.25	0.40	0.64	1.05	2.64	5.60	9.39	14.9	26.2	45.5	71.7	107	148	191	219
-10	0.02	0.02	0.04	0.13	0.27	0.43	0.71	1.25	3.34	6.83	11.4	19.8	37.5	68.0	123	219	366	544	661
0	0.02	0.02	0.03	0.12	0.27	0.42	0.72	1.10	3.21	6.78	11.5	19.3	37.1	68.8	126	237	441	766	1038
10	0.02	0.02	0.04	0.13	0.27	0.43	0.71	1.25	3.38	6.88	11.5	19.1	34.6	60.0	103	174	305	484	610
20	0.02	0.02	0.04	0.12	0.25	0.40	0.65	1.05	2.70	5.67	9.48	14.7	24.3	40.7	63.0	93.3	131	167	189
30	0.02	0.02	0.04	0.11	0.22	0.35	0.53	0.77	1.50	3.65	6.72	11.5	17.8	26.6	37.3	48.5	57.6	65.3	70.0
40	0.02	0.02	0.04	0.09	0.18	0.28	0.41	0.59	0.78	1.84	4.60	8.16	12.4	17.3	22.7	27.3	31.6	35.4	38.2
50	0.02	0.03	0.04	0.07	0.13	0.22	0.31	0.40	0.72	1.46	2.62	4.33	6.74	9.56	12.6	15.5	18.2	20.5	22.4
60	0.02	0.03	0.04	0.06	0.09	0.15	0.21	0.29	0.40	0.66	1.15	1.90	2.87	4.31	6.49	8.62	10.7	12.6	14.4
70	0.02	0.03	0.04	0.05	0.07	0.09	0.13	0.17	0.22	0.29	0.37	0.46	0.56	1.33	2.54	3.86	5.23	6.56	7.84
80	0.02	0.02	0.04	0.05	0.06	0.07	0.09	0.10	0.11	0.13	0.15	0.17	0.19	0.41	0.69	0.99	1.31	1.62	1.92
90	0.02	0.02	0.03	0.04	0.05	0.05	0.06	0.07	0.07	0.08	0.08	0.09	0.09	0.10	0.10	0.11	0.11	0.12	0.12
100	0.02	0.02	0.03	0.04	0.04	0.05	0.06	0.06	0.07	0.07	0.08	0.08	0.09	0.10	0.10	0.11	0.11	0.12	0.12
110	0.02	0.02	0.03	0.04	0.04	0.04	0.04	0.04	0.05	0.06	0.06	0.08	0.09	0.10	0.10	0.11	0.11	0.12	0.12
120	0.02	0.02	0.03	0.03	0.03	0.02	0.02	0.02	0.04	0.05	0.06	0.08	0.10	0.12	0.12	0.12	0.13	0.14	0.14
130	0.02	0.02	0.03	0.03	0.02	0.02	0.02	0.02	0.03	0.04	0.06	0.08	0.10	0.14	0.16	0.17	0.18	0.19	0.19
140	0.02	0.02	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.06	0.10	0.16	0.21	0.26	0.29	0.30	0.30	0.30
150	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.03	0.03	0.04	0.09	0.16	0.24	0.34	0.46	0.58	0.64	0.69	0.69
160	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.03	0.04	0.09	0.14	0.23	0.38	0.60	0.82	1.05	1.21	1.26	1.27
170	0.02	0.02	0.02	0.02	0.02	0.03	0.03	0.04	0.07	0.12	0.20	0.35	0.59	0.89	1.21	1.42	1.48	1.47	1.50
180	0.02	0.02	0.02	0.02	0.02	0.03	0.03	0.04	0.08	0.12	0.22	0.39	0.68	1.06	1.40	1.51	1.46	1.45	1.52

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.00V I:0.0500A P:6.6000W PF:0.9000 Freq:50.00Hz Lamp Flux:272.31x1 lm																		
NAME:Lumino Ground-500mm-RGBW 4000K-25D-REV2									TYPE:RGBW-4000K					WEIGHT:00				
SPEC.:25 DEG									DIM.:500mm					SERIAL No.:01				
MFR.: 001									SUR.:0.8					Shielding Angle:				

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	1.61	1.65	1.55	1.26	0.88	0.52	0.29	0.15	0.08	0.04	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.03	
-170	1.57	1.58	1.44	1.14	0.80	0.50	0.29	0.17	0.10	0.06	0.03	0.03	0.02	0.02	0.02	0.02	0.01	0.03	
-160	1.35	1.20	1.00	0.77	0.54	0.37	0.24	0.16	0.10	0.07	0.04	0.03	0.03	0.03	0.02	0.02	0.02	0.03	
-150	0.75	0.65	0.52	0.41	0.31	0.23	0.18	0.14	0.10	0.07	0.05	0.04	0.04	0.03	0.03	0.02	0.02	0.03	
-140	0.35	0.31	0.26	0.21	0.18	0.15	0.13	0.11	0.09	0.07	0.06	0.05	0.04	0.03	0.03	0.02	0.02	0.03	
-130	0.21	0.19	0.18	0.16	0.15	0.13	0.11	0.10	0.09	0.08	0.07	0.06	0.04	0.04	0.03	0.03	0.02	0.03	
-120	0.17	0.16	0.16	0.15	0.13	0.12	0.11	0.10	0.09	0.08	0.07	0.06	0.05	0.04	0.03	0.03	0.03	0.03	
-110	0.17	0.16	0.15	0.14	0.13	0.12	0.11	0.10	0.09	0.08	0.07	0.06	0.05	0.04	0.04	0.03	0.03	0.03	
-100	0.17	0.16	0.15	0.14	0.14	0.13	0.12	0.10	0.09	0.08	0.07	0.06	0.05	0.05	0.04	0.03	0.03	0.03	
-90	0.17	0.16	0.15	0.14	0.14	0.13	0.12	0.11	0.09	0.08	0.07	0.06	0.06	0.05	0.05	0.04	0.04	0.03	
-80	2.33	1.88	1.43	0.99	0.60	0.27	0.21	0.18	0.14	0.11	0.09	0.07	0.06	0.06	0.05	0.04	0.04	0.03	
-70	7.86	6.27	4.65	3.06	1.54	0.56	0.46	0.37	0.30	0.23	0.17	0.12	0.10	0.07	0.07	0.05	0.04	0.03	
-60	14.0	11.7	9.39	6.96	4.48	2.95	1.97	1.23	0.72	0.41	0.26	0.19	0.16	0.12	0.08	0.07	0.04	0.03	
-50	21.7	19.0	15.9	12.5	9.17	6.67	4.44	2.61	1.40	0.68	0.40	0.30	0.22	0.17	0.11	0.07	0.05	0.03	
-40	37.5	33.2	28.3	23.0	17.6	12.7	8.52	5.02	2.30	0.70	0.53	0.42	0.30	0.20	0.14	0.08	0.05	0.03	
-30	74.2	65.2	54.1	41.9	30.0	20.4	13.3	8.06	4.45	1.97	0.71	0.51	0.38	0.25	0.18	0.10	0.06	0.03	
-20	202	162	121	82.4	53.9	32.8	18.9	11.9	6.94	3.31	1.19	0.59	0.43	0.28	0.19	0.11	0.06	0.03	
-10	618	466	293	163	90.5	50.3	26.9	15.3	8.63	4.18	1.39	0.66	0.47	0.31	0.20	0.12	0.06	0.03	
0	1030	770	457	228	115	57.9	28.1	16.2	8.80	4.03	1.21	0.66	0.48	0.32	0.20	0.12	0.07	0.03	
10	590	419	243	136	77.8	43.3	22.9	13.7	7.61	3.54	1.05	0.64	0.47	0.31	0.20	0.12	0.07	0.03	
20	180	147	104	68.0	42.0	23.2	14.8	9.40	5.19	2.29	0.75	0.58	0.43	0.28	0.20	0.11	0.06	0.03	
30	65.0	56.4	45.6	33.7	23.4	15.5	9.60	5.24	2.67	0.94	0.63	0.50	0.36	0.25	0.18	0.10	0.06	0.03	
40	34.0	28.9	23.1	17.1	12.5	8.63	5.50	2.92	1.13	0.61	0.51	0.40	0.29	0.22	0.15	0.09	0.06	0.03	
50	19.4	16.1	12.7	9.19	6.14	4.31	2.77	1.65	0.93	0.54	0.38	0.29	0.23	0.18	0.12	0.08	0.05	0.03	
60	12.2	9.88	7.48	5.04	2.67	1.50	0.96	0.59	0.41	0.32	0.26	0.22	0.17	0.13	0.09	0.07	0.05	0.03	
70	6.49	5.09	3.69	2.37	1.16	0.40	0.35	0.30	0.25	0.21	0.17	0.14	0.11	0.09	0.08	0.06	0.04	0.03	
80	1.61	1.29	0.97	0.67	0.39	0.17	0.15	0.14	0.12	0.10	0.10	0.09	0.08	0.07	0.06	0.05	0.04	0.03	
90	0.12	0.11	0.11	0.10	0.10	0.10	0.09	0.09	0.08	0.08	0.07	0.07	0.06	0.06	0.05	0.05	0.04	0.03	
100	0.12	0.12	0.11	0.11	0.10	0.10	0.09	0.08	0.07	0.06	0.06	0.05	0.05	0.04	0.04	0.04	0.03	0.03	
110	0.12	0.12	0.12	0.11	0.11	0.11	0.09	0.08	0.07	0.06	0.05	0.05	0.04	0.04	0.03	0.03	0.03	0.03	
120	0.14	0.14	0.14	0.13	0.13	0.11	0.10	0.08	0.07	0.06	0.05	0.04	0.04	0.03	0.03	0.02	0.03	0.03	
130	0.19	0.18	0.18	0.16	0.15	0.12	0.10	0.08	0.07	0.05	0.05	0.04	0.04	0.03	0.03	0.02	0.02	0.03	
140	0.30	0.28	0.27	0.24	0.19	0.15	0.10	0.08	0.06	0.05	0.04	0.04	0.03	0.03	0.02	0.02	0.02	0.03	
150	0.66	0.60	0.51	0.39	0.29	0.20	0.13	0.07	0.05	0.04	0.04	0.03	0.03	0.03	0.02	0.02	0.02	0.03	
160	1.23	1.13	0.94	0.70	0.47	0.29	0.18	0.11	0.06	0.04	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.03	
170	1.54	1.50	1.32	1.04	0.72	0.45	0.26	0.14	0.07	0.04	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.03	
180	1.61	1.65	1.55	1.26	0.88	0.52	0.29	0.15	0.08	0.04	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.03	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks: