

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		3829.3 cd per klm.
(Luminaire orientation as tested.)		1.0 degrees vertical
		1.5 degrees horizontal
Beam Spread	At 10% of Imax	53.2V x 46.7H
	At 50% of Imax	24.3V x 22.3H
	At 90% of Imax	9.3V x 8.3H
Beam Flux	Total	1000.5 lumens per klm.
	To 10% of Imax	741.5 lumens per klm.
	To 50% of Imax	355.0 lumens per klm.
	To 90% of Imax	69.1 lumens per klm.
	Upward LOR	0.8 %
	Downward LOR	99.3 %
Luminaire Efficiency (Light Output Ratio)		100.0 %

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-08-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.00V I:0.0490A P:6.4000W PF:0.9000 Freq:50.00Hz Lamp Flux:91.195x1 lm		
NAME:Lumino Ground-500mm-RGBW BLUE-25D-REV2	TYPE:RGBW-BLUE	WEIGHT:00
SPEC.:25 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

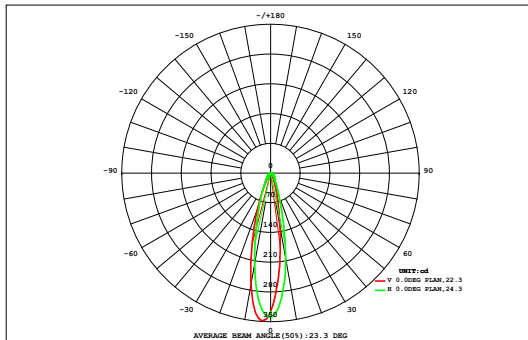

DATA OF LAMP		Eff:14.25lm/W	
MODEL		Imax(cd)	349.2
NOMINAL POWER(W)	6.4	AVAILABILITY(%)	74.0
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	67.52
NOMINAL FLUX(lm)	91.195	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	91.20
TEST VOLTAGE(V)	220	θ @50% (H,V)	22,24DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT: lm			Φ t	Φ a
	0.01	0.01	0.02	0.03	0.05	0.06	0.07	0.08	0.09	0.09	0.08	0.06	0.05	0.03	0.02	0.01	0.01	0.00	0.77	0.00	
45	0.01	0.01	0.02	0.03	0.05	0.06	0.07	0.08	0.09	0.09	0.08	0.06	0.05	0.03	0.02	0.01	0.01	0.00	0.77	0.00	
40	0.01	0.02	0.03	0.04	0.06	0.08	0.09	0.11	0.12	0.12	0.11	0.09	0.07	0.05	0.03	0.02	0.01	0.00	1.04	0.00	
35	0.01	0.02	0.03	0.05	0.07	0.10	0.13	0.15	0.17	0.17	0.16	0.13	0.10	0.07	0.04	0.02	0.01	0.01	1.44	0.00	
30	0.01	0.02	0.04	0.06	0.09	0.13	0.17	0.22	0.26	0.27	0.24	0.20	0.14	0.09	0.05	0.03	0.02	0.01	2.05	0.36	
25	0.02	0.03	0.04	0.07	0.11	0.17	0.24	0.33	0.41	0.44	0.39	0.31	0.21	0.13	0.07	0.04	0.02	0.01	3.06	1.96	
20	0.02	0.03	0.05	0.08	0.14	0.22	0.35	0.53	0.70	0.77	0.68	0.50	0.32	0.18	0.09	0.05	0.03	0.01	4.75	3.86	
15	0.02	0.03	0.06	0.10	0.16	0.27	0.49	0.82	1.18	1.34	1.16	0.78	0.46	0.26	0.13	0.06	0.03	0.02	7.38	6.59	
-15	0.02	0.04	0.06	0.11	0.18	0.33	0.61	1.15	1.78	2.07	1.72	1.12	0.66	0.35	0.17	0.08	0.04	0.02	10.5	9.76	
	0.02	0.04	0.06	0.11	0.19	0.36	0.70	1.33	2.14	2.55	2.15	1.48	0.86	0.43	0.20	0.09	0.04	0.02	12.8	12.1	
	0.02	0.04	0.06	0.11	0.20	0.37	0.75	1.45	2.22	2.48	2.20	1.53	0.88	0.44	0.20	0.09	0.04	0.02	13.1	12.4	
	0.02	0.03	0.06	0.11	0.19	0.35	0.68	1.21	1.73	1.93	1.69	1.20	0.70	0.36	0.18	0.08	0.04	0.02	10.6	9.86	
	0.02	0.03	0.06	0.10	0.16	0.28	0.48	0.77	1.08	1.19	1.04	0.76	0.47	0.26	0.14	0.07	0.04	0.02	6.99	6.18	
	0.02	0.03	0.05	0.08	0.13	0.21	0.31	0.45	0.59	0.64	0.57	0.44	0.30	0.19	0.11	0.06	0.03	0.02	4.22	3.26	
	0.01	0.02	0.04	0.07	0.10	0.15	0.21	0.27	0.33	0.35	0.32	0.26	0.19	0.13	0.08	0.05	0.03	0.02	2.63	1.26	
	0.01	0.02	0.03	0.05	0.08	0.11	0.14	0.18	0.20	0.21	0.20	0.17	0.13	0.09	0.06	0.04	0.02	0.01	1.77	0.00	
	0.01	0.02	0.03	0.04	0.06	0.08	0.11	0.13	0.14	0.15	0.13	0.12	0.09	0.07	0.05	0.03	0.02	0.01	1.29	0.00	
	0.01	0.01	0.02	0.03	0.05	0.06	0.08	0.09	0.11	0.11	0.10	0.09	0.07	0.05	0.04	0.02	0.02	0.01	0.97	0.00	
-45	0.00	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.08	0.07	0.06	0.05	0.04	0.03	0.02	0.01	0.01	0.73	0.00	
-45 -40 -35 -30 -25 -20 -15 -10 HORIZONTAL (DEG) 10 15 20 25 30 35 40 45																					
Φ t	0.25	0.45	0.77	1.28	2.06	3.36	5.67	9.34	13.3	15.0	13.0	9.29	5.76	3.22	1.71	0.87	0.45	0.24	86	---	
Φ a	0.00	0.00	0.00	0.00	0.00	1.82	4.44	8.22	12.3	13.9	12.0	8.21	4.61	1.93	0.16	0.00	0.00	0.00	---	68	

one-half-peak spread: U:12.3,D:12.2 , L:10.7,R:11.7


NEMA Beam Type: Type 4

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.00V I:0.0490A P:6.4000W PF:0.9000 Freq:50.00Hz Lamp Flux:91.195x1 lm		
NAME:Lumino Ground-500mm-RGBW BLUE-25D-REV2	TYPE:RGBW-BLUE	WEIGHT:00
SPEC.:25 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

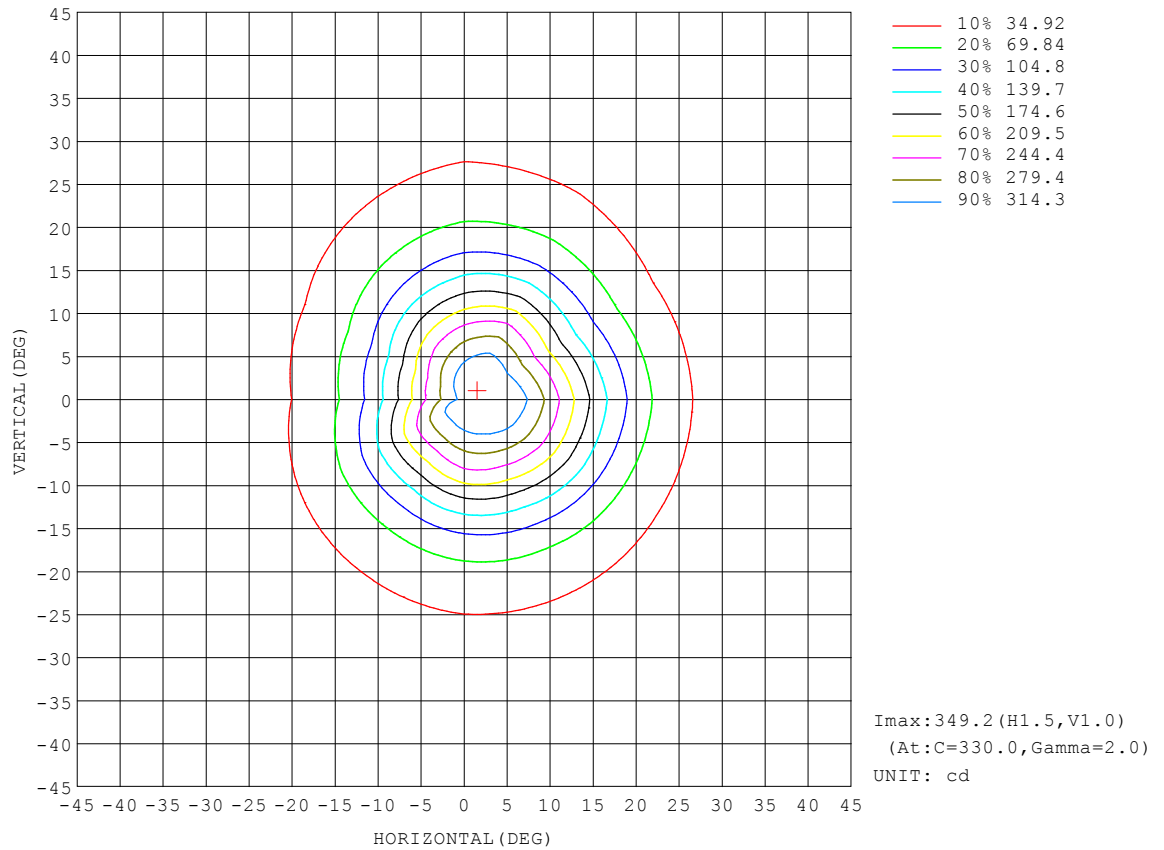


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:220.00V I:0.0490A P:6.4000W PF:0.9000 Freq:50.00Hz Lamp Flux:91.195x1 lm		
NAME:Lumino Ground-500mm-RGBW BLUE-25D-REV2	TYPE:RGBW-BLUE	WEIGHT:00
SPEC.:25 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

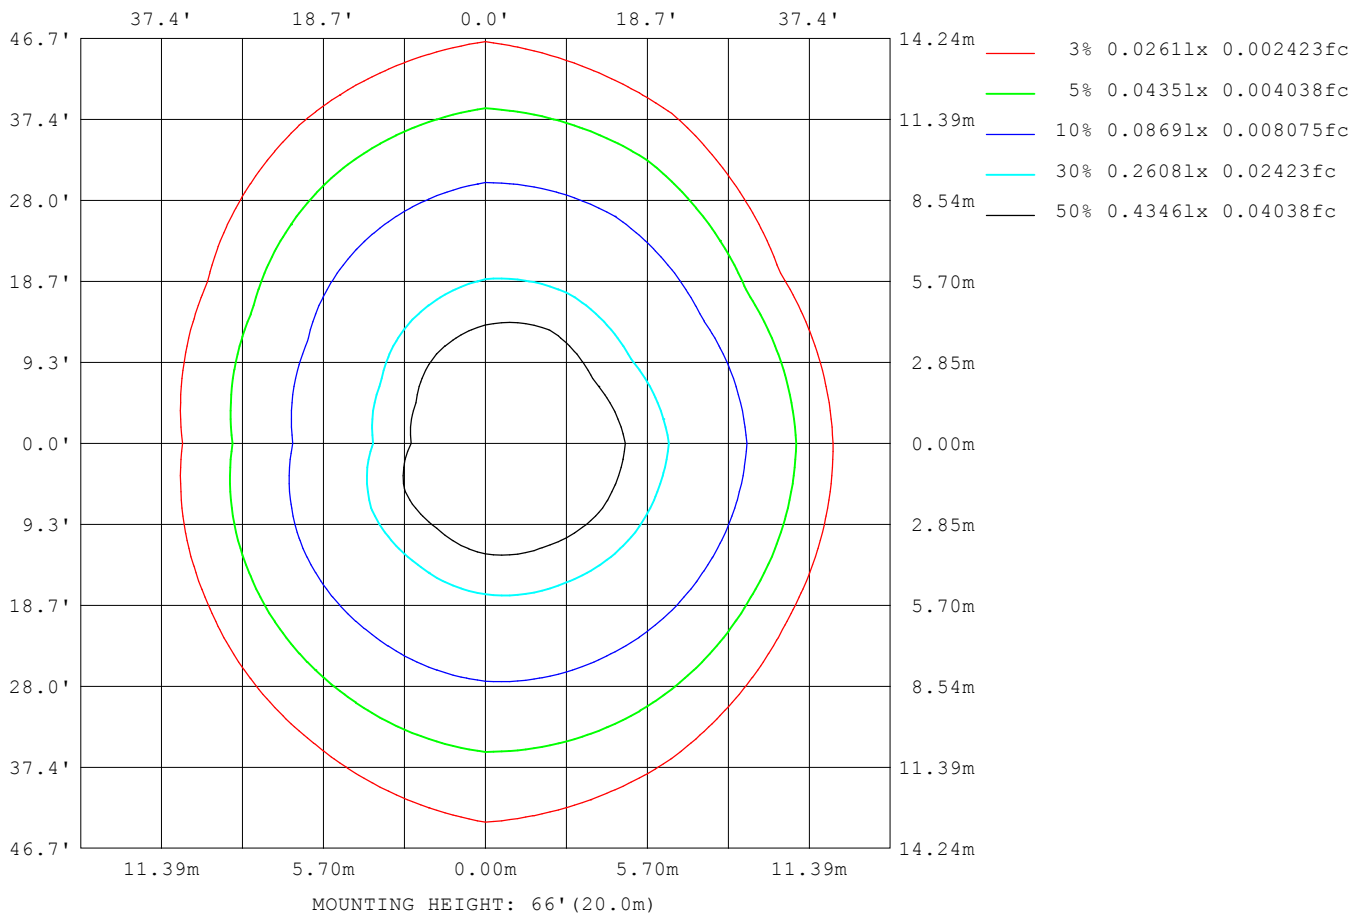

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

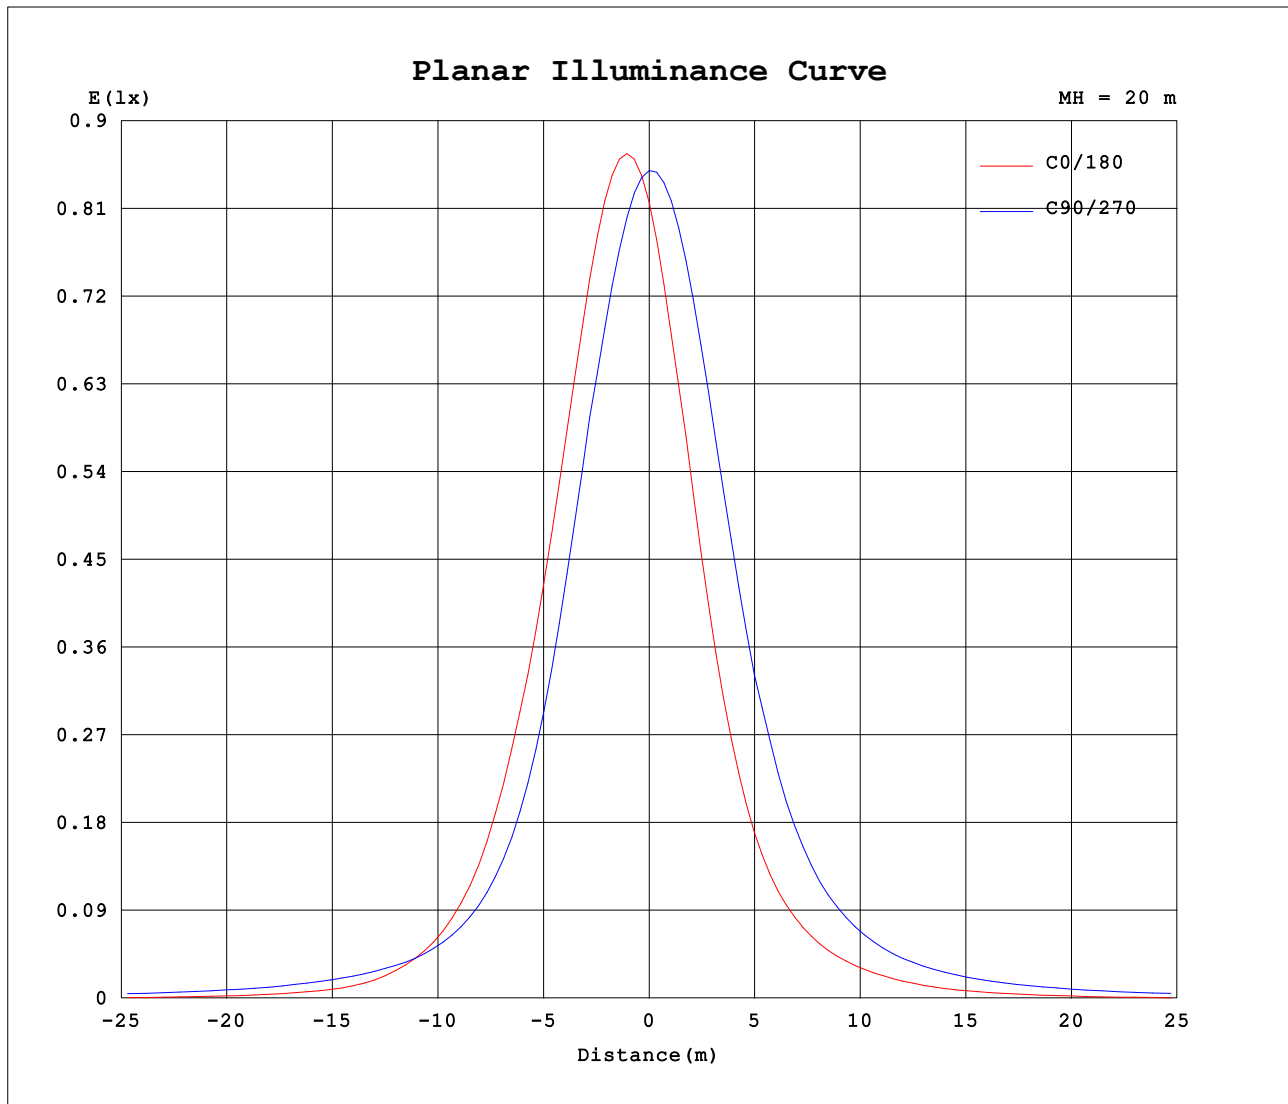


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.00V I:0.0490A P:6.4000W PF:0.9000 Freq:50.00Hz Lamp Flux:91.195x1 lm		
NAME:Lumino Ground-500mm-RGBW BLUE-25D-REV2	TYPE:RGBW-BLUE	WEIGHT:00
SPEC.:25 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

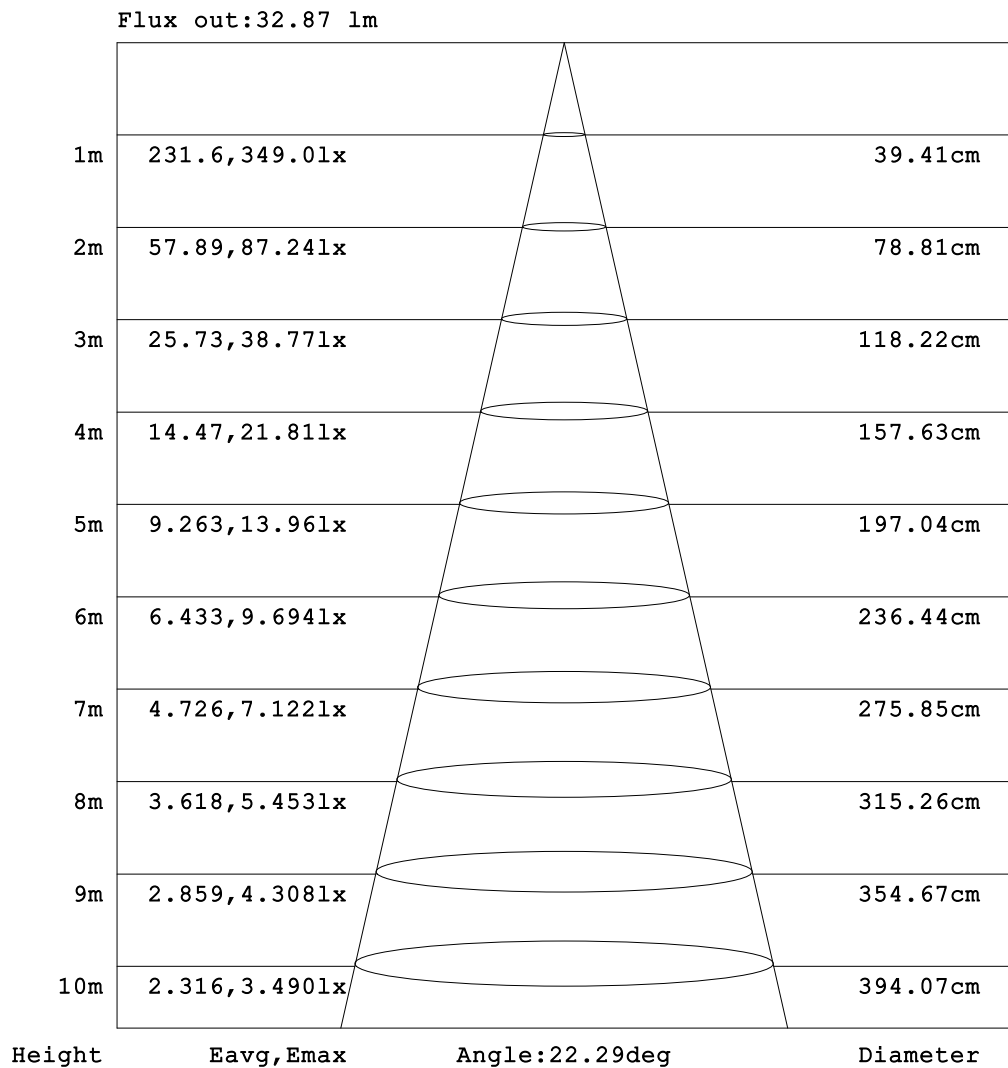

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:20DEG
 Operators:01
 Test Date:2025-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.700m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.00V I:0.0490A P:6.4000W PF:0.9000 Freq:50.00Hz Lamp Flux:91.195x1 lm		
NAME:Lumino Ground-500mm-RGBW BLUE-25D-REV2	TYPE:RGBW-BLUE	WEIGHT:00
SPEC.:25 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.08	0.08	0.07	0.07	0.04	0.04	0.04	0.04	0.05	0.06	0.10	0.17	0.27	0.39	0.49	0.49	0.49	0.49	0.49
-170	0.08	0.08	0.07	0.06	0.04	0.04	0.04	0.04	0.04	0.06	0.09	0.16	0.25	0.37	0.48	0.52	0.52	0.51	0.51
-160	0.08	0.08	0.07	0.06	0.04	0.03	0.03	0.04	0.04	0.05	0.07	0.12	0.18	0.25	0.34	0.40	0.44	0.48	0.51
-150	0.08	0.07	0.07	0.06	0.04	0.03	0.03	0.03	0.03	0.04	0.05	0.07	0.09	0.13	0.17	0.21	0.26	0.29	0.31
-140	0.08	0.07	0.06	0.05	0.05	0.03	0.03	0.03	0.02	0.03	0.03	0.04	0.04	0.05	0.06	0.09	0.12	0.14	0.15
-130	0.08	0.07	0.06	0.05	0.04	0.03	0.03	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.04	0.05	0.06	0.07	0.09
-120	0.08	0.07	0.06	0.05	0.04	0.03	0.02	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.04	0.04	0.05	0.06	0.07
-110	0.08	0.07	0.06	0.05	0.04	0.03	0.02	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.04	0.04	0.04	0.05	0.05
-100	0.08	0.07	0.06	0.05	0.04	0.03	0.02	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.04	0.04	0.04	0.04
-90	0.08	0.07	0.06	0.05	0.04	0.03	0.02	0.02	0.02	0.03	0.03	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04
-80	0.08	0.07	0.06	0.05	0.04	0.03	0.02	0.02	0.03	0.04	0.06	0.08	0.10	0.20	0.34	0.48	0.64	0.79	0.94
-70	0.08	0.07	0.06	0.05	0.04	0.03	0.02	0.03	0.05	0.09	0.13	0.17	0.21	0.54	1.04	1.59	2.16	2.73	3.27
-60	0.08	0.07	0.06	0.05	0.04	0.04	0.05	0.07	0.12	0.19	0.32	0.55	0.85	1.36	2.24	3.10	3.92	4.72	5.47
-50	0.08	0.07	0.06	0.06	0.05	0.07	0.10	0.12	0.22	0.45	0.82	1.36	2.08	2.93	4.02	5.12	6.14	7.06	7.88
-40	0.08	0.07	0.07	0.06	0.08	0.11	0.15	0.21	0.26	0.58	1.44	2.56	3.85	5.29	6.84	8.50	10.1	11.5	12.6
-30	0.08	0.07	0.07	0.07	0.11	0.14	0.20	0.28	0.49	1.22	2.31	3.92	5.92	8.46	11.4	14.7	17.9	20.8	22.8
-20	0.08	0.08	0.07	0.09	0.13	0.18	0.26	0.38	0.93	2.03	3.48	5.42	8.61	13.4	19.8	28.5	39.6	51.9	60.1
-10	0.08	0.08	0.08	0.09	0.14	0.19	0.30	0.47	1.24	2.57	4.37	7.12	11.9	19.4	32.5	57.8	102	157	204
0	0.08	0.08	0.08	0.10	0.15	0.20	0.31	0.45	1.25	2.63	4.50	7.34	12.4	20.5	35.1	65.2	129	233	326
10	0.08	0.08	0.08	0.11	0.16	0.21	0.32	0.52	1.31	2.65	4.48	7.31	12.1	19.2	31.3	53.8	99.7	166	218
20	0.08	0.08	0.08	0.11	0.15	0.21	0.30	0.45	1.06	2.19	3.66	5.74	9.05	14.4	21.7	32.4	46.7	62.7	75.1
30	0.08	0.08	0.09	0.10	0.15	0.20	0.26	0.35	0.64	1.42	2.58	4.37	6.70	9.87	13.6	17.6	21.7	25.5	28.3
40	0.08	0.08	0.09	0.10	0.13	0.18	0.23	0.29	0.36	0.77	1.77	3.05	4.58	6.34	8.29	10.0	11.7	13.1	14.2
50	0.08	0.08	0.09	0.10	0.12	0.15	0.19	0.23	0.34	0.60	1.01	1.63	2.51	3.54	4.67	5.76	6.75	7.61	8.34
60	0.08	0.08	0.09	0.10	0.11	0.13	0.16	0.19	0.22	0.31	0.48	0.74	1.08	1.59	2.38	3.18	3.95	4.67	5.33
70	0.08	0.08	0.09	0.09	0.10	0.11	0.13	0.14	0.15	0.18	0.20	0.22	0.25	0.51	0.94	1.41	1.90	2.37	2.82
80	0.08	0.08	0.09	0.09	0.10	0.10	0.11	0.11	0.12	0.12	0.12	0.12	0.13	0.20	0.30	0.41	0.52	0.63	0.74
90	0.08	0.08	0.09	0.09	0.10	0.10	0.11	0.11	0.11	0.11	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.13	0.13
100	0.08	0.08	0.09	0.09	0.10	0.10	0.11	0.11	0.11	0.12	0.11	0.11	0.11	0.12	0.12	0.12	0.12	0.12	0.12
110	0.08	0.08	0.09	0.09	0.10	0.11	0.11	0.11	0.11	0.11	0.11	0.10	0.10	0.10	0.10	0.10	0.11	0.12	0.12
120	0.08	0.08	0.09	0.09	0.10	0.10	0.11	0.11	0.10	0.09	0.08	0.08	0.08	0.08	0.09	0.10	0.11	0.11	0.12
130	0.08	0.08	0.08	0.09	0.09	0.09	0.09	0.09	0.08	0.07	0.06	0.07	0.07	0.08	0.08	0.09	0.10	0.10	0.11
140	0.08	0.08	0.08	0.09	0.09	0.08	0.07	0.07	0.05	0.05	0.05	0.06	0.07	0.09	0.11	0.11	0.11	0.11	0.10
150	0.08	0.08	0.08	0.08	0.07	0.06	0.06	0.05	0.05	0.04	0.05	0.06	0.07	0.11	0.16	0.20	0.21	0.21	0.19
160	0.08	0.08	0.08	0.07	0.06	0.05	0.05	0.05	0.04	0.05	0.05	0.07	0.11	0.19	0.28	0.35	0.40	0.41	0.40
170	0.08	0.08	0.07	0.07	0.05	0.05	0.04	0.04	0.04	0.05	0.07	0.12	0.21	0.31	0.40	0.46	0.48	0.48	0.48
180	0.08	0.08	0.07	0.07	0.04	0.04	0.04	0.04	0.05	0.06	0.10	0.17	0.27	0.39	0.49	0.49	0.49	0.49	0.53

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.00V I:0.0490A P:6.4000W PF:0.9000 Freq:50.00Hz Lamp Flux:91.195x1 lm																		
NAME:Lumino Ground-500mm-RGBW BLUE-25D-REV2									TYPE:RGBW-BLUE					WEIGHT:00				
SPEC.:25 DEG									DIM.:500mm					SERIAL No.:01				
MFR.: 001									SUR.:0.8					Shielding Angle:				

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.54	0.54	0.49	0.38	0.25	0.14	0.07	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	
-170	0.52	0.52	0.48	0.38	0.26	0.15	0.08	0.04	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	
-160	0.46	0.39	0.33	0.26	0.18	0.13	0.08	0.05	0.04	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	
-150	0.27	0.22	0.16	0.13	0.10	0.08	0.06	0.05	0.04	0.03	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	
-140	0.13	0.11	0.08	0.05	0.05	0.04	0.04	0.04	0.03	0.03	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	
-130	0.07	0.06	0.05	0.04	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	
-120	0.06	0.05	0.04	0.04	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	
-110	0.05	0.04	0.04	0.04	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	
-100	0.04	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	
-90	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	
-80	0.80	0.64	0.49	0.34	0.21	0.10	0.08	0.06	0.05	0.04	0.03	0.02	0.02	0.02	0.02	0.01	0.01	0.01	
-70	2.75	2.19	1.63	1.07	0.54	0.20	0.16	0.12	0.10	0.06	0.04	0.02	0.02	0.02	0.02	0.02	0.01	0.01	
-60	4.75	3.99	3.19	2.38	1.55	1.03	0.69	0.42	0.24	0.13	0.07	0.05	0.04	0.03	0.03	0.02	0.02	0.01	
-50	7.10	6.22	5.23	4.15	3.09	2.26	1.50	0.87	0.47	0.21	0.11	0.09	0.07	0.05	0.04	0.03	0.02	0.01	
-40	11.7	10.6	9.09	7.47	5.69	4.10	2.78	1.68	0.77	0.22	0.17	0.13	0.09	0.07	0.05	0.03	0.02	0.01	
-30	22.0	20.0	17.1	13.3	9.57	6.56	4.27	2.56	1.46	0.66	0.23	0.17	0.12	0.08	0.06	0.04	0.02	0.01	
-20	59.2	50.3	38.5	26.8	17.4	10.4	6.03	3.76	2.21	1.12	0.41	0.20	0.14	0.10	0.07	0.04	0.02	0.01	
-10	197	158	104	59.0	32.0	16.9	8.61	4.84	2.72	1.37	0.49	0.23	0.16	0.11	0.07	0.05	0.03	0.01	
0	342	266	167	91.2	44.1	21.0	9.32	5.08	2.73	1.32	0.45	0.24	0.18	0.11	0.08	0.05	0.03	0.01	
10	222	159	98.3	57.0	31.0	15.8	7.61	4.35	2.40	1.17	0.39	0.23	0.17	0.11	0.08	0.05	0.03	0.01	
20	72.3	60.9	43.8	28.3	16.4	8.10	4.90	2.97	1.67	0.78	0.28	0.22	0.16	0.11	0.08	0.05	0.03	0.01	
30	26.7	23.4	19.0	13.6	8.88	5.48	3.18	1.69	0.89	0.34	0.24	0.19	0.14	0.10	0.07	0.05	0.03	0.01	
40	12.7	10.9	8.68	6.25	4.44	2.98	1.87	1.01	0.41	0.24	0.20	0.16	0.12	0.09	0.07	0.04	0.03	0.01	
50	7.18	5.92	4.60	3.27	2.12	1.48	0.97	0.59	0.34	0.21	0.16	0.13	0.11	0.08	0.06	0.05	0.03	0.01	
60	4.50	3.63	2.73	1.82	0.94	0.52	0.35	0.22	0.16	0.14	0.12	0.11	0.08	0.07	0.05	0.04	0.03	0.01	
70	2.33	1.83	1.33	0.85	0.43	0.16	0.15	0.13	0.12	0.10	0.09	0.08	0.07	0.06	0.05	0.04	0.02	0.01	
80	0.63	0.51	0.39	0.28	0.18	0.10	0.09	0.09	0.09	0.09	0.08	0.07	0.07	0.06	0.05	0.03	0.02	0.01	
90	0.12	0.12	0.11	0.11	0.10	0.10	0.09	0.09	0.08	0.08	0.07	0.07	0.06	0.05	0.04	0.03	0.02	0.01	
100	0.12	0.11	0.11	0.10	0.10	0.10	0.09	0.09	0.08	0.08	0.07	0.07	0.06	0.05	0.04	0.03	0.02	0.01	
110	0.12	0.11	0.11	0.10	0.10	0.09	0.09	0.09	0.08	0.08	0.07	0.07	0.06	0.05	0.04	0.03	0.02	0.01	
120	0.12	0.11	0.10	0.10	0.09	0.09	0.09	0.08	0.08	0.08	0.07	0.06	0.05	0.04	0.04	0.03	0.02	0.01	
130	0.10	0.10	0.10	0.09	0.09	0.08	0.06	0.06	0.08	0.07	0.07	0.06	0.05	0.04	0.03	0.02	0.02	0.01	
140	0.10	0.10	0.10	0.10	0.08	0.07	0.05	0.04	0.03	0.03	0.06	0.05	0.04	0.04	0.03	0.02	0.02	0.01	
150	0.19	0.18	0.17	0.13	0.09	0.06	0.04	0.03	0.02	0.02	0.02	0.04	0.03	0.03	0.02	0.02	0.01	0.01	
160	0.39	0.36	0.29	0.20	0.12	0.06	0.03	0.02	0.02	0.02	0.01	0.03	0.02	0.02	0.02	0.02	0.01	0.01	
170	0.50	0.48	0.40	0.30	0.20	0.11	0.05	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	
180	0.54	0.54	0.49	0.38	0.25	0.14	0.07	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks: