

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		3754.9 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		4.0 degrees horizontal
Beam Spread	At 10% of Imax	54.2V x 46.3H
	At 50% of Imax	24.5V x 23.0H
	At 90% of Imax	9.1V x 9.3H
Beam Flux	Total	1000.5 lumens per klm.
	To 10% of Imax	744.4 lumens per klm.
	To 50% of Imax	363.5 lumens per klm.
	To 90% of Imax	75.1 lumens per klm.
	Upward LOR	0.7 %
	Downward LOR	99.4 %
Luminaire Efficiency (Light Output Ratio)		100.0 %

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-08-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.00V I:0.0490A P:6.5000W PF:0.9000 Freq:50.00Hz Lamp Flux:353.246x1 lm		
NAME:Lumino Ground-500mm-RGBW GREEN-25D-REV2	TYPE:RGBW-GREEN	WEIGHT:00
SPEC.:25 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

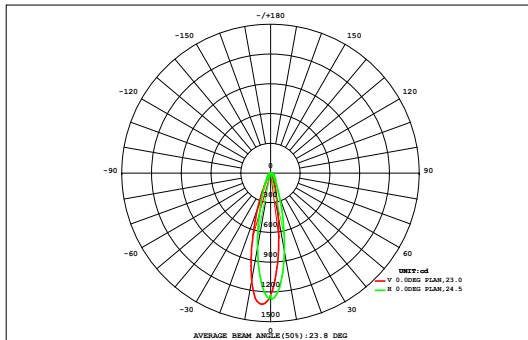

DATA OF LAMP		Eff:54.35lm/W	
MODEL		Imax(cd)	1326
NOMINAL POWER(W)	5.3	AVAILABILITY(%)	74.5
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	263.2
NOMINAL FLUX(lm)	353.246	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	353.2
TEST VOLTAGE(V)	220	θ @50% (H,V)	23,24DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.03	0.05	0.09	0.13	0.17	0.21	0.25	0.29	0.32	0.32	0.27	0.22	0.16	0.11	0.08	0.05	0.03	0.01	2.79	0.00
45	0.03	0.05	0.09	0.13	0.17	0.21	0.25	0.29	0.32	0.32	0.27	0.22	0.16	0.11	0.08	0.05	0.03	0.01	2.79	0.00
40	0.03	0.07	0.11	0.16	0.21	0.27	0.33	0.38	0.43	0.43	0.38	0.31	0.23	0.16	0.11	0.07	0.04	0.02	3.73	0.00
35	0.04	0.08	0.13	0.19	0.26	0.34	0.43	0.51	0.58	0.60	0.54	0.46	0.35	0.23	0.14	0.09	0.05	0.02	5.05	0.00
30	0.05	0.09	0.15	0.23	0.32	0.44	0.58	0.73	0.86	0.91	0.84	0.70	0.51	0.32	0.19	0.11	0.06	0.03	7.13	0.47
25	0.07	0.11	0.17	0.27	0.40	0.57	0.81	1.11	1.40	1.53	1.43	1.15	0.78	0.46	0.24	0.12	0.07	0.04	10.7	6.34
20	0.08	0.13	0.20	0.31	0.47	0.74	1.17	1.78	2.41	2.71	2.51	1.92	1.21	0.66	0.32	0.16	0.09	0.05	16.9	13.5
15	0.08	0.14	0.23	0.36	0.55	0.91	1.62	2.80	4.11	4.73	4.28	3.09	1.86	0.98	0.48	0.21	0.11	0.06	26.6	23.5
10	0.09	0.15	0.25	0.39	0.64	1.08	2.06	4.01	6.33	7.37	6.44	4.54	2.77	1.43	0.66	0.28	0.13	0.07	38.7	35.8
5	0.09	0.15	0.25	0.41	0.68	1.20	2.42	4.81	7.94	9.48	8.47	6.17	3.68	1.85	0.81	0.33	0.14	0.08	49.0	46.2
0	0.09	0.15	0.25	0.42	0.70	1.28	2.66	5.38	8.42	9.53	8.84	6.43	3.79	1.92	0.85	0.34	0.15	0.08	51.3	48.6
-5	0.09	0.15	0.25	0.41	0.69	1.26	2.51	4.62	6.69	7.58	6.91	5.08	3.07	1.62	0.76	0.33	0.15	0.08	42.2	39.5
-10	0.08	0.14	0.23	0.38	0.61	1.04	1.86	3.09	4.40	4.96	4.48	3.37	2.17	1.22	0.61	0.28	0.14	0.07	29.2	26.2
-15	0.07	0.12	0.21	0.33	0.51	0.81	1.25	1.90	2.58	2.86	2.60	2.03	1.40	0.84	0.46	0.23	0.12	0.07	18.4	14.9
-20	0.06	0.11	0.17	0.27	0.41	0.60	0.85	1.18	1.50	1.62	1.48	1.20	0.88	0.57	0.34	0.17	0.10	0.06	11.6	7.15
-25	0.05	0.09	0.15	0.22	0.32	0.44	0.59	0.76	0.92	0.97	0.90	0.76	0.59	0.41	0.25	0.15	0.09	0.05	7.70	1.00
-30	0.04	0.08	0.12	0.18	0.25	0.34	0.43	0.53	0.62	0.64	0.59	0.52	0.42	0.30	0.20	0.12	0.07	0.04	5.49	0.00
-35	0.03	0.06	0.10	0.15	0.20	0.26	0.33	0.40	0.45	0.47	0.43	0.37	0.30	0.22	0.15	0.10	0.06	0.03	4.09	0.00
-40	0.02	0.05	0.08	0.11	0.15	0.20	0.25	0.30	0.33	0.34	0.31	0.26	0.21	0.16	0.11	0.08	0.05	0.02	3.03	0.00
-45	0.02	0.05	0.08	0.11	0.15	0.20	0.25	0.30	0.33	0.34	0.31	0.26	0.21	0.16	0.11	0.08	0.05	0.02	3.03	0.00
-45 -40 -35 -30 -25 -20 -15 -10 HORIZONTAL(DEG) 10 15 20 25 30 35 40 45																				
Φ t	1.09	1.91	3.13	4.91	7.56	12.0	20.4	34.6	50.3	57.0	51.7	38.6	24.4	13.5	6.75	3.21	1.64	0.90	334	---
Φ a	0.00	0.00	0.00	0.00	0.00	5.53	15.5	30.3	46.2	53.0	47.8	34.6	20.3	8.84	1.12	0.00	0.00	0.00	---	263

one-half-peak spread: U:12.1,D:12.5 , L:11.4,R:11.9


NEMA Beam Type: Type 4

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.00V I:0.0490A P:6.5000W PF:0.9000 Freq:50.00Hz Lamp Flux:353.246x1 lm		
NAME:Lumino Ground-500mm-RGBW GREEN-25D-REV2	TYPE:RGBW-GREEN	WEIGHT:00
SPEC.:25 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

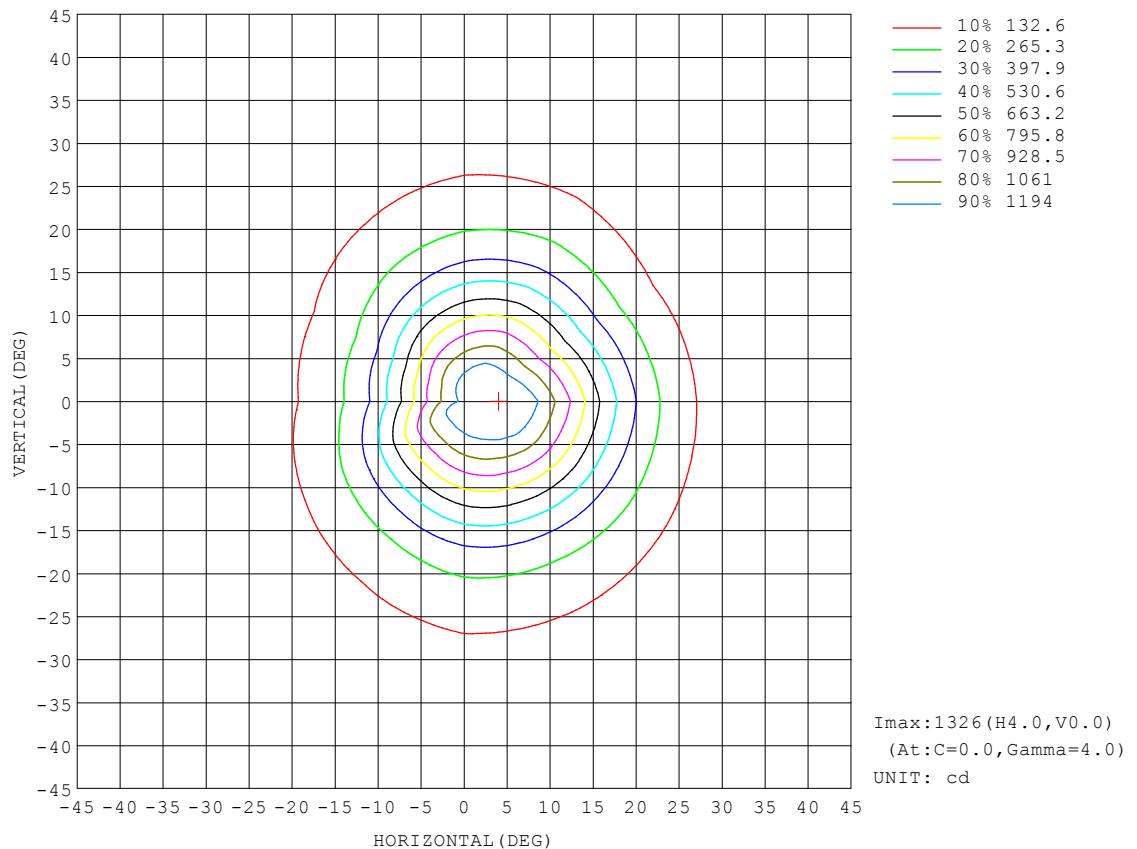


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:220.00V I:0.0490A P:6.5000W PF:0.9000 Freq:50.00Hz Lamp Flux:353.246x1 lm		
NAME:Lumino Ground-500mm-RGBW GREEN-25D-REV2	TYPE:RGBW-GREEN	WEIGHT:00
SPEC.:25 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

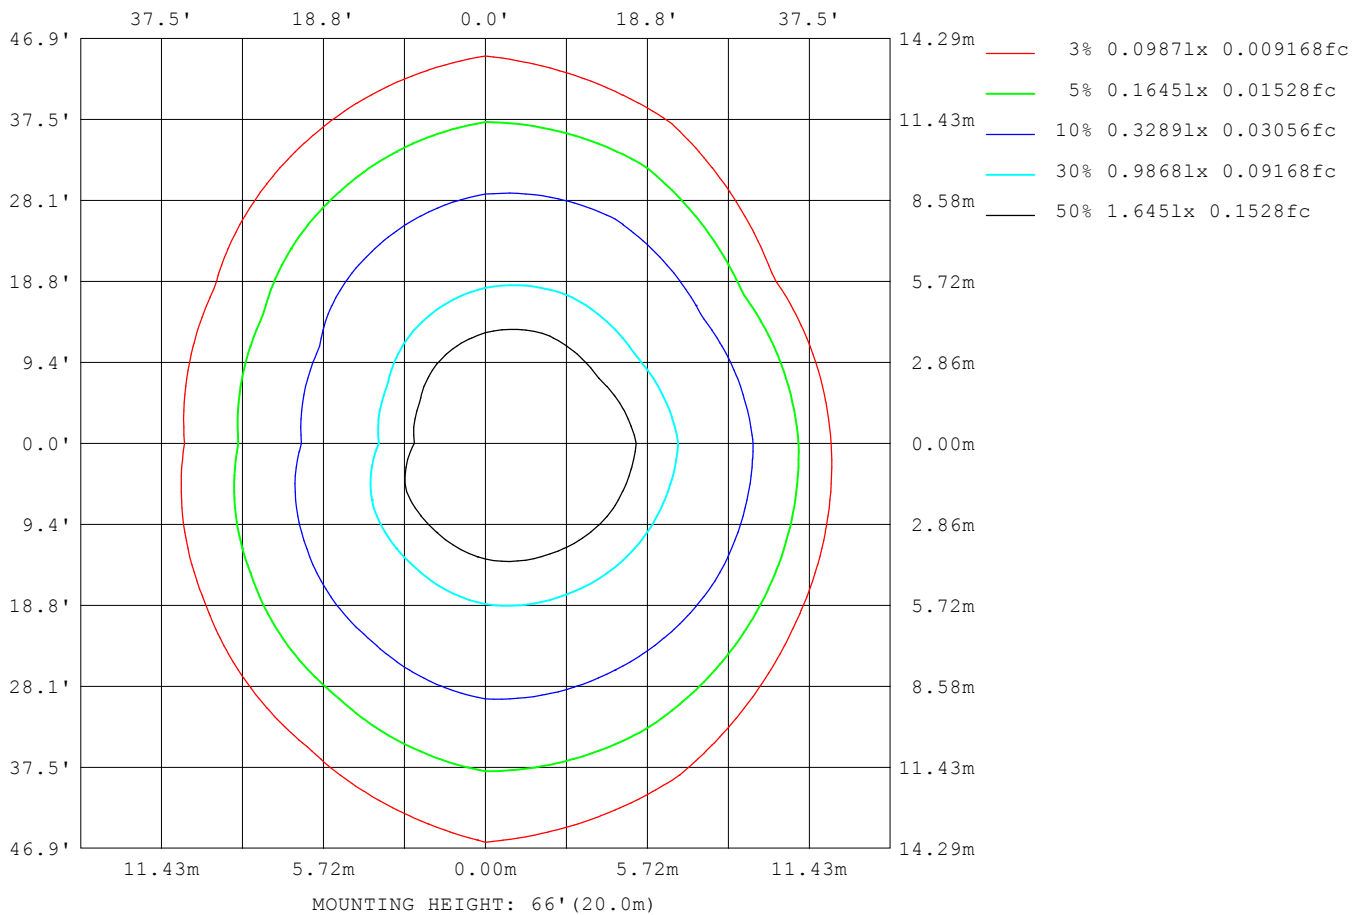

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

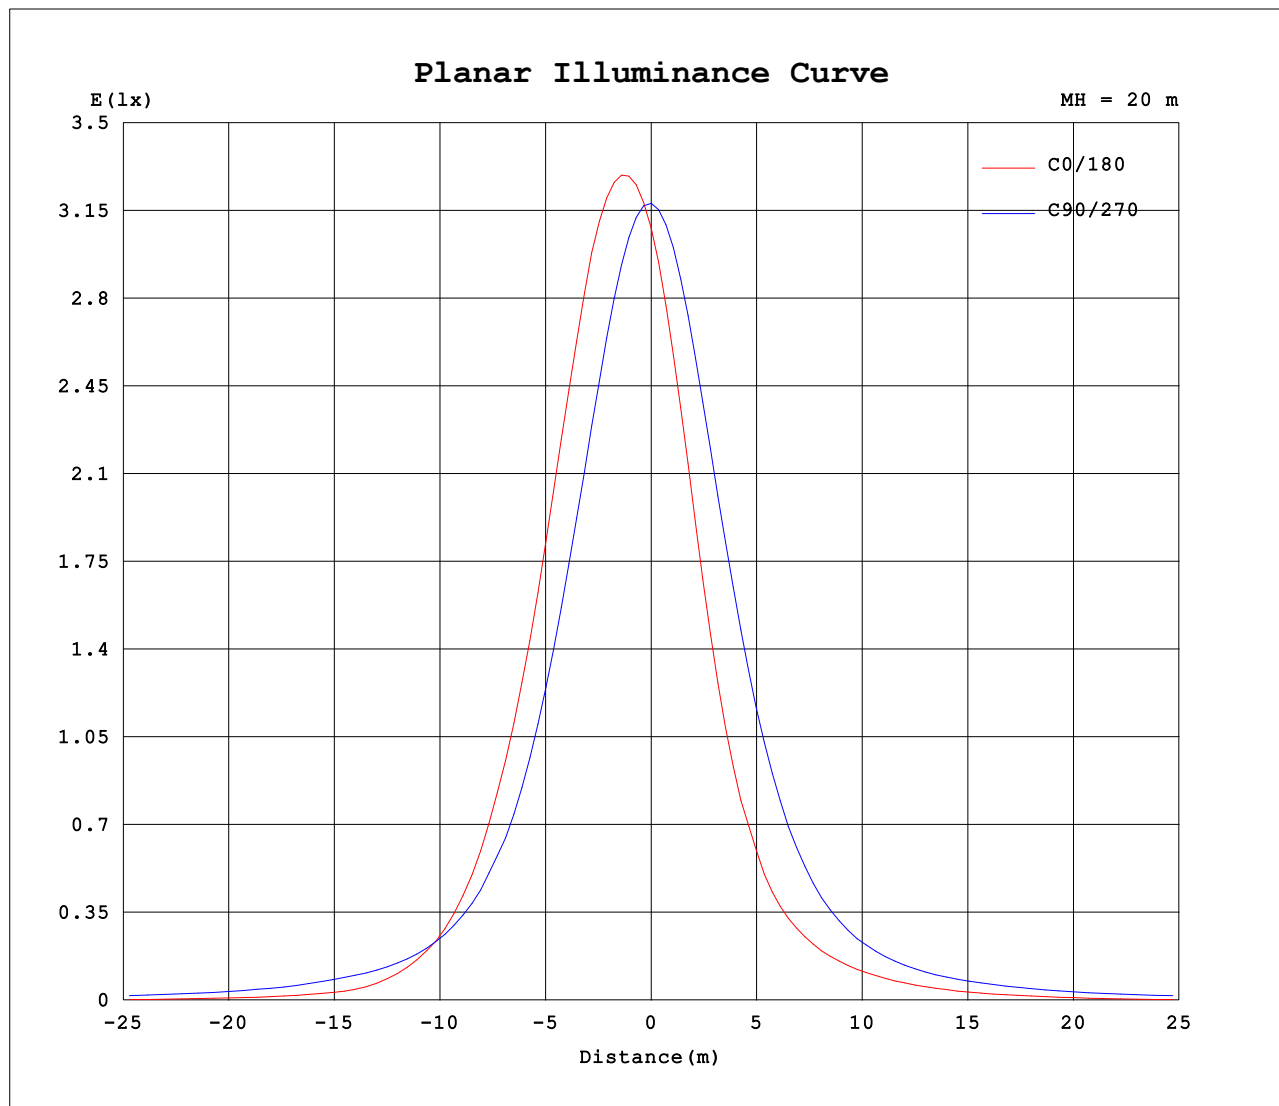


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.00V I:0.0490A P:6.5000W PF:0.9000 Freq:50.00Hz Lamp Flux:353.246x1 lm		
NAME:Lumino Ground-500mm-RGBW GREEN-25D-REV2	TYPE:RGBW-GREEN	WEIGHT:00
SPEC.:25 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

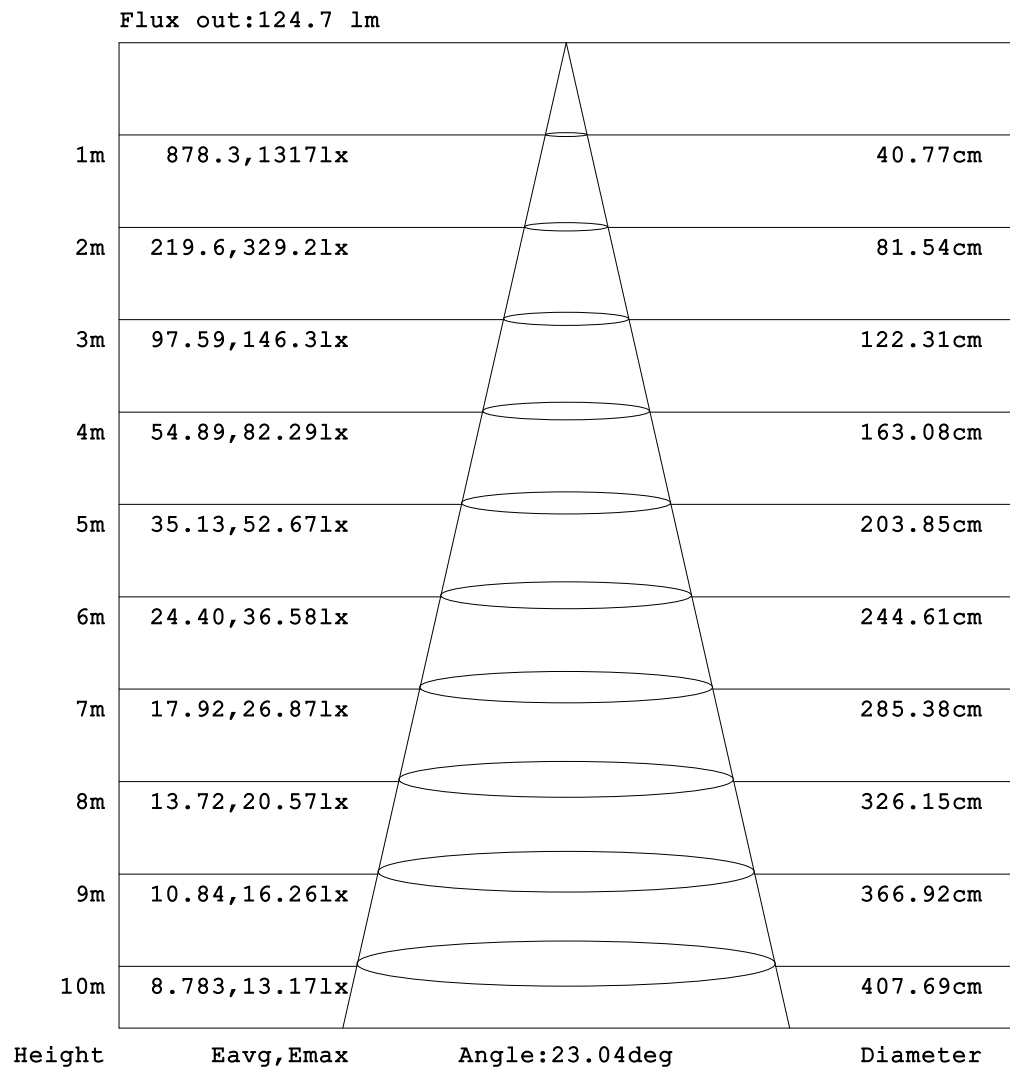

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:20DEG
 Operators:01
 Test Date:2025-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.700m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.00V I:0.0490A P:6.5000W PF:0.9000 Freq:50.00Hz Lamp Flux:353.246x1 lm																		
NAME:Lumino Ground-500mm-RGBW GREEN-25D-REV2									TYPE:RGBW-GREEN					WEIGHT:00				
SPEC.:25 DEG									DIM.:500mm					SERIAL No.:01				
MFR.: 001									SUR.:0.8					Shielding Angle:				

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.09	0.09	0.08	0.07	0.07	0.07	0.07	0.08	0.11	0.18	0.35	0.63	1.05	1.53	1.89	1.95	1.88	1.89	1.99
-170	0.09	0.09	0.08	0.07	0.07	0.07	0.07	0.08	0.11	0.18	0.33	0.58	0.95	1.40	1.79	2.03	2.03	2.01	2.00
-160	0.09	0.09	0.08	0.07	0.07	0.07	0.07	0.08	0.11	0.15	0.25	0.42	0.67	0.97	1.29	1.55	1.70	1.80	1.83
-150	0.09	0.09	0.08	0.07	0.07	0.07	0.08	0.08	0.10	0.13	0.17	0.26	0.37	0.52	0.69	0.85	0.98	1.05	1.07
-140	0.09	0.09	0.08	0.07	0.07	0.07	0.07	0.08	0.09	0.10	0.13	0.16	0.20	0.26	0.32	0.40	0.45	0.49	0.51
-130	0.09	0.09	0.08	0.07	0.07	0.06	0.07	0.07	0.08	0.09	0.10	0.11	0.13	0.16	0.18	0.22	0.25	0.28	0.30
-120	0.09	0.09	0.08	0.07	0.07	0.07	0.06	0.06	0.07	0.08	0.09	0.10	0.11	0.12	0.14	0.16	0.18	0.20	0.22
-110	0.09	0.09	0.08	0.08	0.07	0.07	0.06	0.07	0.07	0.08	0.09	0.10	0.11	0.12	0.13	0.15	0.16	0.18	0.19
-100	0.09	0.09	0.08	0.08	0.07	0.07	0.06	0.07	0.08	0.09	0.09	0.10	0.11	0.12	0.12	0.13	0.14	0.15	0.16
-90	0.09	0.09	0.08	0.08	0.07	0.07	0.06	0.07	0.09	0.10	0.11	0.12	0.14	0.14	0.14	0.14	0.14	0.15	0.15
-80	0.09	0.09	0.08	0.08	0.07	0.07	0.07	0.10	0.14	0.18	0.23	0.28	0.33	0.77	1.31	1.90	2.52	3.13	3.72
-70	0.09	0.09	0.08	0.08	0.09	0.11	0.14	0.21	0.30	0.42	0.55	0.68	0.82	2.08	4.02	6.14	8.33	10.5	12.6
-60	0.09	0.09	0.09	0.11	0.15	0.21	0.30	0.42	0.59	0.85	1.43	2.37	3.63	5.71	9.08	12.4	15.6	18.6	21.5
-50	0.09	0.09	0.10	0.14	0.23	0.37	0.50	0.64	1.07	2.07	3.59	5.79	8.72	12.2	16.6	20.9	24.9	28.6	31.8
-40	0.09	0.09	0.12	0.19	0.34	0.51	0.71	1.01	1.32	2.74	6.42	11.1	16.3	21.9	27.9	34.8	41.5	47.9	53.0
-30	0.09	0.09	0.13	0.24	0.44	0.65	0.96	1.36	2.41	5.71	10.5	17.0	24.8	35.0	46.5	59.6	75.2	90.3	102
-20	0.09	0.09	0.15	0.28	0.51	0.76	1.19	1.80	4.35	9.30	15.4	23.5	35.9	53.9	78.4	115	163	228	278
-10	0.09	0.10	0.16	0.32	0.56	0.85	1.34	2.16	5.72	11.6	19.0	30.2	47.3	73.4	119	214	393	625	805
0	0.09	0.10	0.16	0.34	0.59	0.87	1.40	2.04	5.73	11.9	19.5	30.7	47.9	74.5	122	224	456	866	1232
10	0.09	0.10	0.17	0.33	0.58	0.86	1.34	2.27	5.89	11.8	19.1	29.6	45.3	67.9	105	176	336	577	765
20	0.09	0.10	0.16	0.31	0.54	0.79	1.20	1.92	4.63	9.62	15.7	23.5	34.6	51.1	73.6	107	155	212	258
30	0.09	0.11	0.16	0.28	0.48	0.69	0.99	1.36	2.73	6.21	11.1	17.7	25.8	35.8	47.0	59.4	73.1	86.3	96.1
40	0.09	0.11	0.15	0.24	0.39	0.57	0.77	1.05	1.33	3.16	7.31	12.4	17.9	23.9	30.1	36.0	41.6	46.4	50.2
50	0.09	0.11	0.14	0.20	0.31	0.45	0.58	0.73	1.23	2.35	4.11	6.74	10.3	14.2	18.1	21.8	25.2	28.0	30.3
60	0.09	0.11	0.13	0.17	0.23	0.31	0.42	0.54	0.71	1.13	1.90	3.04	4.50	6.55	9.39	12.2	14.8	17.2	19.4
70	0.09	0.11	0.13	0.15	0.19	0.23	0.28	0.34	0.43	0.53	0.64	0.77	0.90	1.93	3.58	5.35	7.15	8.91	10.6
80	0.09	0.11	0.13	0.14	0.17	0.19	0.21	0.23	0.25	0.28	0.31	0.33	0.37	0.65	1.02	1.42	1.83	2.25	2.64
90	0.09	0.11	0.12	0.14	0.16	0.17	0.19	0.19	0.20	0.20	0.21	0.21	0.21	0.22	0.22	0.23	0.23	0.24	0.24
100	0.09	0.11	0.12	0.14	0.15	0.17	0.18	0.19	0.19	0.20	0.20	0.21	0.21	0.22	0.22	0.23	0.23	0.24	0.24
110	0.09	0.11	0.12	0.13	0.15	0.16	0.17	0.17	0.17	0.17	0.18	0.18	0.19	0.20	0.21	0.22	0.23	0.25	0.26
120	0.09	0.11	0.12	0.13	0.14	0.14	0.14	0.15	0.16	0.16	0.17	0.18	0.19	0.21	0.22	0.23	0.24	0.25	0.26
130	0.09	0.11	0.11	0.12	0.12	0.12	0.13	0.13	0.12	0.13	0.14	0.16	0.18	0.20	0.22	0.24	0.26	0.27	0.28
140	0.09	0.10	0.11	0.11	0.11	0.11	0.11	0.09	0.09	0.10	0.12	0.15	0.23	0.30	0.37	0.40	0.42	0.43	0.41
150	0.09	0.10	0.10	0.10	0.10	0.10	0.09	0.09	0.09	0.09	0.15	0.24	0.34	0.49	0.66	0.81	0.88	0.92	0.91
160	0.09	0.09	0.09	0.09	0.09	0.08	0.08	0.08	0.09	0.14	0.23	0.34	0.58	0.90	1.19	1.43	1.59	1.64	1.63
170	0.09	0.09	0.09	0.08	0.08	0.08	0.08	0.08	0.10	0.17	0.30	0.54	0.91	1.32	1.66	1.86	1.90	1.88	1.92
180	0.09	0.09	0.08	0.07	0.07	0.07	0.07	0.08	0.11	0.18	0.35	0.63	1.05	1.53	1.89	1.95	1.88	1.89	2.02

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.00V I:0.0490A P:6.5000W PF:0.9000 Freq:50.00Hz Lamp Flux:353.246x1 lm																		
NAME:Lumino Ground-500mm-RGBW GREEN-25D-REV2									TYPE:RGBW-GREEN					WEIGHT:00				
SPEC.:25 DEG									DIM.:500mm					SERIAL No.:01				
MFR.: 001									SUR.:0.8					Shielding Angle:				

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	2.14	2.14	1.92	1.50	1.00	0.58	0.32	0.19	0.11	0.07	0.04	0.02	0.02	0.02	0.02	0.02	0.03	0.04	
-170	2.04	2.00	1.75	1.35	0.91	0.56	0.33	0.21	0.14	0.09	0.06	0.04	0.03	0.03	0.03	0.02	0.03	0.04	
-160	1.70	1.49	1.23	0.92	0.64	0.42	0.29	0.20	0.14	0.10	0.07	0.05	0.04	0.03	0.03	0.03	0.03	0.04	
-150	0.97	0.82	0.66	0.51	0.38	0.29	0.23	0.18	0.14	0.10	0.08	0.06	0.05	0.04	0.03	0.03	0.03	0.04	
-140	0.47	0.41	0.35	0.28	0.24	0.20	0.17	0.15	0.12	0.10	0.08	0.06	0.05	0.04	0.04	0.04	0.03	0.04	
-130	0.28	0.25	0.23	0.20	0.18	0.15	0.14	0.12	0.11	0.09	0.08	0.06	0.05	0.05	0.04	0.04	0.03	0.04	
-120	0.21	0.19	0.18	0.15	0.14	0.12	0.11	0.10	0.09	0.08	0.07	0.06	0.06	0.05	0.04	0.04	0.03	0.04	
-110	0.18	0.16	0.15	0.14	0.13	0.12	0.11	0.10	0.09	0.08	0.08	0.07	0.06	0.05	0.04	0.04	0.04	0.04	
-100	0.15	0.14	0.14	0.13	0.12	0.12	0.11	0.10	0.09	0.08	0.07	0.07	0.06	0.05	0.05	0.04	0.04	0.04	
-90	0.15	0.15	0.15	0.15	0.15	0.14	0.13	0.12	0.11	0.09	0.08	0.07	0.06	0.06	0.05	0.05	0.04	0.04	
-80	3.13	2.51	1.90	1.30	0.76	0.32	0.28	0.23	0.19	0.15	0.12	0.09	0.08	0.07	0.06	0.06	0.05	0.04	
-70	10.6	8.45	6.28	4.13	2.08	0.74	0.61	0.50	0.40	0.31	0.23	0.17	0.13	0.10	0.08	0.07	0.06	0.04	
-60	18.7	15.7	12.5	9.29	6.03	3.99	2.70	1.68	0.98	0.57	0.37	0.27	0.22	0.16	0.11	0.08	0.06	0.04	
-50	28.5	24.8	20.7	16.3	12.0	8.83	5.97	3.50	1.88	0.93	0.54	0.42	0.30	0.22	0.15	0.09	0.06	0.04	
-40	49.6	44.5	38.1	30.6	22.8	16.3	11.0	6.76	3.25	1.01	0.71	0.56	0.41	0.28	0.19	0.11	0.07	0.04	
-30	98.7	89.3	75.9	58.2	40.1	26.1	16.6	10.1	6.00	2.82	1.02	0.68	0.50	0.33	0.22	0.13	0.07	0.04	
-20	274	233	179	123	75.6	41.8	22.5	14.3	8.74	4.60	1.70	0.80	0.57	0.38	0.25	0.14	0.07	0.04	
-10	808	671	455	275	142	68.8	31.7	17.6	10.5	5.53	2.08	0.89	0.62	0.40	0.26	0.15	0.07	0.04	
0	1320	1101	721	399	186	81.0	31.8	17.9	10.4	5.30	1.93	0.88	0.63	0.41	0.27	0.15	0.07	0.04	
10	783	614	401	230	119	56.2	25.6	15.4	9.12	4.67	1.59	0.85	0.61	0.40	0.27	0.15	0.08	0.04	
20	261	229	164	102	56.2	27.0	16.7	10.9	6.47	3.16	1.02	0.78	0.56	0.37	0.25	0.15	0.08	0.04	
30	92.3	82.1	67.4	47.6	30.8	19.1	11.6	6.47	3.50	1.32	0.85	0.67	0.49	0.33	0.23	0.14	0.07	0.04	
40	45.1	38.4	30.6	22.2	16.0	11.1	7.20	3.98	1.51	0.82	0.68	0.53	0.39	0.29	0.20	0.12	0.07	0.04	
50	26.3	21.9	17.1	12.4	8.26	5.80	3.75	2.27	1.29	0.73	0.51	0.39	0.31	0.23	0.17	0.11	0.07	0.04	
60	16.4	13.3	10.1	6.91	3.72	2.14	1.39	0.86	0.58	0.45	0.35	0.30	0.23	0.18	0.13	0.10	0.07	0.04	
70	8.76	6.87	5.00	3.22	1.60	0.58	0.51	0.43	0.37	0.30	0.25	0.20	0.17	0.14	0.11	0.09	0.07	0.04	
80	2.23	1.80	1.36	0.95	0.58	0.28	0.26	0.23	0.20	0.18	0.17	0.15	0.13	0.11	0.10	0.08	0.06	0.04	
90	0.23	0.23	0.22	0.21	0.20	0.20	0.19	0.17	0.16	0.15	0.14	0.13	0.11	0.10	0.08	0.07	0.05	0.04	
100	0.24	0.23	0.23	0.22	0.22	0.21	0.19	0.17	0.16	0.14	0.12	0.11	0.09	0.08	0.07	0.06	0.05	0.04	
110	0.25	0.25	0.24	0.23	0.23	0.22	0.20	0.18	0.16	0.14	0.12	0.10	0.09	0.08	0.07	0.05	0.04	0.04	
120	0.25	0.24	0.24	0.23	0.23	0.21	0.19	0.17	0.15	0.13	0.11	0.10	0.09	0.07	0.06	0.05	0.04	0.04	
130	0.27	0.27	0.26	0.25	0.24	0.20	0.18	0.16	0.14	0.12	0.10	0.09	0.08	0.07	0.06	0.05	0.04	0.04	
140	0.40	0.38	0.35	0.32	0.26	0.21	0.16	0.13	0.11	0.10	0.09	0.08	0.07	0.06	0.05	0.05	0.04	0.04	
150	0.85	0.75	0.63	0.49	0.35	0.25	0.17	0.11	0.09	0.08	0.08	0.07	0.06	0.05	0.04	0.04	0.03	0.04	
160	1.56	1.41	1.14	0.83	0.54	0.33	0.21	0.14	0.10	0.07	0.06	0.05	0.05	0.04	0.04	0.03	0.03	0.04	
170	1.98	1.86	1.59	1.23	0.83	0.50	0.29	0.18	0.11	0.07	0.05	0.04	0.04	0.03	0.03	0.03	0.03	0.04	
180	2.14	2.14	1.92	1.50	1.00	0.58	0.32	0.19	0.11	0.07	0.04	0.02	0.02	0.02	0.02	0.02	0.03	0.04	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
γ Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks: