

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		2203.2 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		3.0 degrees horizontal
Beam Spread	At 10% of Imax	85.7V x 55.5H
	At 50% of Imax	54.5V x 21.0H
	At 90% of Imax	24.7V x 6.7H
Beam Flux	Total	1000.4 lumens per klm.
	To 10% of Imax	850.9 lumens per klm.
	To 50% of Imax	426.5 lumens per klm.
	To 90% of Imax	77.1 lumens per klm.
	Upward LOR	1.1 %
	Downward LOR	98.9 %
Luminaire Efficiency (Light Output Ratio)		100.0 %

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-08-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.90V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:121.672x12 lm		
NAME:LuminoFlex Ground-500mm-3000K-20x55D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:20x55 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

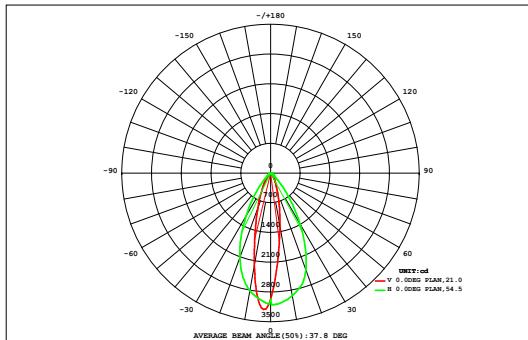

DATA OF LAMP		Eff:82.03lm/W	
MODEL		Imax(cd)	3217
NOMINAL POWER(W)	18	AVAILABILITY(%)	85.0
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	1242
NOMINAL FLUX(lm)	121.672	LOR(%)	100.0
LAMPS INSIDE	12	TOTAL FLUX(lm)	1460
TEST VOLTAGE(V)	220	θ @50% (H,V)	21,55DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.01	0.01	0.02	0.03	0.04	0.08	0.19	0.33	0.46	0.46	0.33	0.20	0.09	0.05	0.03	0.02	0.01	0.01	2.36	0.00
72	0.01	0.01	0.02	0.04	0.09	0.18	0.37	0.59	0.78	0.79	0.61	0.40	0.21	0.11	0.05	0.02	0.01	0.01	4.30	0.00
64	0.01	0.01	0.02	0.07	0.20	0.45	0.82	1.18	1.49	1.53	1.29	0.94	0.54	0.23	0.08	0.03	0.01	0.01	8.92	0.00
56	0.01	0.01	0.03	0.11	0.36	0.90	1.71	2.80	4.09	4.24	3.18	2.14	1.13	0.44	0.14	0.04	0.02	0.01	21.3	1.16
48	0.01	0.02	0.04	0.13	0.51	1.44	3.02	6.24	10.8	11.3	7.38	4.13	1.95	0.65	0.16	0.05	0.02	0.01	47.8	31.6
40	0.01	0.02	0.06	0.15	0.67	2.35	4.90	10.6	21.1	22.5	13.8	7.19	3.36	0.94	0.19	0.07	0.03	0.01	87.9	74.9
32	0.01	0.02	0.07	0.21	1.11	3.10	7.00	14.9	31.9	35.7	22.0	10.7	4.66	1.69	0.30	0.09	0.03	0.01	134	122
24	0.01	0.02	0.08	0.28	1.49	3.78	8.35	19.0	39.5	48.0	28.7	13.2	6.05	2.52	0.44	0.11	0.04	0.01	172	160
	0.01	0.02	0.08	0.28	1.63	4.22	9.42	20.6	42.9	55.1	32.5	16.1	7.25	3.01	0.51	0.11	0.04	0.01	194	183
	0.01	0.03	0.09	0.34	1.74	4.53	10.4	23.5	47.8	58.1	36.0	17.1	7.58	3.12	0.55	0.11	0.04	0.01	211	201
	0.01	0.03	0.09	0.44	1.80	4.51	10.4	22.9	43.8	51.1	32.2	15.2	6.79	2.80	0.52	0.11	0.04	0.01	193	182
-24	0.01	0.03	0.09	0.36	1.61	3.90	8.78	18.2	37.0	40.2	24.3	12.2	5.40	2.07	0.36	0.10	0.04	0.01	155	143
-32	0.01	0.02	0.07	0.23	1.14	3.05	6.17	13.1	25.4	26.6	15.8	8.11	3.92	1.20	0.22	0.08	0.03	0.01	105	92.6
-40	0.01	0.02	0.06	0.17	0.70	1.93	3.77	7.86	13.5	13.9	8.80	4.66	2.22	0.74	0.18	0.06	0.02	0.01	58.7	43.4
-48	0.01	0.02	0.04	0.15	0.47	1.13	2.13	3.61	5.41	5.52	3.87	2.38	1.23	0.49	0.15	0.04	0.02	0.01	26.7	5.38
-56	0.01	0.01	0.03	0.11	0.28	0.60	1.02	1.44	1.80	1.82	1.48	1.04	0.57	0.23	0.09	0.03	0.02	0.01	10.6	0.00
-64	0.01	0.01	0.02	0.06	0.14	0.28	0.50	0.72	0.91	0.90	0.67	0.42	0.20	0.10	0.05	0.02	0.01	0.01	5.03	0.00
-72	0.01	0.01	0.02	0.03	0.06	0.12	0.24	0.38	0.52	0.52	0.37	0.22	0.09	0.05	0.03	0.02	0.01	0.01	2.71	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)	16	24	32	40	48	56	64	72			
Φ t	0.14	0.32	0.93	3.20	14.0	36.5	79.2	168	329	378	233	116	53.3	20.5	4.04	1.13	0.44	0.17	1439	---
Φ a	0.00	0.00	0.00	0.00	0.00	2.92	57.1	153	317	366	219	99.3	27.8	0.00	0.00	0.00	0.00	0.00	---	1242


one-half-peak spread: U:27.7,D:27.1 , L:10.6,R:10.6 Beam Type: Type 4 x 5 (H x V)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.90V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:121.672x12 lm		
NAME:LuminoFlex Ground-500mm-3000K-20x55D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:20x55 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

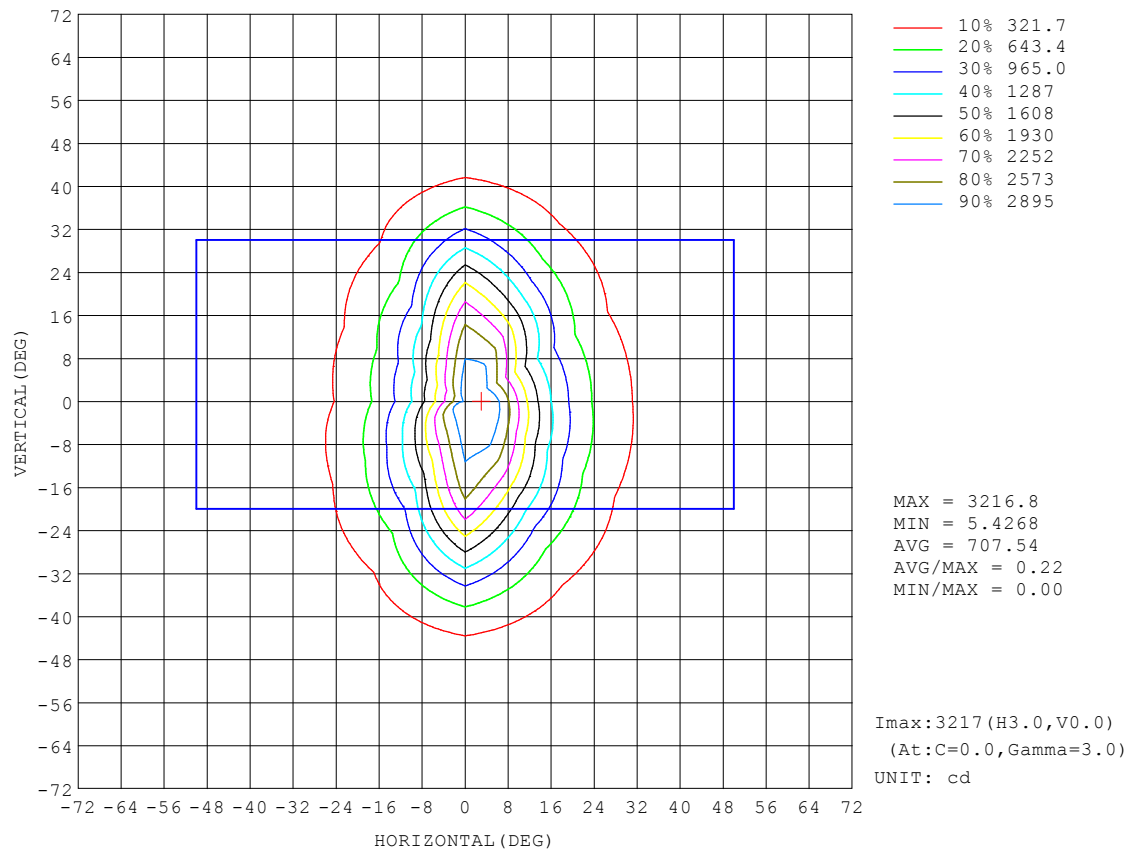


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.90V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:121.672x12 lm		
NAME:LuminoFlex Ground-500mm-3000K-20x55D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:20x55 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

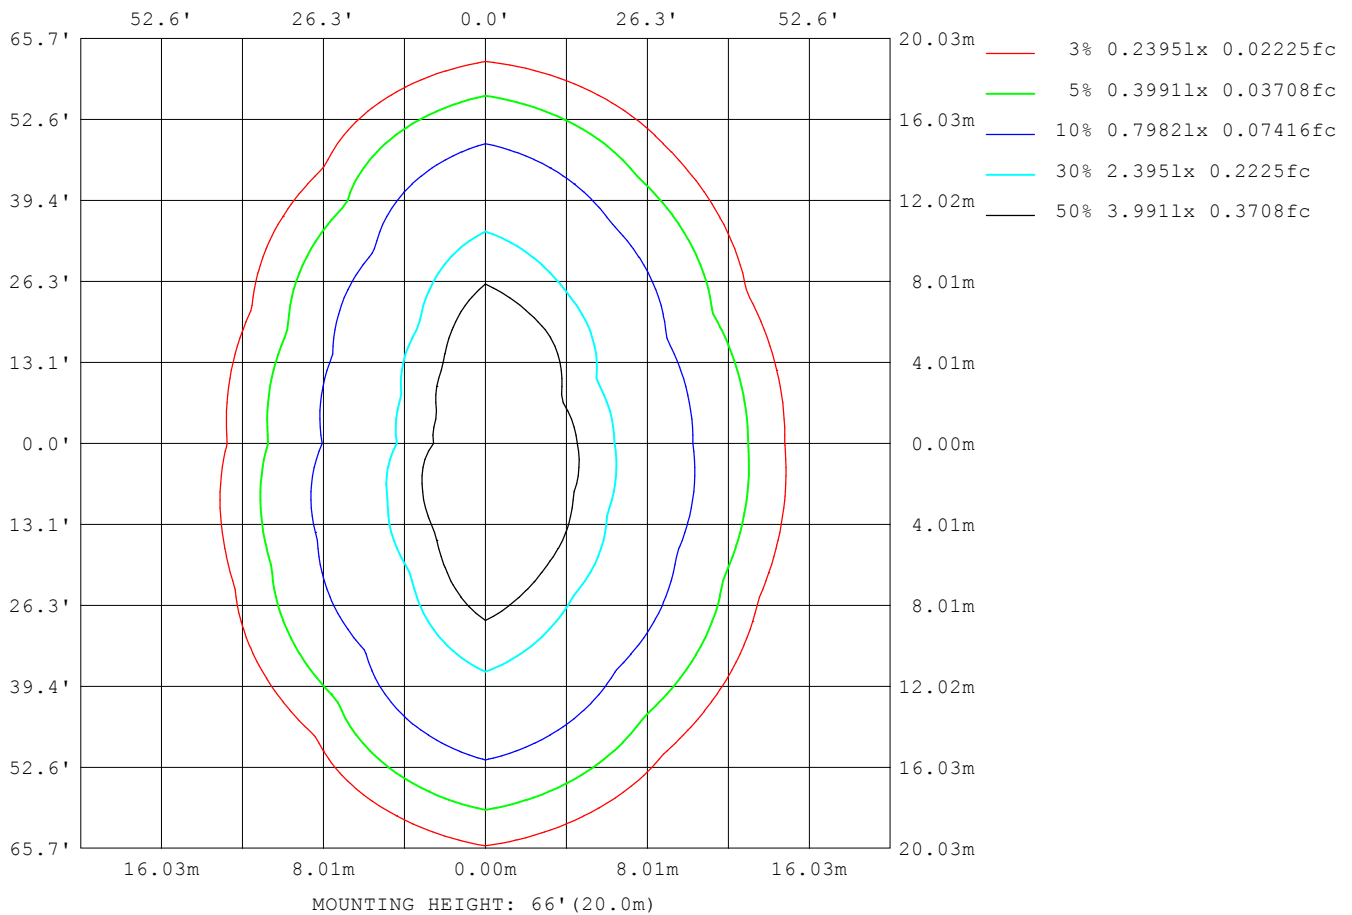

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

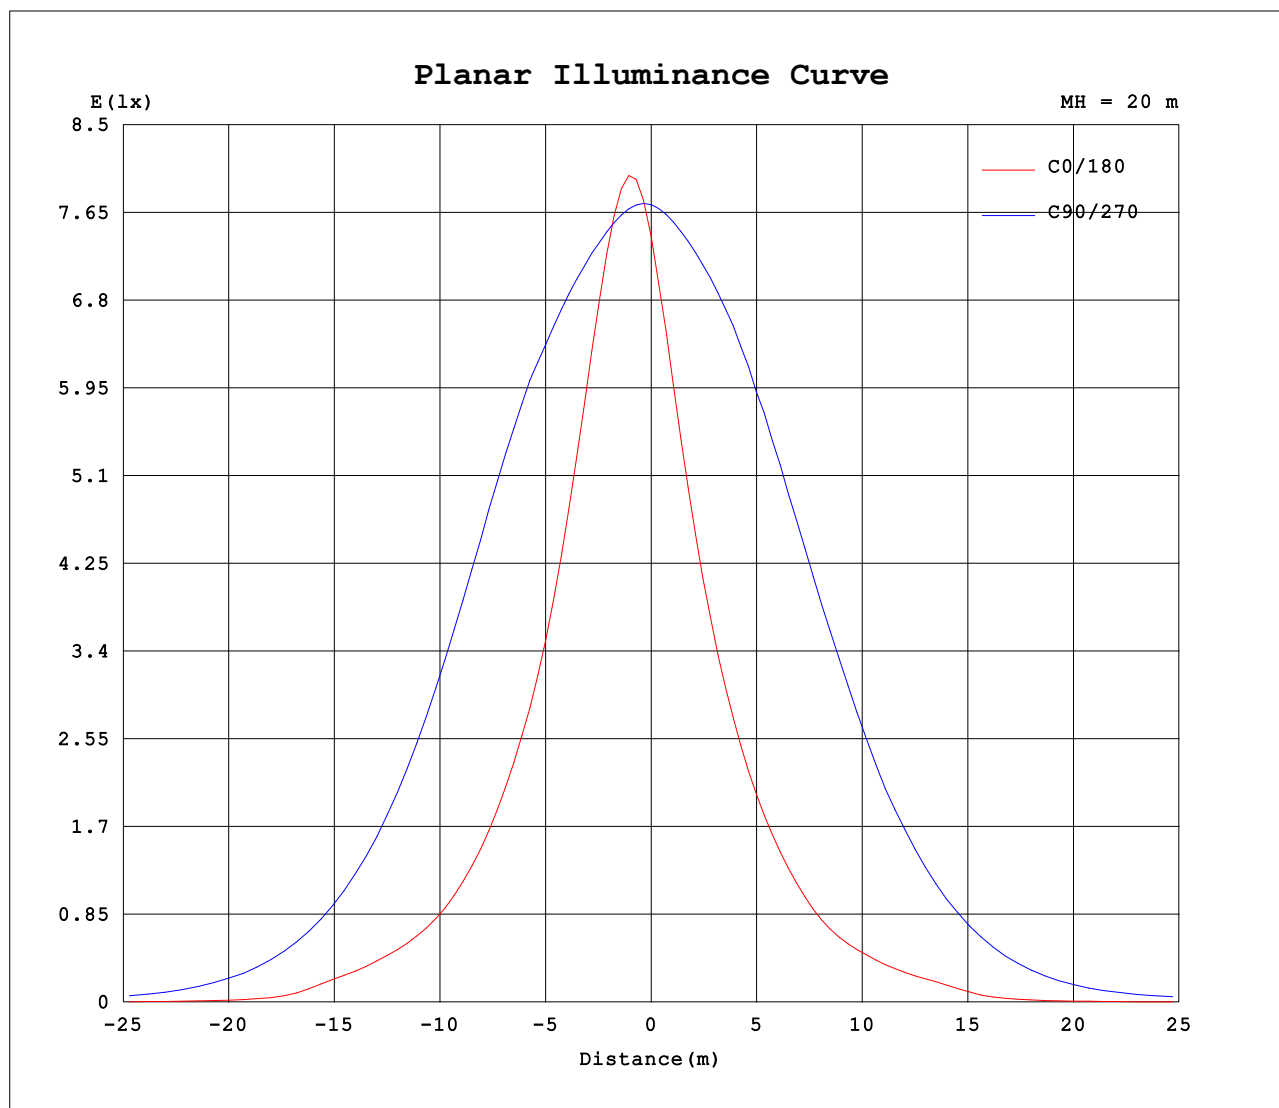


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-08-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.90V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:121.672x12 lm		
NAME:LuminoFlex Ground-500mm-3000K-20x55D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:20x55 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

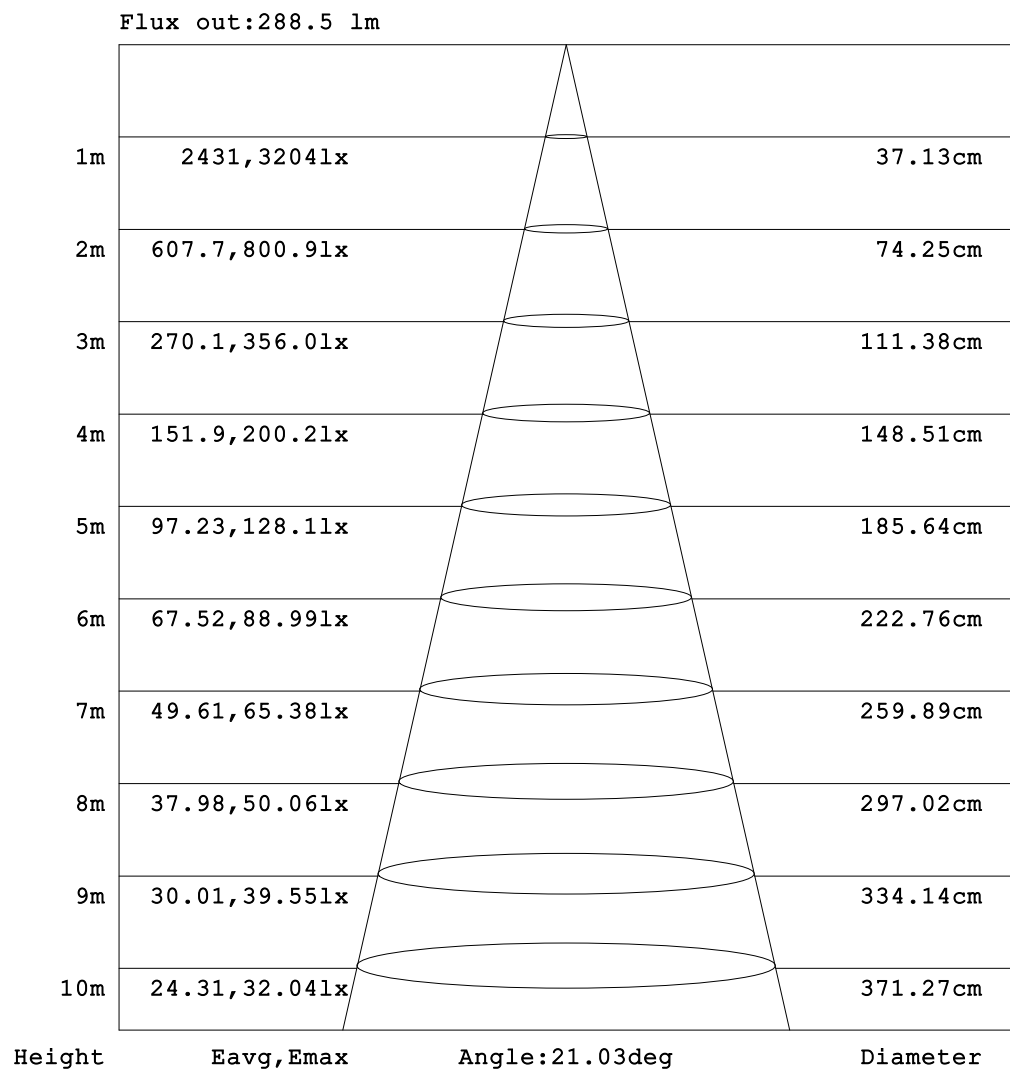

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:20DEG
 Operators:01
 Test Date:2025-08-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.700m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.90V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:121.672x12 lm								
NAME:LuminoFlex Ground-500mm-3000K-20x55D-REV2					TYPE:3000K			WEIGHT:00
SPEC.:20x55 DEG					DIM.:500mm			SERIAL No.:01
MFR.: 001					SUR.:0.8			Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.11	0.11	0.11	0.11	0.13	0.15	0.19	0.29	0.48	0.77	1.25	1.95	3.06	4.62	6.26	7.33	7.39	7.28	7.49
-170	0.11	0.12	0.14	0.16	0.18	0.22	0.28	0.39	0.59	0.88	1.36	2.10	3.21	4.68	6.12	7.08	7.30	7.49	7.03
-160	0.11	0.14	0.17	0.20	0.23	0.28	0.34	0.46	0.63	0.88	1.28	1.83	2.71	4.27	5.62	6.26	6.61	7.09	7.21
-150	0.11	0.15	0.19	0.23	0.28	0.33	0.40	0.50	0.64	0.83	1.11	1.57	2.30	3.46	5.04	6.59	7.61	8.60	9.53
-140	0.11	0.16	0.22	0.27	0.32	0.38	0.45	0.54	0.64	0.94	1.27	1.53	1.80	2.17	2.74	3.27	3.81	4.26	4.54
-130	0.11	0.17	0.23	0.30	0.36	0.42	0.49	0.57	0.86	1.39	1.84	2.14	2.39	2.59	2.93	3.31	3.70	4.12	4.59
-120	0.11	0.18	0.25	0.32	0.39	0.46	0.53	0.65	0.91	1.27	1.78	2.45	3.19	3.75	4.23	4.79	5.38	6.02	6.65
-110	0.11	0.18	0.26	0.33	0.41	0.49	0.56	0.74	0.98	1.21	1.46	1.72	2.00	2.21	2.42	2.62	2.81	2.98	3.13
-100	0.11	0.19	0.27	0.34	0.42	0.50	0.58	0.74	0.94	1.15	1.38	1.62	1.86	2.03	2.18	2.32	2.47	2.60	2.74
-90	0.11	0.20	0.29	0.38	0.46	0.55	0.64	0.77	0.91	1.04	1.17	1.30	1.44	1.53	1.62	1.71	1.80	1.90	1.99
-80	0.11	0.21	0.34	0.48	0.61	0.72	0.84	1.00	1.17	1.35	1.54	1.73	1.92	3.26	4.84	6.54	8.29	10.0	11.7
-70	0.11	0.23	0.41	0.54	0.68	0.83	1.01	1.22	1.48	1.82	2.37	3.13	4.09	7.08	11.0	15.0	18.9	22.7	26.3
-60	0.11	0.27	0.43	0.58	0.78	0.98	1.21	1.52	2.32	3.68	5.80	9.04	13.6	19.8	26.9	33.6	39.9	45.6	50.4
-50	0.11	0.30	0.44	0.65	0.87	1.13	1.40	1.70	3.30	7.30	13.4	21.9	34.0	50.5	65.9	80.8	96.0	110	120
-40	0.11	0.30	0.46	0.69	0.96	1.25	1.62	2.74	4.66	9.67	20.6	40.1	69.3	108	149	225	323	429	522
-30	0.11	0.29	0.47	0.72	1.01	1.34	2.17	3.94	6.77	11.3	24.9	71.3	134	203	296	442	742	1079	1396
-20	0.11	0.28	0.47	0.72	1.03	1.43	2.47	4.90	8.62	17.9	54.6	113	182	296	472	727	1115	1787	2432
-10	0.11	0.27	0.46	0.71	1.01	1.43	2.51	5.19	9.38	22.0	59.4	129	220	348	570	924	1473	2155	2933
0	0.11	0.25	0.43	0.66	0.94	1.27	2.14	4.64	7.65	13.5	33.6	122	201	304	492	805	1277	2019	2967
10	0.11	0.27	0.45	0.70	1.00	1.34	2.24	4.76	8.00	14.8	42.8	113	191	291	459	750	1232	1904	2813
20	0.11	0.28	0.47	0.71	1.01	1.34	2.00	4.15	7.08	12.1	27.2	81.7	144	235	376	585	920	1527	2120
30	0.11	0.29	0.46	0.70	0.99	1.30	1.71	3.01	5.43	8.36	15.5	41.7	94.2	161	236	352	601	885	1151
40	0.11	0.30	0.46	0.67	0.93	1.22	1.51	1.97	3.31	7.33	15.9	31.2	54.2	84.7	122	178	251	330	399
50	0.11	0.30	0.44	0.63	0.85	1.09	1.35	1.61	2.39	4.60	8.92	16.2	26.3	39.1	52.8	66.0	77.9	88.1	95.6
60	0.11	0.26	0.43	0.58	0.76	0.95	1.16	1.40	1.88	2.70	4.01	5.83	8.38	12.6	19.2	26.1	32.7	38.7	44.0
70	0.11	0.22	0.41	0.54	0.67	0.82	0.97	1.17	1.41	1.64	1.91	2.25	2.74	5.34	8.99	12.7	16.5	20.2	23.8
80	0.11	0.20	0.31	0.46	0.60	0.73	0.85	1.04	1.23	1.42	1.60	1.78	1.96	2.89	4.07	5.37	6.73	8.10	9.40
90	0.11	0.20	0.29	0.38	0.47	0.55	0.64	0.94	1.24	1.54	1.85	2.15	2.45	2.59	2.74	2.88	3.03	3.18	3.32
100	0.11	0.19	0.28	0.36	0.44	0.51	0.59	0.90	1.21	1.53	1.85	2.17	2.50	2.69	2.88	3.07	3.25	3.44	3.62
110	0.11	0.19	0.27	0.34	0.41	0.49	0.55	0.77	1.07	1.40	1.88	2.48	3.17	3.82	4.43	5.03	5.64	6.25	6.81
120	0.11	0.18	0.25	0.32	0.38	0.41	0.33	0.49	1.10	1.70	2.21	2.63	2.99	3.24	3.44	3.61	3.12	2.40	2.04
130	0.11	0.17	0.23	0.29	0.31	0.27	0.38	0.46	0.76	1.10	1.12	1.49	1.81	2.04	2.46	2.91	3.36	3.86	4.44
140	0.11	0.16	0.22	0.26	0.22	0.30	0.37	0.42	0.49	0.70	0.96	1.10	1.32	1.83	2.55	3.21	3.85	4.45	4.87
150	0.11	0.15	0.19	0.20	0.21	0.28	0.33	0.40	0.50	0.57	0.82	1.32	2.11	3.30	4.77	6.10	7.10	7.94	8.74
160	0.11	0.14	0.17	0.16	0.20	0.24	0.29	0.38	0.48	0.71	1.10	1.63	2.47	3.95	5.28	6.09	6.42	6.97	7.26
170	0.11	0.12	0.14	0.14	0.17	0.20	0.24	0.35	0.51	0.80	1.28	1.99	3.08	4.54	6.03	7.03	7.23	7.22	7.09
180	0.11	0.11	0.11	0.11	0.13	0.15	0.19	0.29	0.48	0.77	1.25	1.95	3.06	4.62	6.26	7.33	7.39	7.28	7.51

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
γ Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.90V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:121.672x12 lm																		
NAME:LuminoFlex Ground-500mm-3000K-20x55D-REV2										TYPE:3000K					WEIGHT:00			
SPEC.:20x55 DEG										DIM.:500mm					SERIAL No.:01			
MFR.: 001										SUR.:0.8					Shielding Angle:			

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	7.77	7.65	6.79	5.23	3.53	2.22	1.40	0.87	0.53	0.32	0.19	0.10	0.08	0.08	0.08	0.08	0.11	0.23	
-170	7.42	7.03	6.21	4.91	3.45	2.28	1.50	1.00	0.66	0.45	0.30	0.21	0.17	0.15	0.13	0.11	0.12	0.23	
-160	6.93	6.17	5.17	4.15	3.01	1.93	1.37	0.99	0.72	0.52	0.39	0.30	0.25	0.21	0.18	0.14	0.14	0.23	
-150	7.95	6.32	4.83	3.72	2.65	1.82	1.27	0.94	0.73	0.58	0.46	0.38	0.32	0.27	0.22	0.17	0.16	0.23	
-140	4.07	3.46	2.83	2.24	1.77	1.48	1.28	1.09	0.86	0.63	0.53	0.45	0.38	0.32	0.26	0.20	0.18	0.23	
-130	4.03	3.52	3.02	2.52	2.10	1.95	1.77	1.53	1.18	0.80	0.59	0.50	0.43	0.36	0.29	0.23	0.19	0.23	
-120	5.88	5.11	4.36	3.61	2.97	2.47	1.96	1.50	1.13	0.87	0.66	0.55	0.47	0.39	0.32	0.25	0.20	0.23	
-110	2.91	2.68	2.44	2.21	2.00	1.81	1.60	1.39	1.18	0.98	0.76	0.59	0.50	0.42	0.34	0.28	0.22	0.23	
-100	2.60	2.47	2.33	2.19	2.05	1.90	1.66	1.43	1.21	0.99	0.79	0.61	0.52	0.45	0.38	0.31	0.26	0.23	
-90	1.90	1.82	1.73	1.65	1.56	1.48	1.36	1.24	1.12	1.00	0.88	0.76	0.67	0.58	0.49	0.41	0.32	0.23	
-80	10.0	8.29	6.54	4.84	3.26	1.92	1.76	1.59	1.43	1.26	1.10	0.95	0.82	0.70	0.58	0.46	0.35	0.23	
-70	22.4	18.4	14.3	10.3	6.29	3.40	2.67	2.14	1.82	1.59	1.36	1.15	0.99	0.82	0.67	0.51	0.37	0.23	
-60	44.2	37.2	29.5	21.5	13.7	9.34	6.75	4.72	3.23	2.25	1.65	1.38	1.16	0.95	0.75	0.56	0.39	0.23	
-50	112	99.2	84.6	69.3	52.5	33.7	19.6	10.8	5.99	3.26	1.92	1.61	1.34	1.07	0.83	0.60	0.40	0.23	
-40	442	347	255	179	121	75.9	42.6	21.4	9.75	5.12	3.20	1.90	1.49	1.18	0.89	0.63	0.41	0.23	
-30	1134	837	556	385	262	162	70.0	24.0	11.5	7.50	4.82	2.69	1.62	1.26	0.94	0.65	0.42	0.23	
-20	1992	1452	1006	656	407	253	152	54.4	18.6	9.71	6.18	3.52	1.79	1.30	0.96	0.66	0.42	0.23	
-10	2744	2060	1322	847	536	338	211	87.8	25.7	11.3	6.87	3.99	1.88	1.30	0.96	0.66	0.41	0.23	
0	3084	2211	1408	899	556	353	220	82.6	23.8	10.7	6.79	3.97	1.78	1.26	0.92	0.63	0.40	0.23	
10	2611	1838	1135	736	476	310	194	75.5	22.8	10.6	6.62	3.81	1.79	1.28	0.94	0.65	0.41	0.23	
20	1772	1323	900	576	355	215	124	41.4	15.9	8.86	5.72	3.16	1.67	1.26	0.94	0.65	0.41	0.23	
30	951	718	491	339	228	135	57.0	19.6	9.91	6.68	4.23	2.30	1.53	1.21	0.91	0.64	0.41	0.23	
40	347	282	216	163	111	69.3	38.4	18.9	8.66	4.25	2.58	1.71	1.40	1.12	0.86	0.61	0.40	0.23	
50	92.0	84.8	74.9	62.2	47.1	30.9	19.1	10.8	5.62	2.79	1.72	1.49	1.25	1.01	0.79	0.58	0.39	0.23	
60	39.4	34.0	27.9	21.2	14.5	9.91	6.85	4.66	3.11	2.10	1.51	1.27	1.08	0.89	0.71	0.54	0.37	0.23	
70	20.4	16.8	13.2	9.50	5.91	3.27	2.59	2.10	1.76	1.50	1.27	1.06	0.91	0.77	0.63	0.48	0.35	0.23	
80	8.11	6.76	5.41	4.11	2.94	2.01	1.84	1.66	1.48	1.28	1.07	0.87	0.75	0.64	0.54	0.43	0.33	0.23	
90	3.18	3.03	2.88	2.74	2.59	2.45	2.15	1.85	1.55	1.25	0.95	0.65	0.58	0.51	0.44	0.37	0.30	0.23	
100	3.44	3.26	3.09	2.91	2.73	2.54	2.21	1.88	1.56	1.23	0.90	0.58	0.51	0.43	0.36	0.30	0.25	0.23	
110	6.26	5.66	5.02	4.38	3.74	3.10	2.47	1.94	1.50	1.12	0.78	0.54	0.47	0.40	0.33	0.27	0.22	0.23	
120	2.59	3.52	4.27	4.20	3.60	3.15	2.75	2.30	1.76	1.15	0.64	0.49	0.43	0.36	0.30	0.24	0.20	0.23	
130	3.91	3.42	2.92	2.37	1.45	1.71	1.83	1.56	1.22	0.81	0.49	0.43	0.38	0.33	0.27	0.22	0.18	0.23	
140	4.37	3.70	3.01	2.33	1.79	1.43	1.16	0.82	0.72	0.50	0.44	0.38	0.33	0.28	0.24	0.19	0.17	0.23	
150	7.72	6.91	5.78	4.36	2.93	1.84	1.18	0.79	0.59	0.46	0.37	0.32	0.27	0.24	0.20	0.17	0.16	0.23	
160	6.78	6.04	5.45	4.25	3.24	1.82	1.29	0.90	0.62	0.44	0.32	0.25	0.22	0.19	0.16	0.14	0.14	0.23	
170	7.01	6.73	6.18	4.97	3.51	2.28	1.45	0.96	0.62	0.41	0.27	0.18	0.15	0.14	0.12	0.11	0.12	0.23	
180	7.77	7.65	6.79	5.23	3.53	2.22	1.40	0.87	0.53	0.32	0.19	0.10	0.08	0.08	0.08	0.08	0.11	0.23	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
γ Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks: