

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		3528.6 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		2.0 degrees horizontal
Beam Spread	At 10% of Imax	50.7V x 51.5H
	At 50% of Imax	23.6V x 23.8H
	At 90% of Imax	8.9V x 9.1H
Beam Flux	Total	1000.5 lumens per klm.
	To 10% of Imax	722.1 lumens per klm.
	To 50% of Imax	345.8 lumens per klm.
	To 90% of Imax	65.8 lumens per klm.
	Upward LOR	0.7 %
	Downward LOR	99.3 %
Luminaire Efficiency (Light Output Ratio)		100.0 %

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.92V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:134.975x12 lm		
NAME:LuminoFlex Ground-500mm-3000K-25D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:25 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

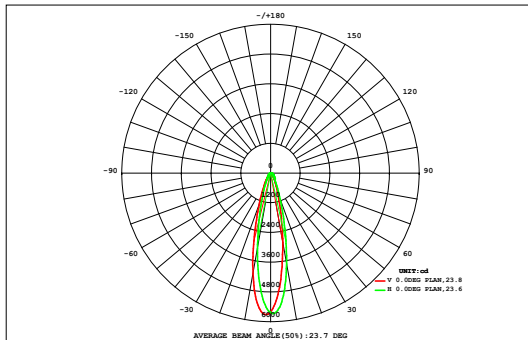

DATA OF LAMP		Eff:90.99lm/W	
MODEL		Imax(cd)	5715
NOMINAL POWER(W)	18	AVAILABILITY(%)	72.0
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	1166
NOMINAL FLUX(lm)	134.975	LOR(%)	100.0
LAMPS INSIDE	12	TOTAL FLUX(lm)	1620
TEST VOLTAGE(V)	220	θ @50% (H,V)	24,24DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.20	0.33	0.48	0.64	0.80	0.93	1.03	1.12	1.17	1.18	1.12	1.04	0.94	0.80	0.63	0.47	0.32	0.19	13.4	0.00
45	0.20	0.33	0.48	0.64	0.80	0.93	1.03	1.12	1.17	1.18	1.12	1.04	0.94	0.80	0.63	0.47	0.32	0.19	13.4	0.00
40	0.24	0.40	0.57	0.77	0.97	1.15	1.31	1.44	1.53	1.54	1.47	1.35	1.19	0.99	0.77	0.57	0.38	0.23	16.9	0.00
35	0.29	0.47	0.69	0.94	1.20	1.47	1.73	1.95	2.09	2.11	2.02	1.83	1.56	1.26	0.97	0.69	0.46	0.27	22.0	0.00
30	0.35	0.56	0.83	1.16	1.53	1.95	2.40	2.84	3.13	3.21	3.03	2.63	2.15	1.67	1.24	0.86	0.56	0.35	30.4	0.00
25	0.42	0.67	1.00	1.43	1.98	2.70	3.59	4.54	5.24	5.42	5.00	4.12	3.12	2.26	1.60	1.08	0.70	0.44	45.3	18.6
20	0.49	0.78	1.19	1.75	2.58	3.82	5.57	7.69	9.39	9.82	8.75	6.67	4.62	3.09	2.05	1.37	0.88	0.54	71.0	52.7
15	0.54	0.88	1.38	2.11	3.29	5.28	8.58	13.1	17.0	17.9	15.3	10.6	6.72	4.20	2.66	1.70	1.05	0.63	113	97.2
10	0.58	0.96	1.54	2.43	4.01	6.96	12.1	20.3	27.9	29.5	23.9	15.7	9.57	5.64	3.33	2.02	1.22	0.71	168	154
5	0.60	1.01	1.62	2.63	4.50	8.22	15.3	26.1	36.8	39.4	32.5	22.0	12.6	6.95	3.87	2.26	1.33	0.77	219	205
0	0.61	1.03	1.67	2.73	4.77	8.98	17.2	29.5	39.9	41.7	35.3	23.7	13.3	7.21	3.99	2.32	1.37	0.78	236	223
-5	0.62	1.03	1.66	2.71	4.69	8.71	16.2	25.5	32.6	33.6	28.1	19.2	11.2	6.32	3.63	2.17	1.31	0.76	200	187
-10	0.60	0.99	1.57	2.48	4.09	6.89	11.3	16.7	21.2	21.8	18.1	12.9	8.23	5.03	3.09	1.93	1.20	0.71	139	124
-15	0.56	0.91	1.41	2.12	3.18	4.79	7.07	9.73	11.9	12.1	10.4	7.92	5.55	3.74	2.49	1.66	1.05	0.63	87.2	69.6
-20	0.50	0.81	1.20	1.71	2.37	3.27	4.38	5.59	6.46	6.60	5.93	4.82	3.70	2.72	1.95	1.37	0.89	0.54	54.8	32.1
-25	0.43	0.68	0.98	1.34	1.76	2.26	2.83	3.39	3.77	3.84	3.57	3.08	2.52	1.98	1.50	1.08	0.72	0.45	36.2	2.20
-30	0.36	0.56	0.79	1.05	1.32	1.62	1.94	2.22	2.40	2.44	2.32	2.09	1.78	1.46	1.14	0.84	0.58	0.36	25.3	0.00
-35	0.30	0.46	0.64	0.84	1.02	1.22	1.42	1.58	1.70	1.72	1.64	1.49	1.30	1.09	0.87	0.66	0.46	0.29	18.7	0.00
-40	0.25	0.38	0.53	0.68	0.83	0.96	1.08	1.19	1.27	1.28	1.22	1.12	0.99	0.86	0.69	0.52	0.37	0.23	14.5	0.00
-45	0.25	0.38	0.53	0.68	0.83	0.96	1.08	1.19	1.27	1.28	1.22	1.12	0.99	0.86	0.69	0.52	0.37	0.23	14.5	0.00
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL(DEG)	10	15	20	25	30	35	40	45			
Φ t	7.97	12.9	19.8	29.5	44.9	71.2	115	175	225	235	200	142	91.1	57.3	36.5	23.6	14.8	8.88	1510	---
Φ a	0.00	0.00	0.00	0.00	16.2	49.9	96.4	157	208	218	183	125	71.7	34.7	6.83	0.00	0.00	0.00	---	1166

one-half-peak spread: U:11.9,D:11.9 , L:12.1,R:11.9


NEMA Beam Type: Type 4

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.92V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:134.975x12 lm		
NAME:LuminoFlex Ground-500mm-3000K-25D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:25 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

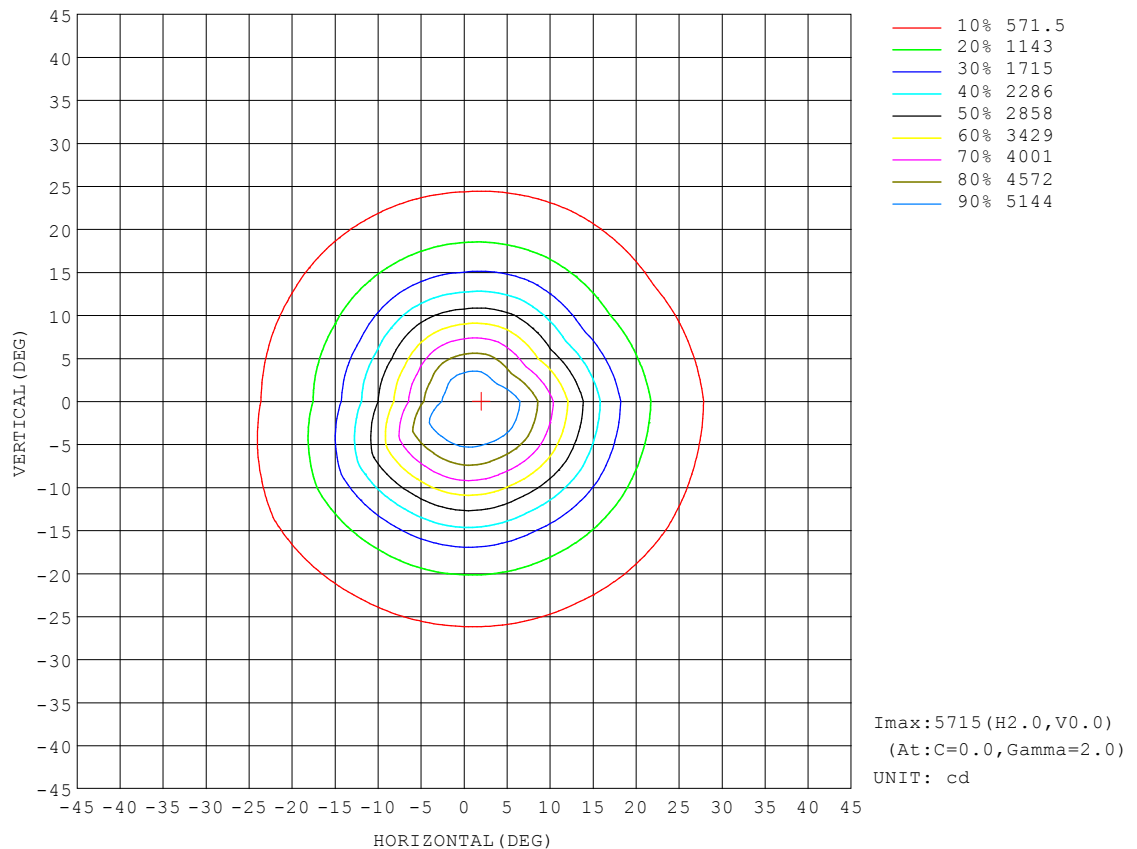


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.92V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:134.975x12 lm		
NAME:LuminoFlex Ground-500mm-3000K-25D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:25 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

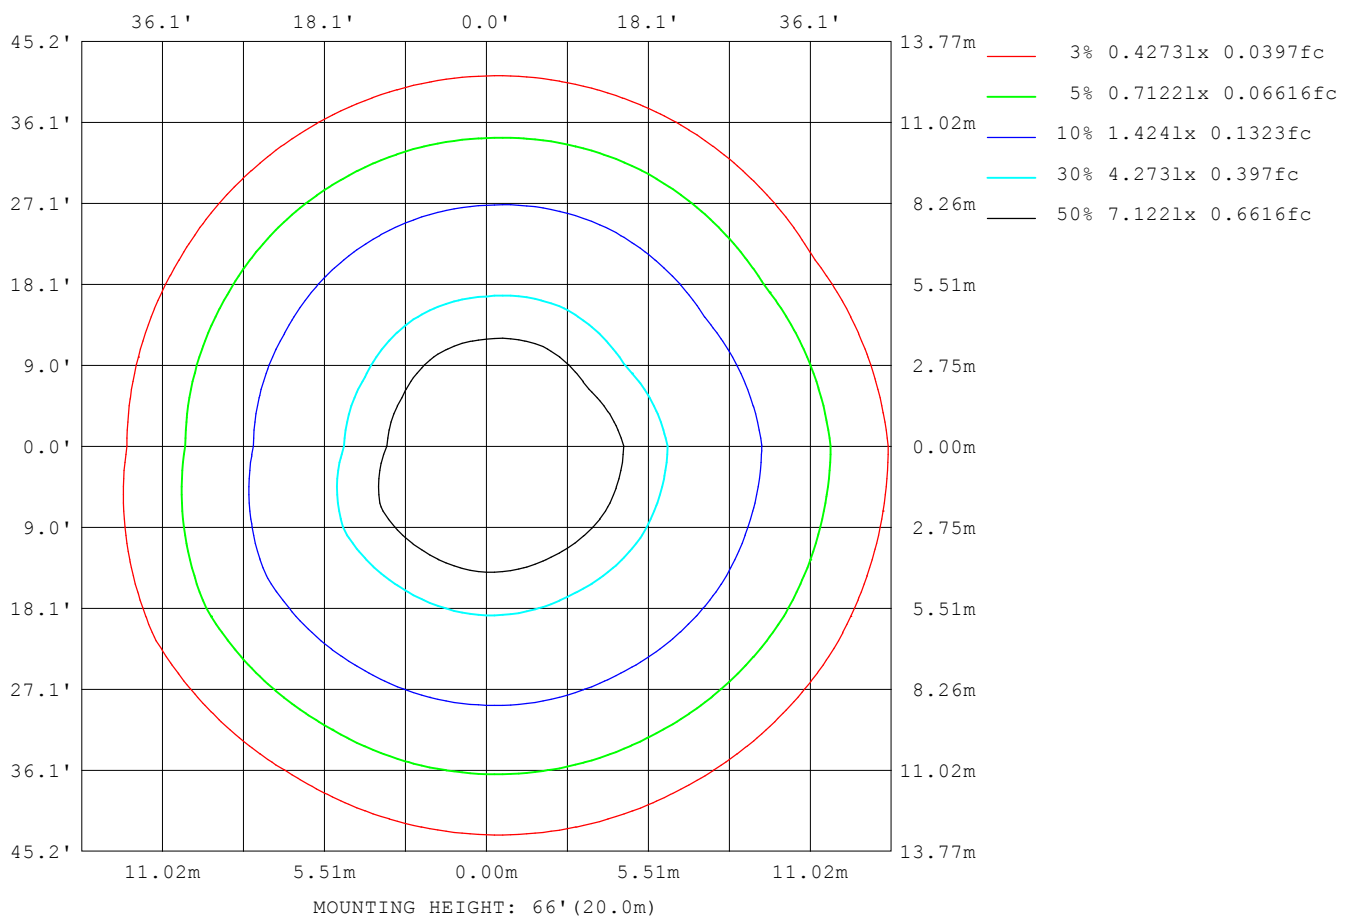

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

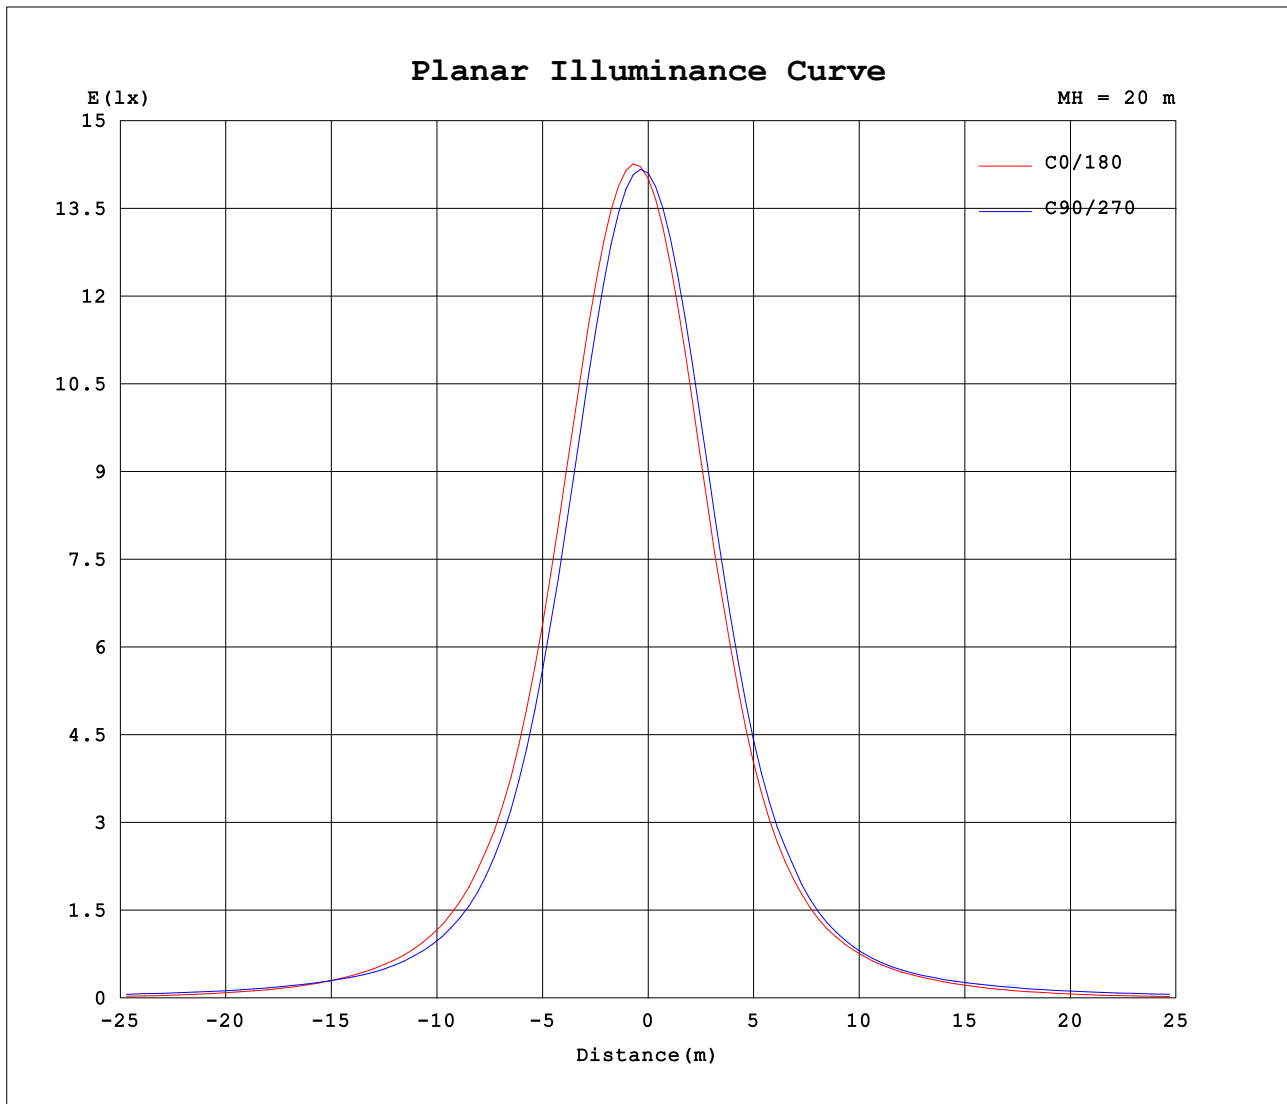


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.92V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:134.975x12 lm		
NAME:LuminoFlex Ground-500mm-3000K-25D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:25 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

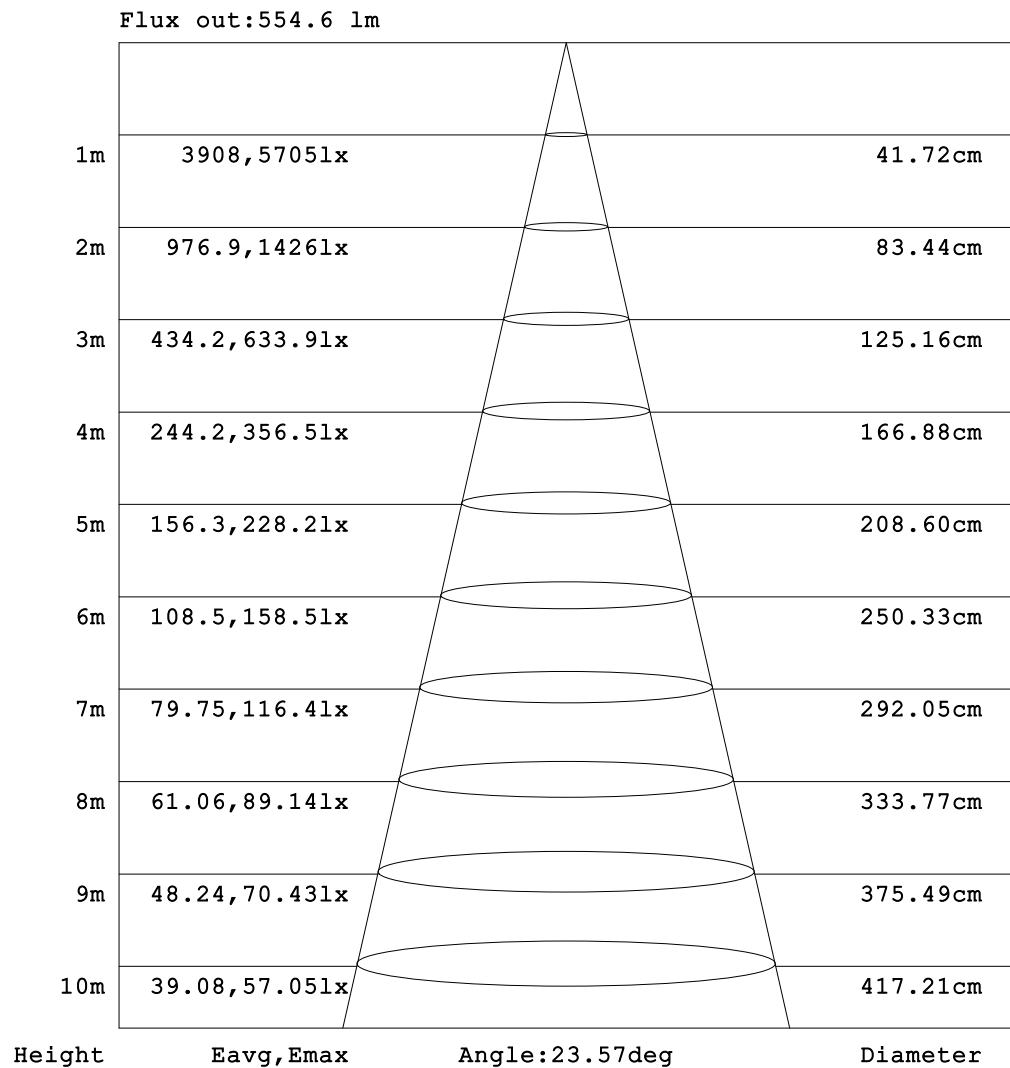

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 20DEG
 Operators: 01
 Test Date: 2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 7.700m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.92V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:134.975x12 lm		
NAME:LuminoFlex Ground-500mm-3000K-25D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:25 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.08	0.08	0.09	0.11	0.14	0.19	0.29	0.42	0.65	0.99	1.56	2.51	4.00	5.94	7.75	8.77	8.64	8.46	8.65
-170	0.08	0.09	0.11	0.13	0.17	0.24	0.34	0.48	0.70	1.02	1.53	2.38	3.71	5.44	7.22	8.55	9.09	9.04	9.08
-160	0.08	0.10	0.12	0.15	0.20	0.27	0.37	0.50	0.68	0.94	1.30	1.86	2.74	4.05	5.45	6.59	7.40	8.01	8.29
-150	0.08	0.10	0.13	0.17	0.22	0.29	0.37	0.49	0.63	0.81	1.06	1.40	1.88	2.62	3.58	4.47	5.07	5.57	5.86
-140	0.08	0.11	0.14	0.18	0.23	0.29	0.37	0.46	0.58	0.74	0.92	1.13	1.36	1.63	1.90	2.14	2.37	2.49	2.51
-130	0.08	0.12	0.15	0.19	0.24	0.30	0.36	0.43	0.54	0.68	0.90	1.07	1.22	1.35	1.48	1.58	1.69	1.77	1.85
-120	0.08	0.12	0.16	0.20	0.25	0.30	0.35	0.42	0.52	0.62	0.74	0.85	0.98	1.12	1.26	1.35	1.40	1.44	1.46
-110	0.08	0.12	0.16	0.20	0.25	0.30	0.34	0.41	0.49	0.57	0.66	0.76	0.85	0.94	1.02	1.09	1.16	1.23	1.29
-100	0.08	0.13	0.17	0.21	0.25	0.30	0.34	0.40	0.47	0.53	0.60	0.66	0.73	0.82	0.90	0.97	1.05	1.13	1.20
-90	0.08	0.13	0.18	0.23	0.28	0.33	0.38	0.45	0.51	0.58	0.65	0.72	0.79	0.84	0.88	0.92	0.97	1.01	1.05
-80	0.08	0.14	0.23	0.31	0.40	0.48	0.58	0.70	0.83	0.96	1.09	1.23	1.36	3.20	5.49	8.02	10.7	13.3	15.8
-70	0.08	0.17	0.28	0.40	0.54	0.68	0.83	1.01	1.34	2.24	4.10	7.01	10.9	17.2	24.3	31.1	37.6	43.4	48.6
-60	0.08	0.19	0.33	0.51	0.70	0.88	1.07	1.59	4.36	9.95	19.1	30.6	43.1	54.4	62.5	69.2	74.8	79.6	83.5
-50	0.08	0.21	0.39	0.61	0.84	1.08	1.30	2.04	9.60	23.7	39.3	54.8	70.0	84.5	94.3	102	109	114	118
-40	0.08	0.22	0.44	0.69	0.97	1.23	2.42	9.01	21.5	38.9	59.1	80.2	101	121	138	156	173	187	195
-30	0.08	0.23	0.48	0.76	1.07	1.56	5.87	17.6	35.3	57.6	85.4	120	156	194	238	285	335	375	394
-20	0.08	0.23	0.50	0.81	1.13	2.24	8.42	24.7	47.1	75.9	117	170	242	329	457	633	850	1063	1165
-10	0.08	0.23	0.51	0.83	1.16	2.27	9.44	28.2	52.8	86.6	135	206	308	485	818	1434	2328	3234	3733
0	0.08	0.22	0.50	0.82	1.14	1.48	7.71	26.7	50.4	83.7	132	206	310	496	855	1564	2852	4473	5605
10	0.08	0.23	0.50	0.82	1.14	1.58	7.68	25.7	48.8	79.8	124	187	274	413	650	1078	1761	2641	3092
20	0.08	0.23	0.49	0.79	1.10	1.46	5.24	20.1	40.1	65.3	99.0	143	199	273	374	512	682	849	935
30	0.08	0.22	0.46	0.73	1.04	1.31	2.61	11.6	27.1	45.6	69.0	100	135	172	211	252	288	318	333
40	0.08	0.22	0.42	0.66	0.93	1.17	1.43	3.66	12.7	29.0	49.2	70.6	92.7	114	134	149	161	171	177
50	0.08	0.20	0.37	0.58	0.79	1.02	1.21	1.40	4.69	15.4	30.7	47.4	64.3	80.7	91.4	99.5	106	111	115
60	0.08	0.19	0.31	0.47	0.64	0.81	0.99	1.26	2.75	6.19	12.0	20.8	32.3	44.5	54.3	62.7	69.7	75.6	80.4
70	0.08	0.16	0.26	0.37	0.49	0.62	0.74	0.89	1.07	1.26	1.72	2.87	4.86	10.3	17.0	23.6	29.8	35.6	41.0
80	0.08	0.13	0.21	0.29	0.37	0.44	0.52	0.62	0.72	0.83	0.95	1.06	1.18	2.45	4.08	5.92	7.85	9.78	11.6
90	0.08	0.13	0.17	0.21	0.26	0.30	0.35	0.41	0.47	0.53	0.59	0.66	0.72	0.77	0.83	0.88	0.94	0.99	1.05
100	0.08	0.13	0.17	0.21	0.25	0.30	0.34	0.40	0.47	0.55	0.62	0.69	0.77	0.84	0.91	0.98	1.05	1.12	1.19
110	0.08	0.12	0.16	0.20	0.25	0.29	0.33	0.39	0.47	0.56	0.65	0.74	0.83	0.91	0.97	1.03	1.08	1.14	1.19
120	0.08	0.12	0.16	0.20	0.24	0.28	0.31	0.38	0.48	0.58	0.69	0.79	0.88	0.95	0.99	1.04	1.12	1.20	1.27
130	0.08	0.12	0.15	0.19	0.22	0.27	0.32	0.39	0.49	0.60	0.68	0.78	1.00	1.25	1.35	1.43	1.50	1.56	1.61
140	0.08	0.11	0.14	0.18	0.21	0.27	0.34	0.42	0.52	0.65	0.86	1.03	1.23	1.36	1.50	1.80	2.04	2.20	2.28
150	0.08	0.10	0.13	0.16	0.21	0.27	0.35	0.45	0.59	0.73	0.89	1.24	1.66	2.27	2.99	3.71	4.17	4.50	4.72
160	0.08	0.10	0.12	0.15	0.19	0.26	0.35	0.47	0.63	0.83	1.22	1.77	2.60	3.79	5.13	6.30	7.13	7.73	8.02
170	0.08	0.09	0.11	0.13	0.17	0.23	0.33	0.46	0.66	0.97	1.49	2.33	3.63	5.35	7.08	8.30	8.77	8.75	8.73
180	0.08	0.08	0.09	0.11	0.14	0.19	0.29	0.42	0.65	0.99	1.56	2.51	4.00	5.94	7.75	8.77	8.64	8.46	8.67

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.92V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:134.975x12 lm																		
NAME:LuminoFlex Ground-500mm-3000K-25D-REV2									TYPE:3000K					WEIGHT:00				
SPEC.:25 DEG									DIM.:500mm					SERIAL No.:01				
MFR.: 001									SUR.:0.8					Shielding Angle:				

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	9.10	9.54	9.10	7.62	5.60	3.67	2.26	1.42	0.91	0.62	0.41	0.27	0.18	0.12	0.09	0.09	0.09	0.17	
-170	9.28	9.15	8.28	6.69	4.86	3.23	2.07	1.37	0.93	0.65	0.46	0.32	0.22	0.15	0.11	0.10	0.09	0.17	
-160	7.92	7.05	5.97	4.72	3.41	2.29	1.61	1.17	0.86	0.64	0.47	0.34	0.25	0.17	0.13	0.11	0.10	0.17	
-150	5.28	4.52	3.73	2.97	2.23	1.65	1.25	0.97	0.76	0.59	0.46	0.35	0.26	0.19	0.15	0.13	0.11	0.17	
-140	2.41	2.23	1.96	1.68	1.47	1.26	1.06	0.88	0.70	0.54	0.44	0.34	0.27	0.21	0.17	0.14	0.11	0.17	
-130	1.76	1.65	1.53	1.40	1.29	1.15	1.01	0.85	0.67	0.51	0.41	0.33	0.27	0.22	0.18	0.15	0.12	0.17	
-120	1.42	1.38	1.33	1.26	1.15	0.98	0.83	0.70	0.59	0.49	0.39	0.33	0.27	0.23	0.19	0.15	0.12	0.17	
-110	1.22	1.15	1.07	0.99	0.91	0.82	0.72	0.64	0.54	0.46	0.38	0.31	0.27	0.24	0.20	0.16	0.13	0.17	
-100	1.12	1.04	0.96	0.87	0.79	0.70	0.63	0.57	0.50	0.44	0.38	0.32	0.28	0.24	0.20	0.16	0.15	0.17	
-90	1.01	0.96	0.91	0.86	0.81	0.76	0.70	0.63	0.57	0.50	0.44	0.38	0.34	0.31	0.27	0.24	0.21	0.17	
-80	13.3	10.6	7.98	5.45	3.14	1.29	1.18	1.06	0.94	0.81	0.70	0.59	0.51	0.44	0.38	0.32	0.26	0.17	
-70	42.2	35.3	27.9	20.4	12.7	6.59	3.98	2.21	1.35	1.14	0.97	0.82	0.71	0.60	0.49	0.37	0.29	0.17	
-60	77.7	71.0	63.1	53.9	43.1	31.9	21.4	12.9	6.95	3.21	1.37	1.05	0.91	0.76	0.59	0.44	0.31	0.17	
-50	114	109	101	92.7	81.4	65.5	49.3	33.4	18.8	6.77	1.56	1.29	1.10	0.91	0.70	0.51	0.33	0.17	
-40	190	180	164	145	126	103	79.2	56.2	35.8	19.1	7.52	1.78	1.27	1.04	0.80	0.56	0.34	0.17	
-30	388	358	313	264	216	170	126	87.1	56.4	35.1	17.9	5.31	1.46	1.15	0.88	0.61	0.36	0.17	
-20	1113	923	714	527	383	277	195	130	82.1	49.6	27.5	10.2	1.92	1.23	0.94	0.64	0.38	0.17	
-10	3422	2623	1708	1031	626	395	259	165	102	59.7	33.6	13.6	2.34	1.28	0.97	0.66	0.39	0.17	
0	5455	4125	2515	1377	776	458	286	175	107	61.0	34.6	14.0	2.05	1.30	0.97	0.66	0.39	0.17	
10	2949	2157	1362	866	549	355	233	149	93.4	55.2	31.4	12.5	2.00	1.27	0.96	0.66	0.39	0.17	
20	917	786	604	440	315	223	156	107	68.8	42.7	23.8	8.28	1.63	1.21	0.93	0.64	0.38	0.17	
30	329	305	272	228	183	139	101	66.5	44.0	28.0	13.9	3.55	1.39	1.12	0.87	0.61	0.36	0.17	
40	173	164	151	136	115	91.4	68.3	47.1	28.1	13.3	4.58	1.50	1.22	1.01	0.79	0.56	0.34	0.17	
50	111	106	98.4	90.0	78.8	62.5	46.1	30.2	15.6	4.89	1.38	1.22	1.06	0.88	0.69	0.50	0.33	0.17	
60	75.3	69.1	61.8	53.1	43.1	31.3	20.2	11.8	6.17	2.80	1.27	1.01	0.88	0.74	0.59	0.43	0.31	0.17	
70	35.7	29.9	23.7	17.3	10.7	5.43	3.39	2.02	1.34	1.09	0.93	0.79	0.69	0.58	0.47	0.37	0.28	0.17	
80	9.79	7.86	5.93	4.10	2.47	1.22	1.10	0.99	0.88	0.77	0.66	0.55	0.50	0.44	0.38	0.31	0.25	0.17	
90	0.99	0.94	0.89	0.84	0.79	0.74	0.68	0.61	0.55	0.48	0.42	0.35	0.32	0.29	0.26	0.23	0.20	0.17	
100	1.12	1.06	1.00	0.94	0.87	0.80	0.72	0.64	0.56	0.49	0.42	0.35	0.30	0.26	0.22	0.18	0.15	0.17	
110	1.15	1.10	1.05	1.00	0.95	0.88	0.78	0.68	0.58	0.49	0.40	0.34	0.29	0.25	0.21	0.17	0.13	0.17	
120	1.26	1.23	1.19	1.12	1.06	0.96	0.84	0.72	0.61	0.50	0.39	0.33	0.28	0.24	0.20	0.16	0.13	0.17	
130	1.54	1.46	1.38	1.31	1.27	1.15	1.00	0.81	0.64	0.51	0.41	0.33	0.27	0.22	0.19	0.15	0.12	0.17	
140	2.22	2.07	1.88	1.70	1.49	1.20	1.02	0.86	0.69	0.54	0.43	0.34	0.27	0.21	0.17	0.14	0.12	0.17	
150	4.57	4.33	3.93	3.04	2.22	1.61	1.24	0.93	0.74	0.58	0.45	0.35	0.26	0.19	0.15	0.13	0.11	0.17	
160	7.60	6.86	6.11	4.87	3.50	2.31	1.60	1.15	0.84	0.62	0.46	0.34	0.24	0.17	0.13	0.12	0.10	0.17	
170	8.89	8.73	7.98	6.59	4.81	3.24	2.08	1.37	0.92	0.65	0.45	0.32	0.22	0.15	0.11	0.10	0.10	0.17	
180	9.10	9.54	9.10	7.62	5.60	3.67	2.26	1.42	0.91	0.62	0.41	0.27	0.18	0.12	0.09	0.09	0.09	0.17	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks: