

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	1736.0 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	4.0 degrees horizontal

Beam Spread	At 10% of Imax	75.1V x 74.8H
	At 50% of Imax	39.7V x 39.6H
	At 90% of Imax	15.9V x 15.4H

Beam Flux	Total	1000.2 lumens per klm.
	To 10% of Imax	854.2 lumens per klm.
	To 50% of Imax	458.3 lumens per klm.
	To 90% of Imax	95.5 lumens per klm.

Upward LOR	0.7 %
Downward LOR	99.3 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.01V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:141.876x12 lm		
NAME:LuminoFlex Ground-500mm-3000K-40D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:40 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

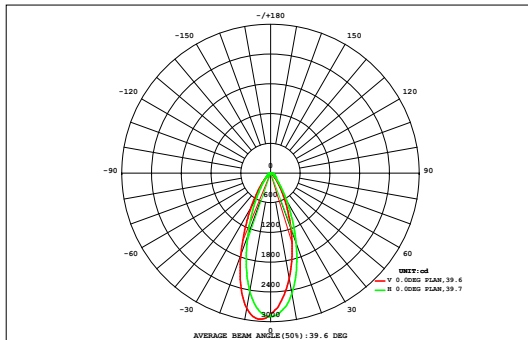

DATA OF LAMP		Eff:95.65lm/W	
MODEL		Imax(cd)	2956
NOMINAL POWER(W)	18	AVAILABILITY(%)	85.3
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	1453
NOMINAL FLUX(lm)	141.876	LOR(%)	100.0
LAMPS INSIDE	12	TOTAL FLUX(lm)	1703
TEST VOLTAGE(V)	220	θ @50% (H,V)	40,40DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.01	0.01	0.02	0.06	0.15	0.32	0.49	0.65	0.65	0.50	0.33	0.16	0.07	0.03	0.01	0.01	0.00	3.49	0.00
72	0.00	0.01	0.02	0.08	0.23	0.48	0.77	1.03	1.23	1.23	1.04	0.79	0.50	0.24	0.09	0.02	0.01	0.01	7.80	0.00
64	0.01	0.01	0.03	0.17	0.49	0.93	1.32	1.61	1.79	1.79	1.61	1.33	0.94	0.51	0.19	0.03	0.01	0.01	12.8	0.00
56	0.01	0.01	0.06	0.33	0.82	1.42	2.03	2.51	2.82	2.85	2.59	2.09	1.46	0.85	0.35	0.07	0.01	0.01	20.3	0.00
48	0.01	0.02	0.14	0.54	1.26	2.26	3.56	4.87	5.80	5.93	5.16	3.85	2.44	1.34	0.57	0.17	0.02	0.01	38.0	11.0
40	0.01	0.03	0.26	0.84	1.93	3.81	6.65	10.1	12.8	13.3	11.1	7.53	4.31	2.15	0.94	0.32	0.05	0.01	76.2	61.8
32	0.01	0.05	0.39	1.20	2.86	6.11	11.7	19.1	25.2	26.4	21.7	13.8	7.29	3.42	1.45	0.49	0.09	0.01	141	130
24	0.01	0.07	0.49	1.53	3.83	8.69	17.4	29.5	40.4	43.3	34.9	21.7	11.3	5.05	1.98	0.66	0.12	0.01	221	212
16	0.01	0.08	0.55	1.72	4.46	10.5	21.5	36.3	49.8	54.7	45.8	29.6	15.1	6.44	2.40	0.77	0.14	0.01	280	271
8	0.01	0.08	0.57	1.80	4.69	11.1	22.9	38.4	50.9	54.6	47.6	31.1	15.8	6.70	2.49	0.80	0.15	0.01	290	281
0	0.01	0.09	0.56	1.74	4.42	10.2	20.4	32.5	41.7	44.1	37.6	25.0	13.0	5.72	2.22	0.73	0.14	0.01	240	231
-8	0.01	0.08	0.48	1.47	3.60	7.66	14.1	21.7	27.9	28.9	24.0	16.3	9.02	4.27	1.74	0.58	0.10	0.01	162	152
-16	0.01	0.06	0.36	1.11	2.53	4.85	8.23	12.2	15.2	15.6	13.1	9.15	5.45	2.82	1.23	0.41	0.06	0.01	92.4	78.8
-24	0.01	0.04	0.24	0.76	1.63	2.85	4.42	6.10	7.31	7.44	6.41	4.74	3.07	1.73	0.78	0.24	0.03	0.01	47.8	23.8
-32	0.01	0.02	0.12	0.48	1.04	1.72	2.44	3.10	3.56	3.59	3.18	2.54	1.78	1.04	0.45	0.10	0.02	0.01	25.2	0.00
-40	0.01	0.01	0.05	0.27	0.66	1.12	1.52	1.82	2.02	2.02	1.82	1.50	1.05	0.58	0.22	0.04	0.01	0.01	14.7	0.00
-48	0.01	0.01	0.03	0.13	0.34	0.65	0.96	1.20	1.38	1.36	1.14	0.85	0.53	0.27	0.10	0.03	0.01	0.01	9.01	0.00
-56	0.00	0.01	0.02	0.05	0.12	0.26	0.46	0.67	0.85	0.84	0.63	0.40	0.20	0.09	0.03	0.01	0.01	0.00	4.65	0.00
-64	0.00	0.01	0.02	0.05	0.12	0.26	0.46	0.67	0.85	0.84	0.63	0.40	0.20	0.09	0.03	0.01	0.01	0.00	4.65	0.00
-72	0.00	0.01	0.02	0.05	0.12	0.26	0.46	0.67	0.85	0.84	0.63	0.40	0.20	0.09	0.03	0.01	0.01	0.00	4.65	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)	16	24	32	40	48	56	64	72			
Φ t	0.13	0.69	4.38	14.2	35.0	74.7	141	223	291	309	260	173	93.5	43.3	17.3	5.50	1.00	0.15	1686	---
Φ a	0.00	0.00	0.00	0.00	8.93	55.4	123	206	273	291	243	155	76.0	22.0	0.00	0.00	0.00	0.00	---	1453

one-half-peak spread: U:21.3,D:18.7 , L:21.3,R:18.6


NEMA Beam Type: Type 5

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.01V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:141.876x12 lm		
NAME:LuminoFlex Ground-500mm-3000K-40D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:40 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

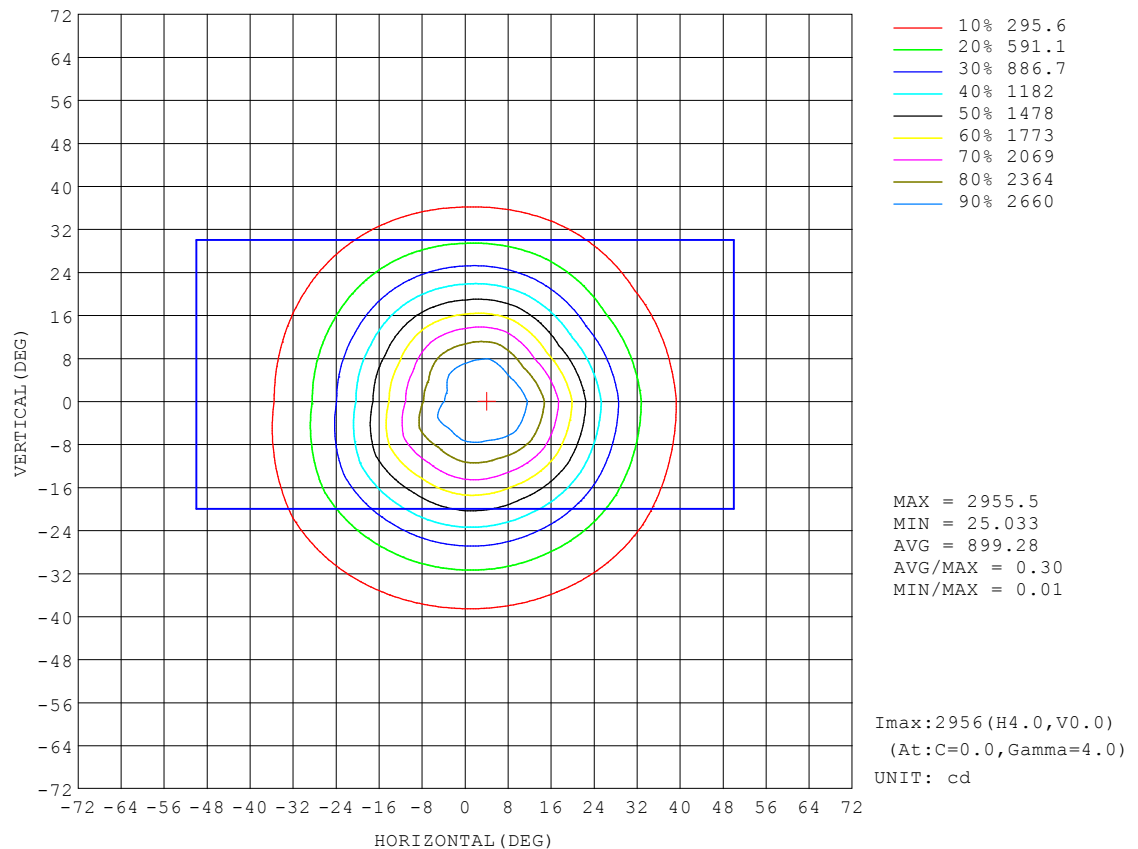


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:220.01V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:141.876x12 lm		
NAME:LuminoFlex Ground-500mm-3000K-40D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:40 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

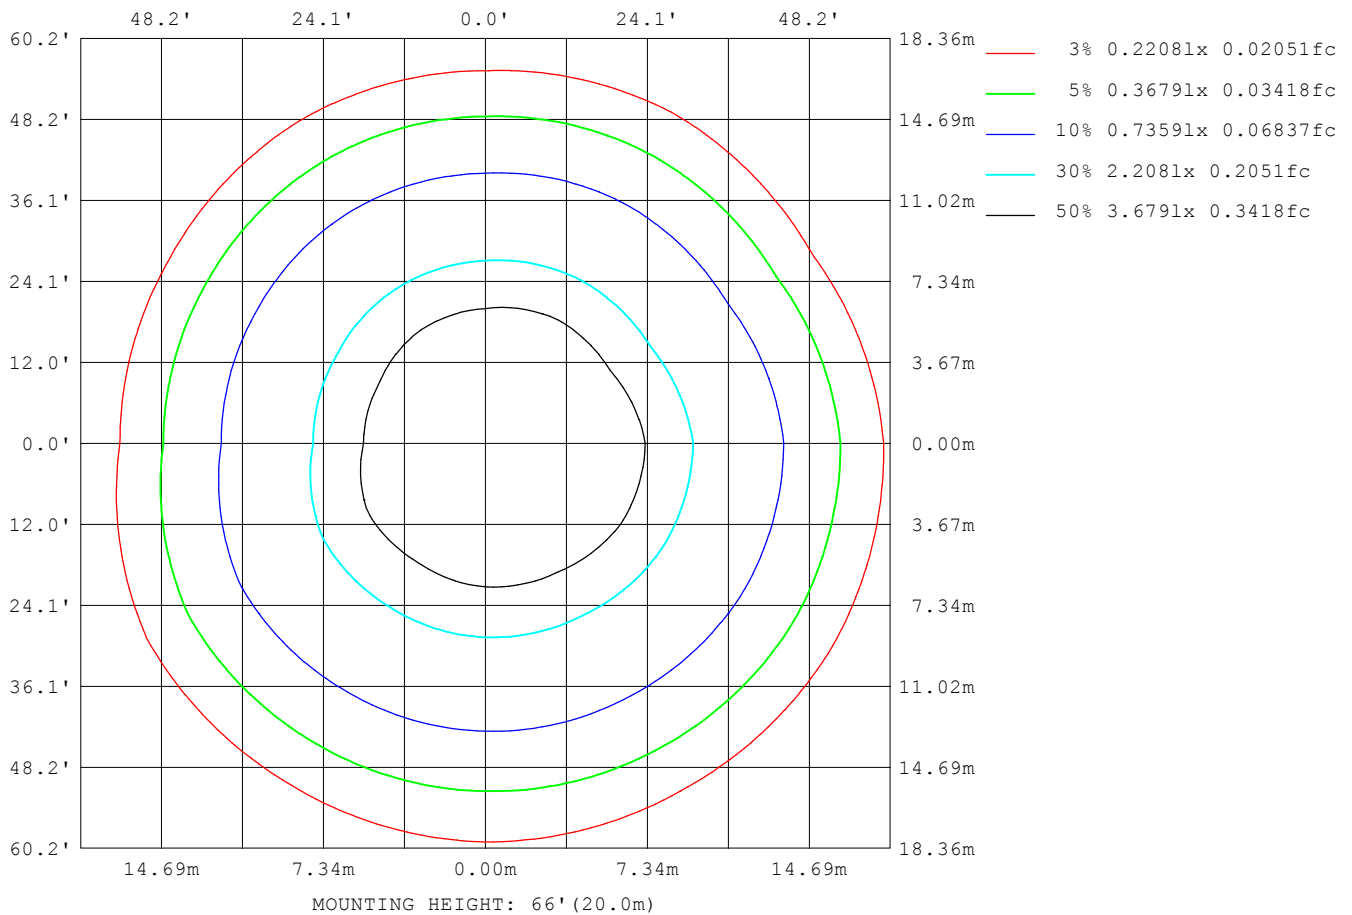

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

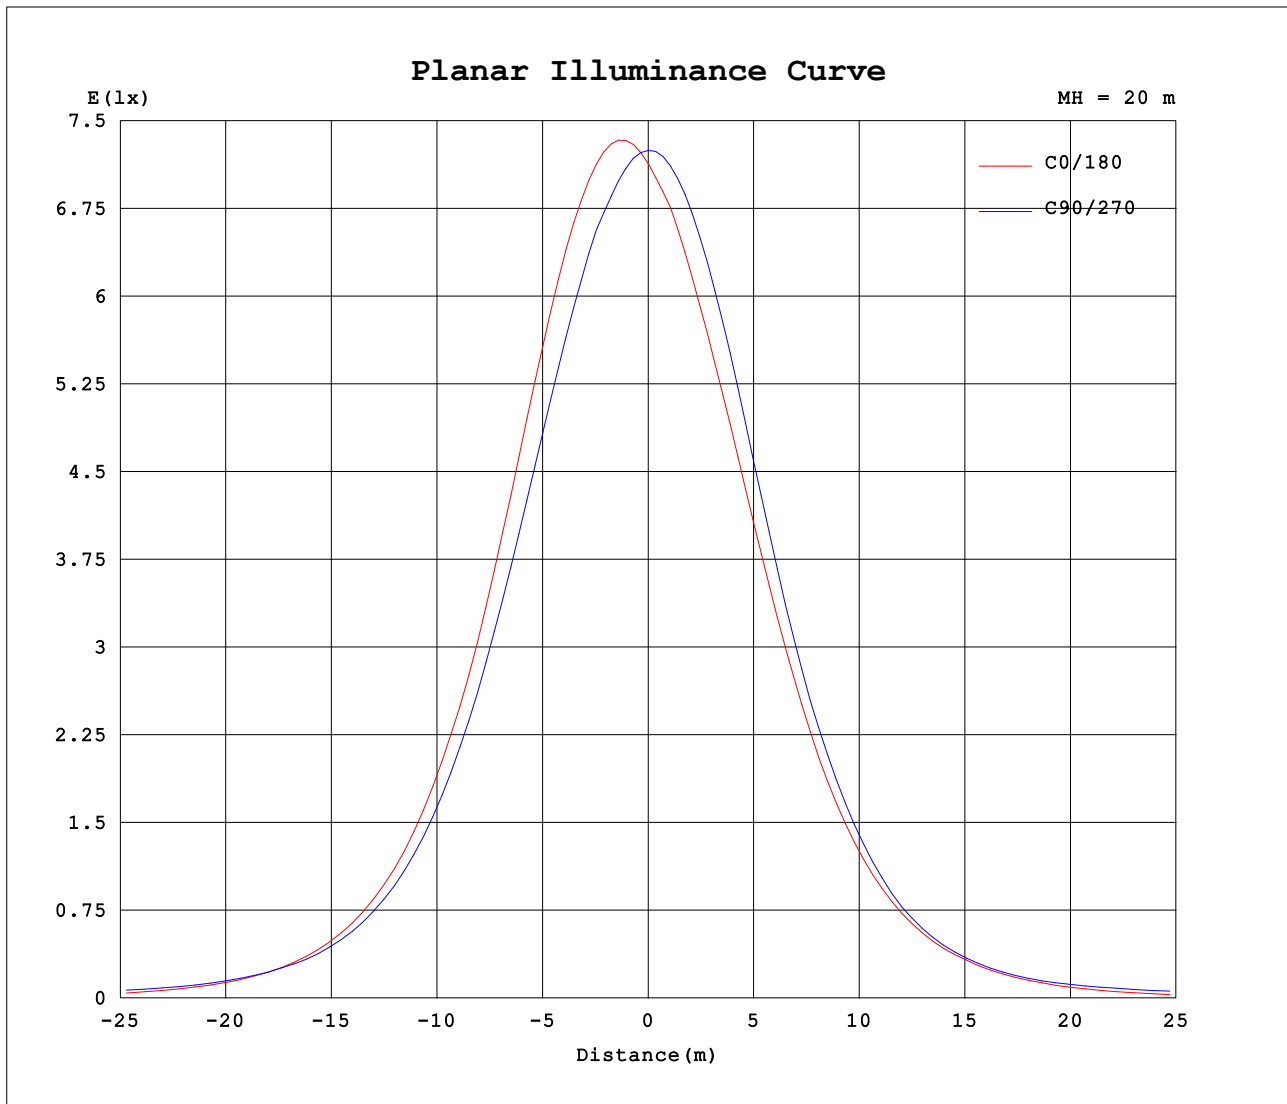


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.01V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:141.876x12 lm		
NAME:LuminoFlex Ground-500mm-3000K-40D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:40 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

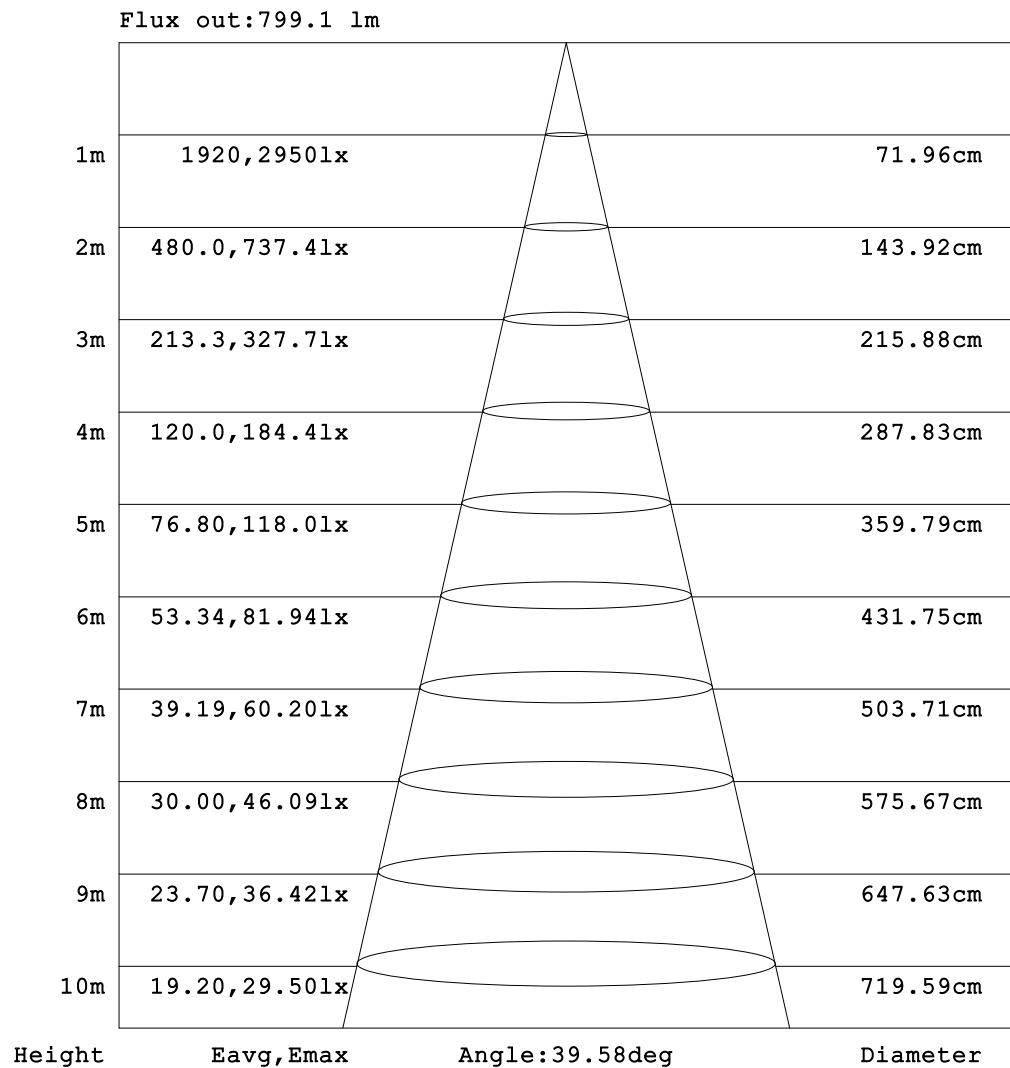

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:20DEG
 Operators:01
 Test Date:2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.700m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.01V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:141.876x12 lm		
NAME:LuminoFlex Ground-500mm-3000K-40D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:40 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.08	0.08	0.09	0.11	0.15	0.23	0.36	0.58	0.96	1.51	2.31	3.36	4.58	5.84	6.90	7.70	8.18	8.70	9.01
-170	0.08	0.09	0.10	0.13	0.18	0.27	0.40	0.61	0.96	1.48	2.22	3.20	4.34	5.54	6.59	7.40	7.85	8.10	8.26
-160	0.08	0.10	0.11	0.15	0.20	0.28	0.40	0.59	0.86	1.28	1.83	2.58	3.50	4.57	5.43	6.08	6.55	6.84	6.93
-150	0.08	0.10	0.12	0.16	0.21	0.28	0.39	0.53	0.73	1.00	1.37	1.89	2.64	3.62	4.56	5.17	5.81	6.40	6.94
-140	0.08	0.11	0.13	0.17	0.22	0.28	0.36	0.47	0.60	0.80	1.03	1.30	1.63	2.10	2.58	2.98	3.33	3.56	3.61
-130	0.08	0.11	0.14	0.18	0.22	0.28	0.34	0.41	0.53	0.71	0.87	1.04	1.20	1.36	1.51	1.65	1.76	1.85	1.91
-120	0.08	0.12	0.15	0.18	0.22	0.27	0.32	0.38	0.49	0.59	0.71	0.85	1.04	1.22	1.31	1.40	1.49	1.58	1.67
-110	0.08	0.12	0.15	0.19	0.23	0.27	0.31	0.37	0.45	0.53	0.62	0.71	0.80	0.89	0.96	1.03	1.09	1.16	1.22
-100	0.08	0.12	0.16	0.20	0.23	0.27	0.31	0.36	0.42	0.49	0.55	0.61	0.68	0.76	0.83	0.90	0.97	1.04	1.11
-90	0.08	0.13	0.17	0.22	0.26	0.31	0.35	0.41	0.46	0.52	0.57	0.63	0.68	0.71	0.74	0.76	0.79	0.81	0.84
-80	0.08	0.14	0.22	0.30	0.38	0.46	0.54	0.65	0.75	0.86	0.97	1.08	1.18	2.47	4.08	5.87	7.73	9.60	11.4
-70	0.08	0.16	0.28	0.38	0.51	0.64	0.78	0.93	1.17	1.82	3.23	5.41	8.31	13.3	19.2	25.0	30.4	35.5	40.0
-60	0.08	0.19	0.32	0.48	0.66	0.84	1.02	1.44	3.52	7.55	14.1	23.0	33.4	43.9	52.6	59.7	65.5	70.1	73.8
-50	0.08	0.21	0.37	0.58	0.80	1.02	1.25	1.73	7.23	19.2	34.3	49.9	65.3	80.3	91.4	101	109	114	117
-40	0.08	0.22	0.42	0.66	0.92	1.18	1.98	7.17	19.2	38.1	60.9	86.4	114	143	174	204	232	252	262
-30	0.08	0.23	0.46	0.74	1.02	1.41	4.71	15.4	35.5	64.3	103	152	215	291	381	477	570	640	672
-20	0.08	0.24	0.48	0.78	1.08	1.89	6.99	22.8	51.3	91.7	153	245	377	548	764	1002	1233	1411	1511
-10	0.08	0.23	0.48	0.79	1.10	1.98	7.46	27.3	60.2	110	188	312	504	792	1180	1613	1989	2270	2473
0	0.08	0.23	0.47	0.77	1.09	1.44	5.36	25.5	58.1	108	186	309	509	806	1209	1688	2165	2579	2854
10	0.08	0.23	0.48	0.78	1.09	1.49	5.60	23.9	54.3	99.0	167	276	442	687	1019	1408	1848	2232	2424
20	0.08	0.23	0.47	0.75	1.05	1.38	3.98	17.2	41.6	75.3	123	194	296	441	632	859	1091	1269	1355
30	0.08	0.23	0.44	0.70	0.98	1.26	2.22	8.99	25.0	47.4	77.3	117	167	231	304	386	467	526	551
40	0.08	0.22	0.40	0.62	0.87	1.11	1.37	2.95	10.1	25.6	46.0	68.5	91.8	116	141	163	183	196	201
50	0.08	0.21	0.35	0.54	0.73	0.95	1.15	1.36	3.72	11.6	23.8	38.7	54.5	69.5	79.9	88.0	94.5	99.2	102
60	0.08	0.18	0.30	0.44	0.59	0.75	0.90	1.14	2.21	4.78	9.14	15.5	24.0	33.3	42.0	50.1	57.1	62.9	67.8
70	0.08	0.15	0.26	0.35	0.46	0.56	0.67	0.80	0.94	1.10	1.45	2.21	3.55	7.37	12.3	17.1	21.8	26.2	30.1
80	0.08	0.12	0.20	0.27	0.35	0.42	0.48	0.56	0.65	0.73	0.82	0.91	1.00	1.85	2.89	4.04	5.24	6.43	7.58
90	0.08	0.12	0.16	0.19	0.23	0.27	0.31	0.36	0.41	0.47	0.52	0.58	0.63	0.68	0.72	0.77	0.81	0.86	0.90
100	0.08	0.12	0.15	0.19	0.22	0.26	0.29	0.35	0.42	0.48	0.55	0.62	0.69	0.76	0.82	0.88	0.94	0.99	1.05
110	0.08	0.12	0.15	0.18	0.22	0.25	0.29	0.35	0.42	0.50	0.59	0.67	0.76	0.83	0.89	0.93	0.98	1.02	1.07
120	0.08	0.11	0.15	0.18	0.21	0.24	0.28	0.32	0.36	0.45	0.60	0.74	0.87	0.95	0.99	1.05	1.11	1.18	1.24
130	0.08	0.11	0.14	0.17	0.20	0.24	0.23	0.24	0.42	0.59	0.71	0.83	1.08	1.29	1.41	1.54	1.65	1.73	1.78
140	0.08	0.11	0.13	0.16	0.19	0.20	0.25	0.41	0.54	0.71	0.97	1.22	1.54	1.89	2.04	2.52	2.86	3.01	3.00
150	0.08	0.10	0.12	0.15	0.18	0.20	0.35	0.49	0.68	0.91	1.24	1.75	2.45	3.37	4.38	4.98	5.35	5.15	4.71
160	0.08	0.10	0.11	0.14	0.16	0.24	0.38	0.56	0.82	1.19	1.76	2.52	3.42	4.47	5.29	5.92	6.35	6.64	6.70
170	0.08	0.09	0.10	0.13	0.16	0.25	0.38	0.60	0.93	1.46	2.18	3.16	4.28	5.45	6.48	7.27	7.78	8.10	8.21
180	0.08	0.08	0.09	0.11	0.15	0.23	0.36	0.58	0.96	1.51	2.31	3.36	4.58	5.84	6.90	7.70	8.18	8.70	8.99

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.01V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:141.876x12 lm		
NAME:LuminoFlex Ground-500mm-3000K-40D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:40 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	8.77	8.34	7.59	6.53	5.31	4.07	2.94	2.02	1.33	0.84	0.52	0.32	0.19	0.13	0.09	0.09	0.09	0.18	
-170	8.18	7.75	6.96	6.00	4.89	3.76	2.74	1.91	1.29	0.85	0.54	0.35	0.22	0.15	0.11	0.10	0.10	0.18	
-160	6.72	6.24	5.59	4.77	3.87	2.94	2.18	1.57	1.10	0.76	0.52	0.35	0.24	0.16	0.13	0.11	0.10	0.18	
-150	6.16	5.23	4.18	3.55	2.94	2.23	1.63	1.18	0.86	0.63	0.46	0.34	0.24	0.17	0.14	0.12	0.11	0.18	
-140	3.39	3.05	2.70	2.31	1.87	1.50	1.17	0.91	0.69	0.52	0.41	0.31	0.24	0.18	0.15	0.13	0.11	0.18	
-130	1.83	1.72	1.59	1.41	1.24	1.09	0.93	0.78	0.63	0.48	0.36	0.29	0.23	0.19	0.16	0.14	0.12	0.18	
-120	1.56	1.44	1.33	1.22	1.12	1.02	0.88	0.70	0.54	0.43	0.33	0.27	0.23	0.20	0.17	0.14	0.12	0.18	
-110	1.15	1.08	1.00	0.92	0.83	0.74	0.65	0.55	0.47	0.39	0.31	0.26	0.23	0.20	0.17	0.15	0.13	0.18	
-100	1.03	0.95	0.86	0.78	0.69	0.60	0.54	0.48	0.42	0.36	0.31	0.26	0.23	0.21	0.18	0.15	0.14	0.18	
-90	0.81	0.77	0.74	0.70	0.67	0.63	0.58	0.53	0.48	0.43	0.38	0.33	0.31	0.28	0.26	0.23	0.21	0.18	
-80	9.59	7.70	5.82	4.02	2.39	1.09	1.00	0.91	0.81	0.71	0.61	0.52	0.46	0.41	0.36	0.31	0.26	0.18	
-70	34.8	29.1	23.0	16.8	10.5	5.51	3.40	1.98	1.22	1.03	0.88	0.75	0.65	0.55	0.45	0.36	0.29	0.18	
-60	68.6	62.4	55.0	46.3	36.4	26.7	18.0	10.9	5.89	2.81	1.28	1.00	0.86	0.71	0.56	0.42	0.31	0.18	
-50	115	110	102	92.3	79.8	63.1	46.1	29.8	15.8	5.76	1.54	1.26	1.06	0.87	0.68	0.49	0.33	0.18	
-40	257	240	213	183	151	120	90.1	61.5	37.1	17.7	6.20	1.75	1.26	1.01	0.78	0.55	0.34	0.18	
-30	659	602	516	419	323	239	167	111	69.1	38.6	16.7	4.48	1.46	1.14	0.87	0.60	0.36	0.18	
-20	1478	1331	1132	883	643	442	290	181	109	60.8	29.1	8.60	1.89	1.23	0.93	0.63	0.38	0.18	
-10	2448	2287	1943	1475	1025	666	413	247	142	78.0	38.4	12.1	2.23	1.30	0.96	0.66	0.39	0.18	
0	2954	2774	2340	1762	1214	775	469	273	154	83.6	40.7	12.6	2.02	1.31	0.97	0.66	0.39	0.18	
10	2460	2177	1731	1292	909	596	372	223	130	71.8	35.5	11.0	1.97	1.28	0.96	0.66	0.39	0.18	
20	1348	1219	992	745	525	350	230	147	91.1	51.3	24.7	6.99	1.64	1.21	0.92	0.63	0.38	0.18	
30	546	502	430	339	258	186	128	83.4	52.2	29.8	12.7	3.19	1.38	1.10	0.85	0.59	0.36	0.18	
40	200	190	172	150	122	95.6	71.0	47.7	27.4	12.2	4.02	1.47	1.19	0.98	0.76	0.55	0.35	0.18	
50	99.5	94.9	88.5	80.3	69.8	55.2	40.1	25.5	12.8	4.23	1.33	1.16	1.01	0.85	0.67	0.49	0.33	0.18	
60	63.2	57.6	51.0	43.0	34.5	25.1	16.3	9.62	5.07	2.38	1.16	0.95	0.82	0.70	0.56	0.43	0.32	0.18	
70	26.3	22.2	17.6	13.0	8.22	4.37	2.77	1.72	1.19	0.97	0.84	0.73	0.64	0.55	0.46	0.37	0.29	0.18	
80	6.44	5.24	4.05	2.91	1.87	1.03	0.95	0.87	0.78	0.70	0.61	0.53	0.48	0.43	0.37	0.32	0.26	0.18	
90	0.86	0.82	0.78	0.74	0.70	0.66	0.61	0.55	0.49	0.44	0.38	0.32	0.30	0.28	0.25	0.23	0.20	0.18	
100	1.00	0.95	0.90	0.84	0.79	0.73	0.65	0.58	0.51	0.44	0.37	0.31	0.27	0.24	0.20	0.17	0.15	0.18	
110	1.03	0.99	0.95	0.91	0.87	0.81	0.71	0.62	0.52	0.44	0.36	0.30	0.26	0.23	0.19	0.16	0.14	0.18	
120	1.20	1.16	1.11	1.05	1.00	0.90	0.78	0.67	0.55	0.45	0.35	0.29	0.25	0.22	0.19	0.16	0.13	0.18	
130	1.70	1.59	1.41	1.23	1.27	1.15	0.94	0.76	0.61	0.47	0.36	0.30	0.24	0.21	0.18	0.15	0.12	0.18	
140	3.00	2.84	2.62	2.34	1.87	1.45	1.15	0.93	0.71	0.54	0.42	0.32	0.24	0.19	0.16	0.14	0.12	0.18	
150	5.13	5.28	4.93	4.22	3.15	2.28	1.67	1.20	0.88	0.64	0.47	0.34	0.24	0.18	0.15	0.13	0.11	0.18	
160	6.53	6.12	5.52	4.69	4.03	2.97	2.17	1.59	1.12	0.77	0.52	0.35	0.24	0.17	0.13	0.12	0.10	0.18	
170	8.14	7.58	6.79	5.89	4.85	3.76	2.73	1.91	1.30	0.85	0.55	0.35	0.22	0.15	0.11	0.10	0.10	0.18	
180	8.77	8.34	7.59	6.53	5.31	4.07	2.94	2.02	1.33	0.84	0.52	0.32	0.19	0.13	0.09	0.09	0.09	0.18	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
γ Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks: